
Second Spectrum: Premier League - Insight Feed Output Format

File Documentation Details
Version 2.3

Version History

Version	Date	Notes
v0.1	29/5/19	Initial Version
v0.2	6/6/19	Add locations to markings
v0.3	23/6/19	Combine Opta event and 2s event into a single object
v0.4	2/8/19	Update markings and attributes
v0.5	18/11/19	Update markings and attributes for the first release of this feed
v0.6	3/2/20	Remove Opta seqId
v2.0	9/28/20	Update documentation to add "pressure", "press", "run" marking types, and other new fields for the v2 major release of this feed. Add "Field Type Conventions" section.
v2.1	11/3/20	Updated coordinate information
v2.2	4/16/21	Removed sequenceIdx
v2.3	3/1/23	Add Defensive States, as well as several attributes to pressures, passes, runs, and shots.

Overview

A line-delimited JSON output where each line is an object that contains an aligned Opta event, a Second Spectrum marking, or both. Opta events and Second Spectrum markings often refer to the same in-game event, but have complementary attributes.

Sample Output

```
{
  "optaEvent": {
    "id": 1575536595,
    "eventId": 3,
    "typeId": 61,
    "periodId": 1,
    "timeMin": 0,
    "timeSec": 19,
    "contestantId": "1pse9ta7a45pi2w2grjim70ge",
    "opContestantId": 91,
    "playerId": "av7e2wk5ub7qnh3sqcvssvh79",
    "opPlayerId": 56917,
    "playerName": "S. Cook",
    "outcome": 1,
    "x": 36.3,
    "y": 5.8,
    "timeStamp": "2019-05-04T11:30:33.984",
    "lastModified": "2019-05-04T11:30:34.11",
    "qualifier": [
      {
        "id": 266963314,
        "qualifierId": 56,
        "value": "Back"
      },
      ...
    ],
    "markingId": "6e7f3519-2465-4584-93a2-04d811048c01",
    "alignedClock": 19.28,
    "alignedFrameIdx": 482,
  },
  "2sMarking": {
    "id": "6e7f3519-2465-4584-93a2-04d811048c01",
    "optaId": 1575536595,
    "gameId": "987952",
    "period": 1,
  },
}
```

```
"markingType": "pass",
"gameClock": 19.28,
"frameIdx": 482,
"attTeamId": "6",
"defTeamId": "91",
"passerId": "108823",
"passerDefId": "103912",
"passerDefDist": 8.37,
"receiverId": "107040",
"velocity": 12.90,
"defBehindPasser": 7,
"defBehindReceiver": 5,
"attAheadPasser": 3,
"attAheadReceiver": 2,
"defBypassed": 2,
"defInBox": 4,
"attInBox": 1,
"expectedCompletionPct": 0.84,
}
}
...
```

Combined Object

The combined object always has the same two attributes. The attributes will be `Null` under the following conditions:

Opta Event with a Matching Second Spectrum Marking

```
{"optaEvent": {...}, "2sMarking": {...}}
```

Opta Event with no Matching Second Spectrum Marking

```
{"optaEvent": {...}, "2sMarking": null}
```

Second Spectrum Marking with no Matching Opta Event

```
{"optaEvent": null, "2sMarking": {...}}
```

Field	Type	Description
optaEvent	Aligned Opta Event Object	Aligned Opta Event <pre>"optaEvent": {...}</pre> <code>Null</code> if no matching Opta event.
2sMarking	Second Spectrum Marking Object	Second Spectrum Marking <pre>"2sMarking": {...}</pre> <code>Null</code> if no matching Second Spectrum marking.

Aligned Opta Event

These are Opta events aligned to tracking data. Additional attributes are included to link the event to it's exact time in the tracking data and the corresponding Second Spectrum marking if applicable.

Sample Aligned Opta Event Object

```
{
  "id": 1575536595,
  "eventId": 3,
  "typeId": 61,
  "periodId": 1,
  "timeMin": 0,
  "timeSec": 19,
  "contestantId": "1pse9ta7a45pi2w2grjim70ge",
  "opContestantId": 91,
  "playerId": "av7e2wk5ub7qnh3sqcvssvh79",
  "opPlayerId": 56917,
  "playerName": "S. Cook",
  "outcome": 1,
  "x": 36.3,
  "y": 5.8,
  "timeStamp": "2019-05-04T11:30:33.984",
  "lastModified": "2019-05-04T11:30:34.11",
  "qualifier": [
    {
      "id": 266963314,
      "qualifierId": 56,
      "value": "Back"
    }
    ...
  ],
  "markingId": "6e7f3519-2465-4584-93a2-04d811048c01",
  "alignedClock": 19.28,
  "alignedFrameIdx": 482,
}
```

Note: Refer to <https://docs.performgroup.com/> for Opta field details.

Field	Type	Description
id	Int	Opta event ID <code>"id": 1575536595</code>
eventId	Int	Opta event ID <code>"eventId": 3</code>
typeId	Int	Opta type ID <code>"typeId": 61</code>
periodId	Int	Period number <code>"periodId": 1</code>
timeMin	Int	Event time minutes <code>"timeMin": 0</code>
timeSec	Int	Event time seconds <code>"timeSec": 19</code>
contestantId	String	Opta contestant ID <code>"contestantId": "1pse9ta7a45pi2w2grjim70ge"</code>
opContestantId	Int	Opta opContestant ID <code>"opContestantId": 91</code>
playerId	String	Opta player ID <code>"playerId": "av7e2wk5ub7qnh3sqcvssvh79"</code>
opPlayerId	Int	Opta opPlayer ID

		<pre>"opPlayerId": 56917</pre>
playerName	String	Opta player Name <pre>"playerName": "S. Cook"</pre>
outcome	Int	Opta outcome <pre>"outcome": 1</pre>
x	Float	Opta event x-coordinate <pre>"x": 36.3</pre>
y	Float	Opta event y-coordinate <pre>"y": 5.8</pre>
timeStamp	String	Opta's timestamp of the event <pre>"timeStamp": "2019-05-04T11:30:33.984"</pre>
lastModified	String	Opta's last modified timestamp <pre>"lastModified": "2019-05-04T11:30:34.11"</pre>
qualifier	JSON Array of Opta's qualified object(s)	Opta's list of qualifiers <pre>"qualifier": [{ "id": 266963314, "qualifierId": 56, "value": "Back" } ...],</pre>
markingId	UUID	ID of corresponding Second Spectrum marking. <pre>"markingId": "6e7f3519-2465-4584-93a2-04d811048c01"</pre>

		Null if there is no corresponding marking.
alignedClock	Float	The time the event occurred in seconds since the start of the half. Can be used with periodId to match to a specific frame in the game's tracking data. <pre>"alignedClock": 19.28</pre> Null if no alignment is required.
alignedFrameIdx	Int	The frame index the event occurred at. Can be used with periodId to match to a specific frame in the game's tracking data. <pre>"alignedFrameIdx": 482</pre> Null if no alignment is required.

Second Spectrum Marking

These are Second Spectrum markings aligned to tracking data. Additional attributes are included to link the event to its exact time in the tracking data and the corresponding Opta event if applicable.

Sample Marking

```
{
  "id": "6e7f3519-2465-4584-93a2-04d811048c01",
  "optaId": 1575536595,
  "gameId": "987952",
  "period": 1,
  "markingType": "pass",
  "gameClock": 19.28,
  "frameIdx": 482,
  "attTeamId": "6",
  "defTeamId": "91",
  "passerId": "108823",
  "passerDefId": "103912",
  "passerDefDist": 8.37,
  "receiverId": "107040",
  "velocity": 12.90,
  "defBehindPasser": 7,
  "defBehindReceiver": 5,
  "attAheadPasser": 3,
  "attAheadReceiver": 2,
  "defBypassed": 2,
  "defInBox": 4,
  "attInBox": 1,
  "expectedCompletionPct": 0.84,
}
```

Marking Types

Event	Description
pass	A pass directed at a teammate
shot	An attempt at goal
corner	A corner kick
pressure	A defensive action in which a player whose team is out of possession moves to close down an opposing player. Pressures may be applied to players in possession, or potential receivers.
press	A co-ordinated action by 2 or more defending players applying pressure at the same time, to one or more pressed players.
run	A sustained off ball movement by a player whose team is in possession, made with intensity, in order to receive a pass or create space
defensive state	Defensive states break down defensive possessions. When out of possession a defending team can be in transition or organisation.

Type Conventions

Distances & Velocities


All distances are represented as floats in metres, and velocities are represented as metres per second.

Locations

To maintain consistency within the feed, all locations are in meters (x, y), with the center of the field designated (0,0), with positive coordinates in the direction of attack for the team taking the action. For example, a pass from the right corner of the final third will have a location of approximately (52.5, 33.5).

Field Zones

For markings which may take place across different regions of the pitch, fields may be exported using “Zone Enum” strings. The field is divided into 36 rectangular zones, each of which is assigned a string identifier, as described in the graphic below.

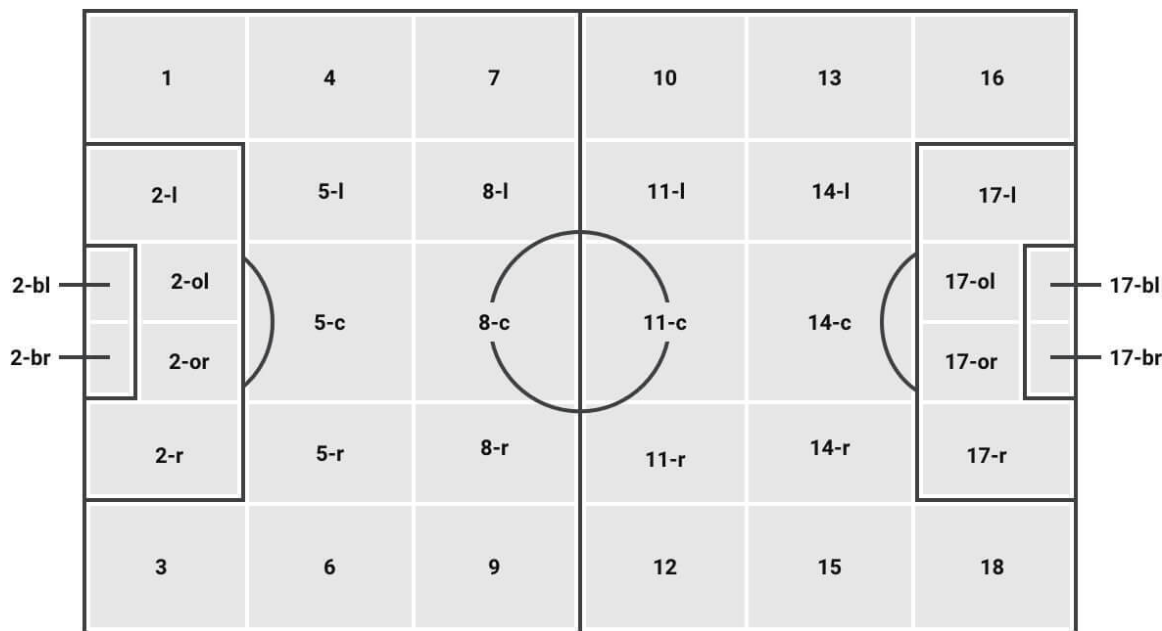

Shared Object Fields

Message objects share some common fields, defined below:

Field	Type	Description
id	UUID	Second Spectrum’s marking ID <code>"id": "2f0989c0-f785-4d0c-809b-b15c790fe694"</code>
optald	int	Corresponding Opta event ID <code>"optaId": 1575536595</code>

		Null there is no corresponding event.
gameId	String	Opta game ID <code>"gameId": "987792"</code>
period	Int	Period number, 1 for the first half, 2 for the second half, 3 and 4 for extra time halves, and 5 for penalties <code>"period": 1</code>
markingType	String	Marking type <code>"markingType": "pass"</code>

Additional Attributes

Attributes will differ between markings, however markings of the same type will always have the same set of attributes.

PASS

Field	Type	Description
Shared fields from Overview		
gameClock	Float	Game clock when the pass was made <code>"gameClock": 596.08</code>
frameIdx	Int	Frame index when the pass was made <code>"frameIdx": 14902</code>
attTeamId	String	Opta ID of the passing team <code>"attTeamId": "57"</code>

defTeamId	String	Opta ID of the defending team. <pre>"defTeamId": "91"</pre>
playerId	String	Opta ID of the passer. <pre>"playerId": "40868"</pre>
passerDefId	String	Opta ID of the closest defender at the time of the pass. <pre>"passerDefId": "78007"</pre>
passerDefDist	Float	Distance between the passer and their closest defender at the time of the pass (m). <pre>"passerDefDist": 8.16</pre>
receiverId	String	Opta ID of the player that receives the pass, including players on the opposing team. <pre>"receiverId": "38439"</pre>
targetId	String	Opta ID of the player that the passer was attempting to pass to. <pre>"targetId": "40868"</pre> Null if the pass was crossed, cleared, or launched.
targetDefId	String	Opta ID of the closest defender to the target at the time of the pass. <pre>"targetDefId": "78007"</pre> Null if the pass was crossed, cleared, or launched, or if the target is unmarked at the time of the pass.
targetDefDist	Float	Distance between the target and their closest defender at the time of the pass (m). <pre>"targetDefDist": 8.16</pre> Null if the pass was crossed, cleared, or launched, or if the target is unmarked at the time of the pass.

velocity	Float	Speed of the pass (m/s). <pre>"velocity": 12.90</pre>
breaksOffsideLine	Bool	Set 'true' if the pass doesn't start goal-side of the back line, and ends goal-side of the back line (defined by the second to last defender at the frameIdx). <pre>"breaksOffsideLine": true</pre>
passLoc	Float List	Ball location when the pass is played. <pre>"passLoc": [14.8, 20.25, 0.0]</pre>
endLoc	Float List	The location at which the pass was received. If the pass was not received by a player on either team, the location of the ball at the interrupting event (out of bounds, other stoppage, etc.) is used. <pre>"endLoc": [14.8, 20.25, 0.0]</pre>
distance	Int	The distance of the pass (m). <pre>"distance": 12.45</pre>
direction	String	Direction the pass was played, one of backward, square, diagonal, or forward. <pre>"direction": "diagonal"</pre>
defBehindPasser	Int	Number of defenders goal-side of the passer (opposition goal). <pre>"defBehindPasser": 7</pre>
defBehindTarget	Int	Number of defenders goal-side of the intended recipient (opposition goal). <pre>"defBehindTarget": 9</pre>
defBehindReceiver	Int	Number of defenders goal-side of the receiver

		(opposition goal). <code>"defBehindReceiver": 5</code>
attAheadPasser	Int	Number of attackers goalside of the passer (opposition goal). <code>"attAheadPasser": 3</code>
attAheadTarget	Int	Number of attackers goalside of the intended recipient (opposition goal). <code>"attAheadTarget": 6</code>
attAheadReceiver	Int	Number of attackers goalside of the receiver (opposition goal). <code>"attAheadReceiver": 2</code>
defBypassed	Int	Number of defenders bypassed by the pass - range from -11 to 11. <code>"defBypassed": 1</code>
defInBox	String List	A list of players on the defTeamId that were in the defensive penalty area at the frameIdx. <code>"defInBox": [438098,444145,205651]</code>
attInBox	String List	A list of players on the attTeamId that were in the attacking penalty area at the frameIdx. <code>"attInBox": [432098,445145,245651]</code>
pressurePlayers	String List	A list of players on the defTeamId that were actively pressing the playerId. <code>"pressurePlayers": [432398,440145,246651]</code>
receivedBetweenLines	Bool	Set true if the pass is successfully received and the target is occupying space between the relevant

		defensive and midfield players at the time of the reception. <pre>"receivedBetweenLines": false</pre>
options	Int	Number of passing options available to the passer, defined by the likelihood of the pass being completed exceeding 75%, and excluding passes longer than 40 metres. <pre>"options": 5</pre>
optionsAtReception	Int	Number of passing options available to the receiving player at the time of the reception, defined by the likelihood of the pass being completed exceeding 75%, and excluding passes longer than 40 metres. <pre>"optionsAtReception": 1</pre> 0 if the pass is not completed.
passProbability	Float	The percentage likelihood that an average passer would complete the particular pass, based on player location features as well as the particular trajectory and target movement after the pass. <pre>"passProbability": 0.5582</pre>
passerImpact	Float	The difference between a Pass Probability and actual completion (1 or 0). When accumulated over many passes, this metric is an approximate model of a passer's ability to complete difficult passes. <pre>"passerImpact": 0.4418</pre>

SHOT

Field	Type	Description
Shared fields from Overview		
gameClock	Float	Game clock when the shot was taken. <code>"gameClock": 134.12</code>
frameIdx	Int	Frame index when the shot was taken. <code>"frameIdx": 14902</code>
attTeamId	String	Opta ID of the shooter's team. <code>"attTeamId": "57"</code>
defTeamId	String	Opta ID of the defending team. <code>"defTeamId": "91"</code>
shooterId	String	Opta ID of the shooter. <code>"shooterId": "61566"</code>
shotLoc	Float List	Ball location when the shot is attempted. <code>"shotLoc": [14.8, 20.25, 0.0]</code>
goalDist	Float	Distance from goal when the shot was taken (distance to post or goal center, whichever is closer)(m). <code>"goalDist": 14.88</code>
shooterDefId	String	Opta ID of the nearest defender to the shooter. <code>"shooterDefId": "56872"</code>

shooterDefDist	Float	Distance from the closest defender to the shooter (m). <code>"shooterDefDist": 2.67</code>
defGoalside	Int	Number of defenders between the shooter and goal. <code>"defGoalside": 3</code>
pressurePlayers	String List	A list of players on the defTeamId that were actively pressing the shooterId. <code>"pressurePlayers": [432398,440145,246651]</code>
options	Int	At the time of the shot, the number of players on the attTeamId for whom the expected completion percentage of a potential pass is greater or equal to 75%. <code>"options": 4</code>
keeperInitialDist	Float	Distance the goalkeeper would need to travel to reach the nearest point in the goal plane to the ball (m). <code>"keeperInitialDist": 1.29</code>
inTransition	Bool	Set true if the shot happens while the defensive team is in defensive transition, as defined by Second Spectrum's defensive state model. <code>"inTransition": true</code>
keeperReactionDist	Float	Distance the goalkeeper actually travels from the time the shot is taken to the time the ball crosses the goal-line plane, is saved or blocked, or hits the post (m). <code>"keeperReactionDist": 0.85</code>
keeperInitialDist	Float	The 2D distance from the keeper's location at the frameIdx to the location where the ball crosses the goal line (or to the post if the shot is wide)(m).

		<pre>"keeperInitialDist": 0.85</pre>
velocity	Float	Average speed of the shot, from the time the ball is kicked to the time it is blocked, saved, hits the post, or crosses the goal line. Set to 0.0 if the shot is blocked immediately after being kicked (m/s). <pre>"velocity": 14.95</pre>

CORNER

Field	Type	Description
Shared fields from Overview		
gameClock	Float	Game clock when the turnover occurred. <pre>"gameClock": 134.12</pre>
frameIdx	Int	Frame index when the turnover occurred. <pre>"frameIdx": 14902</pre>
attTeamId	String	Opta ID of the team taking the corner. <pre>"attTeamId": "57"</pre>
defTeamId	String	Opta ID of the team defending the corner. <pre>"defTeamId": "91"</pre>
takerId	String	Opta ID of the offensive team. <pre>"teamId": "57"</pre>
defInBox	Int	Opta IDs for all defenders in the 18-yard box. <pre>"defInBox": 4</pre>

attInBox	String List	Opta IDs for all attackers in the 18-yard box. <pre>"attInBox": ["40142", "75115", "83314", "101148", "57145", "153127"]</pre>
defInGkBox	String List	Opta IDs for all defenders in the 6-yard box when the corner is taken. <pre>"defInGkBox": ["55459", "37096", "215439", "204480"]</pre>
attInGkBox	String List	Opta IDs for all attackers in the 6-yard box when the corner is taken. <pre>"attInGkBox": ["75115", "83314"]</pre>
nearPostDefender	Bool	Set true if the defensive team has stationed a player on the near post. <pre>"nearPostDefender": True</pre>
farPostDefender	Bool	Set true if the defensive team has stationed a player on the far post <pre>"farPostDefender": False</pre>
crossSwing	String	Whether the corner was taken as an in-swinger or an out-swinger. <pre>"crossSwing": "inswing"</pre>
defOnEdge	String List	Opta IDs for all defenders on the edge of the 18-yard box when the corner is taken, defined as the final third of the field in between the vertical 18-yard lines, and not in the box. <pre>"defOnEdge": ["170137"]</pre>

attOnEdge	String List	Opta IDs for all attackers on the edge of the 18-yard box when the corner is taken, defined as the final third of the field in between the vertical 18-yard lines, and not in the box. <pre>"attOnEdge": ["170137"]</pre>
defOnWing	String List	Opta IDs for all defenders on the wing at the time the corner is taken – in the final third but outside of the vertical boundaries of the 18-yard box. <pre>"defOnWing": [170137]</pre>
attOnWing	String List	Opta IDs for all attackers on the wing at the time the corner is taken – in the final third but outside of the vertical boundaries of the 18-yard box. <pre>"attOnWing": [170137]</pre>
defLeftUp	String List	Opta IDs for all defenders left up, outside of the final third of the field at the time the corner is taken. <pre>"defLeftUp": [170137]</pre>
attLeftBack	String List	Opta IDs for all attackers left back, outside of the final third of the field at the time the corner is taken. <pre>"attLeftBack": ["37096", "81012"]</pre>
shortOption	Bool	Set 'true' if the Corner is both not crossed, not deflected, and was passed no more than 18 meters. <pre>"shortOption": true</pre>

PRESSURE

Field	Type	Description
Shared fields from Overview		
startClock	Float	Game clock when the pressure started, with the defender moving towards the pressed opponent. Pressure can be applied directly to the ball-possessor, and indirectly to potential receivers. <code>"startClock": 2121.28</code>
endClock	Float	Game clock when the pressure ended. <code>"endClock": 2125.28</code>
startFrameIdx	Int	Frame index when the pressure started. <code>"frameIdx": 14902</code>
endFrameIdx	Int	Frame index when the pressure ended. <code>"frameIdx": 14902</code>
presserId	String	Opta ID of the player applying pressure. <code>"presserId": "217593"</code>
pressedId	String	Opta ID of the player being pressured. <code>"pressedId": "91"</code>
startDist	Float	Distance from between the defender and the pressured player at the time the pressure started (m). <code>"startDist": 1.39</code>
endDist	Float	Distance from between the defender and the pressured player at the time the pressure ended (m).

		<pre>"endDist": 1.02</pre>
maxSpeed	Float	The top instantaneous speed the presserId reaches during the pressure (m/s). <pre>"maxSpeed": 3.92</pre>
avgSpeed	Float	The presserId's average instantaneous speed during the pressure (m/s). <pre>"avgSpeed": 3.11</pre>
zones	String List (Zone Enum)	The field zones the defender and pressed player travel through during the pressure. <pre>"zones": ["17-ol", "17-r"]</pre>
playerInPossPressed	Bool	Set true if the pressed player is in possession of the ball at some point during the pressure event. <pre>"playerInPossPressed": true</pre>
inTeamPress	Bool	Set true if the pressure occurred as a part of an organised team press. <pre>"inTeamPress": true</pre>
isTurnover	Bool	Set true if the pressured touch results in a turnover. <pre>"isTurnover": true</pre>
outcome	String	The result of the pressured touch: LostBall, Clearance, CompletedPass, DefenderDribbled, Foul, Out, IncompletePass, Shot, Stoppage. <pre>"Outcome": "defender_dribbled"</pre>
intensity	Int	The speed interval reached by the presser_id during the Pressure: Sprinting (> 25km/h), HighSpeedRunning (20-25 km/h), Running (15-20 km/h), Other (< 15km/h).

		<pre>"intensity": 12.49</pre>
--	--	-------------------------------

PRESS

Field	Type	Description
Shared fields from Overview		
startClock	Float	Game clock when the pressure started, defined as the start time of the first pressure related to this pressing action. <pre>"startClock": 2361.56</pre>
endClock	Float	Game clock when the press ended. <pre>"endClock": 2368.0</pre>
startFrameIdx	Int	Frame index when the press started. <pre>"frameIdx": 59039</pre>
endFrameIdx	Int	Frame index when the press ended. <pre>"frameIdx": 59200</pre>
attTeamId	String	Opta ID of the team in possession of the ball, being pressed. <pre>"attTeamId": "21"</pre>
defTeamId	String	Opta ID of the team executing the press <pre>"defTeamId": "4"</pre>

pressingPlayers	String List	Opta IDs for all players who are involved in the pressures that make up the coordinated team press. <pre>"pressingPlayers": ["40142", "75115"]</pre>
-----------------	-------------	---

RUN

Field	Type	Description
Shared fields from Overview		
startClock	Float	Game clock when the run started. <pre>"startClock": 2375.48</pre>
endClock	Float	Game clock when the run ended. <pre>"endClock": 2379.12</pre>
startFrameIdx	Int	Frame index when the run started. <pre>"frameIdx": 59387</pre>
endFrameIdx	Int	Frame index when the run ended. <pre>"frameIdx": 59478</pre>
playerId	String	Opta ID of the player making the run. <pre>"shooterId": "57531"</pre>
targeted	Bool	Set 'true' if the runner is targeted by a pass. <pre>"targeted": false</pre>
runStartLoc	Float List	Player location when the run begins.

		<pre>"runStartLoc": [-1.5, -39.19, 0.0]</pre>
runEndLoc	Float List	Player location when the run ends. <pre>"runEndLoc": [10.78, -55.7, 0.0]</pre>
zones	String List (Zone Enum)	The field zones the running player travels through during the run. <pre>"zones": ["12", "11-r"]</pre>
targeted	Bool	Set true if the player making the run is targeted by a pass attempt during or immediately after the run. <pre>"targeted": false</pre>
maxSpeed	Float	Maximum velocity the player making the run achieves during the run (m/s). <pre>"maxSpeed": 6.11</pre>
avgSpeed	Float	Average velocity the player making the run achieves during the run (m/s). <pre>"avgSpeed": 5.09</pre>
distance	Float	The total distance the player travels during the run (m). <pre>"distance": 17.07</pre>
isSprinting	Bool	Set true if the player reaches sprinting speed during the run (Sprinting > 25km/h). <pre>"isSprinting": false</pre>

DEFENSIVE STATE

Field	Type	Description
Shared fields from Overview		
teamId	String	Opta ID of the defensive team. <code>"teamId": "4"</code>
attTeamId	String	Opta ID of the attacking team. <code>"attTeamId": "3"</code>
startFrameIdx	Int	Frame index when the defensive state started. <code>"frameIdx": 59387</code>
endFrameIdx	Int	Frame index when the defensive state ended. <code>"frameIdx": 59478</code>
startClock	Float	Game clock when the defensive state started. <code>"startClock": 2375.48</code>
endClock	Float	Game clock when the defensive state ended. <code>"endClock": 2379.12</code>
duration	Float	The defensive state duration is equal to the endClock minus the startClock. <code>"duration": 12.23</code>
startSetPlay	Bool	Set 'true' if the defensive state begins with a Corner Kick, Free Kick or Penalty Kick. <code>"startSetPlay": true</code>

state	String	Valid values: organisation, transition. <pre>"state": "transition"</pre>
isFinalThird	Bool	Set 'true' if the attTeamId reaches the final third at any point during the state. <pre>"isFinalThird": false</pre>
isPenaltyArea	Bool	Set 'true' if the attTeamId reaches the penalty area at any point during the state. <pre>"isPenaltyArea": false</pre>