

Welcome to Colab!

Explore the Gemini API

The Gemini API gives you access to Gemini models created by Google DeepMind. Gemini models are built from the ground up to be multimodal, so you can reason seamlessly across text, images, code, and audio.

How to get started

1. Go to [Google AI Studio](#) and log in with your Google account.
2. [Create an API key](#).
3. Use a quickstart for [Python](#), or call the REST API using [curl](#).

Explore use cases

- [Create a marketing campaign](#)
- [Analyze audio recordings](#)
- [Use System instructions in chat](#)

To learn more, check out the [Gemini cookbook](#) or visit the [Gemini API documentation](#).

If you're already familiar with Colab, check out this video to learn about interactive tables, the executed code history view, and the command palette.



Start coding or [generate](#) with AI.

What is Colab?

Colab, or "Colaboratory", allows you to write and execute Python in your browser, with

- Zero configuration required
- Access to GPUs free of charge
- Easy sharing


Whether you're a **student**, a **data scientist** or an **AI researcher**, Colab can make your work easier. Watch [Introduction to Colab](#) to learn more, or just get started below!

✓ Getting started

The document you are reading is not a static web page, but an interactive environment called a **Colab notebook** that lets you write and execute code.

For example, here is a **code cell** with a short Python script that computes a value, stores it in a variable, and prints the result:

```
seconds_in_a_day = 24 * 60 * 60
seconds_in_a_day
```

 86400

To execute the code in the above cell, select it with a click and then either press the play button to the left of the code, or use the keyboard shortcut "Command/Ctrl+Enter". To edit the code, just click the cell and start editing.

Variables that you define in one cell can later be used in other cells:

```
seconds_in_a_week = 7 * seconds_in_a_day
seconds_in_a_week
```

604800

Colab notebooks allow you to combine **executable code** and **rich text** in a single document, along with **images**, **HTML**, **LaTeX** and more. When you create your own Colab notebooks, they are stored in your Google Drive account. You can easily share your Colab notebooks with co-workers or friends, allowing them to comment on your notebooks or even edit them. To learn more, see [Overview of Colab](#). To create a new Colab notebook you can use the File menu above, or use the following link: [create a new Colab notebook](#).

Colab notebooks are Jupyter notebooks that are hosted by Colab. To learn more about the Jupyter project, see [jupyter.org](#).

▼ Data science

With Colab you can harness the full power of popular Python libraries to analyze and visualize data. The code cell below uses **numpy** to generate some random data, and uses **matplotlib** to visualize it. To edit the code, just click the cell and start editing.


You can import your own data into Colab notebooks from your Google Drive account, including from spreadsheets, as well as from Github and many other sources. To learn more about importing data, and how Colab can be used for data science, see the links below under [Working with Data](#).

```
import numpy as np
import IPython.display as display
from matplotlib import pyplot as plt
import io
import base64

ys = 200 + np.random.randn(100)
x = [x for x in range(len(ys))]

fig = plt.figure(figsize=(4, 3), facecolor='w')
plt.plot(x, ys, '-')
plt.fill_between(x, ys, 195, where=(ys > 195), facecolor='g', alpha=0.6)
plt.title("Sample Visualization", fontsize=10)

data = io.BytesIO()
plt.savefig(data)
image = F"data:image/png;base64,{base64.b64encode(data.getvalue()).decode()}"
alt = "Sample Visualization"
display.display(display.Markdown(F"!!![{alt}]({image})"))
plt.close(fig)
```

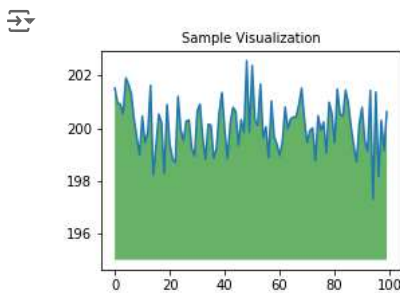

Colab notebooks execute code on Google's cloud servers, meaning you can leverage the power of Google hardware, including [GPUs and TPUs](#), regardless of the power of your machine. All you need is a browser.

For example, if you find yourself waiting for **pandas** code to finish running and want to go faster, you can switch to a GPU Runtime and use libraries like [RAPIDS cuDF](#) that provide zero-code-change acceleration.

To learn more about accelerating pandas on Colab, see the [10 minute guide](#) or [US stock market data analysis demo](#).

▼ Machine learning

With Colab you can import an image dataset, train an image classifier on it, and evaluate the model, all in just [a few lines of code](#).

Colab is used extensively in the machine learning community with applications including:

- Getting started with TensorFlow
- Developing and training neural networks
- Experimenting with TPUs
- Disseminating AI research
- Creating tutorials

To see sample Colab notebooks that demonstrate machine learning applications, see the [machine learning examples](#) below.

✓ More Resources

Working with Notebooks in Colab

- [Overview of Colab](#)
- [Guide to Markdown](#)
- [Importing libraries and installing dependencies](#)
- [Saving and loading notebooks in GitHub](#)
- [Interactive forms](#)
- [Interactive widgets](#)

Working with Data

- [Loading data: Drive, Sheets, and Google Cloud Storage](#)
- [Charts: visualizing data](#)
- [Getting started with BigQuery](#)

Machine Learning Crash Course

These are a few of the notebooks from Google's online Machine Learning course. See the [full course website](#) for more.

- [Intro to Pandas DataFrame](#)
- [Intro to RAPIDS cuDF to accelerate pandas](#)
- [Linear regression with tf.keras using synthetic data](#)

Using Accelerated Hardware

- [TensorFlow with GPUs](#)
- [TensorFlow with TPUs](#)

✓ Featured examples

- [Retraining an Image Classifier](#): Build a Keras model on top of a pre-trained image classifier to distinguish flowers.
- [Text Classification](#): Classify IMDB movie reviews as either *positive* or *negative*.
- [Style Transfer](#): Use deep learning to transfer style between images.
- [Multilingual Universal Sentence Encoder Q&A](#): Use a machine learning model to answer questions from the SQuAD dataset.
- [Video Interpolation](#): Predict what happened in a video between the first and the last frame.

```
import pandas as pd
from sklearn.model_selection import train_test_split
from sklearn.naive_bayes import GaussianNB
from sklearn.metrics import confusion_matrix, accuracy_score, classification_report

# Load the dataset (assuming 'breast_cancer_data.csv' is the dataset file name)
# For this example, we use sklearn's built-in breast cancer dataset
from sklearn.datasets import load_breast_cancer
data = load_breast_cancer()

# Convert to DataFrame
df = pd.DataFrame(data.data, columns=data.feature_names)
df['target'] = data.target

# Step (a): Print the first five rows of the dataset
print("First five rows of the dataset:")
print(df.head())
```

```

# Basic statistical computations on the dataset
print("\nBasic statistical computations:")
print(df.describe())

# Print the columns and their data types
print("\nColumns and their data types:")
print(df.dtypes)

# Step (b): Detect null values
print("\nNull values in the dataset:")
print(df.isnull().sum())

# If there are any null values, replace them with the mode value
for column in df.columns:
    if df[column].isnull().sum() > 0:
        mode_value = df[column].mode()[0]
        df[column].fillna(mode_value, inplace=True)

print("\nNull values after imputation:")
print(df.isnull().sum())

# Step (e): Split the data into train and test sets
X = df.drop('target', axis=1)
y = df['target']
X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.2, random_state=42)

# Train a Naive Bayes classifier
model = GaussianNB()
model.fit(X_train, y_train)

# Predict on the test set
y_pred = model.predict(X_test)

# Step (c): Evaluate the performance of the model
# Confusion matrix
conf_matrix = confusion_matrix(y_test, y_pred)
print("\nConfusion Matrix:")
print(conf_matrix)

# Accuracy
accuracy = accuracy_score(y_test, y_pred)
print(f"\nAccuracy: {accuracy:.2f}")

# Classification report
class_report = classification_report(y_test, y_pred)
print("\nClassification Report:")
print(class_report)

```



First five rows of the dataset:

	mean radius	mean texture	mean perimeter	mean area	mean smoothness	\
0	17.99	10.38	122.80	1001.0	0.11840	
1	20.57	17.77	132.90	1326.0	0.08474	
2	19.69	21.25	130.00	1203.0	0.10960	
3	11.42	20.38	77.58	386.1	0.14250	
4	20.29	14.34	135.10	1297.0	0.10030	

	mean compactness	mean concavity	mean concave points	mean symmetry	\
0	0.27760	0.3001	0.14710	0.2419	
1	0.07864	0.0869	0.07017	0.1812	
2	0.15990	0.1974	0.12790	0.2069	
3	0.28390	0.2414	0.10520	0.2597	
4	0.13280	0.1980	0.10430	0.1809	

	mean fractal dimension	...	worst texture	worst perimeter	worst area	\
0	0.07871	...	17.33	184.60	2019.0	
1	0.05667	...	23.41	158.80	1956.0	
2	0.05999	...	25.53	152.50	1709.0	
3	0.09744	...	26.50	98.87	567.7	
4	0.05883	...	16.67	152.20	1575.0	

	worst smoothness	worst compactness	worst concavity	worst concave points	\
0	0.1622	0.6656	0.7119	0.2654	
1	0.1238	0.1866	0.2416	0.1860	
2	0.1444	0.4245	0.4504	0.2430	
3	0.2098	0.8663	0.6869	0.2575	
4	0.1374	0.2050	0.4000	0.1625	

	worst symmetry	worst fractal dimension	target
0	0.4601	0.11890	0
1	0.2750	0.08902	0
2	0.3613	0.08758	0
3	0.6638	0.17300	0
4	0.2364	0.07678	0

[5 rows x 31 columns]

Basic statistical computations:

	mean radius	mean texture	mean perimeter	mean area \
count	569.000000	569.000000	569.000000	569.000000
mean	14.127292	19.289649	91.969033	654.889104
std	3.524049	4.301036	24.298981	351.914129
min	6.981000	9.710000	43.790000	143.500000
25%	11.700000	16.170000	75.170000	420.300000
50%	13.370000	18.840000	86.240000	551.100000
75%	15.780000	21.800000	104.100000	782.700000
max	28.110000	39.280000	188.500000	2501.000000

	mean smoothness	mean compactness	mean concavity	mean concave points \
count	569.000000	569.000000	569.000000	569.000000
mean	0.096360	0.104341	0.088799	0.048919
std	0.014064	0.052813	0.079720	0.038803
min	0.052630	0.019380	0.000000	0.000000
25%	0.086370	0.064920	0.029560	0.020310
50%	0.095870	0.092630	0.061540	0.033500
75%	0.105300	0.130400	0.130700	0.074000
max	0.162100	0.345100	0.426000	0.201200