

MY SQL MODULE END ASSIGNMENT

Name: Harikarthikeyan V

Screenshots

E-Commerce Customer Churn Analysis Using MySQL

1. DATABASE AND TABLE

Database- ecomm

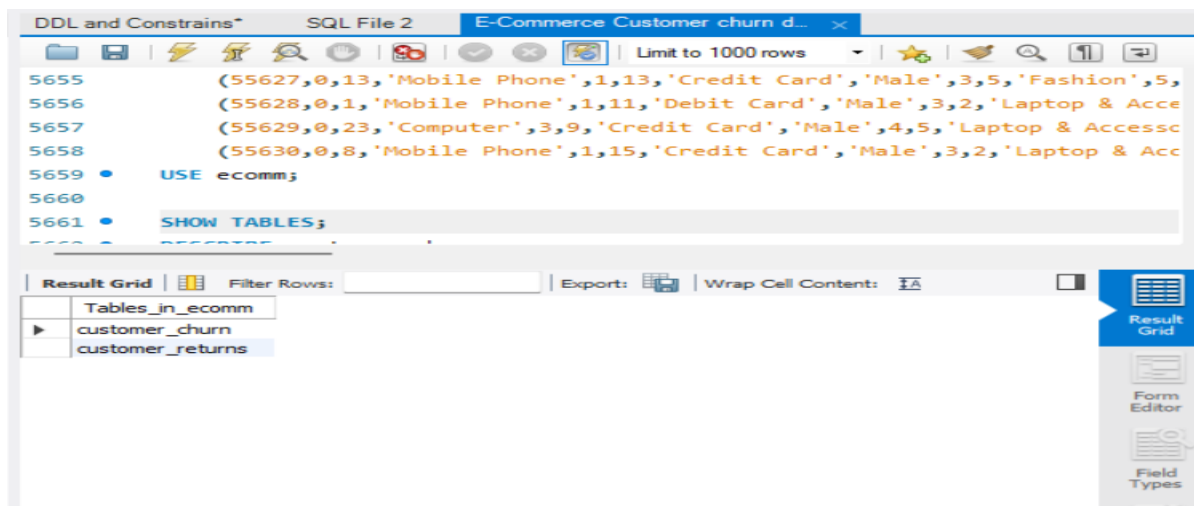


Table – customer_churn

The screenshot shows the MySQL IDE interface with the following SQL queries:

```
5656 (55628,0,1,'Mobile Phone',1,11,'Debit Card','Male',3,2,'Laptop & Acce  
5657 (55629,0,23,'Computer',3,9,'Credit Card','Male',4,5,'Laptop & Access  
5658 (55630,0,8,'Mobile Phone',1,15,'Credit Card','Male',3,2,'Laptop & Acc  
5659 • USE ecomm;  
5660  
5661 • SHOW TABLES;  
5662 • DESCRIBE customer_churn;  
5663 •
```

The 'Result Grid' tab is active, displaying the structure of the 'customer_churn' table:

Field	Type	Null	Key	Default	Extra
CustomerID	int	NO	PRI	NULL	
Tenure	int	YES		NULL	
PreferredLoginDevice	varchar(20)	YES		NULL	
CityTier	int	YES		NULL	
WarehouseToHome	int	YES		NULL	
PreferredPaymentMode	varchar(20)	YES		NULL	
Gender	enum('Male','Female')	YES		NULL	
HoursSpentOnApp	int	YES		NULL	
NumberOfDeviceRegistered	int	YES		NULL	
PreferredOrderCat	varchar(20)	YES		NULL	
SatisfactionScore	int	YES		NULL	
MaritalStatus	varchar(10)	YES		NULL	
NumberOfAddress	int	YES		NULL	
OrderAmountHikeFromlast...	int	YES		NULL	
CouponUsed	int	YES		NULL	

On the right sidebar, there are buttons for 'Result Grid', 'Form Editor', 'Field Types', and 'Query Stats'.

DATA TABLE BEFORE CLEANING

DDL and Constrains* SQL File 2 E-Commerce Customer churn d... x

5659 • `USE ecomm;`
5660
5661 • `SHOW TABLES;`
5662 • `DESCRIBE customer_churn;`
5663 • `SELECT *`
5664 `FROM customer_churn`
5665 `LIMIT 10;`

Result Grid | Filter Rows: | Edit: | Export/Import: |

	CustomerID	Tenure	PreferredLoginDevice	CityTier	WarehouseToHome	PreferredPaymentM
▶	50001	4	Mobile Phone	3	6	Debit Card
	50002	1	Mobile Phone	1	8	UPI
	50003	1	Mobile Phone	1	30	Debit Card
	50004	0	Mobile Phone	3	15	Debit Card
	50005	0	Mobile Phone	1	12	Credit Card
	50006	0	Computer	1	22	Debit Card
	50007	1	Mobile Phone	3	11	Cash on Delivery
	50008	1	Mobile Phone	1	6	Credit Card
	50009	13	Mobile Phone	3	9	E wallet
	50010	1	Mobile Phone	1	31	Debit Card
*	NULL	NULL	NULL	NULL	NULL	NULL

Result Grid
Form Editor
Field Types

2. DATA CLEANING

NULL VALUE

DDL and Constrains* SQL File 2 E-Commerce Customer churn d... x


5763 `FROM customer_churn`
5764 `WHERE OrderCount IS NULL;`
5765
5766 `-- VERIFY MISSING VALUES --`
5767 • `SELECT`
5768 `SUM(WarehouseToHome IS NULL) AS WarehouseToHome_NULL,`
5769 `SUM(HourSpendOnApp IS NULL) AS HourSpendOnApp_NULL,`
5770 `SUM(OrderAmountHike IS NULL) AS OrderAmountHike_NULL,`
5771 `SUM(DaySinceLastOrder IS NULL) AS DaySinceLastOrder_NULL;`

Result Grid | Filter Rows: | Export: | Wrap Cell Content: |

	WarehouseToHome_NULL	HourSpendOnApp_NULL	OrderAmountHike_NULL	DaySinceLastOrder_NULL
▶	0	0	0	0

Result Grid
Form Editor
Field Types

Outlier deletion

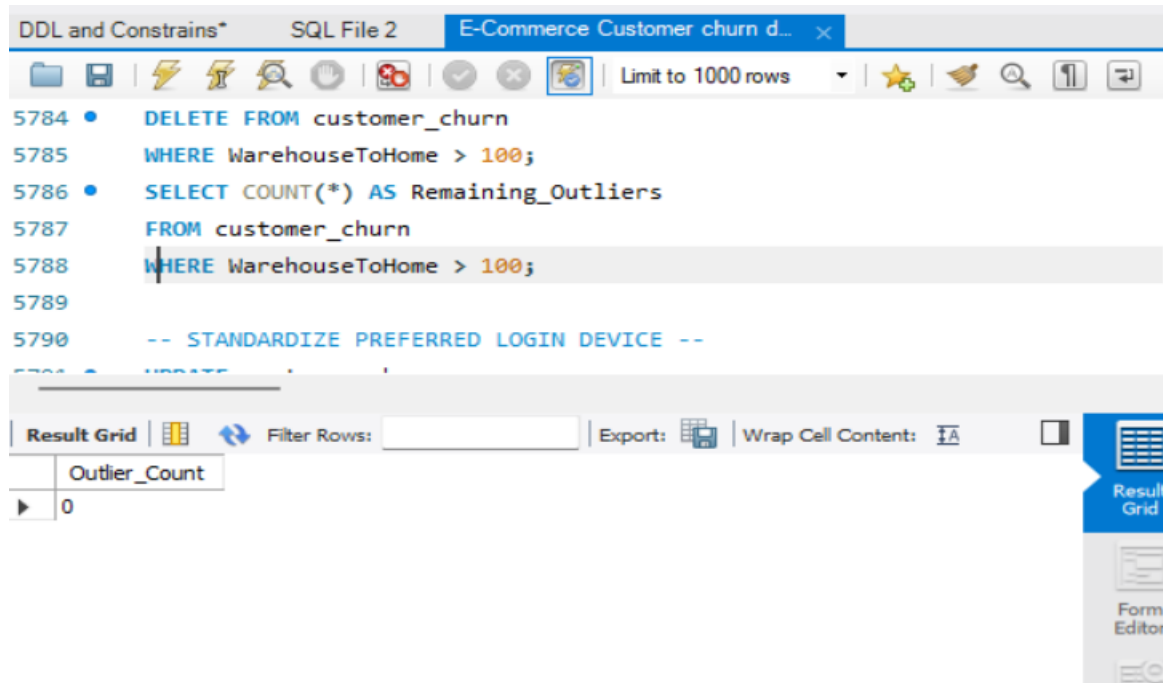

The screenshot shows a SQL IDE window with a query editor and a result grid. The query editor contains the following SQL code:


```
5784 • DELETE FROM customer_churn
5785 WHERE WarehouseToHome > 100;
5786 • SELECT COUNT(*) AS Remaining_Outliers
5787 FROM customer_churn
5788 WHERE WarehouseToHome > 100;
5789
5790 -- STANDARDIZE PREFERRED LOGIN DEVICE --
```

The result grid shows the output of the query:

Outlier_Count
0

The IDE interface includes a toolbar with various icons, a "Limit to 1000 rows" dropdown, and a sidebar with "Result Grid" and "Form Editor" buttons.

Standardization Queries and output

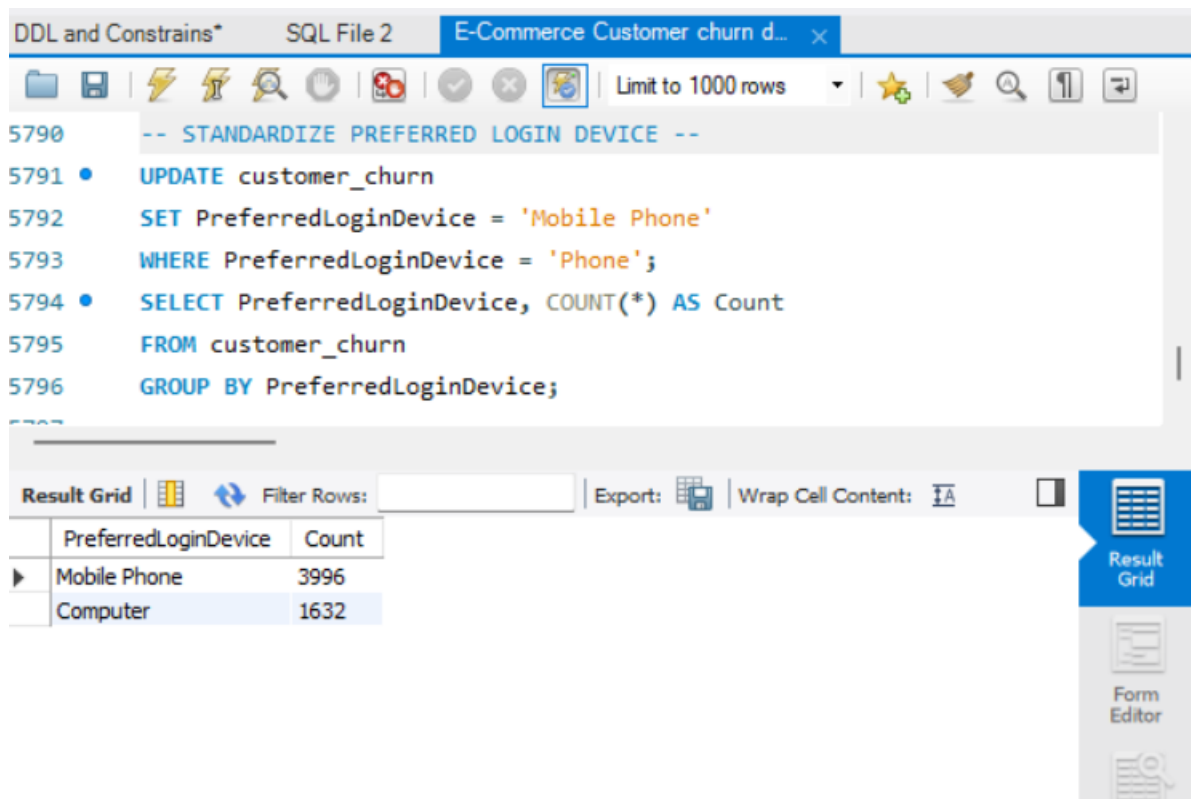

The screenshot shows a SQL IDE window with a query editor and a result grid. The query editor contains the following SQL code:

```
5790 -- STANDARDIZE PREFERRED LOGIN DEVICE --
5791 • UPDATE customer_churn
5792 SET PreferredLoginDevice = 'Mobile Phone'
5793 WHERE PreferredLoginDevice = 'Phone';
5794 • SELECT PreferredLoginDevice, COUNT(*) AS Count
5795 FROM customer_churn
5796 GROUP BY PreferredLoginDevice;
```

The result grid shows the output of the query:

PreferredLoginDevice	Count
Mobile Phone	3996
Computer	1632

The IDE interface includes a toolbar with various icons, a "Limit to 1000 rows" dropdown, and a sidebar with "Result Grid" and "Form Editor" buttons.

DDL and Constrains* SQL File 2 E-Commerce Customer churn d... x

Limit to 1000 rows

```
5798 -- STANDARDIZE PREFERRED ORDERCAT --
5799 • UPDATE customer_churn
5800 SET PreferredOrderCat = 'Mobile Phone'
5801 WHERE PreferredOrderCat = 'Mobile';
5802 • SELECT PreferredOrderCat, COUNT(*) AS Count
5803 FROM customer_churn
5804 GROUP BY PreferredOrderCat;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content: |

	PreferredOrderCat	Count
▶	Laptop & Accessory	2050
	Mobile Phone	2078
	Others	264
	Fashion	826
	Grocery	410

Result Grid
Form Editor
Field Editor

DDL and Constrains* SQL File 2 E-Commerce Customer churn d... x SQLAd...

Limit to 1000 rows

```
5809 WHERE PreferredPaymentMode = 'COD';
5810 • UPDATE customer_churn
5811 SET PreferredPaymentMode = 'Credit Card'
5812 WHERE PreferredPaymentMode = 'CC';
5813 • SELECT PreferredPaymentMode, COUNT(*) AS Count
5814 FROM customer_churn
5815 GROUP BY PreferredPaymentMode;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content: |

	PreferredPaymentMode	Count
▶	Debit Card	2312
	UPI	414
	Credit Card	1774
	Cash on Delivery	514
	E wallet	614

Result Grid
Form Editor
Field Editor

DATA TRANSFORMATION

Column renaming

The screenshot shows the SQL Developer interface with a script window containing the following SQL commands:

```
5816
5817 -- RENAME COLUMN --
5818 • ALTER TABLE customer_churn
5819   RENAME COLUMN PreferredOrderCat TO PreferredOrderCat;
5820 • ALTER TABLE customer_churn
5821   RENAME COLUMN HourSpendOnApp TO HoursSpentOnApp;
5822 • DESCRIBE customer_churn;
```

Below the script, the 'Result Grid' displays the table structure for 'customer_churn':

Field	Type	Null	Key	Default	Extra
CustomerID	int	NO	PRI	NULL	
Churn	bit(1)	YES		NULL	
Tenure	int	YES		NULL	
PreferredLoginDevice	varchar(20)	YES		NULL	
CityTier	int	YES		NULL	
WarehouseToHome	int	YES		NULL	
PreferredPaymentMode	varchar(20)	YES		NULL	
Gender	enum('Male','Female')	YES		NULL	
HoursSpentOnApp	int	YES		NULL	
NumberOfDeviceRegistered	int	YES		NULL	
PreferredOrderCat	varchar(20)	YES		NULL	
SatisfactionScore	int	YES		NULL	
MaritalStatus	varchar(10)	YES		NULL	
NumberofAddress	int	YES		NULL	

Complaint received

The screenshot shows the SQL Developer interface with a script window containing the following SQL command:

```
5827 • UPDATE customer_churn
5828   SET ComplaintReceived =
5829     CASE
5830       WHEN Complain = 1 THEN 'Yes'
5831       ELSE 'No'
5832     END;
5833 • SELECT
```

Below the script, the 'Result Grid' displays the results of the SELECT statement:

Complain	ComplaintReceived	Count
1	Yes	1604
0	No	4024

Churn status creation

The screenshot shows a SQL IDE window with a query editor and a result grid. The query editor contains the following SQL code:

```
5847         ELSE 'Active'
5848     END;
5849 •   SELECT
5850     Churn,
5851     ChurnStatus,
5852     COUNT(*) AS Count
5853 FROM customer_churn
```

The result grid displays the following data:

Churn	ChurnStatus	Count
1	Churned	948
0	Active	4680

Droppind churn and complaints

The screenshot shows a SQL IDE window with a query editor and a result grid. The query editor contains the following SQL code:

```
5854 GROUP BY Churn, ChurnStatus;
5855
5856 -- DROP ORIGINAL CHURN AND COMPLAIN --
5857 •   ALTER TABLE customer_churn
5858     DROP COLUMN Churn,
5859     DROP COLUMN Complain;
5860 •   DESCRIBE customer_churn;
```

The result grid displays the following table structure:

Field	Type	Null	Key	Default	Extra
CustomerID	int	NO	PRI	NULL	
Tenure	int	YES		NULL	
PreferredLoginDevice	varchar(20)	YES		NULL	
CityTier	int	YES		NULL	
WarehouseToHome	int	YES		NULL	
PreferredPaymentMode	varchar(20)	YES		NULL	
Gender	enum('Male','Female')	YES		NULL	
HoursSpentOnApp	int	YES		NULL	
NumberOfDeviceRegistered	int	YES		NULL	
PreferredOrderCat	varchar(20)	YES		NULL	
SatisfactionScore	int	YES		NULL	
MaritalStatus	varchar(10)	YES		NULL	
NumberOfAddress	int	YES		NULL	
OrderAmountHikeFromlast...	int	YES		NULL	
CouponUsed	int	YES		NULL	

4, DATA ANALYSIS

CHURNED VS ACTIVE CUSTOMER

The screenshot shows a SQL IDE window with the following SQL code:

```
5859 DROP COLUMN Complain;  
5860 • DESCRIBE customer_churn;  
5861  
5862 -- DATA ANALYSIS--  
5863 -- CHURNED VS ACTIVE COSTUMER --  
5864 • SELECT  
5865     ChurnStatus,  
5866     COUNT(*) AS CustomerCount  
5867 FROM customer_churn  
5868 GROUP BY ChurnStatus;
```

The result grid shows the following data:

ChurnStatus	CustomerCount
Churned	948
Active	4680

The interface includes a toolbar with icons for file operations, a 'Limit to 1000 rows' dropdown, and a sidebar with buttons for 'Result Grid', 'Form Editor', and 'Field Types'.

AVERAGE TENURE VS TOTAL CASHBACK OF CHURNED CUSTOMER

The screenshot shows a SQL IDE window with the following SQL code:

```
5866     COUNT(*) AS CustomerCount  
5867 FROM customer_churn  
5868 GROUP BY ChurnStatus;  
5869  
5870 -- AVERAGE TENURE & TOTAL CASHBACK OF CHURNED COSTUMER --  
5871 • SELECT  
5872     ROUND(AVG(Tenure), 2) AS AverageTenure,  
5873     SUM(Cashback) AS TotalCashback  
5874 FROM customer_churn  
5875 WHERE ChurnStatus = 'Churned';
```

The result grid shows the following data:

AverageTenure	TotalCashback
3.18	152030

The interface includes a toolbar with icons for file operations, a 'Limit to 1000 rows' dropdown, and a sidebar with buttons for 'Result Grid', 'Form Editor', and 'Field Types'.

PERCENTAGE OF CHURNED CUSTOMER WHO COMPLAINED

The screenshot shows a SQL IDE window with the following query:

```
5874 FROM customer_churn
5875 WHERE ChurnStatus = 'Churned';
5876
5877 -- PERCENTAGE OF CHURNED CUSTOMER WHO COMPLAINS --
5878 • SELECT
5879     ROUND(
5880     SUM(CASE
```

The result grid shows the following data:

ComplaintPercentage
53.59

The right sidebar contains icons for Result Grid, Form Editor, and Field Types.

CITY TIER WITH HIGHEST CHURNED LAPTOP AND ACCESSORY CUSTOMER

The screenshot shows a SQL IDE window with the following query:

```
5886 FROM customer_churn
5887 WHERE ChurnStatus = 'Churned';
5888
5889 -- CITY TIER WITH HIGHEST CHURNED LAPTOP & ACCESSORY CUSTOMERS--
5890 • SELECT
5891     CityTier,
5892     COUNT(*) AS CustomerCount
```

The result grid shows the following data:

CityTier	CustomerCount
3	150

The right sidebar contains icons for Result Grid, Form Editor, and Field Types.

MOST PREFERRED PAYMENT MODE

The screenshot shows a SQL IDE window with the following SQL query:

```
5898 LIMIT 1;  
5899  
5900 -- MOST PREFERRED PAYMENT MODE AMONG ACTIVE CUSTOMER --  
5901 • SELECT  
5902     PreferredPaymentMode,  
5903     COUNT(*) AS CustomerCount  
5904 FROM customer_churn
```

The result grid below the query shows the following data:

PreferredPaymentMode	CustomerCount
Debit Card	1956

The interface includes a toolbar with icons for file operations, a 'Limit to 1000 rows' dropdown, and a sidebar with buttons for 'Result Grid', 'Form Editor', and 'Field Types'.

TOTAL AMOUNT HIKE FOR SINGLE + MOBILE PHONE CUSTOMER

The screenshot shows a SQL IDE window with the following SQL query:

```
5910 -- TOTAL ORDER AMOUNT HIKE - SINGLE + MOBILE PHONE --  
5911 • SELECT  
5912     SUM(OrderAmountHikeFromlastYear) AS TotalOrderAmountHike  
5913 FROM customer_churn  
5914 WHERE MaritalStatus = 'Single'  
5915     AND PreferredOrderCat = 'Mobile Phone';  
5916  
5917
```

The result grid below the query shows the following data:

TotalOrderAmountHike
12177

The interface includes a toolbar with icons for file operations, a 'Limit to 1000 rows' dropdown, and a sidebar with buttons for 'Result Grid', 'Form Editor', and 'Field Types'.

AVERAGE DEVICES REGISTERED FOR UPI USERS

The screenshot shows a SQL IDE window with the following SQL query:

```
5916
5917 -- AVERAGE DEVICES REGISTERED - UPI USERS --
5918 • SELECT
5919     ROUND(AVG(NumberOfDeviceRegistered), 2) AS AverageDevices
5920 FROM customer_churn
5921 WHERE PreferredPaymentMode = 'UPI';
5922
```

The result grid below the query shows the following data:

AverageDevices
3.72

The IDE interface includes a toolbar with icons for file operations, a 'Limit to 1000 rows' dropdown, and a sidebar with 'Result Grid' and 'Form Editor' buttons.

CUSTOMER COUNT Y CITY TIER

The screenshot shows a SQL IDE window with the following SQL query:

```
5923 -- CITY TIER WITH HIGHEST NUMBER OF CUSTOMER --
5924 • SELECT
5925     CityTier,
5926     COUNT(*) AS CustomerCount
5927 FROM customer_churn
5928 GROUP BY CityTier
5929 ORDER BY CustomerCount DESC
```

The result grid below the query shows the following data:

CityTier	CustomerCount
1	3666

The IDE interface includes a toolbar with icons for file operations, a 'Limit to 1000 rows' dropdown, and a sidebar with 'Result Grid' and 'Form Editor' buttons.

COUPON USAGE BY CITY TIER

DDL and Constrains* SQL File 2 E-Commerce Customer churn d... x

Limit to 1000 rows

```
5923 -- CITY TIER WITH HIGHEST NUMBER OF CUSTOMER --
5924 • SELECT
5925     CityTier,
5926     COUNT(*) AS CustomerCount
5927 FROM customer_churn
5928 GROUP BY CityTier
5929 ORDER BY CustomerCount DESC
```

Result Grid

	CityTier	CustomerCount
▶	1	3666

Export: Wrap Cell Content: Fetch row

Result Grid

Form Editor

COUPON USAGE BY GENDER

DDL and Constrains* SQL File 2 E-Commerce Customer churn d... x

Limit to 1000 rows

```
5932 -- GENDER USING THE HIGHEST NUMBER OF COUPON --
5933 • SELECT
5934     Gender,
5935     SUM(CouponUsed) AS TotalCoupons
5936 FROM customer_churn
5937 GROUP BY Gender
5938 ORDER BY TotalCoupons DESC
```

Result Grid

	Gender	TotalCoupons
▶	Male	5494

Export: Wrap Cell Content: Fetch row

Result Grid

Form Editor

Field Types

CUSTOMER COUNT + MAX APP HOURS BY ORDER BY ORDER CATEGORY

DDL and Constrains* SQL File 2 E-Commerce Customer churn d... x

Limit to 1000 rows

```
5941 -- CUSTOMER AND MAXIMUM APP HOURS BY ORDER CATEGORY --
5942 • SELECT
5943     PreferredOrderCat,
5944     COUNT(*) AS CustomerCount,
5945     MAX(HoursSpentOnApp) AS MaximumHoursSpent
5946 FROM customer_churn
5947 GROUP BY PreferredOrderCat;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content: |

PreferredOrderCat	CustomerCount	MaximumHoursSpent
Laptop & Accessory	2050	5
Mobile Phone	2078	5
Others	264	4
Fashion	826	5
Grocery	410	4

Result Grid
Form Editor

TOTAL ORDERS FOR CREDIT CARD USER WITH MAX SATISFACTION

DDL and Constrains* SQL File 2 E-Commerce Customer churn d... x

Limit to 1000 rows

```
5949 -- TOTAL ORDERS - CREDIT CARD + MAXIMUM SATISFACTION --
5950 • SELECT MAX(SatisfactionScore) AS MaxSatisfaction
5951 FROM customer_churn;
5952 • SELECT
5953     SUM(OrderCount) AS TotalOrderCount
5954 FROM customer_churn
5955 WHERE PreferredPaymentMode = 'Credit Card';
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content: |

TotalOrderCount
1090

Result Grid
Form Editor

AVERAGE SATISFACTION SCORE OF CUSTOMERS WHO COMPLAINED

The screenshot shows a SQL IDE window with a query editor and a result grid. The query is as follows:

```
-- AVERAGE SATISFACTION SCORE OF CUSTOMER WHO COMPLAINED --  
SELECT  
    ROUND(AVG(SatisfactionScore), 2) AS AverageSatisfaction  
FROM customer_churn  
WHERE ComplaintReceived = 'Yes';
```

The result grid displays the following data:

AverageSatisfaction
3.00

The IDE interface includes a toolbar with icons for file operations, a 'Limit to 1000 rows' dropdown, and a sidebar with buttons for 'Result Grid', 'Form Editor', and 'Field'.

ORDER CATAGORIES FOR CUSTOMER UDING > 5 COUPONS

The screenshot shows a SQL IDE window with a query editor and a result grid. The query is as follows:

```
-- PREFEERD CATAGORIES - CUSTOMER USING MORE THA 5 COUPONS --  
SELECT DISTINCT  
    PreferredOrderCat  
FROM customer_churn  
WHERE CouponUsed > 5;
```

The result grid displays the following data:

PreferredOrderCat
Others
Laptop & Accessory
Fashion
Mobile Phone
Grocery

The IDE interface includes a toolbar with icons for file operations, a 'Limit to 1000 rows' dropdown, and a sidebar with buttons for 'Result Grid', 'Form Editor', and 'Field'.

TOP 3 CATEGORIES FOR BY AVERAGE CASHBACK AMOUNT

DDL and Constrains* SQL File 2 E-Commerce Customer churn d... x

Limit to 1000 rows

```
5972
5973 -- TOP 3 CATAGORIES BY AVERAGE CASHBACK --
5974 • SELECT
5975     PreferredOrderCat,
5976     ROUND(AVG(CashbackAmount), 2) AS AverageCashback
5977 FROM customer_churn
5978 GROUP BY PreferredOrderCat
```

Result Grid

	PreferredOrderCat	AverageCashback
▶	Others	304.45
	Grocery	266.24
	Fashion	210.40

Export: Wrap Cell Content: Fetch row

Result Grid

Form Editor

Field Types

PAYMENT MODE FOR TENURE = 10 AND ORDER COUNT > 500

DDL and Constrains* SQL File 2 E-Commerce Customer churn d... x

Limit to 1000 rows

```
5990 • SELECT DISTINCT
5991     PreferredPaymentMode
5992 FROM customer_churn
5993 WHERE Tenure = 10
5994     AND OrderCount > 500;
5995
5996 -- CREATE DISTANCE CATAGORY --
```

Result Grid

	PreferredPaymentMode
--	----------------------

Export: Wrap Cell Content: Fetch row

Result Grid

Form Editor

Field Types

DISTANCE CATEGORY + CHURN BREAKDOWN

DDL and Constrains* SQL File 2 E-Commerce Customer churn d... x

Limit to 1000 rows

```
6012
6013     ELSE 'Far Distance'
6014 END;
6015 SELECT
6016     DistanceCategory,
6017     ChurnStatus,
6018     COUNT(*) AS CustomerCount
```

Result Grid

	DistanceCategory	ChurnStatus	CustomerCount
▶	Close Distance	Active	1696
	Close Distance	Churned	265
	Far Distance	Active	1871
	Far Distance	Churned	498
	Moderate Distance	Active	1106
	Moderate Distance	Churned	184
	Very Close Distance	Active	7
	Very Close Distance	Churned	1

Result Grid
Form Editor
Field Types

MARRIED + CITYTIER 1 + ABOVE- AVERAGE ORDERCOUNT CUSTOMERS

DDL and Constrains* SQL File 2 E-Commerce Customer churn d... x

Limit to 1000 rows

```
6023 -- MARRIED + CITY TIRE 1 + ABOVE AVERAGE ORDERS --
6024 SELECT *
6025 FROM customer_churn
6026 WHERE MaritalStatus = 'Married'
6027     AND CityTier = 1
6028     AND OrderCount > (
6029         SELECT AVG(OrderCount)
```

Result Grid

	CustomerID	Tenure	PreferredLoginDevice	CityTier	WarehouseToHome	PreferredPaymentM
▶	50049	3	Computer	1	15	Credit Card
	50119	13	Mobile Phone	1	30	Cash on Delivery
	50132	15	Mobile Phone	1	16	Credit Card
	50152	2	Mobile Phone	1	28	Debit Card
	50187	18	Computer	1	13	Debit Card
	50229	10	Mobile Phone	1	12	Credit Card
	50262	10	Mobile Phone	1	20	Debit Card
	50308	7	Mobile Phone	1	8	Debit Card
	50344	25	Mobile Phone	1	12	Cash on Delivery
	50367	16	Computer	1	15	Credit Card
	50385	6	Computer	1	12	Debit Card
	50453	10	Mobile Phone	1	16	Debit Card
	50460	15	Computer	1	14	Debit Card
	50512	1	Computer	1	31	Debit Card

Result Grid
Form Editor
Field Types
Query Stats

CUSTOMER RETURN TABLE

The screenshot shows a SQL IDE window with a query editor and a result grid. The query editor contains the following SQL code:

```
6046 (104, 52321, '2023-03-08', 2510),
6047 (105, 52928, '2023-03-20', 3000),
6048 (106, 53749, '2023-04-17', 1740),
6049 (107, 54206, '2023-04-21', 3250),
6050 (108, 54838, '2023-04-30', 1990);
6051 SELECT *
6052 FROM customer_returns;
```

The result grid displays the following data:

ReturnID	CustomerID	ReturnDate	RefundAmount
101	50022	2023-01-01	2130.00
102	50316	2023-01-23	2000.00
103	51099	2023-02-14	2290.00
104	52321	2023-03-08	2510.00
105	52928	2023-03-20	3000.00
106	53749	2023-04-17	1740.00
107	54206	2023-04-21	3250.00
108	54838	2023-04-30	1990.00
NULL	NULL	NULL	NULL

JOIN

The screenshot shows a SQL IDE window with a query editor and a result grid. The query editor contains the following SQL code:

```
6053 -- JOIN --
6054
6055 SELECT
6056     r.ReturnID,
6057     r.CustomerID,
6058     r.ReturnDate,
6059     r.RefundAmount,
```

The result grid displays the following data:

ReturnID	CustomerID	ReturnDate	RefundAmount	Tenure	PreferredLoginDevice	CityTier
102	50316	2023-01-23	2000.00	0	Computer	2
104	52321	2023-03-08	2510.00	18	Mobile Phone	3
106	53749	2023-04-17	1740.00	1	Mobile Phone	3