


1. Launch 2 EC2 instances with hosting a web page

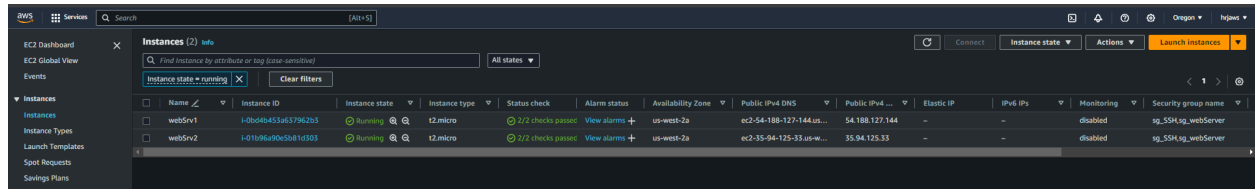

2. Create a target group and add register these two instances

Step 1

Specify group details

Step 2

Register targets

Specify group details

Your load balancer routes requests to the targets in a target group and performs health checks on the targets.

Basic configuration

Settings in this section can't be changed after the target group is created.

Choose a target type

☒ Instances

- Supports load balancing to instances within a specific VPC.
- Facilitates the use of [Amazon EC2 Auto Scaling](#) to manage and scale your EC2 capacity.

☐ IP addresses

- Supports load balancing to VPC and on-premises resources.
- Facilitates routing to multiple IP addresses and network interfaces on the same instance.
- Offers flexibility with microservice based architectures, simplifying inter-application communication.
- Supports IPv6 targets, enabling end-to-end IPv6 communication, and IPv4-to-IPv6 NAT.

☐ Lambda function

- Facilitates routing to a single Lambda function.
- Accessible to Application Load Balancers only.

☐ Application Load Balancer

- Offers the flexibility for a Network Load Balancer to accept and route TCP requests within a specific VPC.
- Facilitates using static IP addresses and PrivateLink with an Application Load Balancer.

Target group name

tg-frontEnd

A maximum of 32 alphanumeric characters including hyphens are allowed, but the name must not begin or end with a hyphen.

Protocol : Port

Choose a protocol for your target group that corresponds to the Load Balancer type that will route traffic to it. Some protocols now include anomaly detection for the targets and you can set mitigation options once your target group is created. This choice cannot be changed after creation.

HTTP 80

1-65535

IP address type

Only targets with the indicated IP address type can be registered to this target group.

☒ IPv4

Each instance has a default network interface (eth0) that is assigned the primary private IPv4 address. The instance's primary private IPv4 address is the one that will be applied to the target.

☐ IPv6

Each instance you register must have an assigned primary IPv6 address. This is configured on the instance's default network interface (eth0). [Learn more](#)

VPC

Select the VPC with the instances that you want to include in the target group. Only VPCs that support the IP address type selected above are available in this list.

vpc-0c3bfa4d0235fb235
IPv4 VPC CIDR: 172.31.0.0/16

Protocol version

☒ HTTP1

Send requests to targets using HTTP/1.1. Supported when the request protocol is HTTP/1.1 or HTTP/2.

☐ HTTP2

Send requests to targets using HTTP/2. Supported when the request protocol is HTTP/2 or gRPC, but gRPC-specific features are not available.

☐ gRPC

Send requests to targets using gRPC. Supported when the request protocol is gRPC.

Health checks

The associated load balancer periodically sends requests, per the settings below, to the registered targets to test their status.

Health check protocol

HTTP

Health check path

Use the default path of "/" to perform health checks on the root, or specify a custom path if preferred.

/

Up to 1024 characters allowed.

Advanced health check settings

Restore defaults

Health check port

The port the load balancer uses when performing health checks on targets. By default, the health check port is the same as the target group's traffic port. However, you can specify a different port as an override.

☒ Traffic port

☐ Override

Healthy threshold

The number of consecutive health checks successes required before considering an unhealthy target healthy.

2

2-10

Unhealthy threshold

The number of consecutive health check failures required before considering a target unhealthy.

2

2-10

Timeout

The amount of time, in seconds, during which no response means a failed health check.

5 seconds

2-120

Interval

The approximate amount of time between health checks of an individual target.

5 seconds

5-300

Success codes

The HTTP codes to use when checking for a successful response from a target. You can specify multiple values (for example, "200,202") or a range of values (for example, "200-299").

200

Attributes

ⓘ Certain default attributes will be applied to your target group. You can view and edit them after creating the target group.

Tags - optional

Consider adding tags to your target group. Tags enable you to categorize your AWS resources so you can more easily manage them.


Key	Value	
name	tg-frontEnd	Remove

Add new tag

You can add up to 49 more tags.

Cancel

Next

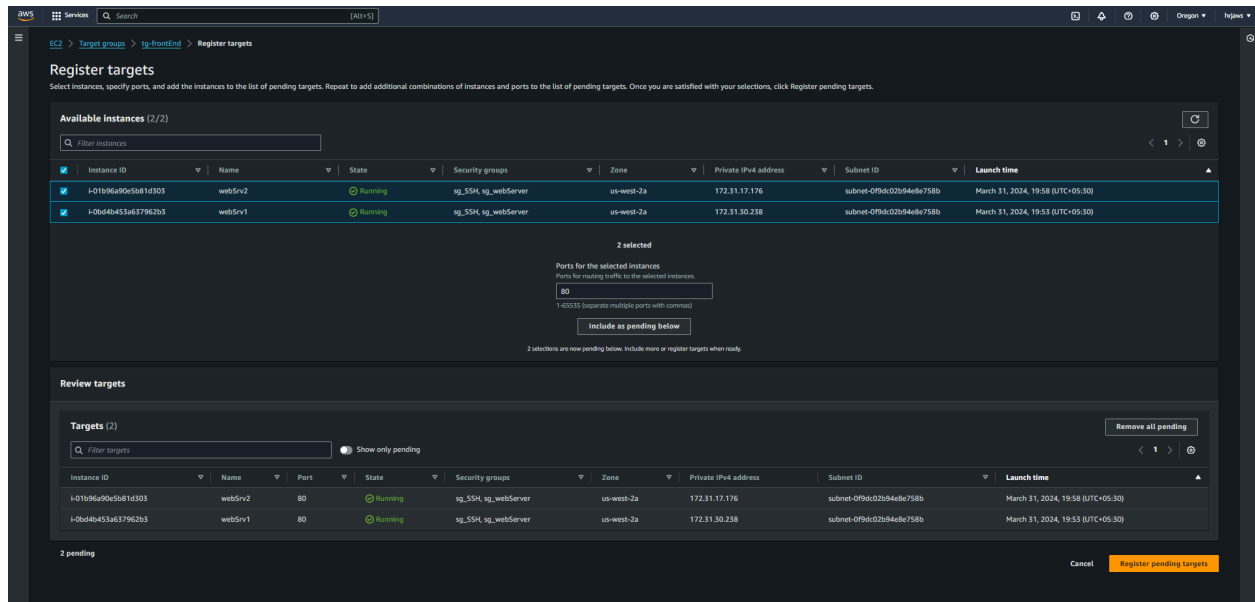

Create Application Load balancer

