Getting Started

This is a guide to the basics of Redmine, written from a new user's perspective. We'll avoid the fancy stuff for now and just go over ***creating a project***, ***working with issues*** and ***the basic workflow***.

Table of contents

Getting Started
- Step One -- Creating a project
- Step Two -- Get some Users
- Workflows...You Can't Explain That!
  - Resolved vs Closed?
- Step Three -- Create Issues
- Step Four -- Work on Issues
- Step Five -- Close Issues

Step One -- Creating a project

Before you let loose your development team, you'll want to set up a project for them to work on. This can be done as the Admin user (username and password are both "admin"). Click on ***Projects*** (upper left), then on ***New Project*** (upper right). Fill in all the data. A description of some of the fields can be found here. The only box that might be confusing is the Project Identifier -- this is used internally by Redmine (for URLs and other things).

Step Two -- Get some Users

You'll want to get a few users registered, so that you can assign them to the project. Note that by default, you must activate users manually. So after a user fills out the registration page, you must log in as Admin, navigate to Administration:Users, and set the Filter to All. Activate users as necessary.

Once active, you can assign a user to a project. When you do this you can specify one or more ***roles*** that they play. The default options for roles are:

- Manager
- Developer
- Reporter

These roles affect what each user is allowed to do within each project. It should be noted that assigning a role affects permissions in two different areas:

1. First, a role will affect permissions across all aspects of a project. For example, the Manager role will allow a user to create new (sub)projects, to manage the Forums, the Wiki, the Repository and anything else (in general) within a project. By contrast, the Developer role will not be able to edit the Project or delete messages from the Forums.
2. Second, a role will affect permissions on the Workflow. In general, a new Issue progresses through various states from **New** to **In Progress** to **Resolved** to **Closed**. One of the key differences between Managers and Developers is that Managers are allowed to Reject issues, but Developers are not. (More on this below in the explanation of Workflow).

Workflows...You Can't Explain That!

Workflows are how Redmine tracks issues from creation through completion. The default Workflow contains the following states:

- New
- In Progress
- Resolved
- Feedback
- Closed
- Rejected

By default, anyone who's logged in can create an issue (Bug or Feature), but only Managers can Reject them or Reopen a closed issue.

Resolved vs Closed?

There's a lot of discussion on the Internet about this, but the general consensus is that Resolved means a Developer thinks he's fixed the bug, and Closed means the original reporter or a Manager has signed off on it. Many blogs talk about this -- such as http://journal.sifterapp.com/blog/2011/07/resolved-vs-closed/.

Step Three -- Create Issues

TBD

Step Four -- Work on Issues

TBD

Step Five -- Close Issues

TBD

Files (0)

Updated by S T almost 7 years ago · 9 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang

Backward translation from German revision 10

Accounts

My account

Table of contents

Accounts
- My account
  - Information
  - Mail notifications
  - Email address
  - Preferences
  - Password
- Password lost
- Register

This area enables you to adapt your existing account to your needs.

Information

Here you can edit your user data: first name, last name, email address, display language.
From version 4.2.0 you can, if activated in the system configuration (options: blocked/optional/required), increase security by activating two-factor authentication for your access.

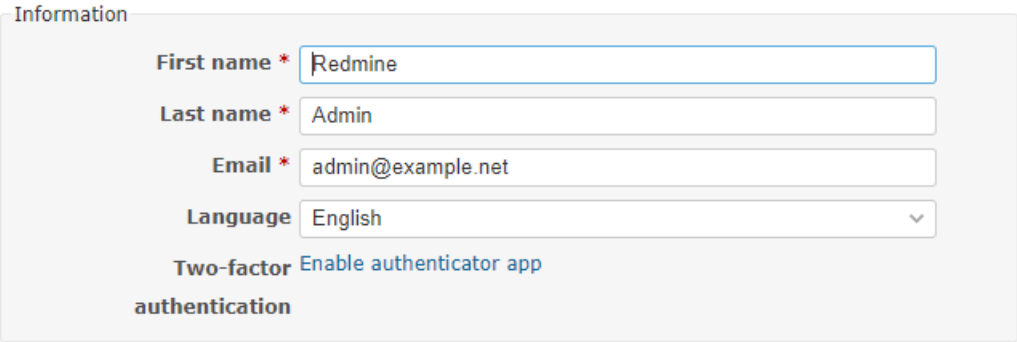

Mail notifications

If the E-Mail notifications option is activated in the system configuration, you will receive notifications about events that occur in the projects to which you belong (problem added or edited, new document, ...).
Here you can set the events about which you want to be notified by email:

- `For all events in all my projects`
- `Only for tasks that I observe or work on`
  - *Collaboration includes the author who created the ticket and the person responsible to whom the ticket is assigned*
- `Only for tasks I'm responsible for`
- `Only for tasks that I have created`
- `No events`

From version 4.2.0 you can choose whether you only want to receive notifications with high importance and thus filter out changes with low priority.
You can also tick that you do not want to be notified of your own changes.

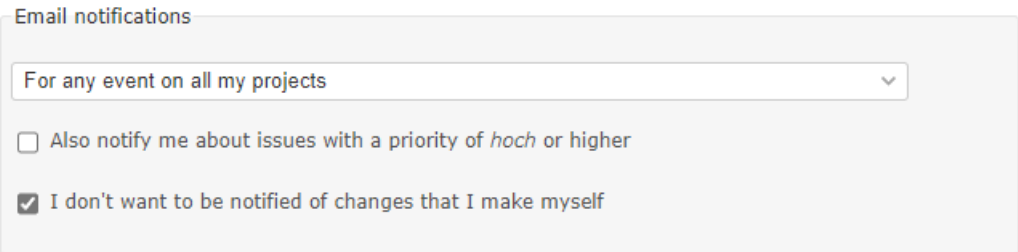

Email address

You can store additional addresses to which notifications will be sent. To do this, click on the link E-Mails

In a window you can enter the other addresses, delete them and deactivate / activate the notifications.

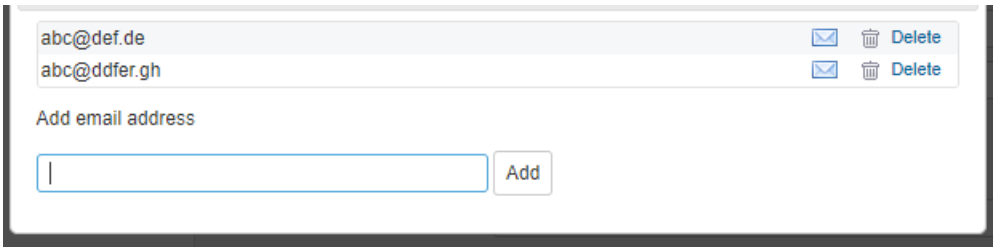

Preferences

Personal settings for display in Redmine.

- **Do not show email address:** Hides the email address in the profile page so that other users cannot see it.
- **Time zone:** Here you can select a time zone that differs from the default setting in Redmine. The time zone controls the display of the date and time.
- **Show comments:** Controls the chronological sorting of comments.
- **Warn before leaving a page with unsecured text in the editor:** Security setting against data loss.
- **Font for text areas:** Here you can force a predefined proportional or non-proportional font instead of the standard font.
- **Number of recently used projects in the project jump box:** Here you can specify how many of your recently used projects are shown above the standard list. Default is 3.
- **Standard tab for ticket history:** The detailed contents of the tickets are divided into tabs, here you can specify which tab should be opened when a ticket is called up. The default is notes.
- **Languages for code highlighting, editor S toolbar**: Specifies which programming languages are to be recognized and parsed accordingly. Default: `c, cpp, csharp, css, diff, go, groovy, html, java, javascript, objc, perl, php, python, r, ruby, sass, scala, shell, sql, swift, xml, yaml`

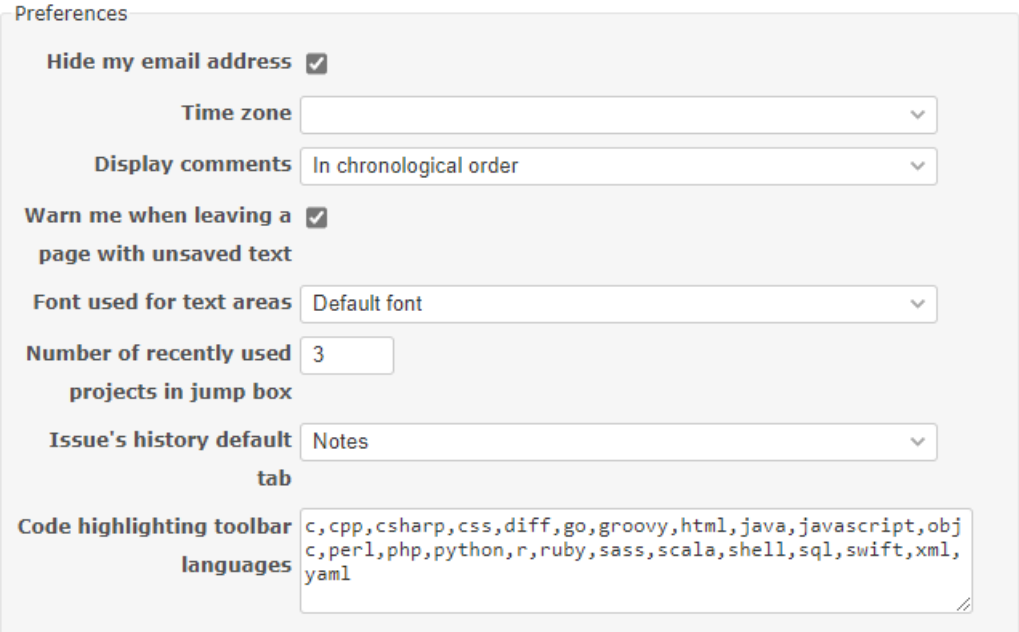

Password

To change your password, click Change password on "My account" page and then type your old password and your new password twice. Password length must be 8 characters or more (the admin can change the minimum length. See RedmineSettings).

If your account uses an external authentication mean (LDAP), you can't change your password in Redmine.

Password lost

If you forget your password, this procedure lets you choose a new one.

On the login screen, click on **Lost password**. Enter your email address and submit the form. An email is then sent to you. It contains a link that allows you to change your password.

Note that this functionality can be disabled by the administrator (see RedmineSettings). Also, if your account uses an external authentication mean (LDAP), this procedure isn't available.



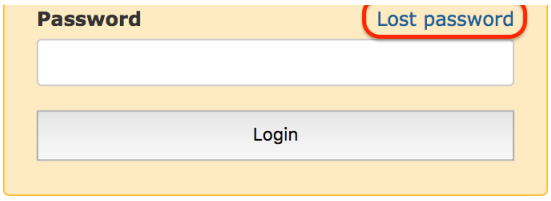

Register

By registering, you can get an account without the intervention of the administrator.

In the upper right corner of the login screen, click on **Register**. Fill the form and submit it. An email will be sent to you. To activate your account, use the link that is contained in this email. See Register for more details.

Note that this functionality can be disabled by the administrator.

Files (11)

Updated by C S almost 4 years ago · 15 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang

Redmine Attached Files

Introduction

Table of contents

Redmine Attached Files
Introduction
Usage
Inline Images
Non plain text files
File storage
Unattached uploaded files
Attach files form
Files added via "New File"

Attached files can be added to different resources within the Redmine system:

- issues - using the "New File" form while adding/editing an issue
- documents - using the "New File" form while adding/editing a document
- forum messages - using the "New File" form while adding/editing a forum message
- news items - using the "New File" form while adding/editing a news item
- wiki pages - using the "New File" link at the bottom of the page

Usage

Inline Images

Attached files can be shown within the parent page by targeting it's name via image url (i.e. `!attached_image!`).

Non plain text files

Keep in mind there is a dedicated documents module for storing technical and user documentation that can be linked via the wiki and a dedicated files module for publishing versions of the tracked project, as a bundle (release).

However, if that doesn't fit the bill, file upload support provides a way to distribute any file for user download.

File storage

Uploaded attached files are stored in `<Redmine install dir>/files` directory subdirectories named after the year the file has been uploaded.

The uploaded file name is prefixed with a unique id based on it's parent for directory storage. Multiple files can be uploaded with the same name, however a link within the wiki will only show the most recently uploaded one.

Unattached uploaded files

Uploaded files can be left unattached if the user don't submit the form; a Rake task is made available and can be scheduled for regular deletion of these files.

Attach files form

The input form is as shown below.

Starting from version 2.3.0 and depending on the browser supporting it (IE10+), it is possible to:

- select and attach multiple files at once
- drag and drop files over the form

The optional description field, which appears once the file upload is finished, is also used as the alternate text of the image file inserted using `!image_url!` syntax within the parent content (i.e. issue description or note, forum message, wiki page, document, ...).



Files added via "New File"

At the bottom of many of the pages in Redmine is a "New File" link. Attaching a file makes that page the parent of the file and it is limited in scope to that page.

See the Usage section for more information.

Files (4)

Updated by Mischa The Evil almost 12 years ago · 7 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang

Table of contents

Calendar
Overview
Access control
Module activation
Roles and permissions
Filters

Calendar

Overview

The calendar provides an overview of the current project as a monthly view. This view displays all the issues that have at least a start date and indicates their start date and (if available) their due date. The calendar also displays all versions which have a due date set.

Access control

Module activation

The calendar module can be enabled or disabled per project via the project's configuration tab. Within the configuration page go to the Modules tab and check or uncheck the Calendar checkbox to activate or disable the module.

Roles and permissions

Access to the module can be granted or denied at a role level.
To do this go to the administration page, follow the roles and permissions link, choose a role and check or uncheck the Calendar permissions checkbox.

Filters

Like on the issue-lists and the Gantt chart, it is possible to define filters to define a subset of issues to be shown on the calendar. Such filters are similar to those specified on any issue-list.

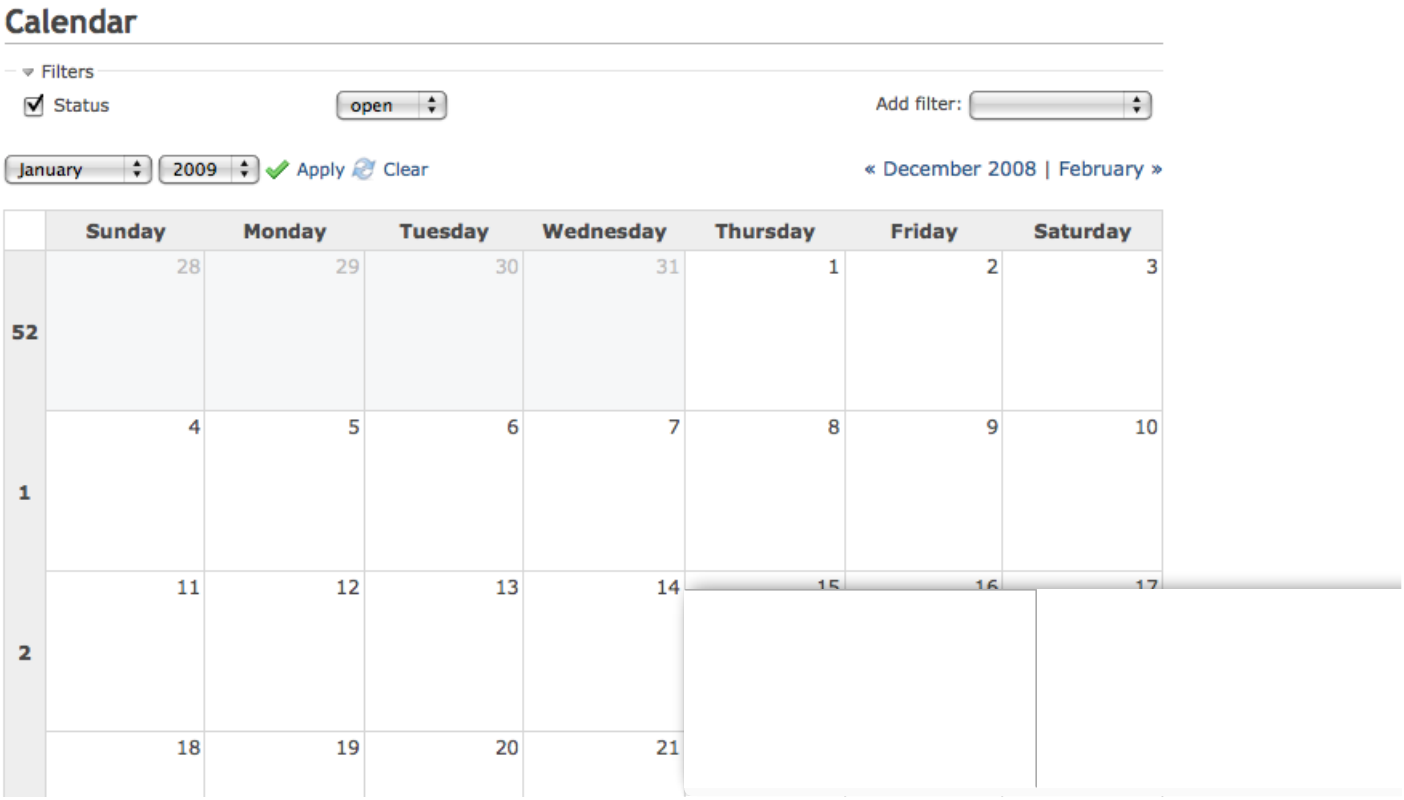

3							
4	25	26	27	28	29	30	31

task beginning this day
task ending this day
task beginning and ending this day

Powered by Redmine © 2006-2010 Jean-Philippe Lang

Files (2)

Updated by Alex Chernyakevich over 1 year ago · 9 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang

Code highlighting supported languages

Default code highlighting relies on Rouge since Redmine 4.0.0. It supports over 200 languages. Refer RedmineTextFormattingTextile or RedmineTextFormattingMarkdown for how to highlight code.

Here is a list of supported languages by Rouge 4.5.0, which is bundled with Redmine 6.0.1. You can also get a list by running `bundle exec rougify list` in the installation directory of Redmine.

Language	Description
`abap`	SAP - Advanced Business Application Programming
`actionscript`	ActionScript [aliases: as,as3]
`ada`	The Ada 2012 programming language
`apache`	configuration files for Apache web server
`apex`	The Apex programming language (provided by salesforce)
`apiblueprint`	Markdown based API description language. [aliases: apiblueprint,apib]
`applescript`	The AppleScript scripting language by Apple Inc. (https://developer.apple.com/library/archive/documentation/AppleScript/Conceptual/AppleScriptLangGuide/introduction/ASLR_intro.html) [aliases: applescript]
`armasm`	Arm assembly syntax
`augeas`	The Augeas programming language (augeas.net) [aliases: aug]
`awk`	pattern-directed scanning and processing language
`batchfile`	Windows Batch File [aliases: bat,batch,dosbatch,winbatch]
`bbcbasic`	BBC BASIC syntax
`bibtex`	BibTeX [aliases: bib]
`biml`	BIML, Business Intelligence Markup Language
`bpf`	BPF bytecode syntax
`brainfuck`	The Brainfuck programming language [aliases: bf]
`brightscript`	BrightScript Programming Language (https://developer.roku.com/en-ca/docs/references/brightscript/language/brightscript-language-reference.md) [aliases: bs,brs]
`bsl`	The 1C:Enterprise programming language
`c`	The C programming language
`ceylon`	Say more, more clearly.
`cfscript`	CFScript, the CFML scripting language [aliases: cfc]
`cisco_ios`	Cisco IOS configuration lexer
`clean`	The Clean programming language (clean.cs.ru.nl)
`clojure`	The Clojure programming language (clojure.org) [aliases: clj,cljs]
`cmake`	The cross-platform, open-source build system
`cmhg`	RISC OS C module header generator source file
`cobol`	COBOL (Common Business-Oriented Language) programming language
`codeowners`	Code Owners syntax (https://docs.gitlab.com/ee/user/project/codeowners/reference.html)
`coffeescript`	The Coffeescript programming language (coffeescript.org) [aliases: coffee,coffee-script]
`common_lisp`	The Common Lisp variant of Lisp (common-lisp.net) [aliases: cl,common-lisp,elisp,emacs-lisp,lisp]
`conf`	A generic lexer for configuration file
`console`	A generic lexer for shell sessions. A rompt option, ?comments to enable # comments, s: terminal,shell_session,shell-session
`coq`	Coq (coq.inria.fr)

coq	Coq (coq.inria.fr)
cpp	The C++ programming language [aliases: c++,c++]
crystal	Crystal The Programming Language (crystal-lang.org) [aliases: cr]
csharp	a multi-paradigm language targeting .NET [aliases: c#,cs]
css	Cascading Style Sheets, used to style web pages
csvs	The CSV Schema Language (digital-preservation.github.io)
cuda	Compute Unified Device Architecture, used for programming with NVIDIA GPU
cypher	The Cypher query language (neo4j.com/docs/cypher-manual) [aliases: cypher]
cython	Cython and Pyrex source code (cython.org) [aliases: pyx,pyrex]
d	The D programming language(dlang.org) [aliases: dlang]
dafny	The Dafny programming language (github.com/dafny-lang/dafny)
dart	The Dart programming language (dart.dev)
datastudio	Datastudio scripting language
diff	Lexes unified diffs or patches [aliases: patch,udiff]
digdag	A simple, open source, multi-cloud workflow engine (https://www.digdag.io/)
docker	Dockerfile syntax [aliases: dockerfile,Dockerfile,containerfile,Containerfile]
dot	graph description language [aliases: graphviz]
ecl	Enterprise Control Language (hpccsystems.com)
eex	Embedded Elixir [aliases: leex,heex]
eiffel	Eiffel programming language
elixir	Elixir language (elixir-lang.org) [aliases: elixir,exs]
elm	The Elm programming language (http://elm-lang.org/)
email	An email message [aliases: eml,e-mail]
epp	Embedded Puppet template files
erb	Embedded ruby template files [aliases: eruby,rhtml]
erlang	The Erlang programming language (erlang.org) [aliases: erl]
escape	A generic lexer for including escaped content - see Formatter.enable_escape! [aliases: esc]
factor	Factor, the practical stack language (factorcode.org)
fluent	Fluent localization files [aliases: ftl]
fortran	Fortran 2008 (free-form)
freefem	The FreeFEM programming language (freefem.org) [aliases: ff]
fsharp	F# (fsharp.net)
gdscript	The Godot Engine programming language (https://godotengine.org/) [aliases: gd,gdscript]
ghc-cmm	GHC Cmm is the intermediate representation of the GHC Haskell compiler [aliases: cmm]
ghc-core	Intermediate representation of the GHC Haskell compiler.
gherkin	A business-readable spec DSL (github.com/cucumber/cucumber/wiki/Gherkin) [aliases: cucumber,behat]
glsl	The GLSL shader language
go	The Go programming language (http://golang.org) [aliases: go,golang]
gradle	A powerful build system for the JVM
graphql	GraphQL
groovy	The Groovy programming language (http://www.groovy-lang.org/) [aliases: nextflow,nf,nextflow,nf]
hack	The Hack programming language (hacklang.org) [aliases: hack,hh]
haml	The Haml templating system for Ruby (haml.info) [aliases: HAML]
handlebars	the Handlebars and Mustache templating languages [aliases: hbs,mustache]
haskell	The Haskell programming language (haskell.org) [aliases: hs]
haxe	Haxe Cross-platform Toolkit (http://haxe.org) [aliases: hx,haxe]
hcl	Hashicorp Configuration Language, used by Terraform and other Hashicorp tools
hlsl	HLSL, the High Level Shading Language for DirectX (docs.microsoft.com/en-

hlsl	us/windows/win32/direct3dhlsl/dx-graphics-hlsl)
hocon	Human-Optimized Config Object Notation (https://github.com/lightbend/config)
hql	Hive Query Language SQL dialect
html	HTML, the markup language of the web
http	http requests and responses
hylang	The HyLang programming language (hylang.org) [aliases: hy]
idlang	Interactive Data Language
idris	The Idris programming language (idris-lang.org) [aliases: idr]
iecst	Structured text is a programming language for PLCs (programmable logic controllers).
igorpro	WaveMetrics Igor Pro
ini	the INI configuration format
io	The IO programming language (http://iolanguage.com)
irb	Shell sessions in IRB or Pry [aliases: pry]
isabelle	Isabelle theories (isabelle.in.tum.de) [aliases: isa,Isabelle]
isbl	The ISBL programming language
j	The J programming language (jsoftware.com)
janet	The Janet programming language (janet-lang.org) [aliases: jdn]
java	The Java programming language (java.com)
javascript	JavaScript, the browser scripting language [aliases: js,js]
jinja	Django/Jinja template engine (jinja.pocoo.org) [aliases: django,django]
jsl	The JMP Scripting Language (JSL) (jmp.com)
json	JavaScript Object Notation (json.org)
json-doc	JavaScript Object Notation with extensions for documentation [aliases: jsonc]
json5	JSON 5 extension for JSON (json5.org)
jsonnet	An elegant, formally-specified config language for JSON
jsp	JSP
jsx	An XML-like syntax extension to JavaScript (facebook.github.io/jsx/) [aliases: jsx,react,jsx,react]
julia	The Julia programming language [aliases: jl]
kotlin	Kotlin Programming Language (http://kotlinlang.org)
lasso	The Lasso programming language (lassosoft.com) [aliases: lassoscript]
lean	The Lean programming language (leanprover.github.io) [aliases: lean]
liquid	Liquid is a templating engine for Ruby (liquidmarkup.org)
literate_coffeescript	Literate coffeescript [aliases: litcoffee]
literate_haskell	Literate haskell [aliases: lithaskell,lhaskell,lhs]
livescript	LiveScript, a language which compiles to JavaScript (livescript.net) [aliases: ls]
llvm	The LLVM Compiler Infrastructure (http://llvm.org/)
lua	Lua (http://www.lua.org)
lustre	The Lustre programming language (Verimag)
lutin	The Lutin programming language (Verimag)
m68k	Motorola 68k Assembler
magik	Smallworld Magik
make	Makefile syntax [aliases: makefile,mf,gnumake,bsdmake]
markdown	Markdown, a light-weight markup language for authors [aliases: md,mkd,md,mkd]
mason	The HTML::Mason framework (https://metacpan.org/pod/HTML::Mason)
mathematica	Wolfram Mathematica, the world's definitive system for modern technical computing. [aliases: wl,wolfram]
matlab	Matlab [aliases: m]
meson	Meson's specification language (mesonbuild.com)
minizinc	MiniZinc is a free and open-source constraint modeling language (minizinc.org)

minizinc	MiniZinc is a free and open-source constraint modeling language (minizinc.org)
mojo	The Mojo programming language (modular.com) [aliases: mojo]
moonscript	Moonscript (http://www.moonscript.org) [aliases: moon]
mosel	An optimization language used by Fico's Xpress.
msgtrans	RISC OS message translator messages file
mxml	MXML
nasm	Netwide Assembler
nesasm	Nesasm3 assembly (6502 asm) [aliases: nes]
nginx	configuration files for the nginx web server (nginx.org)
nial	The Nial programming language (nial-array-language.org)
nim	The Nim programming language (http://nim-lang.org/) [aliases: nimrod]
nix	The Nix expression language (https://nixos.org/nix/manual/#ch-expression-language) [aliases: nixos]
objective_c	an extension of C commonly used to write Apple software [aliases: objc,obj-c,obj_c,objectivec,objective-c]
objective_cpp	an extension of C++ uncommonly used to write Apple software [aliases: objcpp,obj-cpp,obj_cpp,objectivecpp,objc++,obj-c++,obj_c++,objectivec++]
ocaml	Objective Caml (ocaml.org)
ocl	OMG Object Constraint Language (omg.org/spec/OCL) [aliases: OCL]
openedge	The OpenEdge ABL programming language [aliases: abl]
opentype_feature_file	Feature specifications for an OpenType font (adobe-type-tools.github.io/afdko) [aliases: fea,opentype,opentypefeature]
p4	The P4 programming language
pascal	a procedural programming language commonly used as a teaching language.
perl	The Perl scripting language (perl.org) [aliases: pl]
php	The PHP scripting language (php.net) [aliases: php,php3,php4,php5,php,php3,php4,php5]
plaintext	A boring lexer that doesn't highlight anything [aliases: text]
plist	plist [aliases: plist]
plsql	Procedural Language Structured Query Language for Oracle relational database
postscript	The PostScript language (adobe.com/devnet/postscript.html) [aliases: postscr,postscript,ps,eps]
powershell	powershell [aliases: posh,microsoftshell,msshell]
praat	The Praat scripting language (praat.org)
prolog	The Prolog programming language (http://en.wikipedia.org/wiki/Prolog) [aliases: prolog]
prometheus	prometheus [aliases: prometheus]
properties	.properties config files for Java
protobuf	Google's language-neutral, platform-neutral, extensible mechanism for serializing structured data [aliases: proto]
puppet	The Puppet configuration management language (puppetlabs.org) [aliases: pp]
python	The Python programming language (python.org) [aliases: py,py]
q	The Q programming language (kx.com) [aliases: kdb+]
qml	QML, a UI markup language [aliases: qml]
r	The R statistics language (r-project.org) [aliases: r,R,s,S]
racket	Racket is a Lisp descended from Scheme (racket-lang.org)
reasonml	New syntax on top of OCaml ecosystem (reasonml.github.io)
rego	The Rego open-policy-agent (OPA) policy language (openpolicyagent.org)
rescript	The ReScript programming language (rescript-lang.org)
rml	A system agnostic domain-specific language for runtime monitoring and verification (https://rmlatdibris.github.io/)
robot_framework	Robot Framework is a generic open source automation testing framework (robotframework.org) [aliases: robot,robot-framework]
ruby	The Ruby programming language (ruby-lang.org) [aliases: rb,rb]

`rust`	The Rust programming language (rust-lang.org) [aliases: rs,rust,no_run,rs,no_run,rust,ignore,rs,ignore,rust,should_panic,rs,should_panic]
`sas`	SAS (Statistical Analysis Software)
`sass`	The Sass stylesheet language language (sass-lang.com)
`scala`	The Scala programming language (scala-lang.org) [aliases: scala]
`scheme`	The Scheme variant of Lisp
`scss`	SCSS stylesheets (sass-lang.com)
`sed`	sed, the ultimate stream editor
`shell`	Various shell languages, including sh and bash [aliases: bash,zsh,ksh,sh]
`sieve`	mail filtering language
`slice`	Specification Language for Ice (doc.zeroc.com)
`slim`	The Slim template language
`smalltalk`	The Smalltalk programming language [aliases: st,squeak]
`smarty`	Smarty Template Engine [aliases: smarty]
`sml`	Standard ML [aliases: ml]
`sparql`	Semantic Query Language, for RDF data
`sqf`	Status Quo Function, a Real Virtuality engine scripting language
`sql`	Structured Query Language, for relational databases
`ssh`	A lexer for SSH configuration files
`stan`	Stan Modeling Language (mc-stan.org)
`stata`	The Stata programming language (www.stata.com)
`supercollider`	A cross-platform interpreted programming language for sound synthesis, algorithmic composition, and realtime performance
`svelte`	Svelte single-file components (https://svelte.dev/)
`swift`	Multi paradigm, compiled programming language developed by Apple for iOS and OS X development. (developer.apple.com/swift)
`systemd`	A lexer for systemd unit files [aliases: unit-file]
`syzlang`	Syscall description language used by syzkaller
`syzprog`	Program description language used by syzkaller
`tap`	Test Anything Protocol [aliases: tap]
`tcl`	The Tool Command Language (tcl.tk)
`terraform`	Terraform HCL Interpolations [aliases: tf]
`tex`	The TeX typesetting system [aliases: TeX,LaTeX,latex]
`toml`	the TOML configuration format (https://github.com/toml-lang/toml)
`tsx`	TypeScript-compatible JSX (www.typescriptlang.org/docs/handbook/jsx.html)
`ttcn3`	The TTCN3 programming language (ttcn-3.org)
`tulip`	the tulip programming language (twitter.com/tuliplang) [aliases: tulip]
`turtle`	Terse RDF Triple Language, TriG
`twig`	Twig template engine (twig.sensiolabs.org)
`typescript`	TypeScript, a superset of JavaScript (https://www.typescriptlang.org/) [aliases: ts]
`vala`	A programming language similar to csharp.
`vb`	Visual Basic [aliases: visualbasic]
`vcl`	The configuration language for Varnish HTTP Cache (varnish-cache.org) [aliases: varnishconf,varnish]
`velocity`	Velocity is a Java-based template engine (velocity.apache.org)
`verilog`	The System Verilog hardware description language
`vhdl`	Very High Speed Integrated Circuit Hardware Description Language
`viml`	VimL, the scripting language for the Vim editor (vim.org) [aliases: vim,vimscript,ex]
`vue`	Vue.js single-file components [aliases: vuejs]
`wollok`	Wollok lang

`xml`	<desc for="this-lexer">XML</desc>
`xojo`	Xojo [aliases: realbasic]
`xpath`	XML Path Language (XPath) 3.1
`xquery`	XQuery 3.1: An XML Query Language
`yaml`	Yaml Ain't Markup Language (yaml.org) [aliases: yml,yml]
`yang`	Lexer for the YANG 1.1 modeling language (RFC7950)
`zig`	The Zig programming language (ziglang.org) [aliases: zir]

Note for the wiki maintainers

Files (0)

Updated by Go MAEDA 12 months ago · 11 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang

Redmine Documents

Table of contents

Redmine Documents
Introduction
Adding Documents
Viewing Documents

Introduction

Documents is an available module to projects in Redmine.

Adding Documents

From the **Documents** tab press the **New document** link.

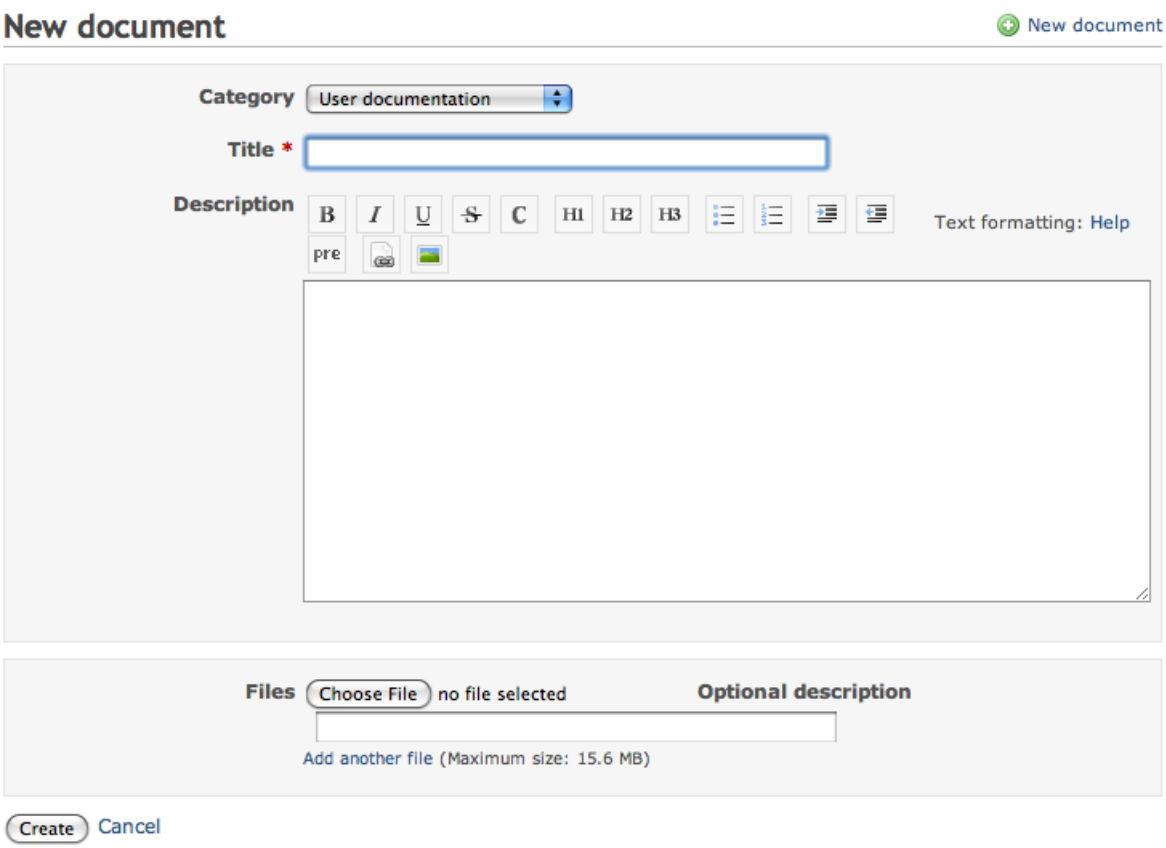

By default there are two categories for documentation:

1. User documentation
2. Technical documentation

These categories can be modified and other categories can be added by a Redmine administrator using document category enumerations.

Viewing Documents

Once documents have been uploaded, the title is used as the link to download the attached documents, and add more if necessary.

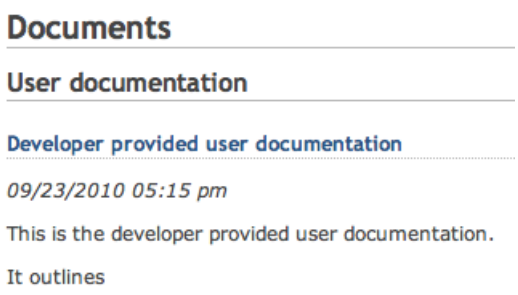

1. How to do things
2. Who to contact for help

Management Provided Documentation

09/23/2010 05:16 pm

Useless documentation

Technical documentation

Systems Documentation

09/23/2010 05:17 pm

How to recover from disaster.

Files (7)

Updated by Mischa The Evil about 15 years ago · 5 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang

Redmine Files

Files Module

Table of contents

Redmine Files
- Files Module
- File storage
- New file form

Each project can have a **Files** module enabled/disabled via the settings menu.

A sortable table shows the details of all the uploaded files. If a version if selected while uploading a file, that file will be shown below the version. Of note are the Checksum hash and D/L(Download Count).

Files New file

File	Date	Size	D/L	Checksum
project_file.zip	07/20/2006 04:07 AM	320 Bytes	0	MD5: b91e08d0cf966d5c6ff411bd8c4cc3a2
redmine_logo.ai.unknown	04/30/2019 09:23 AM	4.88 KB	0	SHA256: 68d90c016f0806d88234a6f16530fdf0b7f1d2481354798f1a5fd165dca6b04f
0.1				
version_file.zip	07/20/2006 04:07 AM	452 Bytes	0	MD5: b91e08d0cf966d5c6ff411bd8c4cc3a2
version_file.zip	07/20/2006 04:07 AM	452 Bytes	0	MD5: b91e08d0cf966d5c6ff411bd8c4cc3a2

New files are added via the **New File** button in the upper right hand corner.

File storage

All uploaded files are stored at the `/{install dir}/files` directory.

The uploaded file name is prefixed with a unique id based on it's parent for directory storage.

New file form

If a new file is added, the input form is as shown below. Select a version from the list to link a file to a specific version. Adding multiple files at once is possible using the "Add another file" link.

The optional description is used for an `alt` text.

Files Choose File no file selected **Optional description**

Add another file (Maximum size: 15.6 MB)

Files (4)

Updated by Go MAEDA almost 5 years ago · 10 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang

Forums

The forums allow users from a project to communicate with each others. The administrator defines a list of forums in the Project Settings.

The forum list displays the project forums overview:

- total number of topics
- total number of messages
- a link to the latest message

Forums

Forum	Topics	Messages	Last message
Open discussion General discussion	836	2930	Added by jacob briggs about 1 month ago LDAP auth modification to sync LDAP groups and Redmine gr...
Help Get public help	1669	5016	Added by J Kenoyer about 1 month ago Ability to set the assigned to field as required?
Plugins Announcements or discussions about Redmine plugins	231	1872	Added by Obivan Chinobi about 1 month ago RE: Using Amazon S3 for storage

Also available in: Atom

Adding a topic

To add a topic in a given forum, click on the forum name, then click on **New message**.

You can now enter a subject, a body and attach files to your message.
Two options are available:

- **sticky**: if checked, the topic will stay displayed at the top of topic list, in bold.
- **locked**: if checked, users can not add replies to the message.

Files (2)

Updated by mesut cevikler 10 months ago · 4 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang

Gantt chart

The gantt chart displays issues that have a start date and a due date or are assigned to a version with a date.

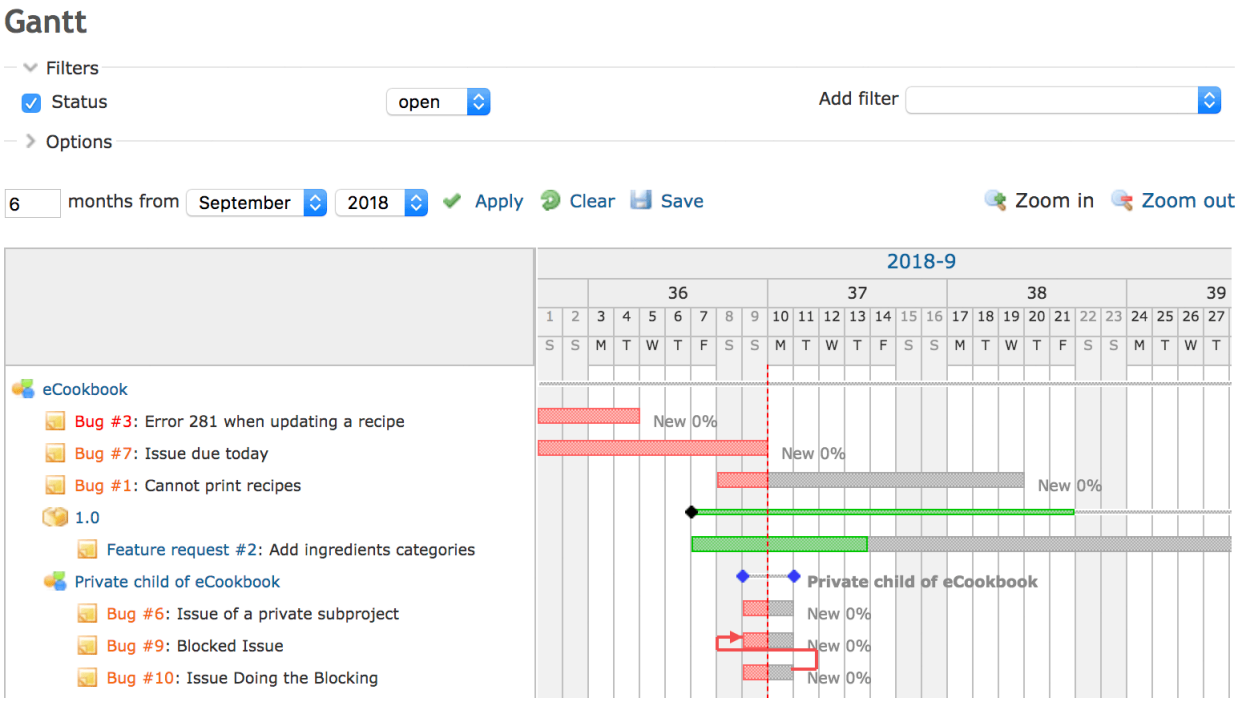

Files (4)

Updated by Go MAEDA about 7 years ago · 3 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang

The issue list

Table of contents

The issue list
Overview
Applying and saving filters
Custom queries
Shortcut menu
Bulk editing issues
Sidebar

Overview

The issue list provides a way to look at issues for a project.

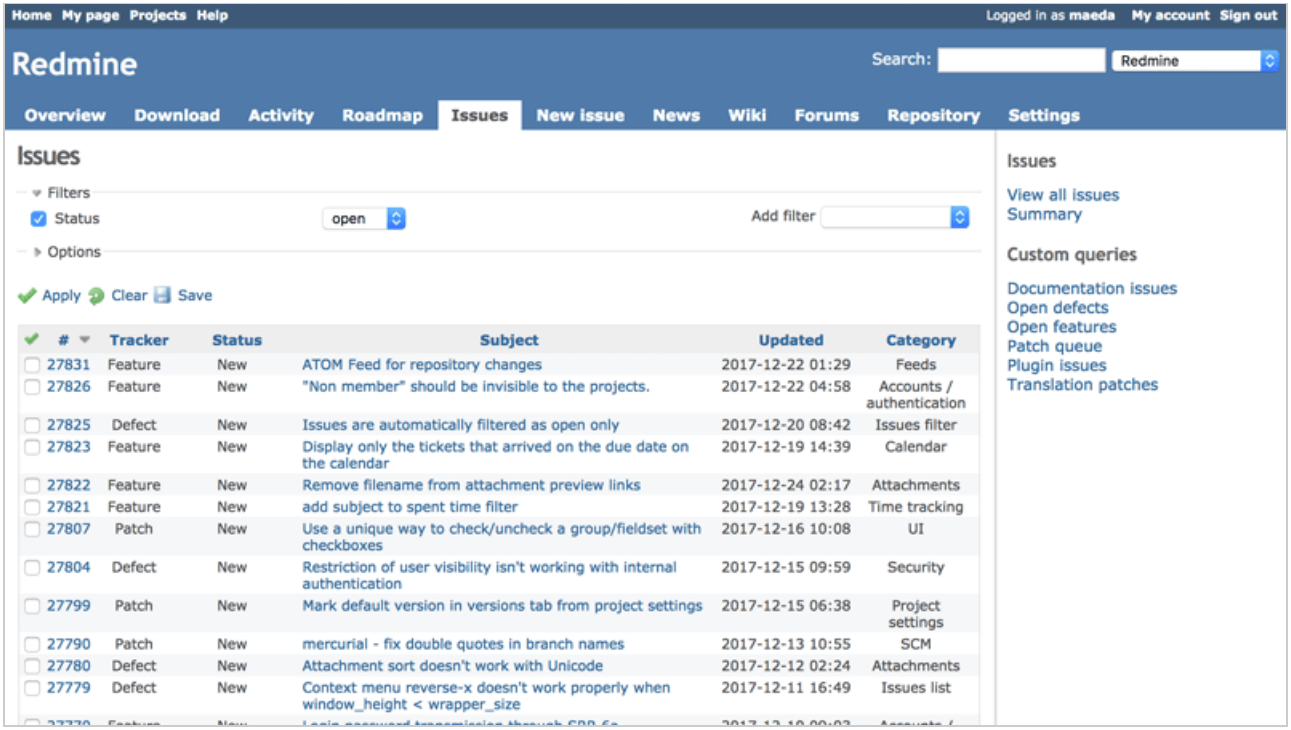

Applying and saving filters

The issue list displays open issues by default. By setting the filter you can change the condition of the issues to be listed. Standard and custom fields can be used as filters. Once the filters are set, click on ✔ to refresh the issue list. Click on ↻ to clear the filters.

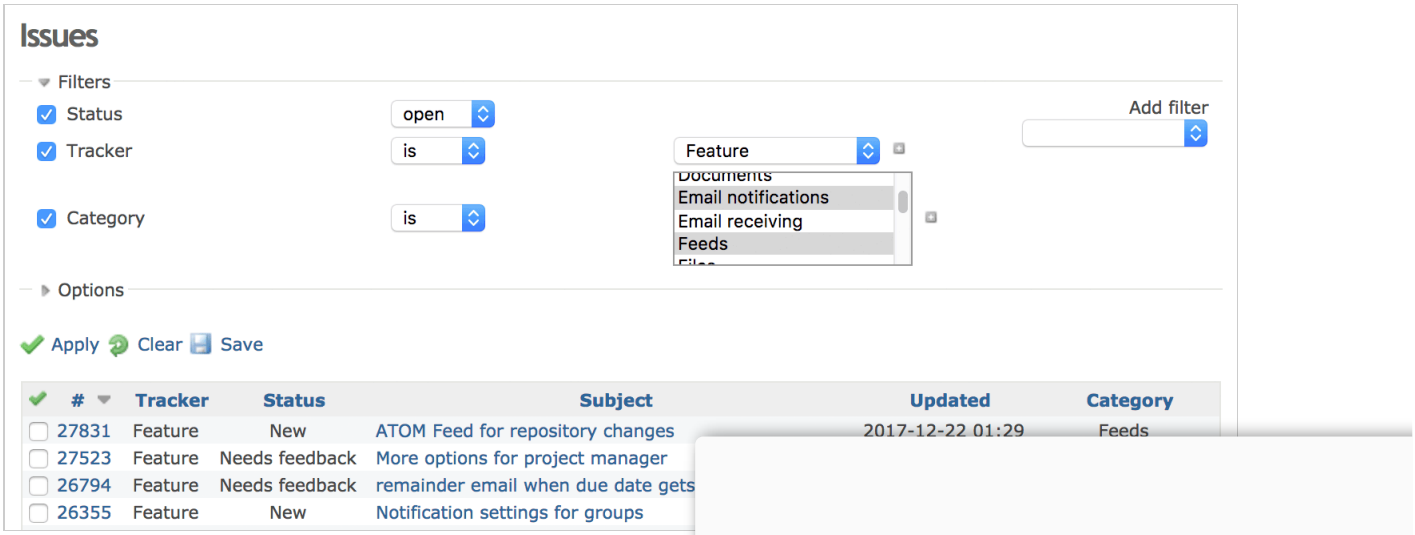

It is possible to select multiple values at once for a specified f
down menu in a selection list. In order to add to the selectior
keyboard.

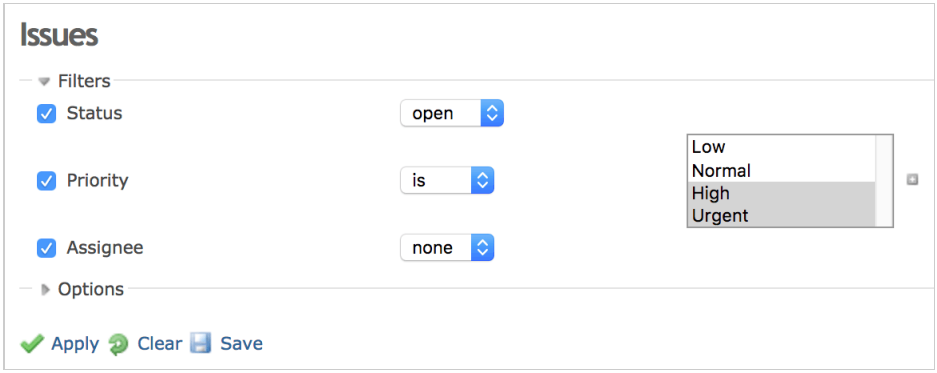

Custom queries

Filters you built can be saved as custom queries. And you can apply the saved filters with a single click.

Custom queries can be saved by clicking on .
A form lets you give it a name and select the columns that you want to be displayed on the issue list for this query (both standard and custom fields can be displayed). Checking the **public** attribute will make the query visible to everyone, otherwise only you will see the query.

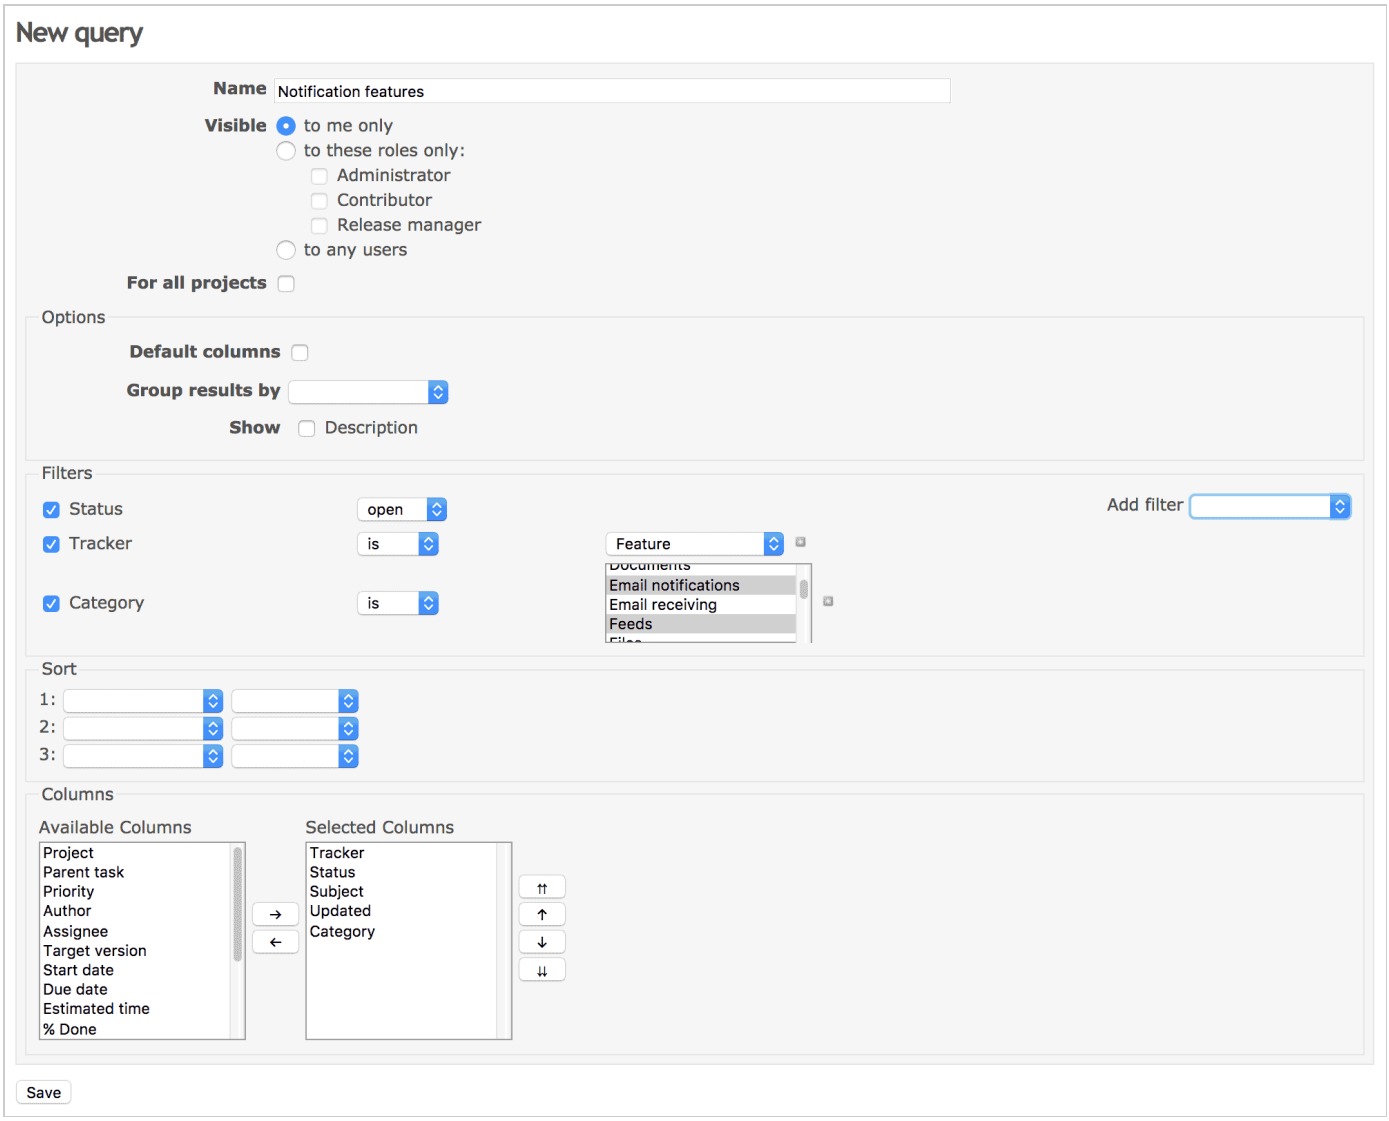

Once saved, the query is listed in the sidebar.

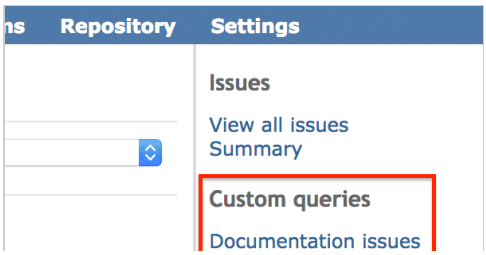

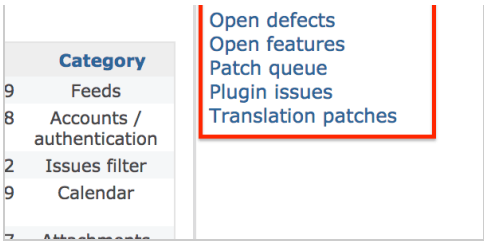

Shortcut menu

A context menu pops up when right clicking (ALT + Left click for Opera users) on an issue of the issue list.
This menu offers several shortcuts to quickly edit, reprioritize, reassign, copy, move or delete the issue.

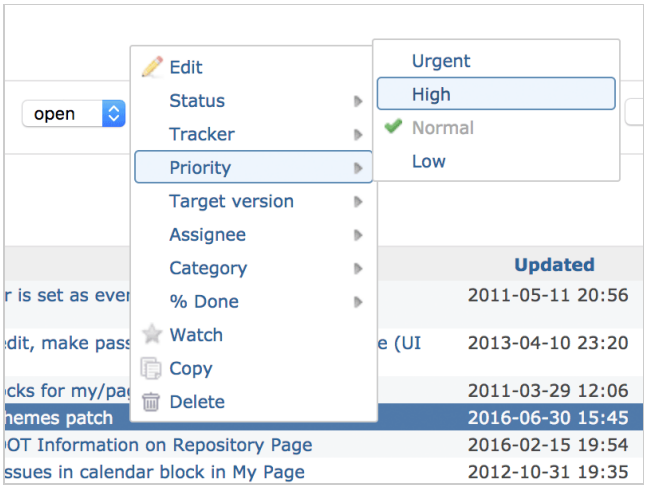

Note that you have to **right-click outside of the issue link**, otherwise the browser's default context menu is displayed.

Bulk editing issues

From the issue list, you can bulk edit/move/delete issues by selecting multiple issues and then right-click on the selection.
Issues can be selected either by using the checkboxes or by clicking on the rows with Control or Shift key pressed.
You can also use the little tick at the upper-left corner of the list to select/unselect all the issues.

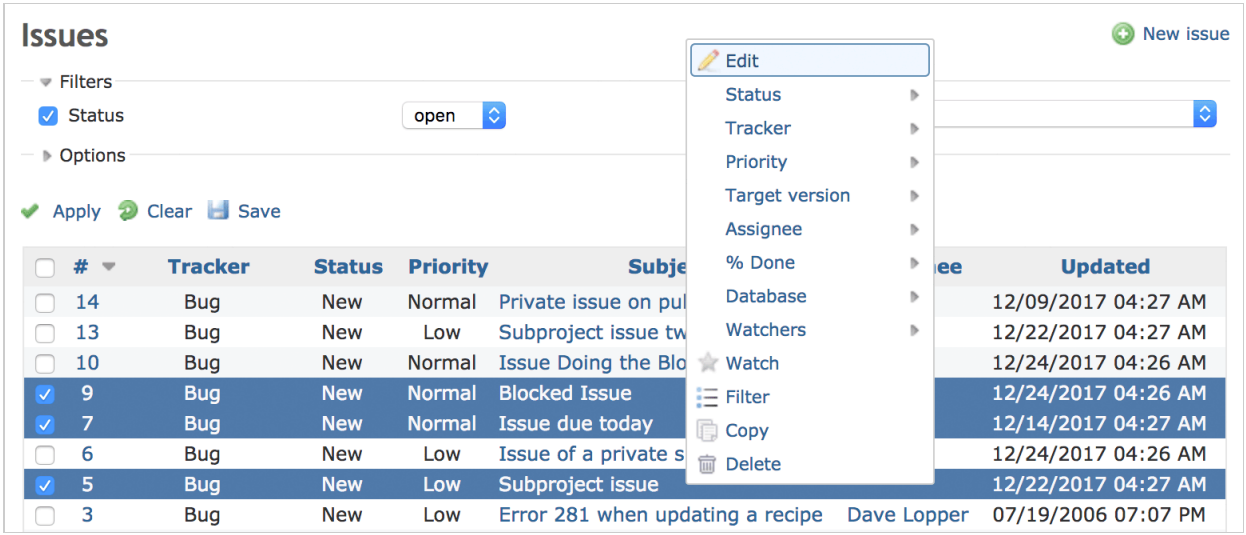

Sidebar

The contextual sidebar on the right of the issue list provides links to several different things:

- a quicklink to the default issuelist without any other filters applied (thus only open issues), which is useful when you are looking at a custom query and want to get back to the default issue list
- a link to the issue summary, which is a report of all the issues at a project-level (in contrast to the version overview which provides an overview at version-level)
- a link to the change log, which provides a project-level overview of all closed **and** targeted issues, sorted per target-versions
- links to several levels of custom queries:
  - global (cross-project) queries
    - public queries

        - private queries
    - current-project's queries
        - public queries
        - private queries
- depending on the project settings it also shows a planning section with links to:
    - the calendar
    - the gantt chart

Files (15)

Updated by Go MAEDA almost 8 years ago · 27 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang

Issue summary

Overview

The issue summary provides a report of the amount of all the issues at a project-level (in contrast to the version overview which provides an overview at version-level). This report is split-up in different blocks where each block shows the amount of open/closed/total issues per:

- Tracker
- Priority
- User to which the issue is assigned to
- User who opened the issue (the author)
- Version
- Category

Reports

Tracker

	open	closed	Total
Bug	3	3	6
Feature request	1	-	1
Support request	-	-	-

Priority

	open	closed	Total
Inactive Priority	-	-	-
Immediate	-	-	-
Urgent	-	-	-
High	-	-	-
Normal	2	3	5
Low	2	-	2

Assignee

	open	closed	Total
Dave Lopper	2	-	2
John Smith	-	-	-

Author

	open	closed	Total
Dave Lopper	-	1	1
John Smith	4	2	6

Version

	open	closed	Total
0.1	-	1	1
1.0	1	1	2
2.0	-	-	-
2.0	-	-	-
Private Version of public subproject	-	-	-
Systemwide visible version	-	-	-

Subproject

	open	closed	Total
Private child of eCookbook	3	-	3
Child of private child	-	-	-
eCookbook Subproject 1	3	-	3
eCookbook Subproject 2	-	-	-

Category

	open	closed	Total
Printing	1	2	3
Recipes	-	-	-

Drill-through links

Each tracker, priority, assigned user, author, version and category links to the issue list which has the selected item as the current filter.
Also the numbers of issues in the reports provides drill-through links to their respective views in the issue list.

Detailed reports

Each report-block can be selected to get a detailed report from it. This not only shows the amount of open/closed/total issues but also provides details for all the other configured issue statuses. The screenshot below shows the detailed report for the versions.

Reports

Version

	New	Assigned	Resolved	Closed	Reopened	open	closed	Total
0.7	-	-	-	82	-	-	82	82
0.7.1	-	-	-	17	-	-	17	17
0.7.2	-	-	-	70	-	-	70	70
0.7.3	-	-	-	7	-	-	7	7
0.8	1	-	1	279	2	4	279	283
0.9	3	1	-	1	-	4	1	5

Back

Files (3)

Updated by Go MAEDA about 7 years ago · 5 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang

Issue Tracking

Issues are the heart of the Redmine business. An issue is bound to a project, owned by a user, can be related to a version, etc.

Table of contents

Issue Tracking
- Listing of the issue
  - Related issues
  - Watchers
  - Associated revisions
- Adding a new issue
- Updating an existing issue
- Editing an existing issue's Subject or Description
- Subtasks
  - Filtering & sorting
  - Relations between the parent task and its subtasks

Listing of the issue

From a selected issue page, you can see the work in progress that is done to fix the issue. The messages are displayed in chronological order, (to change the order - see the setting in 'My Accounts'). It is possible to quote others' messages as well as to edit yours.

Related issues

'Related issues' allow developers to link issues to each other in order to remove duplicates or simplify their workflow.

It is possible to link issues based on various relations. Current relations are:

- **related to** - Just adds a link to the other issue.
- **duplicates** - Links issues so that closing one, will close the other (e.g. closing A will close B)
  For example, if issue B **duplicates** A:
  - closing B will leave A open
  - closing A will automatically close B
- **duplicated by** - Reciprocal of *duplicates*.
  For example, if issue A is **duplicated by** issue B:
  - closing B will leave A open
  - closing A will automatically close B
- **blocks** - Links issues so that closing one can be blocked by an issue which is still open
  If issue B blocks A,
  A can't be closed unless B is.
- **blocked by** - Reciprocal of *blocks*.
- **precedes** - Links issues to define an "order", where A needs to be completed x days before B can be started on
  If B follows A, you can't give B
  a starting date equal or less
  than the ending date of A.
- **follows** - Reciprocal of *precedes*.
  If issue B follows A (ex A ends the 21/04 and B begins the 22/04)
  and you add +2 day at the ending date of A,
  the starting and ending dates of B will be +2 too.
- **copied from** - Links issues to identify whether it was copied, and from which issue it was copied from.
- **copied to** - Reciprocal of *copied from*.



Administrators can define the permissions of users to add and edit such relations.

Watchers

Display a list of all the users who are watching this issue. If the issue is updated, those users will be notified.

If you are logged in as a project administrator, it is possible for you to add users to the watch list on this page. By clicking on the Add link, a drop-down menu with a **Add** butto
the watch list.

Administrators can define the permissions of users to add/delete watchers as well as to see the list of watchers.

Associated revisions

If the administrator has defined Referencing Issues Keywords, a developer that uses such keyword(s) will see its commit message displayed on the issue page, under the Associated revisions block (generally to the right of the first reply).

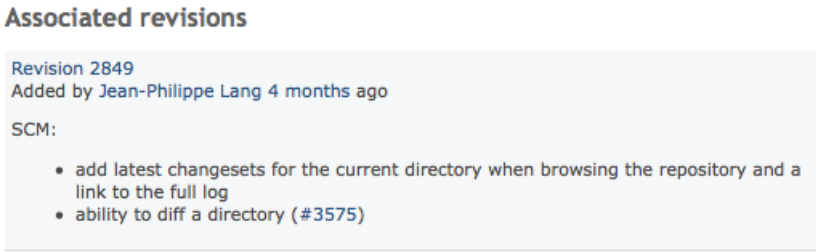

Revisions can also be associated to issues manually, from a changeset (revision) view in the Repository browser. The manual associations are reversible. They can be revoked by using the broken chain icon to the right of an added association, again in the changeset view.

Adding a new issue

People can create a new issue when they meet the roles and permissions configured by the Redmine Administrator (Role: Issue Tracking > Add Issues).
When creating a new issue, one of the most important items is the tracker field, which defines the nature of the issue. By default, Redmine comes with three different trackers: *bug*, *feature*, and *support*.

Updating an existing issue

(TODO: describe and upload a screen-shot of update panel)

To edit the issue, Click *Update* link (having a pencil icon) at the top or the bottom of the issue page:

Depending you your role permissions (see roles and permissions), you will see a complete or a limited set of editable issue properties.

Editing an existing issue's Subject or Description

In order to edit an existing issue, your role has to have the Issue Tracking > Edit Issues right in the roles and permissions configuration.

1. Open the issue
2. Click *Update* link (having a pen icon) at the top or the bottom of the issue page.

The description of the issue has pencil icon right next to it that you can click to change the description.

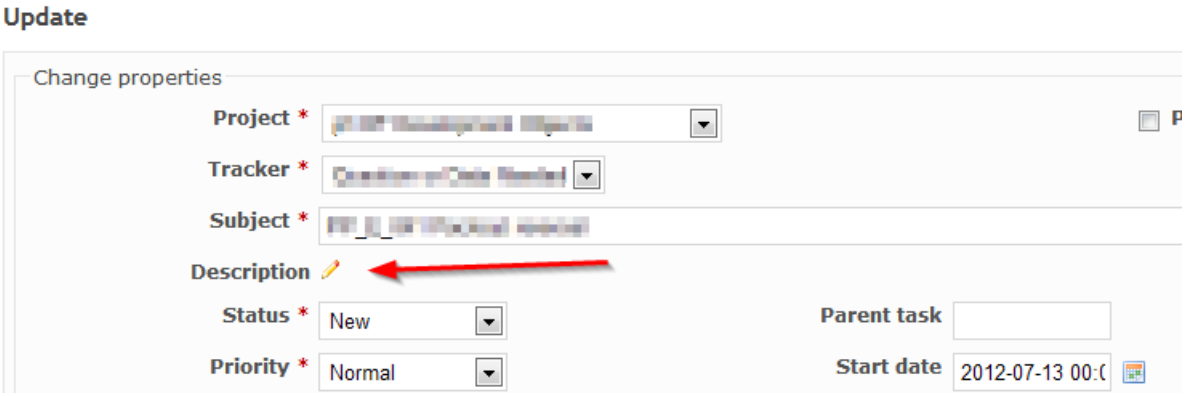

Subtasks

Sometimes it is useful to break huge tasks down into smaller subtasks to have more control over the task or to assign smaller parts of it to different users. One can create a subtask by either clicking the 'Add' link in the subtasks section of the parent task or by filling the parents task id into the 'parents task' field of the subtask. This is also possible after creation by updating the task. Because it's just a normal task a subtask can also have subtasks. There is no limit in the depth of this stack.

Subtasks can belong to a different project than the parent task. This functionality is configurable in the settings section in the administration menu. Defining subtasks requires the permission 'Manage subtasks' which can be set in the roles and permissions section in the administration menu.
If a project gets copied the whole tree beneath the parent task is copied, too. When copying only the parent task one can choose if the subtasks should also be copied.

Filtering & sorting

One can show the parents task id as sortable column in the issues list and there is also a filter option for it.
When the list is sorted by the parent task id the subtasks hierarchy is displayed in an indented tree structure.

As long as the tasks share the same target version the tree structure is also visible in the gantt view.

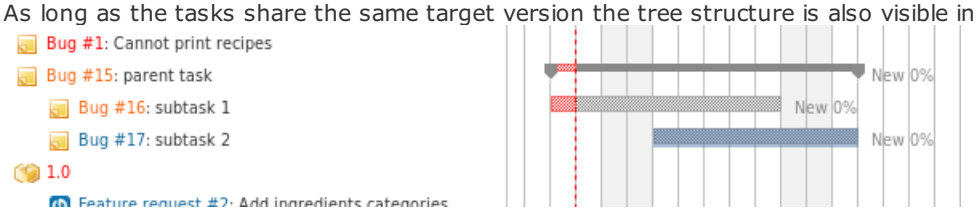

Relations between the parent task and its subtasks

Some properties of the parent task are influenced by the subtasks underneath.
The following relations exist between the parent task and its subtasks.

- The parent task's done percentage is the weighted average ratio of subtasks.
- The parent task's start is the lowest date of subtasks.
- The parent task's due date is the highest due date of subtasks.
- The parent task's spent time is the sum of the subtasks' spent times.
- The parent task's estimation time is the sum of the subtasks' estimation times.
- The parent task's priority is the highest of the subtasks' priorities.
- Subtasks are rescheduled when a 'precedes' relation is set on a parent task.

Files (10)

Updated by Go MAEDA almost 7 years ago · 47 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang

Keyboard Navigation

Accesskeys

Table of contents

Keyboard Navigation
Accesskeys
Accesskey overview
Creating a new issue
Switch to the editor
Moving back and forward
Search in Redmine

Some functions in Redmine can be accessed by a keyboard shortcut.
The shortcuts vary between browsers and operating systems:

	Windows	macOS	Linux	Comments
Chrome	Alt	Ctrl + Opt	Alt + Shift	Accesskeys **7** and **4** are not available for Windows and Linux One should use Alt + Shift for the Accesskeys **e** and **f**
Firefox	Alt + Shift	Ctrl + Opt	Alt + Shift	
Safari	--	Ctrl + Opt	--	
Edge	Alt	--	--	Accesskeys **7** is not available.

Accesskey overview

Key	Description
7	Creates a new issue
n	Moves forward through issue stacks, paginations and more...
p	Moves backward through issue stacks, paginations and more...
e	Jumps into the editor mode. (Issues, wiki, news)
f	Jumps in the global quick search field
4	Opens the project search view

Creating a new issue

By using the accesskey **7**, you can create a new issue from everywhere in a project.

Switch to the editor

You can switch to the editor by using the **e** key.
The accesskey is available for:

- documents
- issues
- wiki pages
- news entries

Moving back and forward

Use the keys **n** (next) or **p** (previous) to move through:

- stacks of issues
- lists with pagination
- activity pages
- month in the calendar view
- periods in the gantt view
- revisions in the repository

Search in Redmine

By using the **f** key, your cursor jumps directly into the search
If you prefer the project search, you can open it with the acc

Files (0)

Updated by C S almost 4 years ago · 12 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang

Login

The ***Sign in*** page is used to login into the project where you have been activated for. The ***Lost password*** link is only displayed if the administrator has activated it.

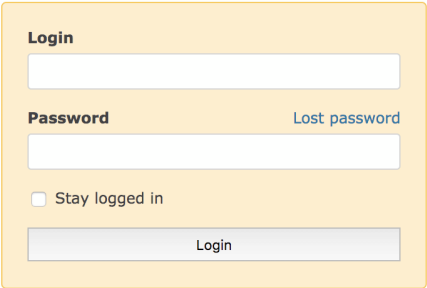

Files (2)

Updated by Go MAEDA about 8 years ago · 7 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang

My page

My page lets you display various blocks of information about your projects. Users can personalize their own "My page" by adding, removing and reordering blocks.

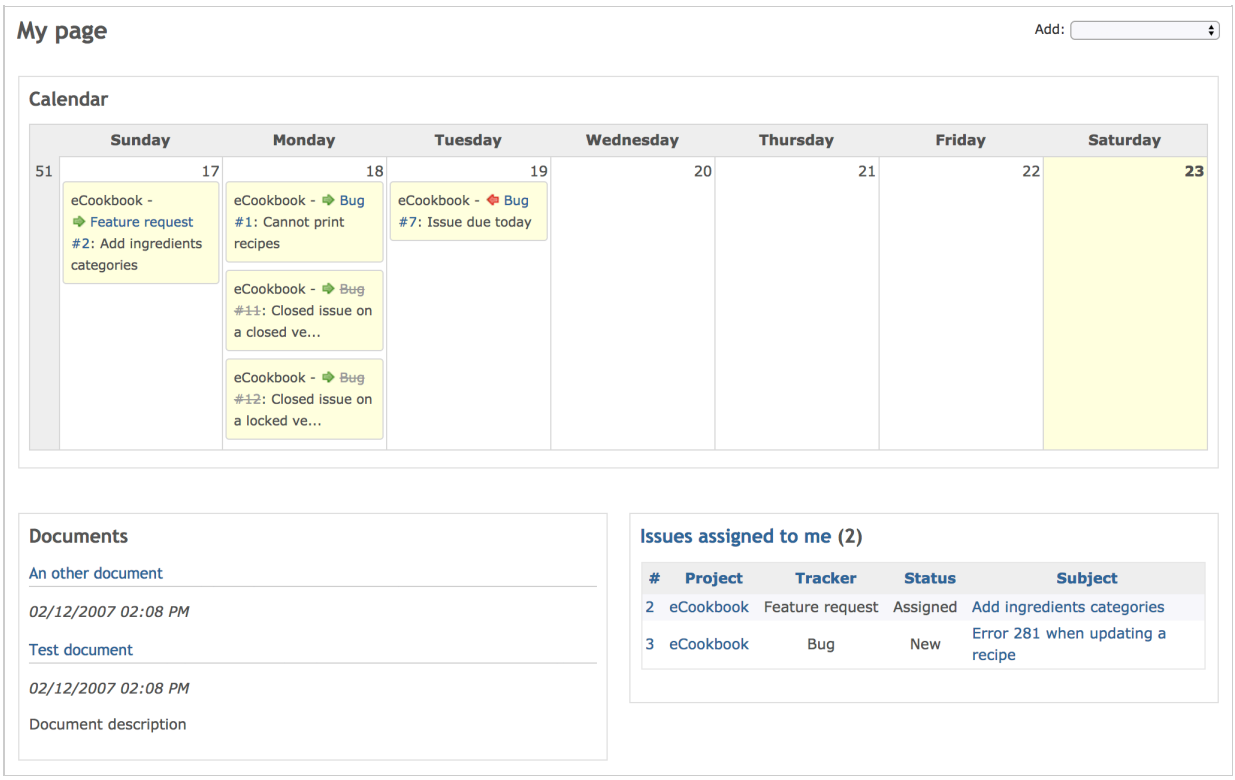

blocks

The following blocks are available. Only "Issues assigned to me" and "Reported issue" block are enabled by default.

The layout (as in positioning of the blocks) of the "My page" can also be re-ordered and modified using drag-and-drop.

Issues assigned to me

"Issues assigned to me" block provides a cross-project list of issues, which are assigned to the current user, showing the issue id's, projects, trackers and subjects with the current issue status appended between braces.

Reported issues

"Reported issues" block provides a cross-project list of issues, which are reported by the current user, showing the issue id's, projects, trackers and subjects with the current issue status appended between braces.

Calendar

"Calendar" block provides a cross-project weekly calendar overview.

Documents

"Documents" block provides a cross-project overview of the latest documents.

Issues

"Issues" block provides a list of issues returned by a selected custom query.

Latest news

"Latest news" block provides a cross-project overview of the latest news.

Spent time

"Spent time" block provides a cross-project overview of the spent time entries of the current user of the last seven days.

Watched issues

"Watched issues" block provides a cross-project list of issues, which are watched by the current user, showing the issue id's, projects, trackers and subjects with the current issue status appended between braces.

Files (1)

Updated by Go MAEDA almost 8 years ago · 5 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang

News

In the news area you can publish news items about the project or any subject you like.

You can give the news item a title, a summary and the detailed description. The summary will be displayed in the **Latest news** area of the project overview whereas the description will be displayed if you click on the title of the news item.

If you have the permissions to create news items, then you can add/edit/delete an existing news entry (see Redmine Permissions).

If you have the permission to create new news items, you have a green plus sign (**+ Add news**) in the upper right of you screen. If you click on that, you can add a new news item. On this page, you have to insert the **Title**, **Summary** and **Description** of the news item.

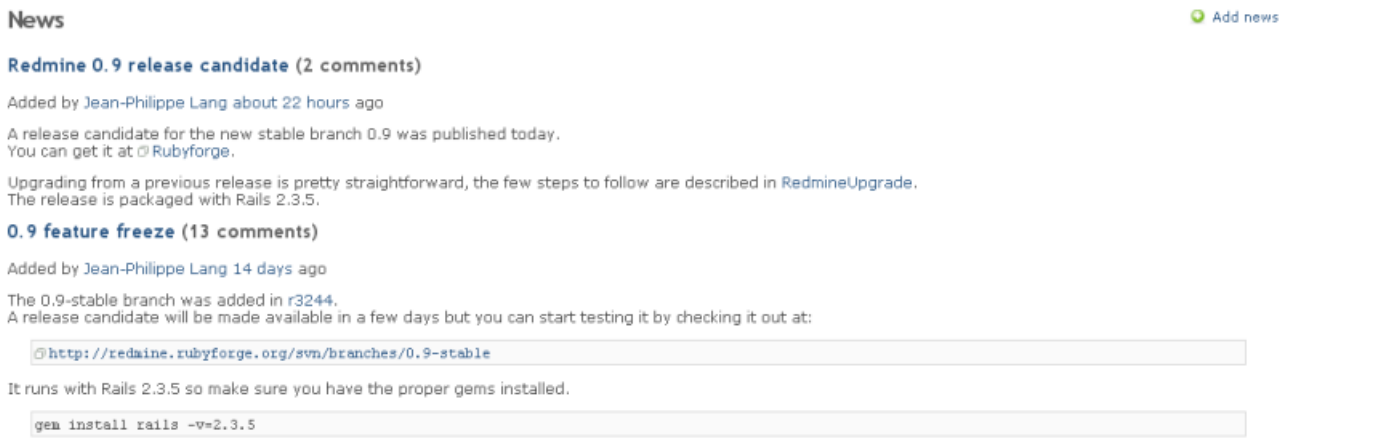

Files (4)

Updated by Tom Rochette almost 16 years ago · 15 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang

Project Activity

The ***Activity*** page will give an historical log of at least all activities which had happen in the given project.

This will include:

- A new issue (feature, defect...) has been created.
- The status of the issue has been changed.
- The given issue has been closed.
- A note to the issue has been added.
- This means a changeset has been commited to the repository.
- A news has been added to the news area.
- A message in the forum area has been added.
- A reply to a message in the forum has been added.
- A wiki page has been edited or newly created.
- A new file has been added in the files area or to a document.
- A new document has been added.
- Some hours has been logged.

Using the checkboxes in the sidebar of the right, you can choose which items are displayed.

The activity is also available as an Atom feed.

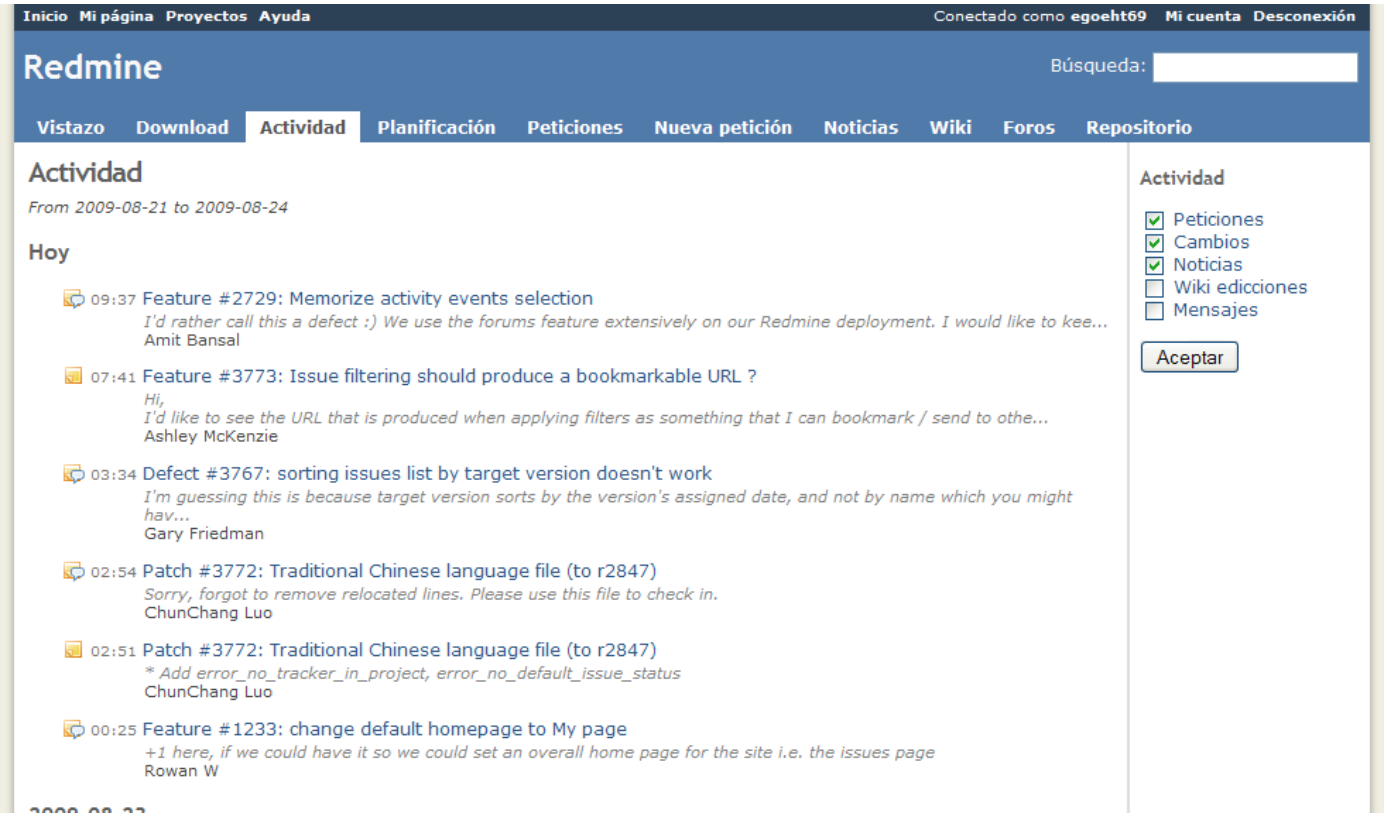

A cross-project activity view is available from the Projects page, it will lists the activity of all visible projects.

Files (1)

Project Overview

The Project overview will give you an overview of the whole project. On left upper side in the ***Issue tracking*** area you will get an overview of how many task are open and closed for each tracker specified for the project. In the ***Members*** area you can see who are the members of the given project and in particular who is the administrator of the project. In the ***Latest news*** area you can see which are the latest news for the particular project.

TODO: Write about Issue trackers and configuration....

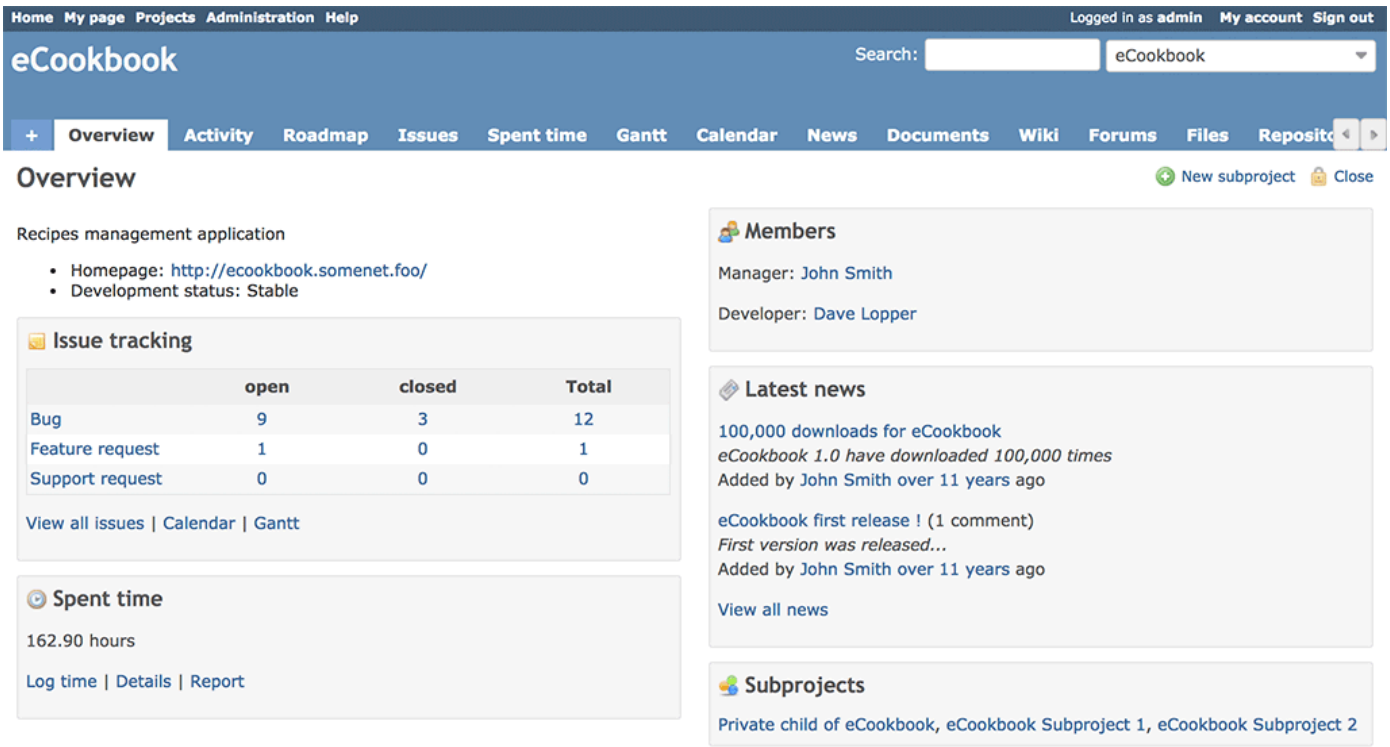

On the upper right side you see Sign in and Register. The Sign in link allows those who have an account for this project to login. The Register link allow unregistered users to register themselves, allowing them to be part of any projects contained within this installation of Redmine.

Note that the Register link can be disabled by the administrator.

TODO: Make links to other areas...

Files (4)

Updated by Tom Rochette almost 16 years ago · 10 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang

Project Settings

Members who have necessary permissions in the project can configure the project on the projects' settings tab.

Table of contents

Project Settings
- Information
  - General settings
  - Trackers
  - Custom fields
- Modules
  - Core modules
- Members
- Versions
- Issue categories
- Wiki
- Repository
- Forums
- Activities (time tracking)

Information

In this screen you can configure the basic (though important) settings for the selected project.

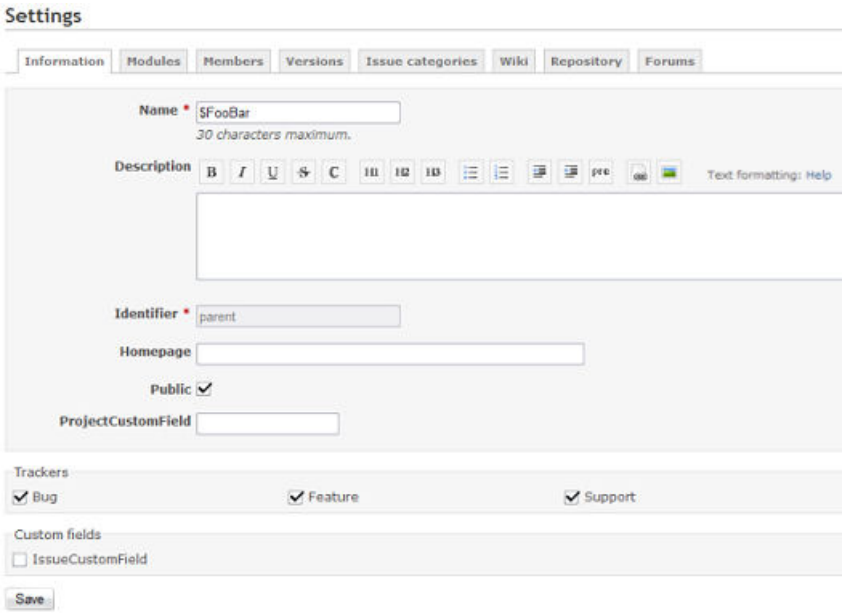

General settings

The following general settings are available:

- **Name**: project display name.
- **Description**: description that appears on the project overview.
- **Identifier**: used by the application for various things (eg. in URLs). It must be unique and cannot be composed of only numbers. Once the project is created, this identifier cannot be modified.
- **Homepage**: homepage-link that appears on the project overview.
- **Public**: if checked, the project can be viewed by all the users, including those who are not members of the project. If unchecked, only the project members have access to it, according to their role.
- **Subproject of**: lets you define a parent project to the project being created. Projects can be unlimitedly nested.

If there are any projects custom fields configured by the administrator, they'll show up behind the "Public"-setting noted above.

Trackers

Redmine lets you define which of the configured trackers (thus also their respective workflows) you are able to use within this specific project.

- **Trackers**: select the trackers that you want to use for issues of the project. Only the administrator can define new trackers.

Custom fields

- **Custom fields**: select the issues custom fields that you
administrator can define new custom fields.

Note that some of these custom fields can be only configured

Note that some of these custom fields can be only configured (e.g. unchecked) if the issue custom field is *not* defined as a *global* issue custom field (which can be done by the administrator by checking the "For all projects" checkbox in the custom field create/edit view).

Modules

This screen lets you choose the modules you want to use for the project.

Disabling a module doesn't delete the associated data. It only prevents users from accessing it. After a module was disabled, it can be re-enabled with all its data.
You can for example disable 'Issue tracking' module for a single project. Existing issues are not deleted. You will be able to access them if you re-enable the module.

Core modules

- Issue tracking: provides Issue tracking feature, including issue categories, versions, the Roadmap and version overviews
- Time tracking: provides Time tracking feature
- News: provides News feature
- Documents: provides Documents feature
- Files: provides Files feature
- Wiki: provides Wiki feature
- Repository: provides Repository feature
- Boards: provides Forum feature
- Calendar: provides Calendar feature
- Gantt: provides Gantt feature

Additional modules can be added to the system using Redmine plugins. Plugins can only be installed by the administrator.

Members

This screen lets you define project members and their roles. You can add a user or a group, with one or multiple role(s) in a given project.

Versions

Projects versions allow you to track and plan changes. You can assign issues to versions and then view the list of assigned issues for each version on the roadmap.
You can also assign a wikipage to a version which will be added to the roadmap and the version overview.

Note: the roadmap menu-item shows up in the project-menu only when the issue tracking module is enabled for the project and at least one version is configured in the projects settings.

The following properties are configurable for (each of the) versions:

- **Name**: The text you want to be displayed to identify the version. *This field is required.*
- **Description**: A short description to describe the version. *This field is optional.*
- **Status**: the status lets you control how issues can be assigned to the version:
  - open: no restriction (default)
  - locked: can not assign new issues to the version
  - closed: can not assign new issues and can not reopen assigned issues
- **Wiki Page**: The name of a wikipage assigned to the version. *This field is optional.*
- **Due date**: The due date for the version to be completed. *This field is optional.*
- **Sharing**: this option lets you share the version with other projects, so that issues from these other projects can be assigned to the shared versions. Each version can be shared with:
  - subprojects: all the descendant projects
  - projects in the project hierarchy: ancestors + descendants (needs versions management permission on the root project)
  - projects in the project tree: root project + all its descendants (same as above)
  - all projects (can be set by admin users only)

```
-------------------------------------------------------------------------------
| None          | Subprojects   | Hierarchy     | Tree          | All projects  |
|               |               |               |               |               |
|      X     X  |      X     X  |      o     X  |      o     X  |      o     o  |
|      |     |  |      |     |  |      |     |  |      |     |  |      |     |  |
|    --X--   X  |    --X--   X  |    --o--   X  |    --o--   X  |    --o--   o  |
|   /  |  \     |   /  |  \     |   /  |  \     |   /  |  \     |   /  |  \     |
|  X   V   X    |  X   V   X    |  X   V   X    |  o   V   o    |  o   V   o    |
|     / \       |     / \       |     / \       |     / \       |     / \       |
|    X   X      |    o   o      |    o   o      |    o   o      |    o   o      |
```

```
|   /           |   /           |   /           |   /           |   /           |
|  X            |  o            |  o            |  o            |  o            |
-------------------------------------------------------------------------------

V = project with the shared version
o = projects that can assign issues to the shared version
X = projects that can't assign issues to the shared version
```

Sharing a version of a private project with public projects will make its name visible to everyone.

From the versions list, you can click on **Close completed versions** to automatically set the status of all the completed versions (due date reached and no open issues) to *closed*.

Issue categories

Issue categories let you to organize issues. Categories can for example correspond to the different components of your project.

You are able to configure your own set of issue categories for each individual project. It is also possible to auto-assign new issues to a specific user based on the chosen category of the newly created issues.

The following properties are configurable for (each of the) issue categories:

- **Name**: The text you want to be displayed to identify the issue category. *This field is required.*
- **Assigned to**: The project member to who you want to auto-assign newly created issues in this category. *This field is optional.*

Wiki

Each project can have its own wiki. Enable the module on the desired project to activate it.

- **Start page**: This page is used as the start page for the wiki in both the project menu wiki link as well as in the start page link in the wiki sidebar (default: 'Wiki'). *This field is required.*

Repository

A SCM repository can be associated with each project. Once the repository is configured, you can browse it and view the changesets. The changesets also appear in the Activity view.
See the following page for details about how to configure your repository in Redmine.

Forums

Each project can have one or more discussion forums. Each forum has the following properties:

- **Name**: The text you want to be displayed to identify the discussion forum. *This field is required.*
- **Description**: A short description to describe the subject of the specific forum. *This field is required.*

Activities (time tracking)

Among the value of time tracking activities which is registered to Enumerations can be excluded when it is not used in the project.
The value which is unchecked "Enabled" on this screen, it is not appear in activities options when entering time log.

Files (1)

Updated by Mischa The Evil about 2 years ago · 43 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang

Register

The Register page is used for self-registration of a new user. You can go to the page by clicking "Register" link at the upper-right corner on pages. Note that admin can disable self-registration. See the description of Self-registration setting.

A new user has to give the information about his ***Login***, ***Password***, ***First name***, ***Last name*** and ***Email*** address and which language the user would like to use to for the user interface.

Table of contents

Register
- Registration Process
  - Account Activation by Email
  - Manual Account Activation
  - Automatic Account Activation

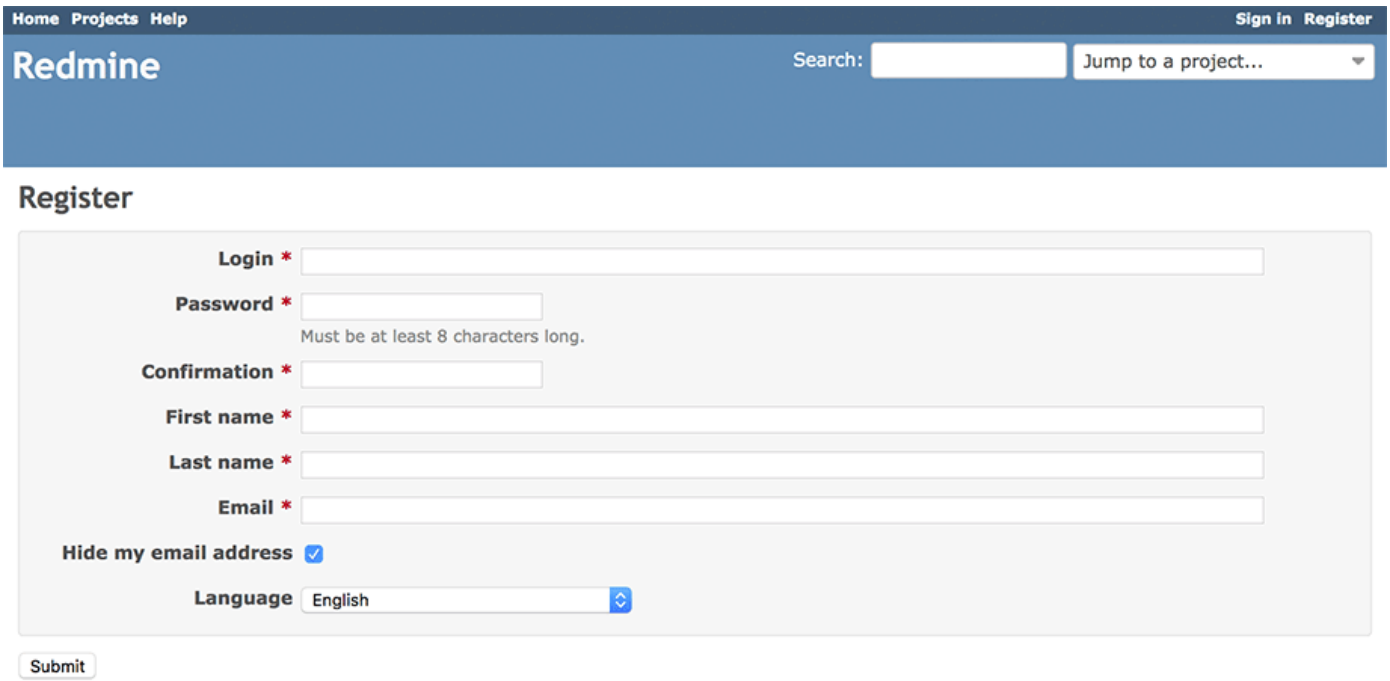

Registration Process

Based on the Redmine settings, the user will have to either **activate his account by email**, **wait for an administrator to validate his account** or **see his account automatically activated**.

Account Activation by Email

After providing the information required on the Registration page, the user will receive an email to the email provided on the Registration page. By clicking on the activation link provided in the email, the user enables himself his account.

Such method is often used to prevent email spamming.

Manual Account Activation

After providing the information required on the Registration page, the user must wait for the approval of an administrator. The administrator will enable the user account on "Administration" > "Users" page. When the user account is enabled, the user is allowed to login.

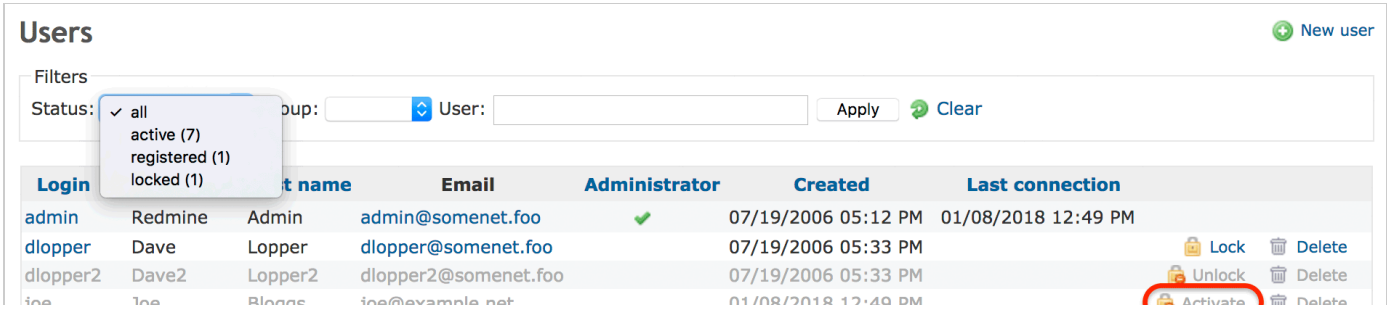

jsmith	John	Smith	jsmith@somenet.foo	07/19/2006 05:32 PM	07/19/2006 08:42 PM	Lock	Delete
miscuser8	User	Misc	miscuser8@foo.bar	07/19/2006 05:33 PM		Lock	Delete

Automatic Account Activation

After providing the information required on the Registration page, the user is allowed to login at any moment, no further steps are required.

Files (3)

Updated by Go MAEDA almost 8 years ago · 9 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang

Repository

The Repository tab lets you browse the project repository and view the latest commits.

You can expand a directory by clicking on .
You can also enter a directory by clicking on its name.

Clicking a revision number will display the details of the commit.

To browse the repository at a given revision, enter the revision number in the upper-right field and hit Enter.

root Statistics | Revision:

Name	Size	Revision	Age	Author	Comment
branches		3296	about 3 hours	Jean-Philippe Lang	Merged r3295 from trunk.
0.6-stable		1233	about 1 year	Jean-Philippe Lang	Docs updated for 0.6.4 release.
0.7-stable		2203	about 1 year	Jean-Philippe Lang	Updates CHANGELOG and version for 0.7.4 release.
0.8-stable		3081	about 1 month	Jean-Philippe Lang	Backported r3080 from trunk (#4248).
0.9-stable		3296	about 3 hours	Jean-Philippe Lang	Merged r3295 from trunk.
nbc		2464	10 months	Nicolas Chuche	
swistak		2058	about 1 year	Liwiusz Ociepa	Fix access to Repository Parent Path (FORBIDEN ...
work		2356	11 months	Jean-Philippe Lang	Branches cleaning.
plugins		2721	8 months	Jean-Philippe Lang	Fixes menu tab and settings partial name of sim...
sandbox		2868	3 months	Jean-Philippe Lang	Highlight new group users.
tags		3297	about 3 hours	Jean-Philippe Lang	tagged version 0.9.0 (release candidate)
trunk		3295	about 3 hours	Jean-Philippe Lang	CHANGELOG update.

Latest revisions

#	Date	Author	Comment
3297	2010-01-09 13:03	Jean-Philippe Lang	tagged version 0.9.0 (release candidate)
3296	2010-01-09 12:50	Jean-Philippe Lang	Merged r3295 from trunk.
3295	2010-01-09 12:49	Jean-Philippe Lang	CHANGELOG update.
3294	2010-01-09 12:47	Jean-Philippe Lang	Merged r3293 from trunk.
3293	2010-01-09 12:46	Jean-Philippe Lang	Updated doc.
3292	2010-01-09 11:41	Jean-Philippe Lang	Locales updated to trunk @ r3291.
3291	2010-01-09 11:36	Jean-Philippe Lang	Translation updates.
3290	2010-01-09 11:27	Jean-Philippe Lang	Merged r3289 from trunk.
3289	2010-01-09 11:27	Jean-Philippe Lang	Fixed: undefined method `stringify_keys!' error in Issue#attributes_with_tracker_first= with ruby1.9 (#4540).
3288	2010-01-09 11:06	Jean-Philippe Lang	Translation update.

View differences

View all revisions

Files (1)

Updated by Jean-Philippe Lang almost 16 years ago · 4 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang

Repository Statistics

Redmine generates two images representing the number of *Changes* and the number of *Revisions* in the configured repository. One image shows a month to month break down of *Changes* vs *Revisions*. The other image shows the number of *Changes* and *Revisions* made by each commiter.

Definitions

- *Revisions* is a count of repository commits and is displayed in reddish/orange.
- *Changes* is a count of the number of files that have changed overall and is displayed in blue.

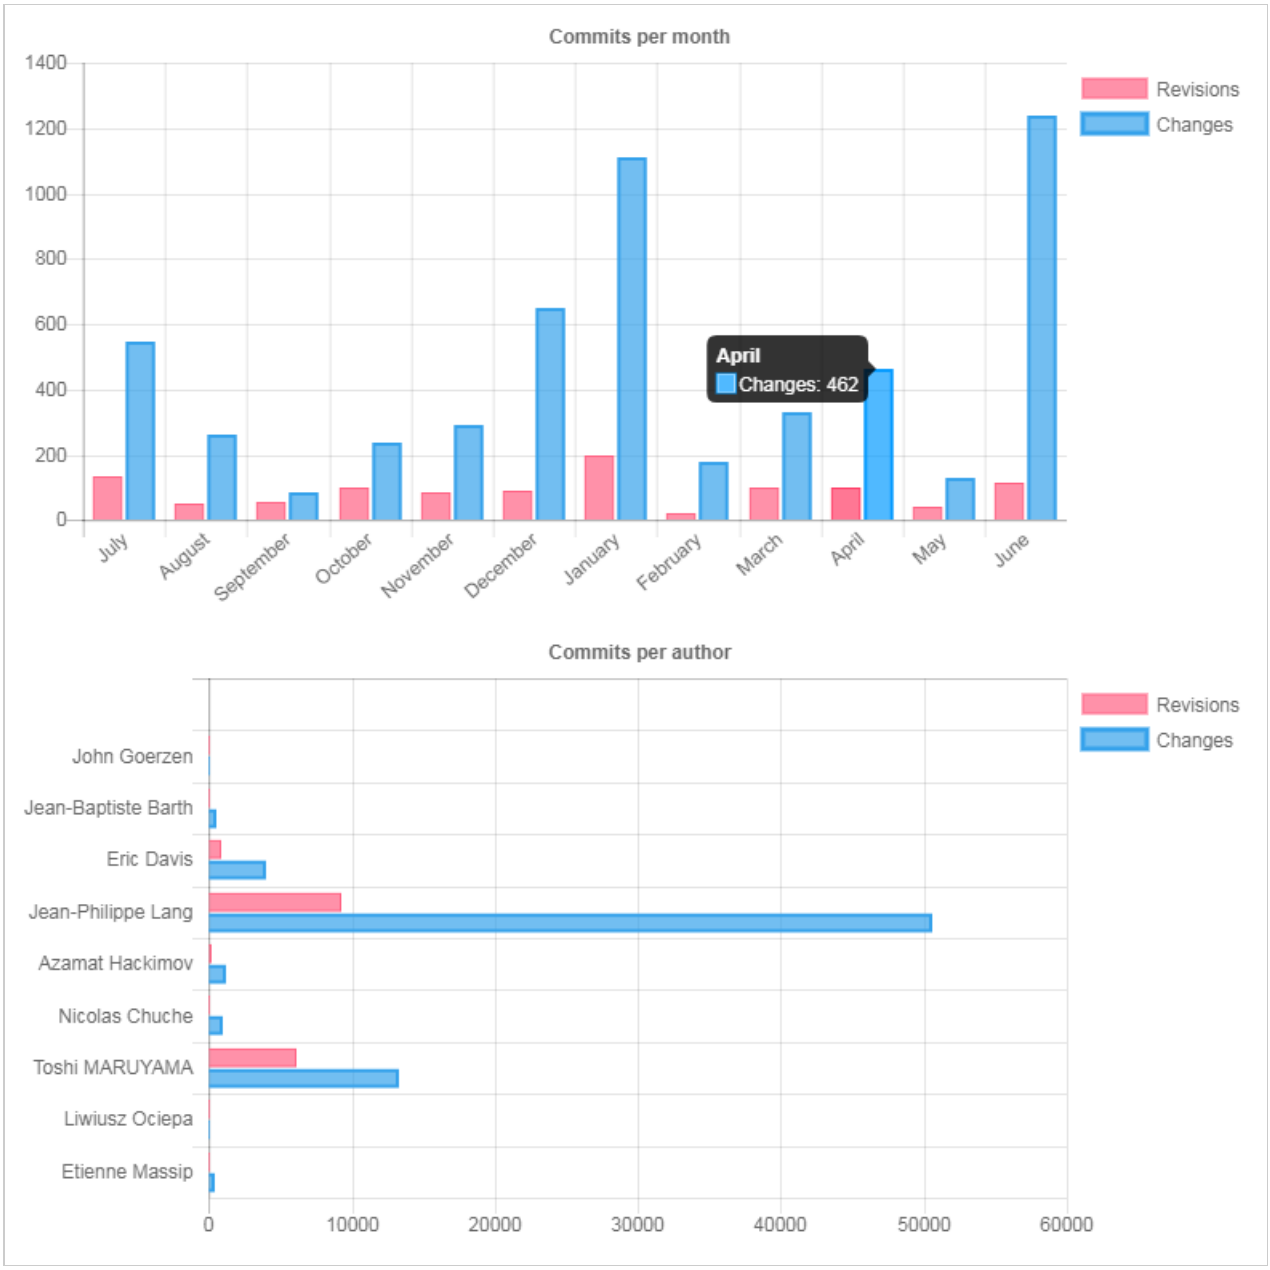

Files (2)

Updated by Go MAEDA almost 7 years ago · 7 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang

Roadmap

The roadmap provides a highly-configurable, version-based view on the issue tracking system that helps planning and managing the development of a project. It also provides an in-depth (version-based) overview of the current state of your project.

Note: the roadmap menu-item shows up in the project-menu only when the issue tracking module is enabled for the project and at least one version is configured in the projects settings.

Table of contents

Roadmap
- Overview
  - Version completion percentage
- Managing the Roadmap
- Sidebar

Overview

If you select the Roadmap you will get an overview of the current state of your project, like the following:

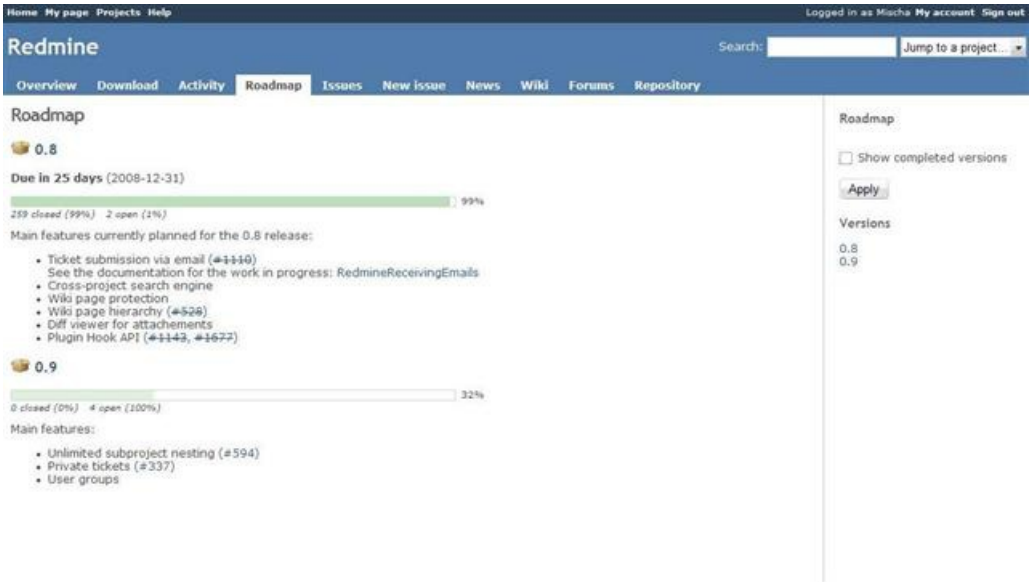

The above mentioned view contains the following "blocks" of information for all (incomplete) versions:

- the version name
- the date the version is scheduled to be complete
- a progress bar which indicates overall active/done/closed-ratio based on the %-done, estimated time and statuses of the issues targeted to the corresponding version, visualized by different color gradients
- if configured: the content of the wiki-page that has been configured to be attached to the version (see below)
- if configured: a list of all the issues assigned to the specific version (see below)

The mentioned progress bar includes drill-down links to the issue-list which preloads the specific filters thus providing quick links to open/closed issues targeted to a corresponding version. Simply click on the number left to ***open*** to see all open issues in the issue-list. If you like to know which issues are already solved/closed simply click on the number left to ***closed***.

If you click on the version itself (0.8 right from the -icon), you can get a detailed view of the current, overall state of a specific version. This is the version-view.

Version completion percentage

It uses estimated time to weight each issue.
Issues with no estimated time are weighted with the average estimated time.
If no issue are estimated, they receive the same weight.

Details ~~#2182#note-6~~

Managing the Roadmap

If you have the appropriate permissions you can change the

1. You can attach a wikipage to the version (see RedmineF

objectives of the version etc.
2. You can select the trackers of which individual issues, which are targetted to the corresponding version, are listed in a way that you will see an area with all related issues directly under the version. This behaviour can be changed as an administrator in the area of the trackers.

Sidebar

The contextual sidebar on the right of the roadmap provides several things:

- a checkbox to include completed target-versions on the roadmap
- checkboxes and an apply-button to include/exclude issues from specific trackers on the roadmap (which trackers are shown here with checkboxes depends on the individual tracker-configuration)
- links to the configured target-versions of the project where each links to the roadmap itself starting with the selected target-version

Files (2)

Updated by Go MAEDA about 8 years ago · 19 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang

RedmineSearch

A part of any project management process is spent looking for existing information. Enter the Redmine search capability..

Table of contents

RedmineSearch
- Search box
- Search configuration
  - Search titles only
  - Search custom fields
- Results
- Search controller

Search box

At the top right-hand side of Redmine is a simple search box. Type anything and press enter to search.

Searching for #{IssueID} or {IssueID} will go straight to the issue. Search parameters can be enclosed in double quotation marks.

Depending on permission settings and project membership a drop down menu option may show the current project. Simple search searches full text on the project currently displayed in that chooser.

Clicking on the word **Search** will immediately take you to the advanced search and results page. Notice the project chooser has followed, and there are checkboxes to limit search to specific types of entries. The checkboxes displayed only if the module is enabled at that project level.

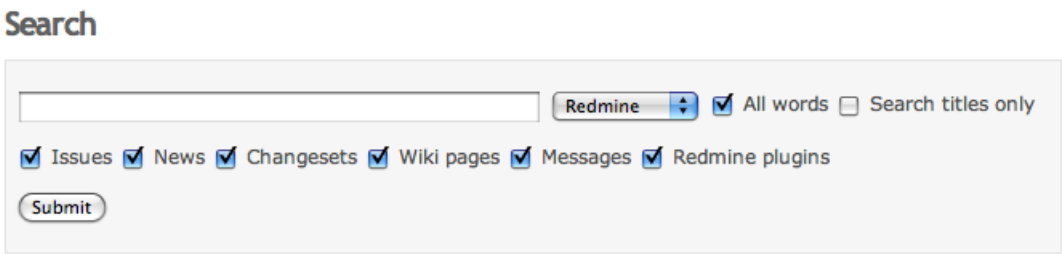

Search configuration

Search titles only

From the advanced search box, **Search titles only** can be enabled to limit results.

Search custom fields

Custom fields are not searched by default. Don't forget to set custom fields checkbox **Searchable** to true to also search these fields.



Results

Here is a sample results page from this site on "test issue".

- Many links to go to what was found.
- Unique text highlighting by search terms.
- Capability to jump to groupings of results (ie News items).
- Leading icons to categorize type of result (ie changeset, issue, comment)

Eric Davis wrote: > Anton Nepomnyaschih wrot ... Any code contributions should be sent to the issue tracker, either as an attachment to an existing issue or a new "Patch" issue. Right now, we really need some people to help triage the issues list. Like review patches to see if they apply to the latest trunk, if they have tests, etc. > > Eric If the wiki is a probl ... are similar but not the same. So I'd add an issue relation between all three. That would help ... cted, don't spam. See [[ForumCodeOfConduct]]]
2010-11-05 20:35

Revision 4367: Allow key authentication when deleting issues (with tests) #6447
2010-11-05 18:49

Revision 4366: Allow key authentication when updating issues (with tests) #6447
2010-11-05 18:49

Revision 4365: Allow key authentication when creating issues (with tests) #6447
2010-11-05 17:29

Search controller

Always check the source first:

source:/trunk/app/controllers/search_controller.rb

A more advanced look at the controller explains some of the above behavior:

- Only searches the first 5 tokens of a search
- Tokens must be at least 2 characters long
- Results are returned in paginated sets of 10

Files (5)

Updated by Go MAEDA almost 8 years ago · 7 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang

Text formatting

Redmine supports two syntaxes of formatting based on configuration (Administration → Settings → Text Formatting)

- Textile (default)
- Markdown

- Code highlighting supported languages

Files (1)

Updated by Go MAEDA about 7 years ago · 127 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang

Markdown formatting

Below is **Markdown** formatting. For **Textile** formatting see Textile formatting.
Currently HTML tags are not allowed by default. See ~~#15520~~ and ~~#20497~~ for details. For other limitations of the current **Markdown** formatting see ~~#16373~~ and #21443.

Table of contents

- Markdown formatting
  - Links
    - Redmine links
    - External links
    - Email addresses
  - Text formatting
    - Acronym
    - Font style
    - Color
    - Inline images
    - Headings
    - Paragraphs
    - Horizontal rule
    - Preformatted Text
    - Blockquotes
    - Unordered lists
    - Ordered lists
    - Tasklists
    - Tables
    - Table of content
    - Footnotes
  - Macros
  - Code highlighting
  - Translation

Links

Redmine links

Redmine allows hyperlinking between resources (wiki pages, issues, documents...) from anywhere text formatting is used.

Wiki links:

- **[[Guide]]** displays a link to the page named 'Guide': Guide
- **[[Guide#further-reading]]** takes you to the anchor "further-reading". Headings get automatically assigned anchors so that you can refer to them: Guide
- **[[Guide|User manual]]** displays a link to the same page but with different text: User manual
- **[[Guide#User-guide|User guide]]** displays a link to the header on the same page with different text: User guide

You can also link to pages of another project's wiki (using the project identifier):

- **[[sandbox:some page]]** displays a link to the page named 'Some page' of the Sandbox wiki
- **[[sandbox:]]** displays a link to the Sandbox wiki main page

Wiki links are displayed in red if the page doesn't exist yet, eg: Nonexistent page.

Links to other resources:

- Issues:
  - **#124** (link to an issue: displays ~~#124~~, link is striked-through if the issue is closed)
  - **#124-6**, or **#124#note-6** (link to an issue note: displays ~~#124-6~~, or ~~#124#note-6~~)
  - **##124** (link to an issue including tracker name and subject: displays ~~Defect #124: bulk edit doesn't change the category or fixed version properties~~)
  - **#note-6** (link to an issue note within the same issue)

- Documents:
  - **document#17** (link to document with id 17)
  - **document:Greetings** (link to the document with title "Greetings")
  - **document:"Some document"** (double quotes can be used when document title contains spaces)
  - **sandbox:document:"Some document"** (link to a document with title "Some document" in project identifier "sandbox")

- Versions:
  - **version#3** (link to version with id 3)
  - **version:1.0.0** (link to version named "1.0.0")
  - **version:"1.0 beta 2"** (double quotes can be used when version name contains spaces)
  - **sandbox:version:1.0.0** (link to version "1.0.0" in the project identifier "sandbox")

- Attachments:
  - **attachment:file.zip** (link to the attachment of the current object named file.zip)
  - **attachment:"file name.zip"** (double quotes can be used when the filename contains non word characters)
  - For now, attachments of the current object can be referenced only (if you're on an issue, it's possible to reference attachments of this issue only)

- Changesets:
  - **r758** (link to a changeset, displays r758)
  - **commit:c6f4d0fd** (link to a changeset with a non-numeric hash)
  - **svn1|r758** (link to a changeset of a specific repository, for projects with multiple repositories)
  - **commit:hg|c6f4d0fd** (link to a changeset with a non-numeric hash of a specific repository)
  - **sandbox:r758** (link to a changeset of another project)
  - **sandbox:commit:c6f4d0fd** (link to a changeset with a non-numeric hash of another project identifier)

- Repository files:
  - **source:some/file** (link to the file located at /some/file in the project's repository)
  - **source:"some file"** (link to the file with non word characters in the path)

- **source:some/file@52** (link to the file's revision 52)
- **source:some/file@master** (link to the file in branch *master*)
- **source:some/file#L120** (link to line 120 of the file)
- **source:some/file@52#L120** (link to line 120 of the file's revision 52)
- **source:repo_identifier|some/file** (link to a file of a specific repository, for projects with multiple repositories)
- **sandbox:source:some/file** (link to the file in the project identifier "sandbox")
- **sandbox:source:repo_identifier|some/file** (link to the file, with non word characters in the path, of a specific repository in the project identifier "sandbox")
- **export:some/file** (force the download of the file)

- Forums:
  - **forum#2** (link to forum with id 2)
  - **forum:Discussion** (link to forum with name "Discussion")
  - **forum:"Help and more"** (double quotes can be used when forum name contains spaces)

- Forum messages:
  - **message#1218** (link to message with id 1218)

- News items
  - **news#1** (link to news item with id 1)
  - **news:Greetings** (link to news item with name "Greetings")
  - **news:"eCookbook first release !"** (double quotes can be used when news item name contains spaces)

- Projects:
  - **project#3** (link to project with id 3)
  - **project:someproject** (link to project with name "someproject")
  - **project:"Multiple words project"** (double quotes can be used when project name contains spaces)

- Users:
  - **Thomas Lecavelier** (link to user with id 2)
  - **user:jsmith** (Link to user with login "jsmith")
  - **@jsmith** (Link to user with login "jsmith")

Escaping:

- You can prevent Redmine links from being parsed by preceding them with an exclamation mark: !

External links

URLs (http, https, ftp and ftps) are automatically turned into clickable links:

- **http://www.redmine.org** -- External link to the redmine website: http://www.redmine.org

URLs can also use different text than the link itself:

- **[Redmine web site](http://www.redmine.org)** -- External link with different text: Redmine web site
- **[![Redmine web site](http://www.redmine.org/attachments/7069/Redmine_logo.png)](http://www.redmine.org)** -- External image with a title that links to an URL:

Email addresses

Email addresses are automatically turned into clickable links:

- **someone@foo.bar** -- Link to an email address: someone@foo.bar
- **[Email someone](mailto:someone@foo.bar)** -- Email link with different text: Email someone

More complex email instructions can be added to an email link. A default subject, default body and CC information can be defined. Note that spaces in any of these fields need to be replaced with the code %20.

- **[Email webmaster and admin](mailto:webmaster@foo.bar?cc=admin@foo.bar)** -- Email to webmaster, CC admin: Email webmaster and admin
- **[Email someone for help](mailto:someone@foo.bar?subject=Website%20Help)** -- Email link with the subject "Website Help": Email someone for help
- **[Email someone for help](mailto:someone@foo.bar?subject=Website%20Help&body=My%20problem%20is%20)** -- Email link with the subject "Website Help" and a default body: Email someone for help

Text formatting

For things such as headlines, bold, tables, lists, Redmine supports Markdown syntax. See http://daringfireball.net/projects/markdown/syntax, http://agea.github.io/tutorial.md/, http://stackoverflow.com/editing-help for information on using any of these features. A few samples are included below, but the engine is capable of much more of that. For conversions see Pandoc. The Redcarpet formatter is used.

Acronym

Not supported by Markdown

Font style

```
* **bold** __bold__
* *italic* _italic_
* ***bold italic*** ___bold italic___
* <ins>underline</ins>
* <del>strike through</del>
* Plain <sup>superscript</sup>
* Plain <sub>subscript</sub>
* `inline monospace`
* normal **bold** _italic_ normal;E=mc<sup>2</sup>
* normal<strong>bold</strong><em>italic</em>normal;E=mc<sup>2</sup>
* Escaping: \*\*bold\*\* \_italic\_ \`inlinemono\`
* <pre>**some lines**      some [link](http://www.redmine.org)</pre>
* <pre>\*\*some lines\*\*      some \[link](http\://www\.redmine\.org)</pre>
```

displays:

- **bold bold**
- *italic italic*
- ***bold italic bold italic***
- underline
- ~~strike through~~
- Plain superscript
- Plain subscript
- `inline monospace`
- normal **bold** *italic* normal;E=mc^2
- normal**bold***italic*normal;E=mc^2
- Escaping: **bold** _italic_ `inlinemono`

```
some lines      some   link
```

```
**some lines**      some [link](http://www.redmine.org)
```

Note: HTML tags need to be allowed to use the HTML tags (, , <ins>, <del>, <sup>, <sub>). See ~~#15520-16~~ and ~~#15520-17~~ for details.
More explicitly, you need to patch redmine, as explained in this post

Color

```
* <span style="color:red">red</span> <span style="color:green">green</span> <span style="color:yellow"
* <span style="color:red">red</span><span style="color:green">green</span><span style="color:yellow">y
* <span style="background-color:lightgreen">Lightgreen Background</span> <span style="background-color
* <span style="background-color:lightgreen">Lightgreen Background</span><span style="background-color:
```

displays:

- red green yellow blue'ish
- redgreenyellowblue'ish
- Lightgreen Background Yellow Background
- Lightgreen BackgroundYellow Background

Note: HTML tags need to be allowed to use the HTML tag (). See ~~#15520-16~~ and ~~#15520-17~~ for details.
More explicitly, you need to patch redmine, as explained in this post

Inline images

- **** displays an image located at image_url (textile syntax)
- **![alt text](image_url "optional title")** displays an image with an alt/title attribute
- **[](URL)** displays an image located at image_url with link URL added

If you have an image attached to your wiki page, it can be displayed inline using its filename: ****.

As of this writing, Markdown has no syntax for specifying the dimensions of an image; if this is important to you, you can use regular HTML <img> tags.

- <img style="float:right" src="URL"/>

- <img style="width:100%" src="attached_image.png"/>

Note: HTML tags need to be allowed to use the HTML tag (<img>). See ~~#15520-16~~ and ~~#15520-17~~ for details.
More explicitly, you need to patch redmine, as explained in this post

Headings

```
# Heading

## Subheading

### Subheading

or

Heading
=======

Subheading
----------
```

Redmine assigns an anchor to each of those headings thus you can link to them with "#Heading", "#Subheading" and so forth.

Paragraphs

Markdown does not support alignment of a paragraph. Use tags if you need it.

```
left aligned
<div style="padding-left:1em;">
left ident 1em
</div>

<div style="padding-left:2em;">
left ident 2em
as well as for following lines
</div>

<div style="text-align:right;">
right aligned
</div>

<div style="padding-right:3em;text-align:right;">
right ident 3em
</div>

<div style="text-align:center;">
This is centered paragraph.
</div>
```

displays;

left aligned

left ident 1em

left ident 2em
as well as for following lines

right aligned

right ident 3em

This is centered paragraph.

Note: HTML tags need to be allowed to use the HTML tags ( ). See ~~#15520-16~~ and ~~#15520-17~~ for details.
More explicitly, you need to patch redmine, as explained in this post

Horizontal rule

`----`

displays:

Preformatted Text

```
<pre>**Your text won't become bold**</pre>
```

displays:

```
**Your text won't become bold**
```

Blockquotes

You can use > at the beginning of each line and stack them for nested quotes:

```
>> Rails is a full-stack framework for developing database-backed web applications according to the Mo
>> To go live, all you need to add is a database and a web server.
> Great!
```

displays:

> > *Rails is a full-stack framework for developing database-backed web applications according to the Model-View-Control pattern.*
> > *To go live, all you need to add is a database and a web server.*
>
> *Great!*

Unordered lists

Unordered lists use asterisks (`*`), pluses (`+`), and hyphens (`-`) as list markers

```
* Item 1
* Item 2
  * Item 21 (two spaces indentation)
  * Item 22
* Item 3
```

displays:

- Item 1
- Item 2
  - Item 21
  - Item 22
- Item 3

Ordered lists

Ordered lists use numbers followed by periods.

```
1. Item 1
3. Item 2
2. Item 3
  1. Item 3.1 (two spaces)
  1. Item 3.2
```

displays:

1. Item 1
2. Item 2
3. Item 3
   1. Item 3.1
   2. Item 3.2

Note that the actual numbers you use to mark the list have no effect on the output.

Tasklists

You can add task list items using the common_mark format

```
* [ ] Task title
```

or by clicking the "Task list" icon from the toolbar.

For now, to check the items, you need to use the Edit feature, we will try to allow this by clicking on the checkbox in the near future

near future.

Tables

```
|UserID (align right)|Name (align left)|Group (align center)|
|-------------------:|:----------------|:------------------:|
|2                   |John Smith       |                    |
|3                   |Dave Lopper      |A Team              |
|4                   |Robert Hill      |B Team              |
```

displays (all multiple spaces are replaced by 1 space):

UserID (align right)	Name (align left)	Group (align center)
2	John Smith	
3	Dave Lopper	**A Team**
4	Robert Hill	**B Team**

Table of content

```
{{toc}} => left aligned toc
{{>toc}} => right aligned toc
```

Please keep in mind, that the toc-tag needs an empty line above and underneath it and no other text before and after it.

Example:

```
h1. headLineOne

h2. something

{{toc}}

h2. something more
```

Footnotes

A footnote works very much like a reference-style link: it consists of a marker next to the text, e.g.

```
This is a sentence.[^1]
```

and a footnote definition on its own line anywhere within the document, e.g.

```
[^1]: This is a footnote.
```

Macros

Redmine includes a macros system that lets you add custom functions to insert dynamic content in formatted text. You can learn about writing your own macros in RedmineMacros. Redmine also includes a few builtin macros:

`hello_world`

```
Sample macro.
```

`macro_list`

```
Displays a list of all available macros, including description if available.
```

`child_pages`

```
Displays a list of child pages. With no argument, it displays the child pages of the current wiki

{{child_pages}} -- can be used from a wiki page only
{{child_pages(depth=2)}} -- display 2 levels nesting only
{{child_pages(Foo)}} -- lists all children of page Foo
{{child_pages(Foo, parent=1)}} -- same as above with a link to page Foo
```

`include`

```
Includes a wiki page. Examples:

{{include(Foo)}}
{{include(projectname:Foo)}} -- to include a page of a specific project wiki
```

`collapse`

```
Inserts of collapsed block of text. Examples:

{{collapse
This is a block of text that is collapsed by default.
It can be expanded by clicking a link.
}}

{{collapse(View details...)
With custom link text.
}}
```

`thumbnail`

```
Displays a clickable thumbnail of an attached image.
Default size is 200 pixels. Examples:

{{thumbnail(image.png)}}
{{thumbnail(image.png, size=300, title=Thumbnail)}} -- with custom title and size
```

`issue`

```
Displays an issue link including additional information. Examples:

{{issue(123)}}                              -- Issue #123: Enhance macro capabilities
{{issue(123, project=true)}}                -- Andromeda - Issue #123: Enhance macro capabilities
{{issue(123, tracker=false)}}               -- #123: Enhance macro capabilities
{{issue(123, subject=false, project=true)}} -- Andromeda - Issue #123
```

`sample_macro`

```
Sample macro
```

Code highlighting

Default code highlightment relies on Rouge, a syntax highlighting library written in pure Ruby. It supports many commonly used languages such as **c**, **cpp** (c++), **csharp** (c#, cs), **css**, **diff** (patch, udiff), **go** (golang), **groovy**, **html**, **java**, **javascript** (js), **kotlin**, **objective_c** (objc), **perl** (pl), **php**, **python** (py), **r**, **ruby** (rb), **sass**, **scala**, **shell** (bash, zsh, ksh, sh), **sql**, **swift**, **xml** and **yaml** (yml) languages, where the names inside parentheses are aliases. Please refer to RedmineCodeHighlightingLanguages for the full list of supported languages.

You can highlight code in your wiki page using this syntax:

```
``` ruby
Place your code here.
```
```

Example:

```ruby
# The Greeter class
class Greeter
  def initialize(name)
    @name = name.capitalize
  end

  def salute
    puts "Hello #{@name}!"
  end
end
```

Translation

Note that the following translations may not be up to date. Please refer to the original english documentation if needed.

- Português Brasileiro
- Русский
- French
- Deutsch
- Korean
- Türkçe
- 繁體中文
- 简体中文

Files (0)

Updated by C S about 2 years ago · 32 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang

Textile formatting

Below is **Textile** formatting. For **Markdown** formatting see RedmineTextFormattingMarkdown.
For limitations of current Textile support see #6269, #10078 (Definition Lists).

Table of contents

- Textile formatting
  - Links
    - Redmine links
    - External links
    - Email addresses
  - Text formatting
    - Acronym
    - Font style
    - Color
    - Inline images
    - Headings
    - Paragraphs
    - Horizontal rule
    - Preformatted Text
    - Blockquotes
    - Unordered lists
    - Ordered lists
    - Tables
      - Special table control sequences
    - Table of content
    - Footnotes
  - Macros
  - Code highlighting
  - Styling text using CSS
    - Allowed CSS properties
  - Translation

Links

Redmine links

Redmine allows hyperlinking between resources (wiki pages, issues, documents...) from anywhere text formatting is used.

Wiki links:

- **[[Guide]]** displays a link to the page named 'Guide': Guide
- **[[Guide#further-reading]]** takes you to the anchor "further-reading". Headings get automatically assigned anchors so that you can refer to them: Guide
- **[[Guide|User manual]]** displays a link to the same page but with different text: User manual
- **[[Guide#User-guide|User guide]]** displays a link to the header on the same page with different text: User guide

You can also link to pages of another project's wiki (using the project identifier):

- **[[sandbox:some page]]** displays a link to the page named 'Some page' of the Sandbox wiki
- **[[sandbox:]]** displays a link to the Sandbox wiki main page

Wiki links are displayed in red if the page doesn't exist yet, eg: Nonexistent page.

Links to other resources:

- Issues:
  - **#124** (link to an issue: displays ~~#124~~, link is striked-through if the issue is closed)
  - **#124-6**, or **#124#note-6** (link to an issue note: displays ~~#124-6~~, or ~~#124#note-6~~)
  - **##124** (link to an issue including tracker name and subject: displays ~~Defect #124: bulk edit doesn't change the category or fixed version properties~~)
  - **#note-6** (link to an issue note within the same issue)

- Documents:
  - **document#17** (link to document with id 17)
  - **document:Greetings** (link to the document with title "Greetings")
  - **document:"Some document"** (double quotes can be used when document title contains spaces)
  - **sandbox:document:"Some document"** (link to a document with title "Some document" in project identifier "sandbox")

- Versions:
  - **version#3** (link to version with id 3)
  - **version:1.0.0** (link to version named "1.0.0")
  - **version:"1.0 beta 2"** (double quotes can be used when version name contains spaces)
  - **sandbox:version:1.0.0** (link to version "1.0.0" in the project identifier "sandbox")

- Attachments:
  - **attachment:file.zip** (link to the attachment of the current object named file.zip)
  - **attachment:"file name.zip"** (double quotes can be used when the filename contains non word characters)
  - For now, attachments of the current object can be referenced only (if you're on an issue, it's possible to reference attachments of this issue only)

- Changesets:
  - **r758** (link to a changeset, displays r758)
  - **commit:c6f4d0fd** (link to a changeset with a non-numeric hash)
  - **svn1|r758** (link to a changeset of a specific repository, for projects with multiple repositories)
  - **commit:hg|c6f4d0fd** (link to a changeset with a non-numeric hash of a specific repository)
  - **sandbox:r758** (link to a changeset of another project)
  - **sandbox:commit:c6f4d0fd** (link to a changeset with a non-numeric hash of another project identifier)

- Repository files:
  - **source:some/file** (link to the file located at /some/file in the project's repository)

    - **source:some/file** (link to the file located at /some/file in the project's repository)
    - **source:"some file"** (link to the file with non word characters in the path)
    - **source:some/file@52** (link to the file's revision 52)
    - **source:some/file@master** (link to the file in branch *master*)
    - **source:some/file#L120** (link to line 120 of the file)
    - **source:some/file@52#L120** (link to line 120 of the file's revision 52)
    - **source:repo_identifier|some/file** (link to a file of a specific repository, for projects with multiple repositories)
    - **sandbox:source:some/file** (link to the file in the project identifier "sandbox")
    - **sandbox:source:repo_identifier|some/file** (link to the file, with non word characters in the path, of a specific repository in the project identifier "sandbox")
    - **export:some/file** (force the download of the file)

- Forums:
    - **forum#2** (link to forum with id 2)
    - **forum:Discussion** (link to forum with name "Discussion")
    - **forum:"Help and more"** (double quotes can be used when forum name contains spaces)

- Forum messages:
    - **message#1218** (link to message with id 1218)

- News items
    - **news#1** (link to news item with id 1)
    - **news:Greetings** (link to news item with name "Greetings")
    - **news:"eCookbook first release !"** (double quotes can be used when news item name contains spaces)

- Projects:
    - **project#3** (link to project with id 3)
    - **project:someproject** (link to project with name "someproject")
    - **project:"Multiple words project"** (double quotes can be used when project name contains spaces)

- Users:
    - **Thomas Lecavelier** (link to user with id 2)
    - **user:jsmith** (Link to user with login "jsmith")
    - **@jsmith** (Link to user with login "jsmith")

Escaping:

- You can prevent Redmine links from being parsed by preceding them with an exclamation mark: !

External links

URLs (http, https, ftp and ftps) are automatically turned into clickable links:

- **http://www.redmine.org** -- External link to the redmine website: http://www.redmine.org

URLs can also use different text than the link itself:

- **"Redmine web site":http://www.redmine.org** -- External link with different text: Redmine web site
- **!http://www.redmine.org/attachments/7069/Redmine_logo.png(Redmine web site)!:http://www.redmine.org** -- External image with a title that links to an URL:

File URI can be used to link UNC path:

- **"\\server\share$":file:///// server/share%24** -- File URI showing UNC path: \\server\share$
  You should URL Encodings for special characters like empty space, $, á, é, í, ó, ú, etc.

Email addresses

Email addresses are automatically turned into clickable links:

- **someone@foo.bar** -- Link to an email address: someone@foo.bar
- **"Email someone":mailto:someone@foo.bar** -- Email link with different text: Email someone

More complex email instructions can be added to an email link. A default subject, default body and CC information can be defined. Note that spaces in any of these fields need to be replaced with the code %20.

- **"Email webmaster and admin":mailto:webmaster@foo.bar?cc=admin@foo.bar** -- Email to webmaster, CC admin: Email webmaster and admin
- **"Email someone for help":mailto:someone@foo.bar?subject=Website%20Help** -- Email link with the subject "Website Help": Email someone for help
- **"Email someone for help":mailto:someone@foo.bar?subject=Website%20Help&body=My%20problem%20is%20** -- Email link with the subject "Website Help" and a default body: My problem is

Text formatting

For things such as headlines, bold, tables, lists, Redmine supports Textile syntax. See http://redcloth.org/hobix.com/textile/ for information on using any of these features. A few samples are included below, but the engine is capable of much more of that.

Acronym

```
JPL(Jean-Philippe Lang)
```

displays:

JPL

Font style

```
* *bold*
* _italic_
* *_bold italic_*
* +underline+
* -strike-through-
* Plain ^superscript^
* Plain ~subscript~
* @inline monospace@
* normal *bold* _italic_ normal;E=mc ^2^
* normal<notextile></notextile>*bold*<notextile></notextile>_italic_<notextile></notextile>normal;E=mc
* Escaping: <notextile>*bold* _italic_ @inlinemono@</notextile>       Alterna
* <pre>*some lines*      some "link":http://www.redmine.org</pre>
* <pre><notextile></notextile>*some lines*      some "link":http://www.redmine.org</pre>
```

displays:

- **bold**
- *italic*
- ***bold italic***
- underline
- ~~strike-through~~
- Plain superscript
- Plain subscript
- `inline monospace`
- normal **bold** *italic* normal;E=mc ^{2}
- normal**bold***italic*normal;E=mc^{2}
- Escaping: *bold* _italic_ @inlinemono@ Alternative using HTML-codes: *bold* _italic_ @inlinemono@

```
*some lines*      some "link":http://www.redmine.org
```

```
some lines      some   link
```

Color

```
* %{color:red}red% %{color:green}green% %{color:yellow}yellow% %{color:#82B6E1}blue'ish%
* %{color:red}red%<notextile></notextile>%{color:green}green%<notextile></notextile>%{color:yellow}yel
* %{background:lightgreen}Lightgreen Background% %{background:yellow}Yellow Background%
* %{background:lightgreen}Lightgreen Background%<notextile></notextile>%{background:yellow}Yellow Back
```

displays:

- red green yellow blue'ish
- redgreenyellowblue'ish
- Lightgreen Background Yellow Background
- Lightgreen BackgroundYellow Background

Inline images

- **!image_url!** displays an image located at image_url (textile syntax)
- **!>image_url!** right floating image
- **!image_url(Image title)!** displays an image with an alt/title attribute
- **!image_url!:URL** displays an image located at image_url with link URL added

If you have an image attached to your wiki page, it can be displayed inline using its filename: **!attached_image.png!**

You can also apply a CSS style to the image in the same ways as styling SPANs. The code **!{width: 100%}attached_image.png!** will make the image adjusts to the parent's width.

Headings

```
h1. Heading

h2. Subheading

h3. Subheading
```

Redmine assigns an anchor to each of those headings thus you can link to them with "#Heading", "#Subheading" and so forth.

Paragraphs

```
p. left aligned

p(. left ident 1em

p((. left ident 2em
as well as for following lines

p>. right aligned

p)))>. right ident 3em

p=. This is centered paragraph.
```

displays;

left aligned

left ident 1em

left ident 2em
as well as for following lines

right aligned

right ident 3em

This is centered paragraph.

Horizontal rule

`----`

displays:

Preformatted Text

```
<pre>*Your text won't become bold*</pre>
```

displays:

```
*Your text won't become bold*
```

Blockquotes

Start the paragraph with **bq.**:

```
bq. Rails is a full-stack framework for developing database-backed web applications according to the Mo
To go live, all you need to add is a database and a web server.
```

displays:

> *Rails is a full-stack framework for developing database-backed web applications according to the Model-View-Control pattern.*
> *To go live, all you need to add is a database and a web server.*

> To go live, all you need to add is a database and a web server.

You can also use > at the beginning of each line and stack them for nested quotes:

```
>> Rails is a full-stack framework for developing database-backed web applications according to the Mo
>> To go live, all you need to add is a database and a web server.
> Great!
```

displays:

> > *Rails is a full-stack framework for developing database-backed web applications according to the Model-View-Control pattern.*
> > *To go live, all you need to add is a database and a web server.*
>
> *Great!*

Unordered lists

```
* Item 1
* Item 2
** Item 21
** Item 22
* Item 3
```

displays:

- Item 1
- Item 2
  - Item 21
  - Item 22
- Item 3

Ordered lists

```
# Item 1
# Item 2
# Item 3
## Item 3.1
## Item 3.2
```

displays:

1. Item 1
2. Item 2
3. Item 3
   1. Item 3.1
   2. Item 3.2

Tables

```
|_.UserID      |_.Name          |_.Group     |_. attribute list   |
|Starting with | a              |   simple   |row                 |
|\3=.IT                                      |<. align left       |
|1             |Artur Pirozhkov |/2.Users    |>. align right      |
|2             |Vasya Rogov     |=. center   |
|3             |John Smith      |Admin
                                 (root)      |^. valign top       |
|4             |-               |Nobody
                                 (anonymous) |~. valign bottom    |
```

displays (all multiple spaces are replaced by 1 space):

UserID	Name	Group	attribute list
Starting with	a	simple	row
IT			align left
1	Artur Pirozhkov	Users	align right
2	Vasya Rogov		center
3	John Smith	Admin (root)	valign top
		Nobody	

4	-	Nobody (anonymous)	valign bottom

If you want to include pipe characters inside your table (e.g. for Wiki links), you need to prevent textile from interpreting them:

Input	Output
<notextile>|</notextile>	|

If you want to specify the width of the table, you need to put **table{width:100%}.** just before your table definition:

```
table{width:100%}.
| This table will use
all horizontal space |
```

This way the table will extend to the whole page width ...

This table will use all horizontal space	

... compared with the standard width:

This table will use only the required space

There must be a blank line before the **table** keyword, but after it (up to the table) there must be no blank lines or anything else.

Special table control sequences

Nothing can be placed between the cell delimiter pipeline character and the control sequences.
The order of the table control sequences is fixed. If two order are equal then the precedence of the sequences is equal.
If the table control sequences are used in the wrong order, they will not be interpreted.

Sequence	Ord	Function
_	1	Highlight the contents of the cell
\n	2	Merge *n* cells horizontally
/n	2	Merge *n* cells vertically
<	3	Allign text to left
=	3	Allign text to center
>	3	Allign text to right
^	3	Allign text to top
~	3	Allign text to bottom
.	4	Control sequence terminator

Table of content

```
{{toc}} => left aligned toc
{{>toc}} => right aligned toc
```

Please keep in mind, that the toc-tag needs an empty line above and underneath it and no other text before and after it.

Example:

```

h1. headLineOne

h2. something

{{toc}}

h2. something more
```

Footnotes

Marker:

```
This is a first word[1] with a footnote.

This is a second word[2] with a footnote.
```

Note: Marker directly attached to word (no space, no dot or any thing else in between).

Definition:

```
fn1. Footnote for the first word

fn2. Footnote for the second word
```

Note: Each definition on its own line anywhere within the document. Empty lines between definitions.

displays:

This is a first word[1] with a footnote.

This is a second word[2] with a footnote.

[1] Footnote for the first word
[2] Footnote for the second word

Macros

Redmine includes a macros system that lets you add custom functions to insert dynamic content in formatted text. You can learn about writing your own macros in RedmineMacros. Redmine also includes a few builtin macros:

`hello_world`

```
Sample macro.
```

`macro_list`

```
Displays a list of all available macros, including description if available.
```

`child_pages`

```
Displays a list of child pages. With no argument, it displays the child pages of the current wiki

{{child_pages}} -- can be used from a wiki page only
{{child_pages(depth=2)}} -- display 2 levels nesting only
{{child_pages(Foo)}} -- lists all children of page Foo
{{child_pages(Foo, parent=1)}} -- same as above with a link to page Foo
```

`include`

```
Includes a wiki page. Examples:

{{include(Foo)}}
{{include(projectname:Foo)}} -- to include a page of a specific project wiki
```

`collapse`

```
Inserts of collapsed block of text. Examples:

{{collapse
This is a block of text that is collapsed by default.
It can be expanded by clicking a link.
}}

{{collapse(View details...)
With custom link text.
}}
```

`thumbnail`

```
Displays a clickable thumbnail of an attached image.
Default size is 200 pixels. Examples:

{{thumbnail(image.png)}}
```

```
{{thumbnail(image.png, size=300, title=Thumbnail)}} -- with custom title and size
```

`issue`

```
Displays an issue link including additional information. Examples:

{{issue(123)}}                              -- Issue #123: Enhance macro capabilities
{{issue(123, project=true)}}                -- Andromeda - Issue #123: Enhance macro capabilities
{{issue(123, tracker=false)}}               -- #123: Enhance macro capabilities
{{issue(123, subject=false, project=true)}} -- Andromeda - Issue #123
```

`sample_macro`

```
Sample macro
```

Code highlighting

Default code highlightment relies on Rouge, a syntax highlighting library written in pure Ruby. It supports many commonly used languages such as **c**, **cpp** (c++), **csharp** (c#, cs), **css**, **diff** (patch, udiff), **go** (golang), **groovy**, **html**, **java**, **javascript** (js), **kotlin**, **objective_c** (objc), **perl** (pl), **php**, **python** (py), **r**, **ruby** (rb), **sass**, **scala**, **shell** (bash, zsh, ksh, sh), **sql**, **swift**, **xml** and **yaml** (yml) languages, where the names inside parentheses are aliases. Please refer to RedmineCodeHighlightingLanguages for the full list of supported languages.

You can highlight code in your wiki page using this syntax:

```
<pre><code class="ruby">
  Place your code here.
</code></pre>
```

Example:

```ruby
# The Greeter class
class Greeter
  def initialize(name)
    @name = name.capitalize
  end

  def salute
    puts "Hello #{@name}!"
  end
end
```

Styling text using CSS

Textile can style text using CSS. Examples as follows:

```
Three primary colors of light are %{color: #f00}red%, %{color: #0f0}green% and %{color: #00f}blue%.

p{border: solid 1px #000; padding: 0.5em;}. The quick brown fox jumps over the lazy dog.

table{width: 100%}.
|={width: 30%; background-color: #aaf;}. column 1 |={width: 70%}. column 2 |
```

displays:

Three primary colors of light are red, green and blue.

The quick brown fox jumps over the lazy dog.

column 1	column 2

Allowed CSS properties

Redmine allows the following properties. Other properties are not allowed for security reasons (see r2192).

- background
- background-*
- border
- border-*

- color
- float
- font
- font-*
- height
- margin
- margin-*
- max-height
- max-width
- min-height
- min-width
- padding
- padding-*
- text
- text-*
- width

Translation

Note that the following translations may not be up to date. Please refer to the original english documentation if needed.

- Português Brasileiro
- Русский
- French
- □□(Korean)
- Türkçe
- 繁體中文
- 简体中文

Files (1)

Updated by Csaba Nyéki 12 days ago · 19 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang

Time tracking

Introduction

Table of contents

Time tracking
- Introduction
- Installing/Configuration
- Logging time on an issue
- Logging time at project level
- Accepted time formats
  - Decimal time format
- Logging time via commit messages

Time tracking allows users to track how many hours of work are logged to a specific issue or project. Each time entry of "spent time" can be categorized by activity, and further explained with comments. By filling time estimates, project managers are able to produce better suited project planning as well as follow individual user's progress.

Time tracking is always related to a user, thus it can be used to track how many billable hours this user has accomplished. See the spent time details or spent time report pages for more information.

Installing/Configuration

Time tracking is a standard module of Redmine and can be enabled/disabled for each project in the **Modules** section of the new project form, or the **Settings** tab of an existing project. See RedmineProjectSettings for details about configuring modules.

Logging time on an issue

You can log time on an issue by clicking **Log time** from the issue details view.

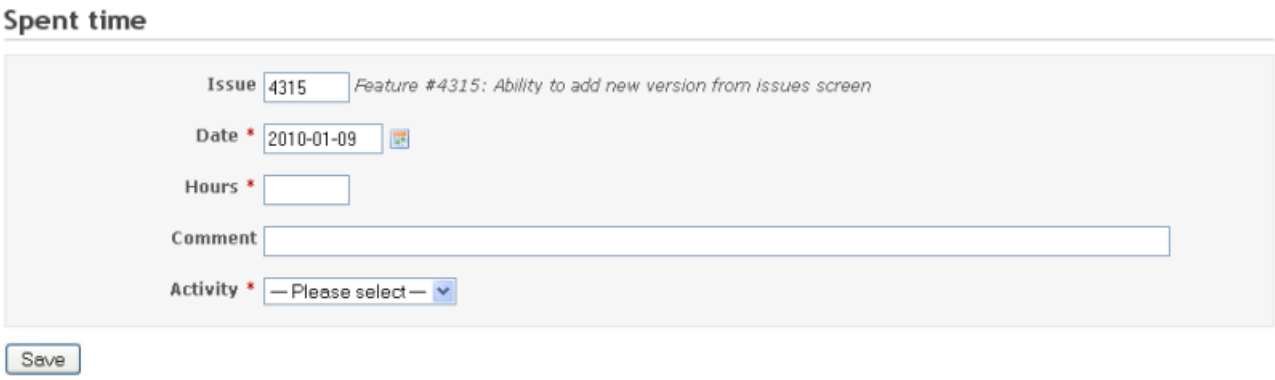

You can also log time when updating an issue.

Logging time at project level

You can log hours at project level by leaving the issue field empty.

Accepted time formats

Estimated and spent time can be entered using either separated hour and minutes or combined in the following formats:

1. Separated: hour and minutes as an integer using standard time format: `1h`, `1 h`, `1 hour`, `2 hours`, `30m`, `30min`, `1h30`, `1h30m`, `1:30`
2. Combined: as a fraction of hours in decimal time format using either period (.) or comma (,) as decimal separator: `1.5`, `1,5` (equals to `1h30`)

Decimal time format

When entering estimated or spent time values in Redmine us
will also show accumulated time values in decimal time format

Consider the following example:

- in a project you have 4 issues with the following spent time values: **1.00**, **0.10**, **0.15** & **0.40**. Now in the Spent Time reports (Project overview -> Spent time -> [Details | Report]) you will see the accumulated total of the decimal values of 1.65 hours (1 hour 39 minutes), not a separate accumulation of the hour and minutes after the decimal point (which would yield an incorrect value of 2.05 hours).

- *Explanation*: this is intended behaviour since the four spent time values are entered in decimal time format. The values are interpreted as follows:
  - 1.00 decimal equals 60 minutes (1 hour)
  - 0.10 decimal equals 6 minutes
  - 0.15 decimal equals 9 minutes
  - 0.40 decimal equals 24 minutes
  - 1.65 decimal equals 99 minutes
  - 2:05 hours (125 minutes) equals 2.0833333333333335 (est.) in decimal notation

Due to rounding of the decimal values to two decimals done when showing an accumulated value there can possibly be a tiny difference (as can be seen from the 2:05 example above).

Some references:

- http://en.wikipedia.org/wiki/Decimal_time
- http://www.springfrog.com/converter/decimal-time.htm

Logging time via commit messages

A handy feature for developers committing to SCM systems integrated with a Redmine instance is that they can register "spent time" against an issue via their commit messages when referencing an issue.

For this to work the **Enable time logging** option must be activated under *Application settings -> Repositories* (refer to documentation). Also the activity under which spent time is logged must be explicitly choosen in the **Activity for logged time** option under *Application settings -> Repositories* (refer to documentation) (the default activity 'Default' doesn't work).

The time specification in the commit message can be any of the above accepted time formats but must be preceded with a valid issue reference as configured under "Referencing and fixing issues in commit messages" in *Application settings -> Repositories* (refer to documentation).

An example using the default issue referencing keyword "refs":

```
Fixed something, refs #435 @1h30
```

This commit message will add 1 hour and 30 minutes of spent time on issue #435.

Files (2)

Updated by Go MAEDA about 7 years ago · 19 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang

Redmine Timelog Details

Introduction

Table of contents
Redmine Timelog Details
Introduction
Searching
Results
HTML output
CSV output

After building a set of time entries through Redmine the **Timelog Details** page can help show running totals of time against a project.

The **Timelog Details** page is accessible from the Overview > Spent Time > Details menu. Note that the timelog feature is available only when the project's "Time tracking" module is activated.

Searching

Shares the same search interface as RedmineTimelogReport

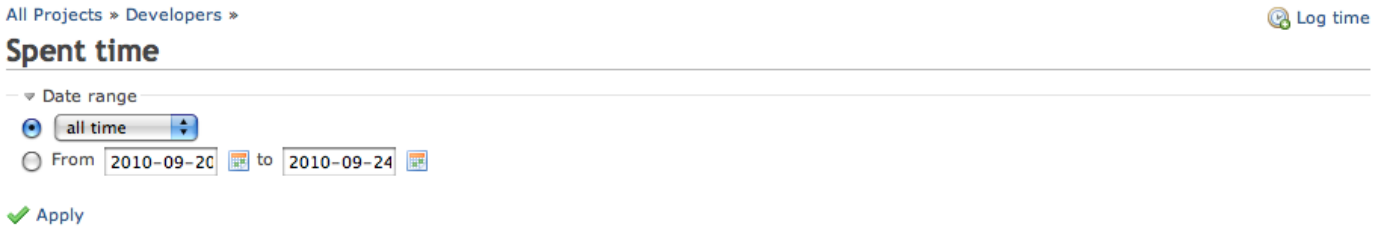

Results

By default the detail time log shows **all time** entries in the system.

From top to bottom in the image

- Total time result of the search
- pagination table of time entries
  - sortable columns
- Atom and CSV format available

Notice the bottom line has no issue, it was logged against the project.

Links work the same as the rest of the wiki; closed issues have strike through applied to them.

HTML output

Details | Report

Total: 5.67 hours

Date	Member	Activity	Project	Issue	Comment	Hours
09/24/2010	Test Developer	Testing	Developers	Bug #10: Bug Report from Test user	make sure the changes work	0.33
09/23/2010	Test Developer	Development	Developers	Bug #10: Bug Report from Test user	Doing the actual coding	1.00
09/23/2010	Test Developer	Implementation	Developers	~~Feature #11~~: Build a bridge	showing a closed issue	2.00
09/22/2010	Test Developer	Research	Developers	Bug #10: Bug Report from Test user	what are the problems with this bug	0.33
09/22/2010	Test Developer	Design	Developers	Bug #10: Bug Report from Test user	Designing an elegant solution	1.00
09/21/2010	Test Developer	Support	Developers		Create this project and demo issue	1.00

(1-6/6) | Per page: 25, 50, 100

CSV output

A sample CSV output of the above time entries (and attached

Date	User	Activity	Project	Issue

09/24/2010	Test Developer	Testing	Developers	10	Bug	Bug Report from Test user	0.333333	make sure the changes work
09/23/2010	Test Developer	Development	Developers	10	Bug	Bug Report from Test user	1.0	Doing the actual coding
09/23/2010	Test Developer	Implementation	Developers	11	Feature	Build a bridge	2.0	showing a closed issue
09/22/2010	Test Developer	Research	Developers	10	Bug	Bug Report from Test user	0.333333	what are the problems with this bug
09/22/2010	Test Developer	Design	Developers	10	Bug	Bug Report from Test user	1.0	Designing an elegant solution
09/21/2010	Test Developer	Support	Developers				1.0	Create this project and demo issue

Files (3)

Updated by Lucile Quirion over 10 years ago · 8 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang

Redmine Timelog Report

Introduction

Table of contents
Redmine Timelog Report
Introduction
Searching
Results
HTML output
CSV output

Time entries can be viewed at a detailed level, but sometimes a report format is desired.

Timelog Report allows users to display their time grouped by categories.

The **Timelog Report** page is accessible from the Overview > Spent Time > Report menu. Note that the timelog feature is available only when the project's "Time tracking" module is activated.

Searching

Shares the same search interface with RedmineTimelogDetails.

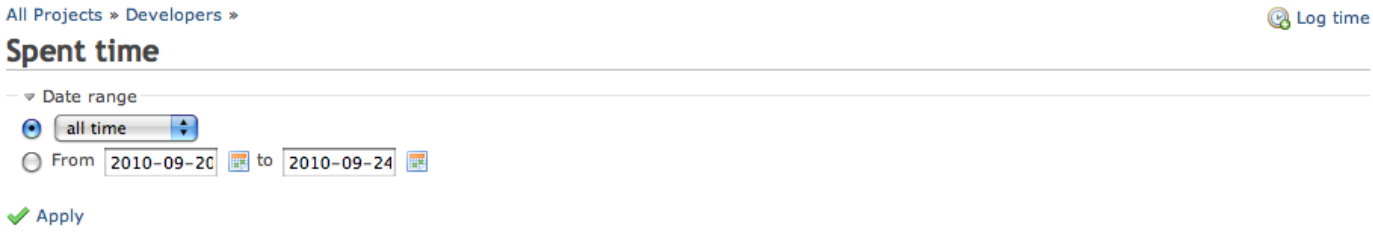

Results

HTML output

Using the drop down choosers this result set is based on the detailed time entries found at RedmineTimelogDetails.

For this example **Days** is set for the **Details** parameter.

Add groupings to show the report; until anything is added this area will be blank. For this example first **Issue** was selected, then **Activity**. The list will always go back to blank after a selection. The drop down will disable once the maximum number of combinations are added, use the clear button to start over.

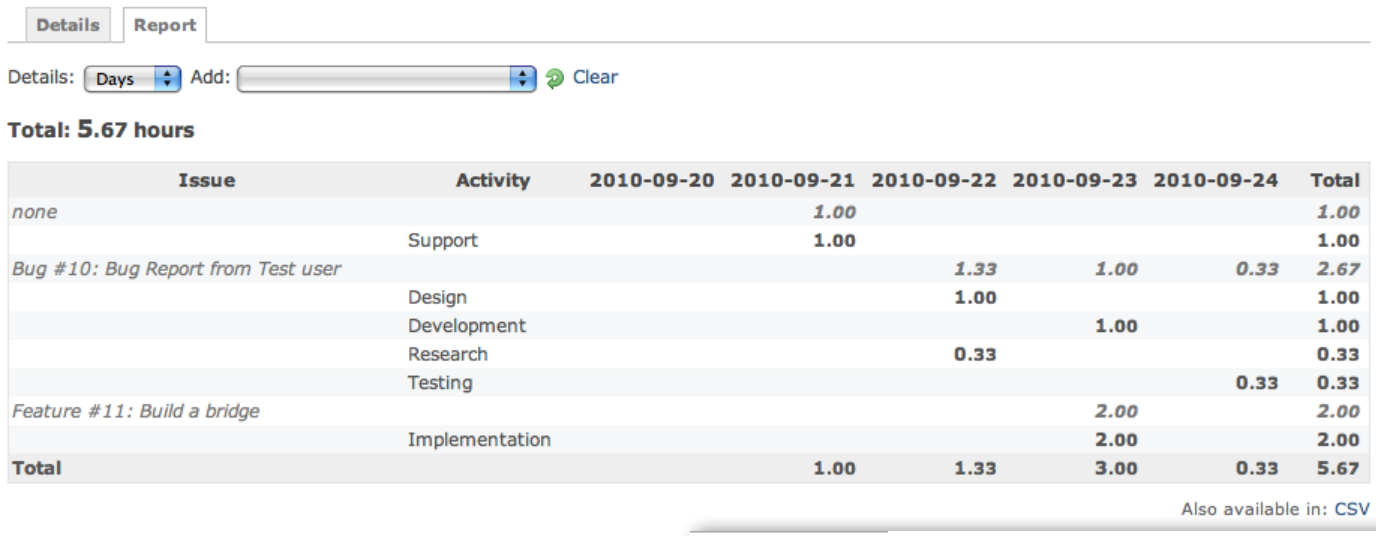

CSV output

Issue	Activity	2010-09-20
none		

	Support		1.00				1.00
Bug ~~#10~~: Bug Report from Test user				1.33	1.00	0.33	2.67
	Design			1.00			1.00
	Development				1.00		1.00
	Research			0.33			0.33
	Testing					0.33	0.33
Feature ~~#11~~: Build a bridge					2.00		2.00
	Implementation				2.00		2.00
Total			1.00	1.33	3.00	0.33	5.67

Files (3)

Updated by Lucile Quirion over 10 years ago · 7 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang

Version overview

The version overview provides a detailed view of the current, overall state of a specific version. This includes:

- a list of all the issues assigned to the specific version, including a progressbar which indicates overall active/done/closed-ratio based on the %-done and statuses of the issues, visualized by different colour-gradients
- the content of the wiki-page that has been configured to be attached to the version
- a block which shows the time-tracking totals of all estimated- and spent-time on the issues assigned to the version
- a block which shows the issue-statistics using the same active/done/closed-ratio progressbar grouped by:
  - Assigned To Users
  - Authors
  - Categories
  - Priorities
  - Trackers
  - Statuses

Both the "grouped by criteria" and the statistics itself (the number of issues) provides drill-down links to the issue-list which preloads the specific filters thus providing quick links to issues of a specific author, category, etc.

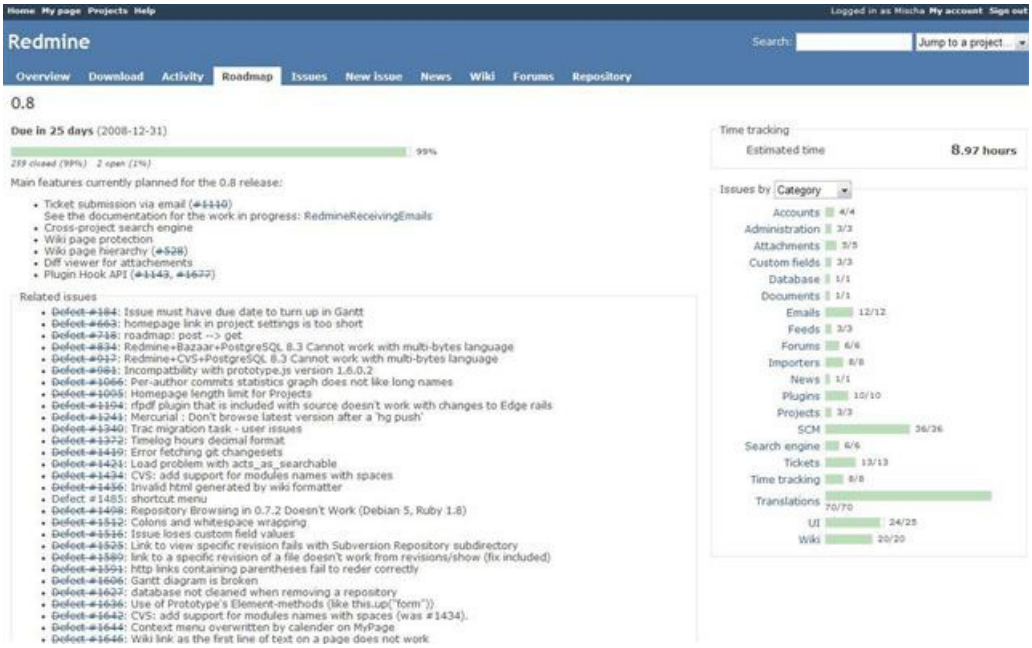

The version-view can be reached from the roadmap by clicking on a specific version.

Files (1)

Updated by Go MAEDA almost 8 years ago · 6 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang

Wikis

Table of contents

Wikis
- Creating a new wiki page
- Creating sub-pages (parent/child relationships)
- Toolbar
  - Edit
  - Watch
  - Rename (or move)
  - Lock (protect)
  - Delete
  - History
- Sidebar

Creating a new wiki page

As in every wiki, just add a link to the page you want to create.

```
[[MyNewWikiPage]]
```

Save the page and click on that link: you are now editing the new wiki page with the name "MyNewWikiPage". Follow the **Edit** instructions below.

Creating sub-pages (parent/child relationships)

It is possible to create parent/child relationships between wiki pages. This has two benefits:

- On the "Index by title", the page tree is sorted according to the relationships:

> - *Guide*
> - *RedmineAccounts*
> - *RedmineCustomFields*
> - *RedmineInstall*
> - *RedmineIssueList*
> - *RedmineIssues*

- On each child page a breadcrumb is displayed showing the location of the page within the page tree: TODO, add image

These relations can be set by assigning a parent page to a to-be child-page.

Toolbar

Each wiki page has a toolbar located in the upper right corner with buttons for actions to perform on the page. Depending on the Roles and permissions of the site your user might not have permission to perform some of the actions, in this case the respective button will not be displayed at all.



The actions are explained below.

Edit

To edit the current contents of a wiki page click the **Edit** button. See RedmineTextFormatting for details about text annotation. The pages's parent can be changed by using the drop down box "Parent page".

Watch

Clicking the **Watch** button adds you as a watcher of the page. This means you will be notified of changes to the page by email.

Rename (or move)

To rename a wiki page or move a wiki page and its children to another project, click on the **Rename** button.

If 'Redirect existing links' is checked, existing links to the curr
or moved. Links to the children-pages move to other project
in #6401#note-8.

You can specify a parent page in 'Parent page'.

You can move a page to another project by specifying the de
page is also moved unless the destination project contains a

page is also moved unless the destination project contains a page with the same name.

Lock (protect)

Clicking the **Lock** button locks the page, and transforms the button into **Unlock**.

A locked wiki page can only be edited by users who have the permission to protect wiki pages, these users can also unlock it again by clicking **Unlock**.

Delete

Click **Delete** to delete the wiki page. A confirmation is needed to perform the action.

History

Redmine keeps a record of every change made to a wiki page. You can view the list of these changes by clicking on **History**.

To view a specific version of the page click on its number.

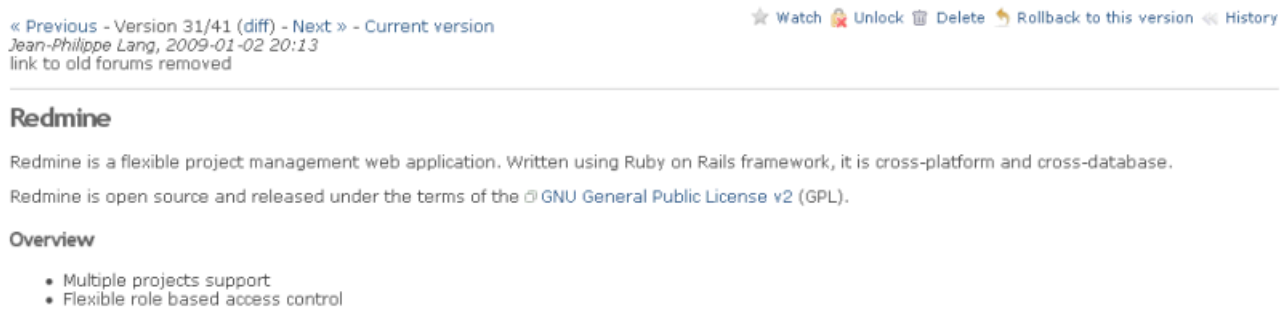

What is displayed can be misleading: `Version 31/41 (diff)` means that you are viewing version 31 out of 41, it does not mean that the diff link will show you the differences between 31 and 41. It does show you the differences between version 30 and 31. If you're looking at version 30, you'll see Version 30/41, and the diff will show you the changes in version 30.

If you want to see differences between 40 and 41, go to the revisions list and click 'View changes' (by default, it will show the diff of the last version).

You can revert a page to a previous version by clicking on **Rollback to this version**, then **Save**. In that case a new page version is created without losing the wiki page history.

If you instead do want to delete all history of a wiki page you have to copy the content of that page to a safe place (copy/paste in edit window), delete the page and re-create it with the same name. Then re-insert the copied content.

Sidebar

The content of the wiki page named '`Sidebar`' is rendered in the wiki sidebar if it exists. Permission to protect wiki pages is required to create this page.
The contextual sidebar on the right of any wiki page provides links to:

- **Start page**: Link to the configured start page of the wiki
- **Index by title**: Index of all the wiki pages sorted by name (and, if configured, by parent/child relationships)

TODO, add image

- Index by date: Index of all the wiki pages sorted by date of last modification

TODO, add image

Files (4)

Updated by Holger Just about 1 year ago · 1 revisions

Powered by Redmine © 2006-2023 Jean-Philippe Lang