

EXPERIMENT 3

Demonstrate missing value analysis, fixing missing values and outlier analysis in dataset.

AIM

To perform missing value analysis, handle missing values through imputation and column removal, and detect and remove outliers from the Titanic dataset.

PROCEDURE

1. Import pandas and matplotlib libraries.
2. Load the Titanic-Dataset.csv using `pd.read_csv()`.
3. Inspect the dataset using `df.head()` and `df.isnull().sum()`.
4. Visualize missing values using a bar plot.
5. Impute missing Age values with the column mean using `fillna()`.
6. Fill missing Embarked values with the mode.
7. Drop the Cabin column due to excessive missing values (687).
8. Verify no missing values remain.
9. Plot a boxplot to detect outliers in the Fare column.
10. Calculate Q1, Q3, and IQR for the Fare column.
11. Define lower and upper bounds: $Q1 - 1.5 \times IQR$ and $Q3 + 1.5 \times IQR$.
12. Filter out rows where Fare is outside the IQR bounds.
13. Apply a second round of IQR-based outlier removal on the cleaned data.
14. Visualize the cleaned Fare distribution with a boxplot.

CODE

```
import pandas as pd
import matplotlib.pyplot as plt

df = pd.read_csv('/content/Titanic-Dataset.csv') df.head()

# Check missing values
df.isnull().sum()

# Bar plot of missing values
df.isnull().sum().plot(kind='bar')
plt.title('Missing Values per Column')
plt.ylabel('Count') plt.show()

# Fix Age: fill with mean age_mean
age_mean = df['Age'].mean()
df['Age'].fillna(age_mean)

# Fix Embarked: fill with mode embarked_mode
embarked_mode = df['Embarked'].mode()[0]
df['Embarked'].fillna(embarked_mode)

# Drop Cabin column df.drop(columns=['Cabin'],
inplace=True)

# Verify no missing values df.isnull().sum()
```

```

# Boxplot for outlier detection
plt.boxplot(df['Fare'])
plt.title('Outlier Detection in Fare')
plt.ylabel('Fare') plt.show()

# IQR outlier removal
Q1 = df['Fare'].quantile(0.25)
Q3 = df['Fare'].quantile(0.75) IQR
= Q3 - Q1
lower_bound = Q1 - 1.5 * IQR upper_bound = Q3 + 1.5 * IQR df_cleaned =
df[(df['Fare'] >= lower_bound) & (df['Fare'] <= upper_bound)]

# Second round of IQR removal
Q1 = df_cleaned['Fare'].quantile(0.25)
Q3 = df_cleaned['Fare'].quantile(0.75) IQR = Q3 - Q1 lower = Q1 - 1.5 * IQR upper = Q3
+ 1.5 * IQR df_cleaned = df_cleaned[(df_cleaned['Fare'] >= lower) &
(df_cleaned['Fare'] <= upper)]

# Boxplot after outlier removal
plt.boxplot(df_cleaned['Fare'])
plt.title('Fare After Outlier Removal')
plt.ylabel('Fare') plt.show()

```

OUTPUTMissing Values


(before):



Age	177
Cabin	687
Embarked	2

After fixing:

All columns: 0 missing values

Outlier removal: Fare range narrowed from [0, 512] to [0, ~55]

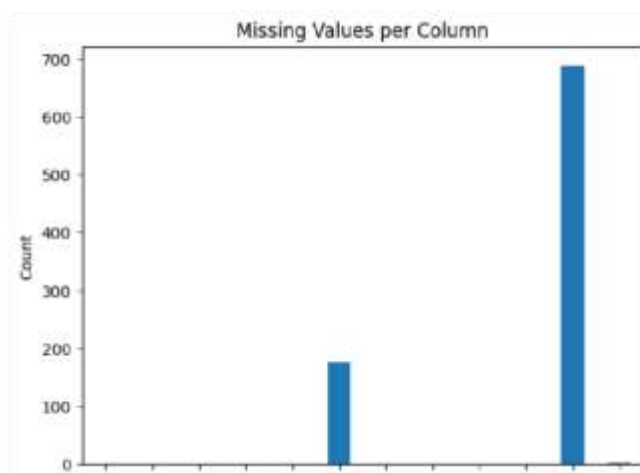

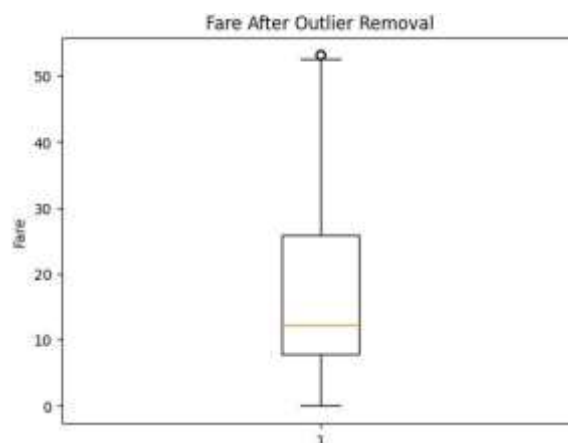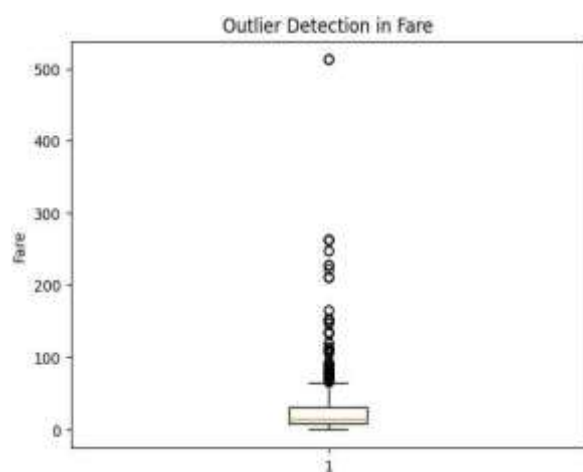

RESULT

Missing values in Age were imputed with mean, Embarked with mode, and Cabin was dropped due to high missingness. IQR-based outlier removal cleaned extreme Fare values, resulting in a well-distributed dataset ready for analysis.