```c
#include<stdio.h>
#include<conio.h>
#include<math.h>
void main()
{clrscr();
printf("%f\n",2.5);
printf("%.0f\n",2.5);
printf("%.1f\n",2.54444);
printf("%.2f\n",2.5);
printf("%.2f\n", 5.5678);
printf("%.2f\n", 5.1234);
printf("%.0f\n", 5.6789);
printf("%.0f\n", 5.1234);
printf("%.0f\n", 5.5555);
printf("%.0f\n", 5.4444);
printf("%.0f\n", floor(2.9999));
printf("%.0f\n", ceil(2.9999));
getch();
}
```

```
2.500000
2
2.5
2.50
5.57
5.12
6
5
6
5
2
3
```

Untitled - Paint

TC

File Edit Run Compile Project Options Debug Break/watch

Line 13 Col 31 Insert Indent Tab Fill Unindent * E:NONAME.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("Krish %c Radha\n",3);
printf("%c + %c = %c\n",1,2,3);
printf("%10.2f\n",1.2); /* ------1.20 */
printf("%-10.2f\n",1.2);
printf("%10s\n","Kishore");
printf("%.3s\n","Kishore");
printf("%10.3s\n","Kishore");
printf("%1.3s\n","Kishore");
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

6:40 PM
01-Aug-23

Document3 - Microsoft Word

TC

```
Krish ♥ Radha
☺ + ☻ = ♥
      1.20
1.20
   Kishore
Kis
       Kis
Kis
```

Activate Windows
Go to PC settings to activate Windows.

6:41 PM
01-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Line 12 Col 1 Insert Indent Tab Fill Unindent * E:NONAME.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("abc addr=%u\n","abc");
printf("Bharathi\n"+1);
printf(1+"Bharathi\n"+1);
printf(1+"abc\n"+1);
printf("Bharathi\n"-1); /* GrBharathi or NULL */
printf("Bharathi\n"+8);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

TC

```
abc addr=417
harathi
arathi
c
```

Activate Windows
Go to PC settings to activate Windows.

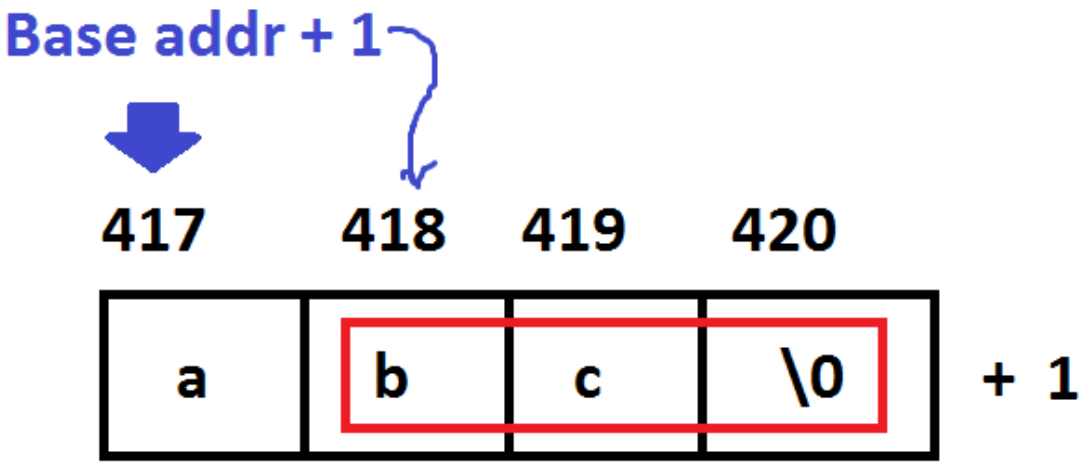


```
File   Edit   Run   Compile   Project   Options   Debug   Break/watch
     Line 14    Col 18  Insert Indent Tab Fill Unindent * E:NONAME.C
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("PK-%d\n", printf("Dilse - %d\n", printf("Mine Pyar Kiya\n")));
printf("Dil-%d\n", printf("Khan-%d\r", printf("Taare Zameen Per\n")));
printf("Raja\n","Rani");
printf("Raja %s\n","Rani");
printf("%s Pyar %s\n","Hai","Kahona");
printf("Dil to %s\n","Pagal %s","Hai");
printf("Dil to %s %s\n","Pagal %s","Hai");
printf("%d\n"+1,999);
printf("%d\n"+1);_
getch();
}
```

```
Mine Pyar Kiya
Dilse - 15
PK-11
Taare Zameen Per
Dil-817
Raja
Raja Rani
Hai Pyar Kahona
Dil to Pagal %s
Dil to Pagal %s Hai
d
d
```

```
p("Dil-%d\n", p("KHan-%d\r", p("Taare Zameen Per\n")));
```

8 17 17

8

```
Taare Zameen Per
Khan-17\r

Dil-8
```

TC

File Edit Run Compile Project Options Debug Break/watch

Line 9 Col 37 Insert Indent Tab Fill Unindent * E:NONAME.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("%d\n",012); /* oct to dec */
printf("%d\n",0x34); /* hex to dec */
printf("%o\n",25); /* dec to oct */
printf("%x\n",35); /* dec to hexa */_
printf("%x\n",45);
printf("%X\n",95);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

TC

```
10
52
31
23
2d
5F
```

Activate Windows
Go to PC settings to activate Windows.

oct to dec

012

$8^1 \times 1 + 8^0 \times 2$

$8 + 2 = 10$ ✓

16 | 45

2 - 13

hex to dec

0x34

$16^1 \times 3 + 16^0 \times 4$

$48 + 4 = 52$ ✓

16 | 95

5 - 15

8 | 25

3 - 1 ✓

16 | 35

2 - 3 ✓

0-9, 10-a, 11-b, 12-c, 13-d, 14-e, 15-f

TC

File Edit Run Compile Project Options Debug Break/watch

Error: Illegal octal digit in function main

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("%o\n",019); /* oct to oct */
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

7:18 PM
01-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Line 7 Col 37 Insert Indent Tab Fill Unindent * E:NONAME.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("%o\n",0x19); /* hexa to oct */
printf("%x",034);  /* oct to hexa */_
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

7:20 PM
01-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Line 7 Col 37 Insert Indent Tab Fill Unindent * E:NONAME.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("%o\n",0x19); /* hexa to oct */
printf("%x",034);  /* oct to hexa */
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

1908 × 861px

100%

7:24 PM
01-Aug-23

hexa to dec

0x19

$16^1 \times 1 + 16^0 \times 9$

$16 + 9 = 25$

dec to octal

$8 \overline{)25}$

$3 - 1$ ✓

oct to decimal

034

$8^1 \times 3 + 8^0 \times 4$

$24 + 4 = 28$

dec to hexa

$16 \overline{)28}$

$1 - 12$

C

TC

File Edit Run Compile Project Options Debug Break/watch

Line 15 Col 22 Insert Indent Tab Fill Unindent * E:NONAME.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
char a=65, b=66,c=a+b;
clrscr();
printf("%d\n",32768);  /* -32768 */
printf("%d\n",32770);  /* -32766 */
printf("%d\n",-32770); /* +32766 */
printf("%d\n",65540);  /* 4 */
printf("%u\n",-3);     /* 65533 */
printf("c=%d\n",c);  /* -125 */
c = 260;
printf("c=%d\n",c);
printf("%x\n",-2+1<<2);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

TC

```
-32768
-32766
32766
4
65533
c=-125
c=4
fffc
```

Activate Windows
Go to PC settings to activate Windows.