Finding even/odd using ternary operator:

TC

File Edit Run Compile Project Options Debug Break/watch

Line 9 Col 24 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
int n;
clrscr();
printf("Enter a no "); scanf("%d",&n);
if(n%2)puts("Odd"); else puts("Even");
puts(n%2?"Odd":"Even");_
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

11:21 AM
14-Aug-23

TC

```
Enter a no 3
Odd
Odd
_
```

Activate Windows
Go to PC settings to activate Windows.

11:21 AM
14-Aug-23

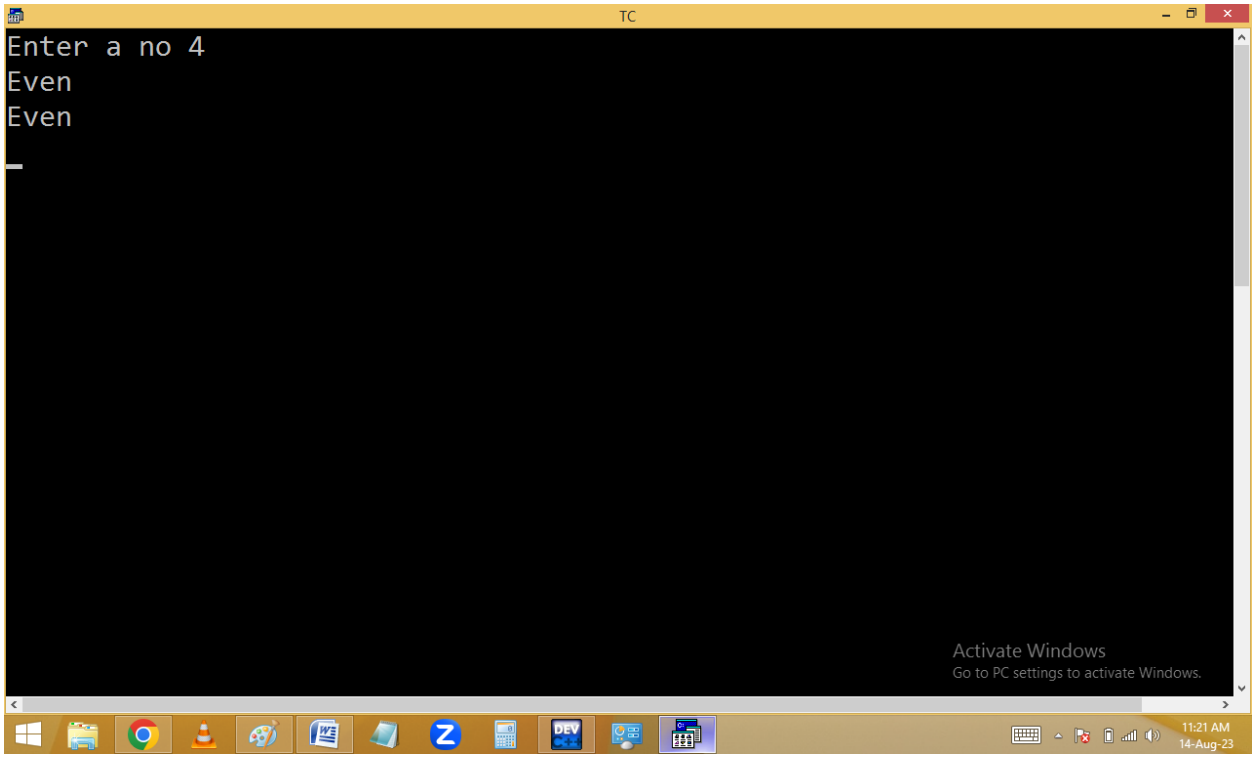

Finding +Ve /-Ve /0 using ternary operator.

TC

File Edit Run Compile Project Options Debug Break/watch

Line 9 Col 25 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
int n;
clrscr();
printf("Enter a no "); scanf("%d",&n);
if(n>0)puts("+Ve"); else if(n<0)puts("-Ve"); else puts("Zero");
puts(n>0?"+Ve":n<0?"-Ve":"Zero");
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

11:23 AM
14-Aug-23

TC

```
Enter a no 4
+Ve
+Ve
```

Activate Windows
Go to PC settings to activate Windows.

11:23 AM
14-Aug-23

```
Enter a no -3
-Ve
-Ve
```

Activate Windows
Go to PC settings to activate Windows.

```
Enter a no 0
Zero
Zero
```

Activate Windows
Go to PC settings to activate Windows.

TC

File Edit Run Compile Project Options Debug Break/watch

Line 8 Col 26 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("%d\n",0?1?2:3:4);
printf("%d\n",1?0?2:3:4);
printf("%d\n",1?2?0:3:4);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

11:27 AM
14-Aug-23

TC

```
4
3
0
```

Activate Windows
Go to PC settings to activate Windows.

11:28 AM
14-Aug-23

con ? true : false

0 ? 1 ? 2 : 3 : 4

con ? true : false

```
if( 0 )
{
if( 1 ) p( 2 );
else    p( 3 );
}
else    p(4);
```

con ? true : false

1 ? 0 ? 2 : 3 : 4

con ? true : false

```
if( 1 )
{
if( 0 ) p( 2 );
else    p( 3 );
}
else    p(4);
```

con ? true : false

1 ? 2 ? 0 : 3 : 4

con ? true : false

```
if( 1 )
{
if( 2 ) p( 0 );
else    p( 3 );
}
else    p(4);
```

SWITCH

It is a selection statement.

It is used to execute one case of statements from no of cases according to the switch expression value matched with case expression value. In switch the program is jumped to matching case like the go to label.

It is similar to ladder if in working style.

Switch performance is high when compared with ladder if because of it jumps to matching case.

Syntax:

```
switch(expression)
{
case    constexp1:
statements;
break;
case    constexp2:
statements;
break;
case  constexpN:
statements;
break;
[  default:  statements; ]
}
```

Here switch, case, break, default are the keywords.

In between case and case expression / value at least one space should be provided. Otherwise it will become a label.

case expression/value should be a constant integer/char value. i.e. float / string not allowed.

One case contains one expression only.
case expression doesn't contain any separators like , . etc.

case expression should be end with : (colon)

Each case should be separated with break keyword. Otherwise remaining cases also executed.

Duplicate cases not allowed.

default is similar to the else and all cases are failed then default statements are executed. Default is optional and we can declare it anywhere in our switch.

Outside case expressions not considered in switch.

TC

File Edit Run Compile Project Options Debug Break/watch

Error: Expression syntax in function main

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
switch( )_
default: printf("Hi");
getch();
}
/* Error */
```

Activate Windows
Go to PC settings to activate Windows.

TC

File Edit Run Compile Project Options Debug Break/watch

Line 9 Col 16 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
switch(1);
getch();
}
/* Blank screen */
```

Activate Windows
Go to PC settings to activate Windows.

TC

File Edit Run Compile Project Options Debug Break/watch

Error: Statement missing ; in function main

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
switch(1)
}
/* Error */
```

Activate Windows
Go to PC settings to activate Windows.

12:11 PM
14-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Line 11 Col 16 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
switch(1)
{
}
getch();
}
/* Blank screen */
```

Activate Windows
Go to PC settings to activate Windows.

12:12 PM
14-Aug-23

TC

File Edit Run Compile Project Options Debug Break/wat

Error: Case outside of switch in function main

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
switch(1)
default: puts("Hi");
case  1: puts("Bye");
getch();
}
/* Error */
```

12:13 Monday August 14

Activate Windows
Go to PC settings to activate Windows.

TC

File Edit Run Compile Project Options Debug Break/watch

Error: Misplaced break in function main

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
switch(0)
default: puts("Hi"); break;
getch();
}
/* Error */
```

Activate Windows
Go to PC settings to activate Windows.

12:14 PM
14-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Error: Default outside of switch in function main

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
default: puts("Hi");
getch();
}
/* Error */
```

Activate Windows
Go to PC settings to activate Windows.

12:15 PM
14-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Error: Case outside of switch in function main

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
case 0: puts("Hi");
getch();
}
/* Error */
```

Activate Windows
Go to PC settings to activate Windows.

12:15 PM
14-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Line 14 Col 4 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
switch(1)
{
case 1: puts("Hi");
default: puts("Bye");
}
getch();
}
/* Hi
   Bye */
```

Activate Windows
Go to PC settings to activate Windows.

12:16 PM
14-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Line 15 Col 6 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
switch(0)
{
default: puts("Bye");
case 1: puts("Hi");
}
getch();
}
/*
   Bye
   Hi_*/
```

Activate Windows
Go to PC settings to activate Windows.

12:17 PM
14-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Line 15 Col 4 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
switch(0)
{
default: puts("Bye");break;
case 1: puts("Hi");
}
getch();
}
/*
   Bye
   _*/
```

Activate Windows
Go to PC settings to activate Windows.

12:18 PM
14-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Line 13 Col 8 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
switch(1)
{
case1: puts("Hi");break;
default: puts("Bye");
}
getch();
}
/* Bye */
```

Activate Windows
Go to PC settings to activate Windows.

12:19 PM
14-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Line 8 Col 25 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
switch(2)
{
case 1-2: puts("Hi");break;
default: puts("Bye");
}
getch();
}
/* Bye */
```

Activate Windows
Go to PC settings to activate Windows.

12:20 PM
14-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Error: Case statement missing : in function main

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
switch(2)
{
case 1_to 2: puts("Hi");break;
default: puts("Bye");
}
getch();
}
/* Error */
```

Activate Windows
Go to PC settings to activate Windows.

12:22 PM
14-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Line 13 Col 6 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
switch(1)
{
case 2>-5: puts("Hi");break;
default: puts("Bye");
}
getch();
}
/* Hi_*/
```

Activate Windows
Go to PC settings to activate Windows.

12:23 PM
14-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Error: Expression syntax in function main

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
switch(1)
{
case >0: puts("Hi");break;
default: puts("Bye");
}
getch();
}
/* Error */
```

Activate Windows
Go to PC settings to activate Windows.

12:24 PM
14-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Error: Constant expression required in function main

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
switch(1)
{
case (0,-1,1): puts("Hi");break;
default: puts("Bye");
}
getch();
}
/* Error */
```

Activate Windows
Go to PC settings to activate Windows.

12:25 PM
14-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Line 13 Col 6 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
switch(1)
{
case 5%2: puts("Hi");break;
case 5/2: puts("Bye");
}
getch();
}
/* Hi */
```

Activate Windows
Go to PC settings to activate Windows.

12:26 PM
14-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Line 8 Col 15 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
switch(5/2,5%2)
{
case 5%2: puts("Hi");break;
case 5/2: puts("Bye");
}
getch();
}
/* Hi */
```

Activate Windows
Go to PC settings to activate Windows.

12:27 PM
14-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Error: Duplicate case in function main

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
switch(1)
{
case 5%2: puts("Hi");break;
case 5/2: puts("Bye");break;
case 5-4: puts("Thank you");
}
getch();
}
/* Error */
```

Activate Windows
Go to PC settings to activate Windows.

12:28 PM
14-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Error: Constant expression required in function main

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=1, b=2;
clrscr();
switch(a,b)
{
case a: puts("Hi");break;
case b: puts("Bye");break;
}
getch();
}
/* Error */
```

Activate Windows
Go to PC settings to activate Windows.

TC

File Edit Run Compile Project Options Debug Break/watch

Line 14 Col 16 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=1, b=2;
clrscr();
switch(a,b)
{
case 'a': puts("Hi");break;
case 'b': puts("Bye");break;
}
getch();
}
/* Blank screen_*/
```

Activate Windows
Go to PC settings to activate Windows.

TC

File Edit Run Compile Project Options Debug Break/watch

Error: Duplicate case in function main

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=1, b=2;
clrscr();
switch(a||b)
{
case 1||2: puts("Hi");break;
case 2||1: puts("Bye");break;
}
getch();
}
/* Error */
```

Activate Windows
Go to PC settings to activate Windows.

12:31 PM
14-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Line 14 Col 1 Insert Indent Tab Fill Unindent * E:11AM.C

```
void main()
{
int a=1, b=2;
clrscr();
switch(a,b)
{
case 1: puts("Hi");break;
case 2: puts("Bye");break;
}
getch();
}
/* Bye */
```

Activate Windows
Go to PC settings to activate Windows.

12:32 PM
14-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Line 12 Col 18 Insert Indent Tab Fill Unindent * E:11AM.C

```
void main()
{
int a=1, b=2;
clrscr();
switch(a=(a++,b--))
{
case 1: puts("Hi");break;
case 2: puts("Bye");break;
}
getch();
}
/* Bye */
```

Activate Windows
Go to PC settings to activate Windows.

TC

File Edit Run Compile Project Options Debug Break/watch

Line 14 Col 6 Insert Indent Tab Fill Unindent * E:11AM.C

```
void main()
{
int a=1, b=2;
clrscr();
switch(a=(a++,--b))
{
case 1: puts("Hi");break;
case 2: puts("Bye");break;
}
getch();
}
/* Hi */
```

Activate Windows
Go to PC settings to activate Windows.

TC

File Edit Run Compile Project Options Debug Break/watch

Line 8 Col 9 Insert Indent Tab Fill Unindent * E:11AM.C

```
void main()
{
int a;
clrscr();
a = 1,2,3;
switch(a)
{
case 1: puts("Hi");break;
case 2: puts("Bye");break;
default: puts("Hello");
}
getch();
}
/* Hi */
```

Activate Windows
Go to PC settings to activate Windows.

12:35 PM
14-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Line 16 Col 15 Insert Indent Tab Fill Unindent * E:11AM.C

```
void main()
{
int a;
clrscr();
switch(a=1,2,3)
{
case 1: puts("Hi");break;
case 2: puts("Bye");break;
default: puts("Hello");
}
printf("a=%d",a);
getch();
}
/* Hello   a=1_*/
```

Activate Windows
Go to PC settings to activate Windows.

12:36 PM
14-Aug-23

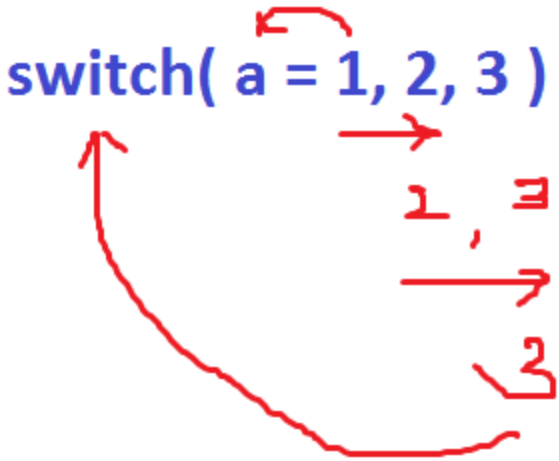

TC

File Edit Run Compile Project Options Debug Break/watch

Line 16 Col 15 Insert Indent Tab Fill Unindent * E:11AM.C

```
void main()
{
int a;
clrscr();
switch(a=(1,2,3))
{
case 1: puts("Hi");break;
case 2: puts("Bye");break;
default: puts("Hello");
}
printf("a=%d",a);
getch();
}
/* Hello   a=3 */
```

Activate Windows
Go to PC settings to activate Windows.

12:38 PM
14-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Line 16 Col 12 Insert Indent Tab Fill Unindent * E:11AM.C

```
void main()
{
int a=1;
clrscr();
switch(a++)
{
case 1: puts("Hi");break;
case 2: puts("Bye");break;
default: puts("Hello");
}
printf("a=%d",a);
getch();
}
/* Hi    a=2 */
```

Activate Windows
Go to PC settings to activate Windows.

TC

File Edit Run Compile Project Options Debug Break/watch

Error: Lvalue required in function main

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=1;
clrscr();
switch(a=(a++,a)++)
{
case 1: puts("Hi");break;
case 2: puts("Bye");break;
default: puts("Hello");
}
printf("a=%d",a);
getch();
}
/* Error */
```

Activate Windows
Go to PC settings to activate Windows.

TC

File Edit Run Compile Project Options Debug Break/watch

Line 16 Col 14 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=1;
clrscr();
switch(a=(a++,a),a=3)
{
case 1: puts("Hi");break;
case 2: puts("Bye");break;
default: puts("Hello");
}
printf("a=%d",a);
getch();
}
/* Hello  a=3 */
```

Activate Windows
Go to PC settings to activate Windows.

12:43 PM
14-Aug-23