TC

File Edit Run Compile Project Options Debug Break/watch

Error: Expression syntax in function main

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
int_i=0;
while()
{
printf("%4d",i++);
}
getch();
}
/* Error */
```

Page: 1 of 1 Words: 0 130%

11:24 AM 28-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Line 6 Col 10 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(i++)
{
printf("%4d",i);
}
getch();
}
/* Blank screen */
```

11:25 AM 28-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Line 9 Col 11 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(++i)
{
printf("%8d",i);
}
getch();
}
/* 1 2 3 ...32767  -32768 -32767 .....-1  */
```

11:27 AM
28-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Line 7 Col 7 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(++i);
{
printf("%8d",i);
}
getch();
}
/* 0  */
```

11:29 AM
28-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Line 13 Col 5 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(i++);
{
printf("%8d",i);
}
getch();
}
/* 1  */
```

TC

File Edit Run Compile Project Options Debug Break/watch

Line 7 Col 20 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(1)
{
printf("%8d",i++);
}
getch();
}
/* 0 to 0 infinite   */
```

TC

File Edit Run Compile Project Options Debug Break/watch

Line 7 Col 5 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=1;
clrscr();
while(i)
{
printf("%8d",i);
}
getch();
}
/* 1 infinite   */
```

11:32 AM
28-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Line 14 Col 1 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(printf("Indian")-i)
{
printf("%d\n",i++);
}
printf("%d",i);
getch();
}
```

11:35 AM
28-Aug-23

```
Indian0
Indian1
Indian2
Indian3
Indian4
Indian5
Indian6
```

File Edit Run Compile Project Options Debug Break/watch

Line 8 Col 13 Insert Indent Tab Fill Unindent * E:11AM.C

```c
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(sizeof("Indian")-i)
{
printf("%d\n",i++);
}
printf("%d",i);
getch();
}
```

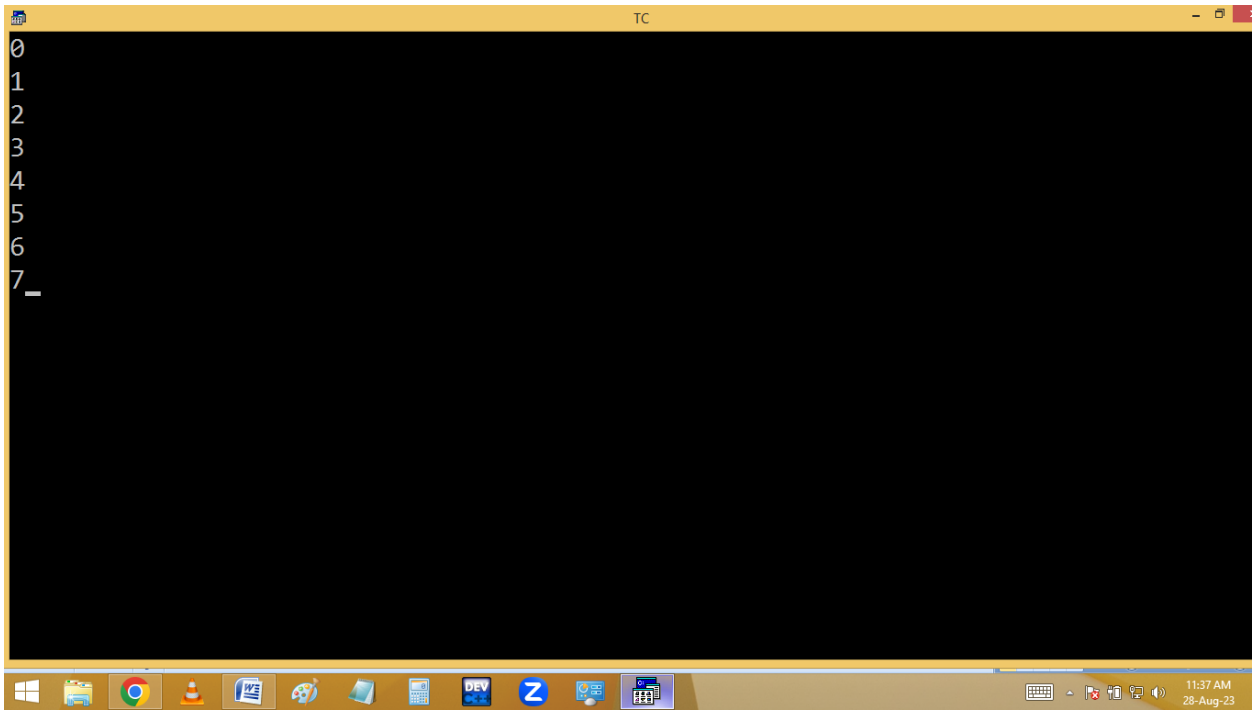
TC
0
1
2
3
4
5
6
7
11:37 AM
28-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Line 7 Col 30 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(sizeof(printf("Indian"))-i)
{
printf("%d\n",i++);
}
printf("%d",i);
getch();
}
```

TC

```
0
1
2
```

TC

File Edit Run Compile Project Options Debug Break/watch

Line 7 Col 33 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(printf("%d",sizeof("Indian"))-i)
{
printf("%d\n",i++);
}
printf("%d",i);
getch();
}
```

TC

```
70
71
```

1 — i

(7)

10

```
while( p("%d", sizeof("Indian"))-i)
{
p("%d\n",i++);
}

p(i);
```

0

1 — 0 = 1

1 — 1 = 0

```
70
71
```

TC

File Edit Run Compile Project Options Debug Break/watch

Line 7 Col 17 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(i<=5)
{
printf("%d\n",i);
}
printf("%d",++i);
getch();
}
/* 0 infinite */
```

11:52 AM
28-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Line 9 Col 13 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(i<=5)
{
printf("%d\t",i++);
}
printf("%d",++i);
getch();
}
/* 0 1 2 3 4 5 7 */
```

11:53 AM
28-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Line 9 Col 13 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(i<=5)
{
printf("%d\t",i++);
}
printf("%d",++i);
getch();
}
/* 0 1 2 3 4 5 7 */
```

TC

File Edit Run Compile Project Options Debug Break/watch

Line 14 Col 16 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(i<=5)
{
printf("%d\t",++i);
}
printf("%d",++i);
getch();
}
/*  1 2 3 4 5 6_7 */
```

TC

File Edit Run Compile Project Options Debug Break/watch

Line 14 Col 18 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(i++<=5)
{
printf("%d\t",i);
}
printf("%d",++i);
getch();
}
/*  1 2 3 4 5 6 8 */
```

11:58 AM
28-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Line 14 Col 15 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(++i<=5)
{
printf("%d\t",i);
}
printf("%d",++i);
getch();
}
/*  1 2 3 4 5  7 */
```

12:00 PM
28-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Line 14 Col 22 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i;
clrscr();
while(i=printf("%d",0))
{
printf("%d\t",++i);
}
printf("%d",++i);
getch();
}
/*  02 infinite times_*/
```

TC

File Edit Run Compile Project Options Debug Break/watch

Line 14 Col 18 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i;
clrscr();
while(i=printf("Naidu")/printf("Kishore"))
{
printf("%d\t",++i);
}
printf("%d",++i);
getch();
}
/*  NaiduKishore1_*/
```

TC

File Edit Run Compile Project Options Debug Break/watch

Line 5 Col 8 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(printf("Naidu")/printf("Kishore"))
{
}
printf("%d",++i);
getch();
}
/*  NaiduKishore1 */
```

TC

File Edit Run Compile Project Options Debug Break/watch

Line 13 Col 26 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while((float)printf("Naidu")/printf("Kishore"))
{
}
printf("%d",++i);
getch();
}
/*  NaiduKishore infinite_*/
```

TC

File Edit Run Compile Project Options Debug Break/watch

Line 13 Col 18 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=1;
clrscr();
while(i=(float)printf("Naidu")/printf("Kishore"))
{
}
printf("%d",++i);
getch();
}
/*  NaiduKishore1 */
```

12:13 PM
28-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Line 13 Col 6 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=1;
clrscr();
while(printf(""))
{
}
printf("%d",++i);
getch();
}
/* 2 */
```

12:15 PM
28-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Error: Lvalue required in function main

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=1;
clrscr();
while(++i =_printf(""))
{
}
printf("%d",++i);
getch();
}
/* Error  */
```

TC

File Edit Run Compile Project Options Debug Break/watch

Line 13 Col 12 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=1;
clrscr();
while(i = printf("Kishore")/printf(""))
{
}
printf("%d",++i);
getch();
}
/* Runtime Error  */
```

TC

File Edit Run Compile Project Options Debug Break/watch

Error: Illegal use of floating point in function main

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=1;
clrscr();
while(printf("Kishore")%1.0)
{
}
printf("%d",++i);
getch();
}
/* Compile time Error  */
```

TC

File Edit Run Compile Project Options Debug Break/watch

Line 14 Col 9 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
#include<math.h>
void main()
{
int i=1;
clrscr();
while( printf("Kishore") % 0)
{
}
printf("%d",++i);
getch();
}
/* Error  */
```

Activate Windows
Go to PC settings to activate Windows.

TC

File Edit Run Compile Project Options Debug Break/watch

Line 14 Col 5 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
#include<math.h>
void main()
{
int i=1;
clrscr();
while( printf("Kishore") % 1)
{
}
printf("%d",++i);
getch();
}
/* 2  */
```

Activate Windows
Go to PC settings to activate Windows.

12:37 PM
28-Aug-23

TC

File Edit Run Compile Project Options Debug Break/watch

Line 8 Col 29 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
#include<math.h>
void main()
{
int i=1;
clrscr();
while( printf("Kishore") % 8)
{
}
printf("%d",++i);
getch();
}
/* kishore infinite  */
```

Activate Windows
Go to PC settings to activate Windows.

TC

File Edit Run Compile Project Options Debug Break/watch

Line 8 Col 29 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
#include<math.h>
void main()
{
int i=1;
clrscr();
while( printf("Kishore") % 2)
{
}
printf("%d",++i);
getch();
}
/* kishore infinite  */
```

Activate Windows
Go to PC settings to activate Windows.

TC

File Edit Run Compile Project Options Debug Break/watch

Line 14 Col 5 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
#include<math.h>
void main()
{
int i=1;
clrscr();
while( printf("Kishore") % 1)
{
}
printf("%d",++i);
getch();
}
/* 2 */
```

Activate Windows
Go to PC settings to activate Windows.

TC

File Edit Run Compile Project Options Debug Break/watch

Error: Do-while statement missing ; in function main

```
#include<stdio.h>
#include<conio.h>
#include<math.h>
void main()
{
int i=0;
clrscr();
do
{
printf("%d\t",i);
}while(i++)
getch();
}
/* Error */
```

Activate Windows
Go to PC settings to activate Windows.

TC

File Edit Run Compile Project Options Debug Break/watch

Line 15 Col 8 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
#include<math.h>
void main()
{
int i=0;
clrscr();
do
{
printf("%d\t",i);
}while(i++);
printf("%d",i);
getch();
}
/* 0, 1_*/
```

Activate Windows
Go to PC settings to activate Windows.

TC

File Edit Run Compile Project Options Debug Break/watch

Line 10 Col 35 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
#include<math.h>
void main()
{
int i;
clrscr();
for(i=0; ; i++)
{
printf("%d\t",i);
}
printf("%d",i);
getch();
}
/* 0,1,2,3.....0,1,2,3 infinite */
```

Activate Windows
Go to PC settings to activate Windows.