



V2V COURIERS USECASE DIAGRAM











Text

V2V COURIER CLASS DIAGRAM

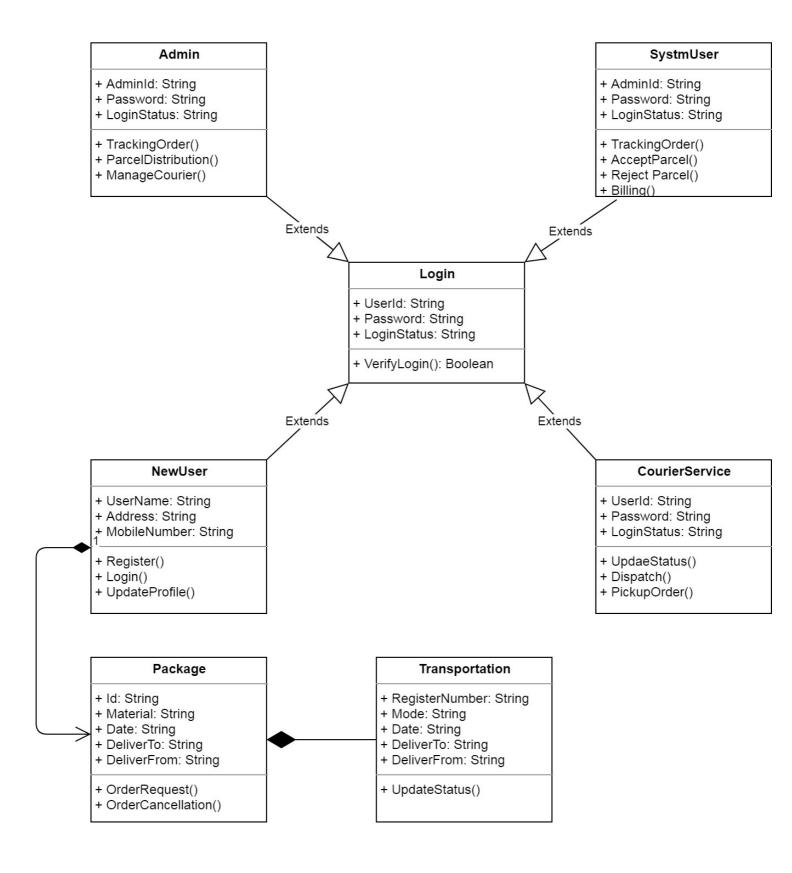

V2V COURIERS SEQUENCE DIAGRAM

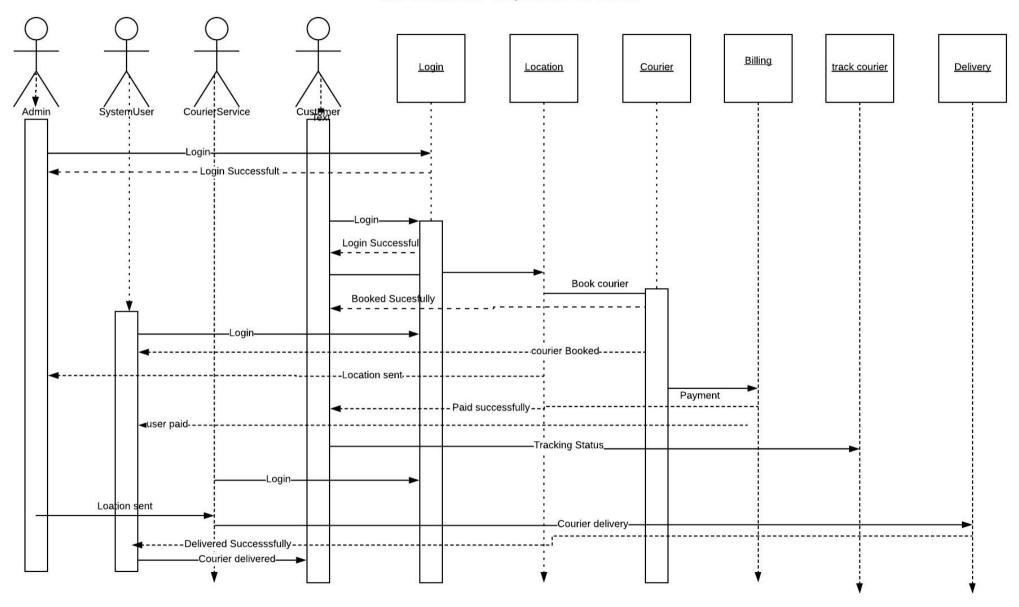

V2V COURIERS DEPLOYMENT DIAGRAM «device» «device» Database Server PC/Laptop «OS» «OS» Windows Windows/MacOS/Linux «execution environment» «execution MongoDB environment» collection» Browser «artifact» *collection» Packages «manifests» acollection» Delivery «component» Online Courier «device» Application Server «OS» Windows «execution environment» «component» . ParcelTracking «protocol» TCP/IP «component» Courier Service «component» ParcelDistribution HTTP Request-«component» RouteOptimization

V2V COURIER PACKAGE DIAGRAM

PresentationLayer

