PES1UG24CS572 Lab7 SE

```
PS C:\Users\hariv\se-labs-PES1UG24CS572> cd lab7
PS C:\Users\hariv\se-labs-PES1UG24CS572\lab7> python .\before\shopping_cart.py
==== Running cart_total ====
Enter cart as name:pricexqty CSV (e.g. pen:10x2,book:250x1): pen:10x2,book:250x1
Cart Total: 270


==== Running promo_percent ====
Enter a promo code (e.g. OFF20): OFF20
Discount Percent: 20

==== Running delivery_zone ====
Enter a 6 digit pincode (e.g. 560085): 560085
Delivery Zone: South
PS C:\Users\hariv\se-labs-PES1UG24CS572\lab7>
```


Ss2

```
PS C:\Users\hariv\se-labs-PES1UG24CS572\lab7> python -m pytest -q .\test_shopping_cart.py
FFF...                                                                   [100%]
================================== FAILURES ===================================
_____________________________ test_cart_total_no_crash _____________________________
  + Exception Group Traceback (most recent call last):
  |   File "C:\Users\hariv\se-labs-PES1UG24CS572\lab7\test_shopping_cart.py", line 7, in test_cart_total_no_crash
  |     def test_cart_total_no_crash(value):
  |                ^^^
  |   File "C:\Users\hariv\AppData\Local\Programs\Python\Python312\Lib\site-packages\hypothesis\core.py", line 2334, in wrapped_test
  |     raise the_error_hypothesis_found
  | ExceptionGroup: Hypothesis found 3 distinct failures. (3 sub-exceptions)
  +-+---------------- 1 ----------------
    | Traceback (most recent call last):
    |   File "C:\Users\hariv\se-labs-PES1UG24CS572\lab7\test_shopping_cart.py", line 8, in test_cart_total_no_crash
    |     result = cart_total(value)
    |              ^^^^^^^^^^^^^^^^
    |   File "C:\Users\hariv\se-labs-PES1UG24CS572\lab7\shopping_cart.py", line 9, in cart_total
    |     price, qty = rest.split('x')
    |     ^^^^^^^^^^
    | ValueError: not enough values to unpack (expected 2, got 1)
    | Failing test case: test_cart_total_no_crash(
    |     value=':',
    | )
    +---------------- 2 ----------------
    | Traceback (most recent call last):
    |   File "C:\Users\hariv\se-labs-PES1UG24CS572\lab7\test_shopping_cart.py", line 8, in test_cart_total_no_crash
    |     result = cart_total(value)
    |              ^^^^^^^^^^^^^^^^
    |   File "C:\Users\hariv\se-labs-PES1UG24CS572\lab7\shopping_cart.py", line 8, in cart_total
    |     name, rest = item.split(':')
    |     ^^^^^^^^^^
    | ValueError: not enough values to unpack (expected 2, got 1)
    | Failing test case: test_cart_total_no_crash(
    |     value='',  # or any other generated value
    | )
    +---------------- 3 ----------------
    | Traceback (most recent call last):
    |   File "C:\Users\hariv\se-labs-PES1UG24CS572\lab7\test_shopping_cart.py", line 8, in test_cart_total_no_crash
    |     result = cart_total(value)
    |              ^^^^^^^^^^^^^^^^
    |   File "C:\Users\hariv\se-labs-PES1UG24CS572\lab7\shopping_cart.py", line 7, in cart_total
    |     for item in cart.split(','):
    |                 ^^^^^^^^^^
    | AttributeError: 'NoneType' object has no attribute 'split'
    | Failing test case: test_cart_total_no_crash(
    |     value=None,  # or any other generated value
    | )
    +------------------------------------
_____________________ test_promo_percent_no_crash ______________________
```


```
    +------------------------------------
_____________________ test_promo_percent_no_crash ______________________
  + Exception Group Traceback (most recent call last):
  |   File "C:\Users\hariv\se-labs-PES1UG24CS572\lab7\test_shopping_cart.py", line 14, in test_promo_percent_no_crash
  |     def test_promo_percent_no_crash(value):
  |                ^^^
  |   File "C:\Users\hariv\AppData\Local\Programs\Python\Python312\Lib\site-packages\hypothesis\core.py", line 2334, in wrapped_test
  |     raise the_error_hypothesis_found
  | ExceptionGroup: Hypothesis found 2 distinct failures. (2 sub-exceptions)
  +-+---------------- 1 ----------------
    | Traceback (most recent call last):
    |   File "C:\Users\hariv\se-labs-PES1UG24CS572\lab7\test_shopping_cart.py", line 15, in test_promo_percent_no_crash
    |     result = promo_percent(value)
    |              ^^^^^^^^^^^^^^^^^^^
    |   File "C:\Users\hariv\se-labs-PES1UG24CS572\lab7\shopping_cart.py", line 15, in promo_percent
    |     return int(code.upper().split('OFF')[1])
    |                ~~~~~~~~~~~~~~~~~~~~~~~~~~~~^^^
    | IndexError: list index out of range
    | Failing test case: test_promo_percent_no_crash(
    |     value='',  # or any other generated value
    | )
    +---------------- 2 ----------------
    | Traceback (most recent call last):
    |   File "C:\Users\hariv\se-labs-PES1UG24CS572\lab7\test_shopping_cart.py", line 15, in test_promo_percent_no_crash
    |     result = promo_percent(value)
    |              ^^^^^^^^^^^^^^^^^^^
    |   File "C:\Users\hariv\se-labs-PES1UG24CS572\lab7\shopping_cart.py", line 15, in promo_percent
    |     return int(code.upper().split('OFF')[1])
    |                ^^^^^^^^^^
    | AttributeError: 'NoneType' object has no attribute 'upper'
    | Failing test case: test_promo_percent_no_crash(
    |     value=None,  # or any other generated value
    | )
    +------------------------------------
_____________________ test_delivery_zone_no_crash ______________________
```

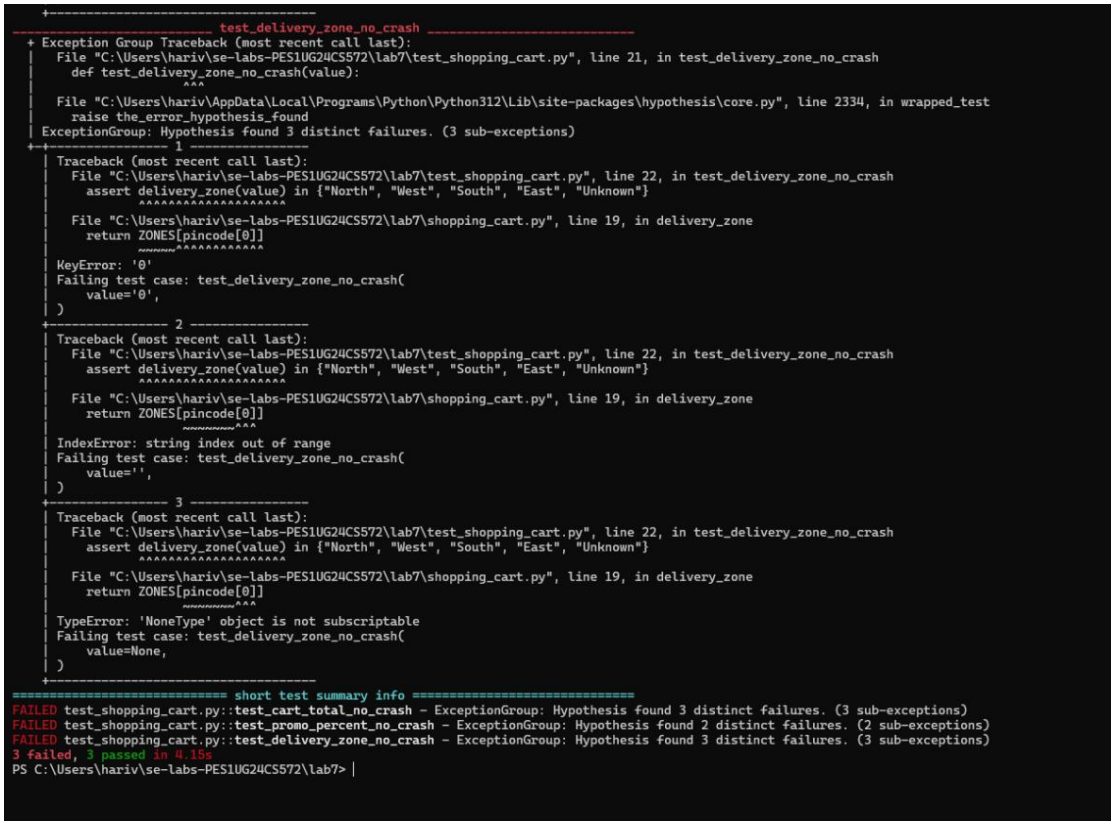

SS3: correct input gives correctly

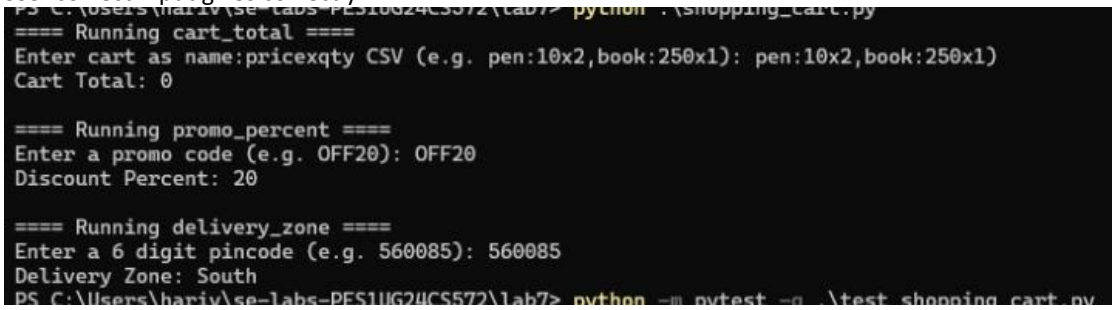

But fixed file doesn’t crash on invalid input.

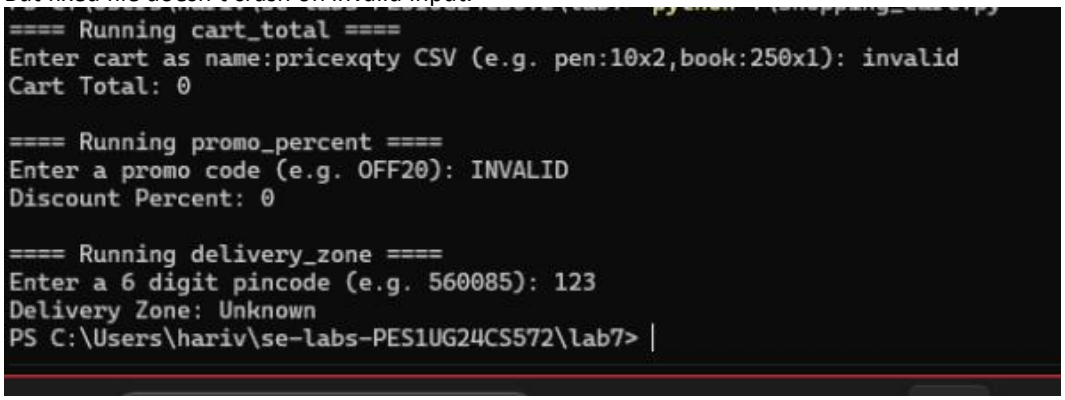

Ss4: all tests passed

