Automated Test Case Document

Jira Ticket: TEST2-82

Document Classification:	Company Confidential
Document Ref:	Automated Test Case Document
Version:	1.0
Date:	21/10/2026
Document Author:	Automated TEST2 Evidence Review
Document Owner:	Quality Assurance / Metricell

This document and its content is copyright of Metricell Limited @ 2026 all rights reserved. All information contained herein is the intellectual property of Metricell Limited and should be treated as confidential. Any external redistribution of reproduction of part or all of the contents in any form is prohibited unless expressly agreed with Metricell Limited in writing. Any reproduced content must include the following statement; "Part or all of the content contained herein is copyright of Metricell Limited @ 2026 all rights reserved".

Table of Contents

1 Revision History 2
2 Test Cycle Information 3
3 Test Summary 4
4 Test Cases 5
About Metricell 20

1 Revision History

Version	Date	Revision Author	Summary of Changes
[1.0]	21/10/2026	TEST2 QA Automation	Generated from TEST2 evidence review

2 Test Cycle Information

Tester:	**Automated**
Jira Ticket:	TEST2-82
Environment:	o2intelligence-v4-dev.metricell.com
Browser Details:	Google Chrome 155.0.8059.85
Date of Test:	21/10/2026
Limitations during Testing:	Blocked criterion(s): 1, 2, 3, 4, 5, 6. See the assessment below each criterion. Defects (No.) counts directly contradicted criteria, not unique Jira bugs; blockers and inconclusive evidence count as zero.
Overall review outcome:	Blocked
Browser URL(s) recorded after criteria:	https://o2intelligence-v4-dev.metricell.com/gis

3 Test Summary

Area of test	Outcome	Fail	Defects (No.)
1. When a selected Ping point's details have loaded, the detail view shows that point's Ping Time with the unit milliseconds (ms).	Blocked	N	0
2. When Ping attributes are returned for the selected point, the detail view displays those attributes alongside the Ping Time.	Blocked	N	0
3. With 5G NSA as the only selected technology, opening a Ping point displays details for that selected point without an error state.	Blocked	N	0
4. While Ping details are loading, the detail view shows a loading state.	Blocked	N	0
5. When Ping details are unavailable, the detail view shows a no-data state.	Blocked	N	0
6. When Ping details fail to load, the detail view shows an error state and does not display data as if it belonged to the selected point.	Blocked	N	0

4 Test Cases

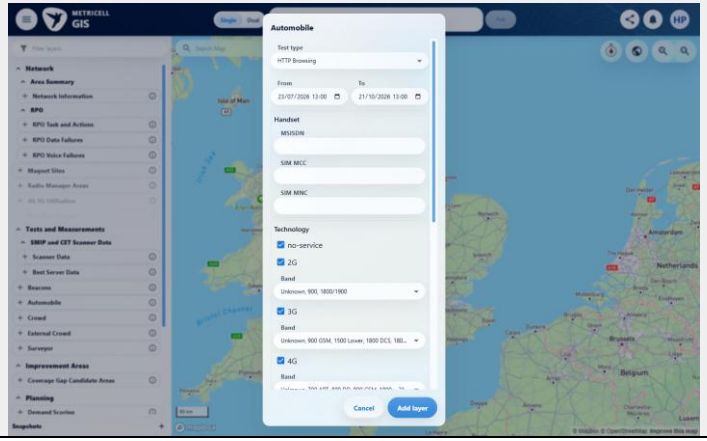
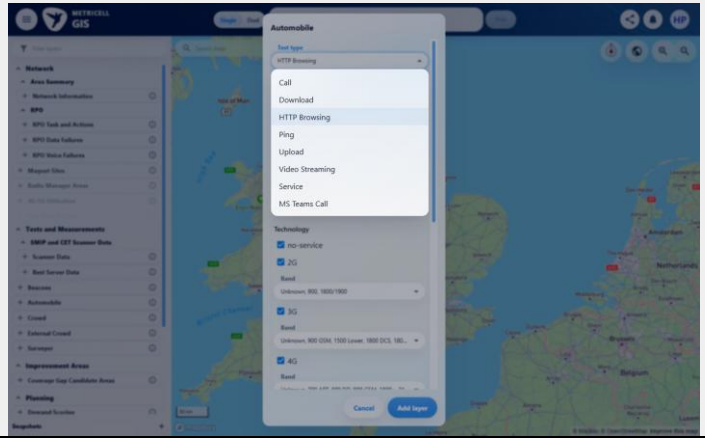
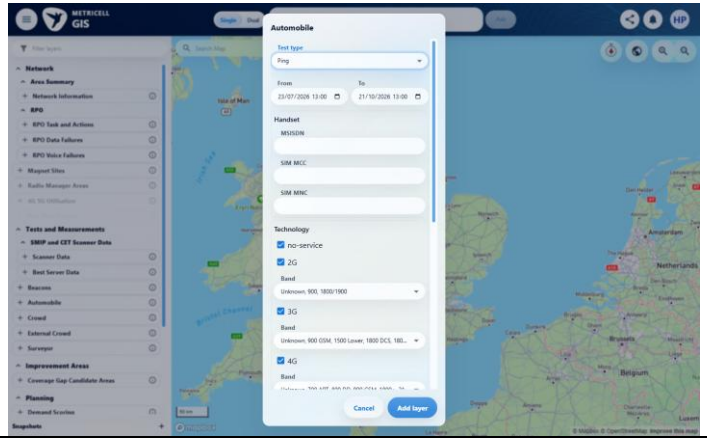
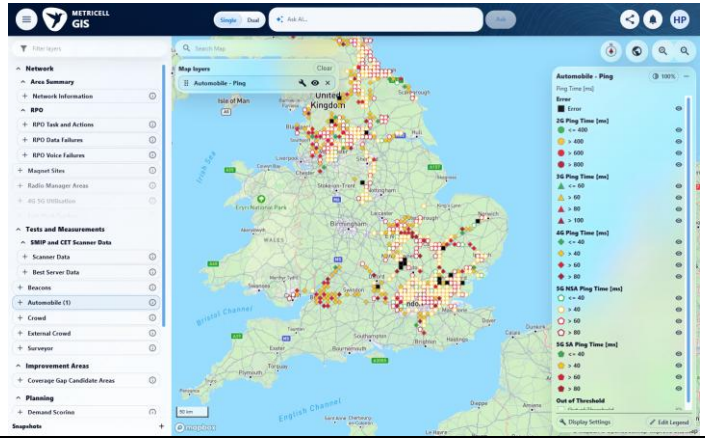
Each test maps to a criterion and decisive browser evidence. Inconclusive results are reported as Failed.

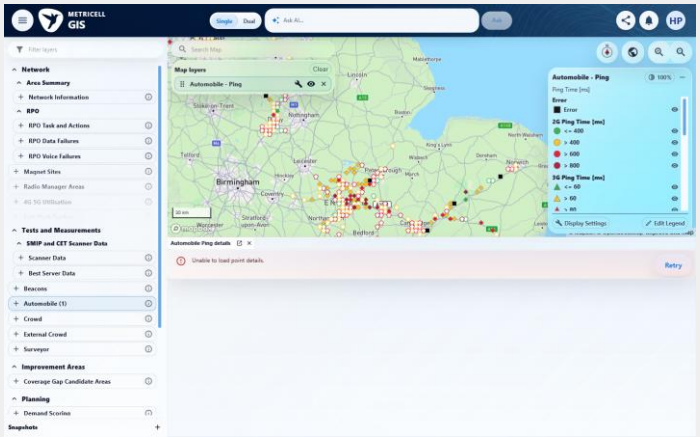
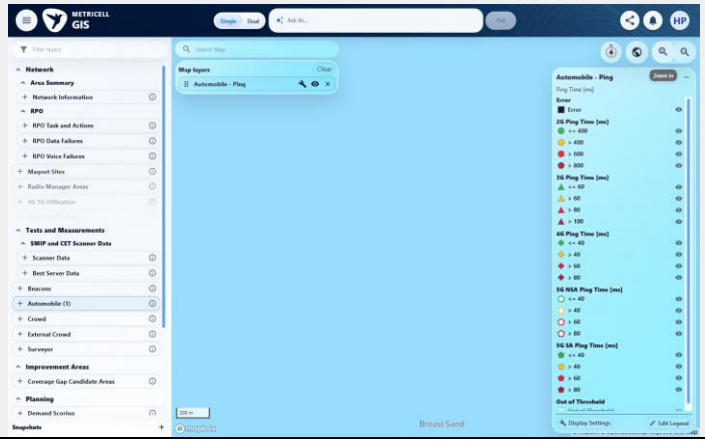
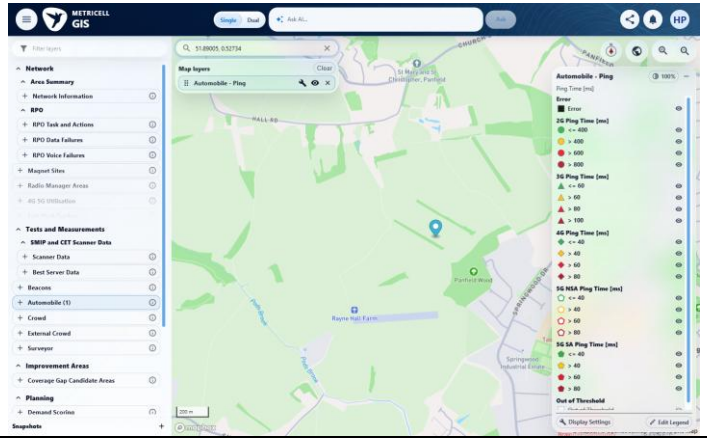
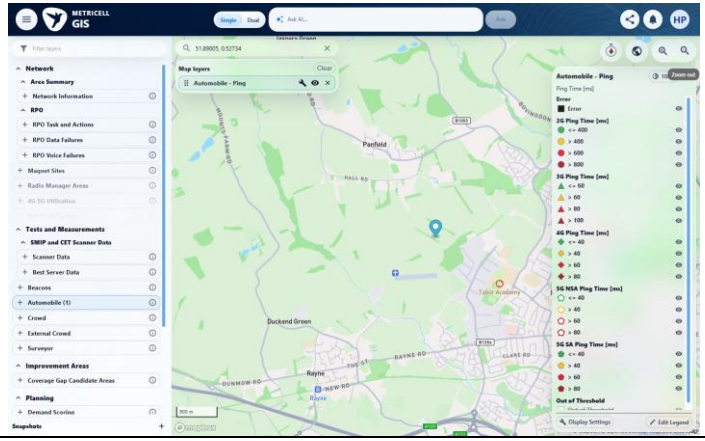
4.1 Tests

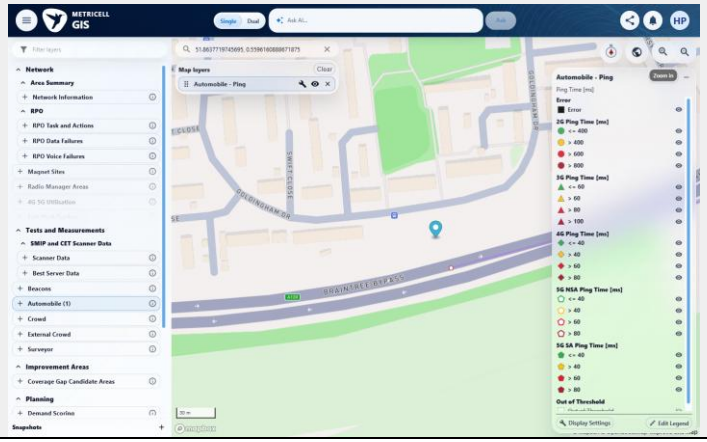
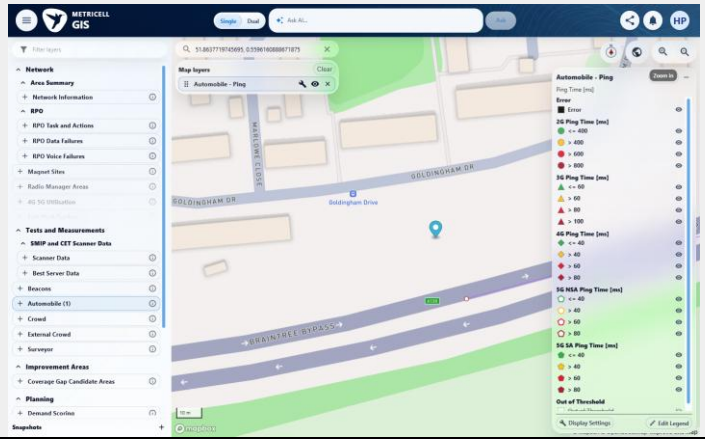
Preconditions:	V4 access and ticket conditions.	***Associated Requirements:***	Ticket criteria below.	Automation Notes:	Screenshots below each criterion; full log retained locally.

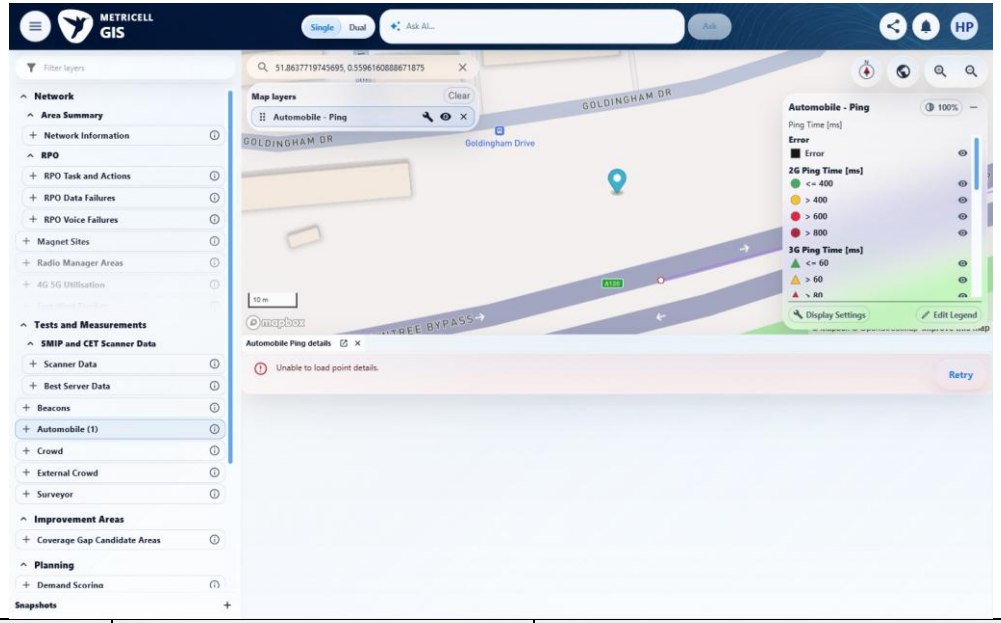
ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
1.0.0	When a selected Ping point's details have loaded, the detail view shows that point's Ping Time with the unit milliseconds (ms).	When a selected Ping point's details have loaded, the detail view shows that point's Ping Time with the unit milliseconds (ms).	criterion-1-test-type-choices.png and criterion-1-ping-layer-loaded.png verify Automobile/Ping. criterion-1-cluster-error.png and criterion-1-final.png show 'Unable to load point details.' Results record GET /api/platform/automobile/ping/points 200 and repeated POST /api/platform/automobile/ping/cluster-details 500. Successful selected-point details were unavailable; the Ping Time [ms] legend cannot establish a point's detail value. Evidence: E01, E02, E03, E04, E05, E06, E07, E08, E09, E10, E11	Blocked

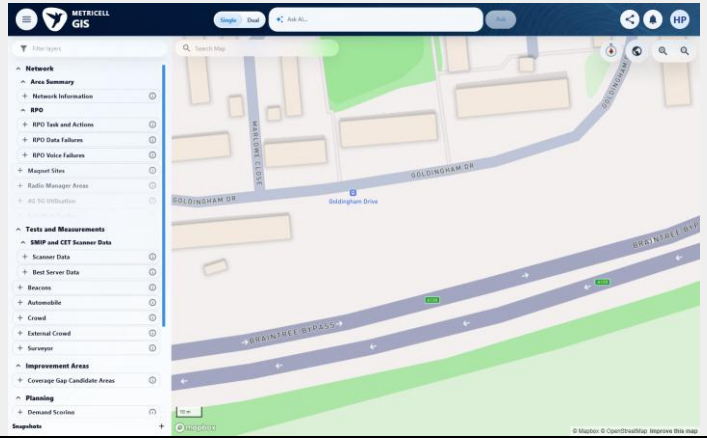
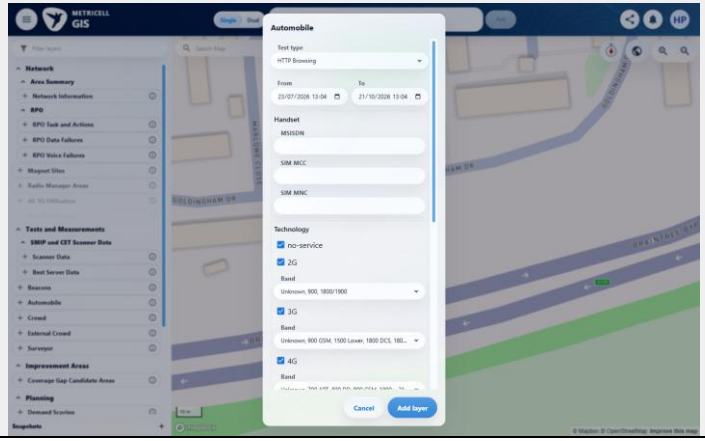
Criterion 1 assessment: criterion-1-test-type-choices.png and criterion-1-ping-layer-loaded.png verify Automobile/Ping. criterion-1-cluster-error.png and criterion-1-final.png show 'Unable to load point details.' Results record GET /api/platform/automobile/ping/points 200 and repeated POST /api/platform/automobile/ping/cluster-details 500. Successful selected-point details were unavailable; the Ping Time [ms] legend cannot establish a point's detail value.
Testing notes: Automobile exposes Ping in its nested Test type choices. GET /api/platform/automobile/ping/points returned HTTP 200 with aggregate markers; POST /api/platform/automobile/ping/cluster-details returned HTTP 500 on initial selection and a separate fresh map selection at zoom 18. The visible Automobile Ping details panel showed 'Unable to load point details.' No individual point's successful details/attributes or detail-read request could be established. Dependent checks were stopped without repeating the known failing request for every criterion. This is a service/data prerequisite blocker, not evidence of an incorrect Ping measurement. Ping Time [ms] in the map legend alone does not prove the selected point's detail value. Map exploration included zoom/search transitions without complete before/after evidence; no pass claimed. Started at launcher, encountered missing screenshot directory on first capture, created own staging screenshot directory, restarted from launcher and saved a valid initial PNG before test interactions. Selected/double-clicked a returned aggregate location through the map; Automobile Ping details displayed Unable to load point details. POST /api/platform/automobile/ping/cluster-details returned HTTP 500. Narrowed to returned aggregate 1513491825141913338 near latitude 51.86356 longitude 0.55979. At zoom 18 selected the rendered marker; a fresh cluster-details POST again returned 500 and the same visible error. Captured criterion-1-final.png at the error panel and recorded actual /gis URL. Closed the own panel and removed the own Automobile Ping layer. Map camera was restored after remaining criteria.

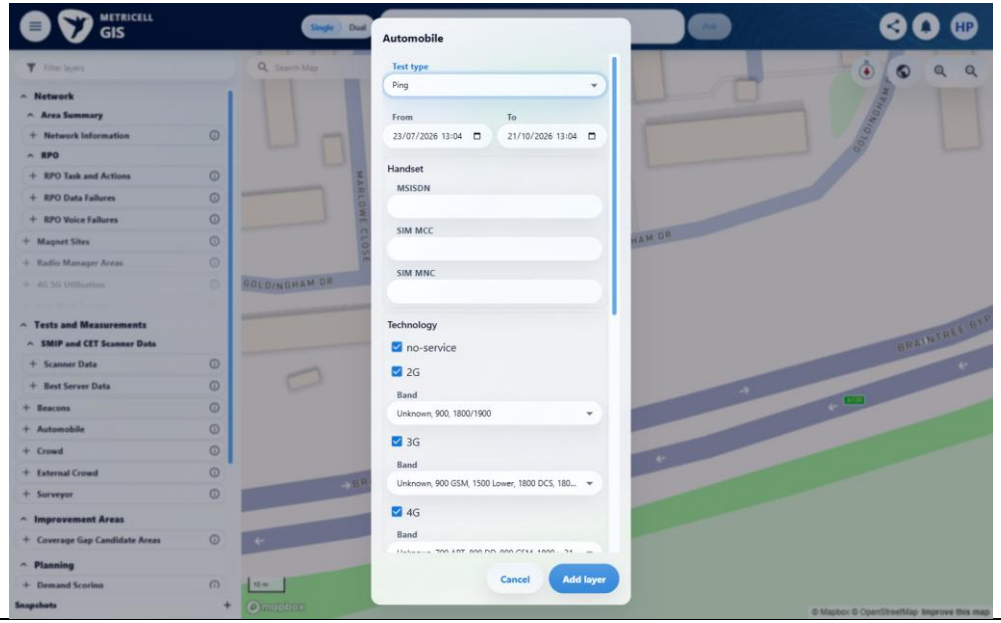
ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 1 evidence: When a selected Ping point's details have loaded, the detail view shows that point's Ping Time with the unit milliseconds (ms). **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E01 - Automobile configuration (criterion-1-automobile-configuration.png)**  **E02 - Test type choices (criterion-1-test-type-choices.png)** 				
Criterion 1 continued: When a selected Ping point's details have loaded, the detail view shows that point's Ping Time with the unit milliseconds (ms). **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E03 - Ping selected (criterion-1-ping-selected.png)**  **E04 - Ping layer loaded (criterion-1-ping-layer-loaded.png)** 				

ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 1 continued: When a selected Ping point's details have loaded, the detail view shows that point's Ping Time with the unit milliseconds (ms). **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E05 - Cluster error (criterion-1-cluster-error.png)**  **E06 - Zoomed map (criterion-1-zoomed-map.png)** 				
Criterion 1 continued: When a selected Ping point's details have loaded, the detail view shows that point's Ping Time with the unit milliseconds (ms). **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E07 - Location loaded (criterion-1-location-loaded.png)**  **E08 - Location zoom13 (criterion-1-location-zoom13.png)** 				

ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 1 continued: When a selected Ping point's details have loaded, the detail view shows that point's Ping Time with the unit milliseconds (ms). **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E09 - Before point zoom (criterion-1-before-point-zoom.png)**  **E10 - Before open point (criterion-1-before-open-point.png)** 				

ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 1 continued: When a selected Ping point's details have loaded, the detail view shows that point's Ping Time with the unit milliseconds (ms). **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E11 - Final (criterion-1-final.png)**  			
2.0.0	When Ping attributes are returned for the selected point, the detail view displays those attributes alongside the Ping Time.	When Ping attributes are returned for the selected point, the detail view displays those attributes alongside the Ping Time.	criterion-2-final.png shows Automobile/Ping configuration only. The aggregate detail service prerequisite failed in criterion 1; no successful individual Ping detail response or displayed attributes alongside Ping Time could be inspected. Evidence: E12, E13, E14	Blocked
Criterion 2 assessment: criterion-2-final.png shows Automobile/Ping configuration only. The aggregate detail service prerequisite failed in criterion 1; no successful individual Ping detail response or displayed attributes alongside Ping Time could be inspected. Testing notes: Automobile exposes Ping in its nested Test type choices. GET /api/platform/automobile/ping/points returned HTTP 200 with aggregate markers; POST /api/platform/automobile/ping/cluster-details returned HTTP 500 on initial selection and a separate fresh map selection at zoom 18. The visible Automobile Ping details panel showed 'Unable to load point details.' No individual point's successful details/attributes or detail-read request could be established. Dependent checks were stopped without repeating the known failing request for every criterion. This is a service/data prerequisite blocker, not evidence of an incorrect Ping measurement. Returned Ping attributes alongside Ping Time could not be inspected. This criterion independently reached Automobile/Ping configuration; its final PNG documents setup only, not the service failure from criterion 1. Stopped dependent point-detail testing due to the already reproduced aggregate detail service failure; did not repeat its failing request.				

ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 2 evidence: When Ping attributes are returned for the selected point, the detail view displays those attributes alongside the Ping Time. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E12 - Before configure (criterion-2-before-configure.png)**  **E13 - Configuration (criterion-2-configuration.png)** 				

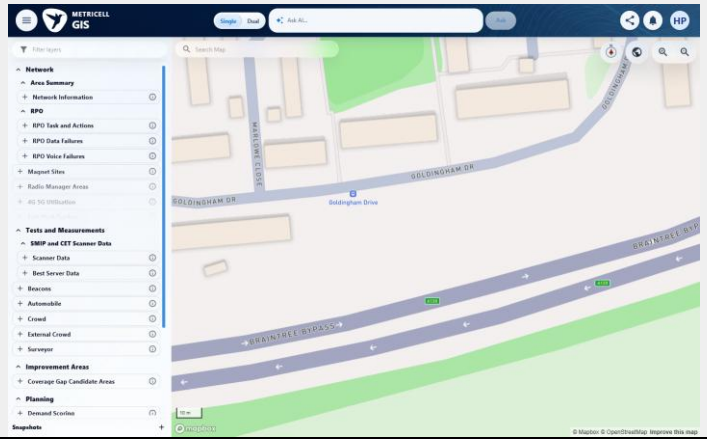
ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 2 continued: When Ping attributes are returned for the selected point, the detail view displays those attributes alongside the Ping Time. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E14 - Final (criterion-2-final.png)**  				

ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
3.0.0	With 5G NSA as the only selected technology, opening a Ping point displays details for that selected point without an error state.	With 5G NSA as the only selected technology, opening a Ping point displays details for that selected point without an error state.	criterion-3-final.png shows Ping configured with only 5G NSA checked and no-service, 2G, 3G, 4G and 5G SA unchecked. This configuration was cancelled without adding its layer or opening a point because the detail service prerequisite was unavailable. Successful 5G NSA point details remain untested. Evidence: E15, E16, E17, E18	Blocked

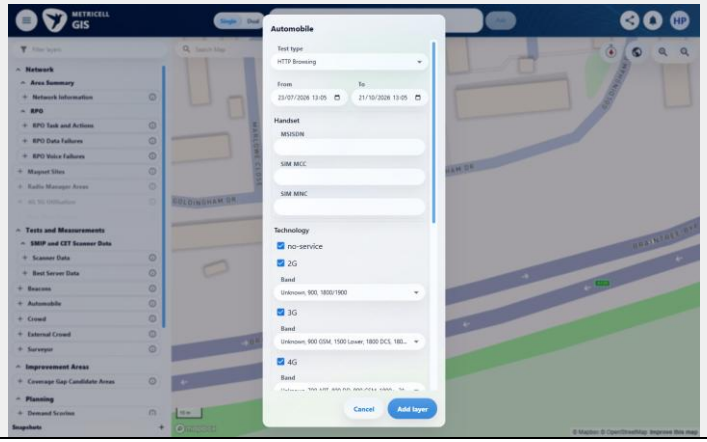
Criterion 3 assessment: criterion-3-final.png shows Ping configured with only 5G NSA checked and no-service, 2G, 3G, 4G and 5G SA unchecked. This configuration was cancelled without adding its layer or opening a point because the detail service prerequisite was unavailable. Successful 5G NSA point details remain untested.
Testing notes: Automobile exposes Ping in its nested Test type choices. GET /api/platform/automobile/ping/points returned HTTP 200 with aggregate markers; POST /api/platform/automobile/ping/cluster-details returned HTTP 500 on initial selection and a separate fresh map selection at zoom 18. The visible Automobile Ping details panel showed 'Unable to load point details.' No individual point's successful details/attributes or detail-read request could be established. Dependent checks were stopped without repeating the known failing request for every criterion. This is a service/data prerequisite blocker, not evidence of an incorrect Ping measurement. Confirmed 5G NSA checked and no-service, 2G, 3G, 4G and 5G SA unchecked. The configuration was cancelled without adding this layer or opening a point; opening a 5G NSA point remains untested. Stopped dependent point-detail testing due to the already reproduced aggregate detail service failure; did not repeat its failing request.

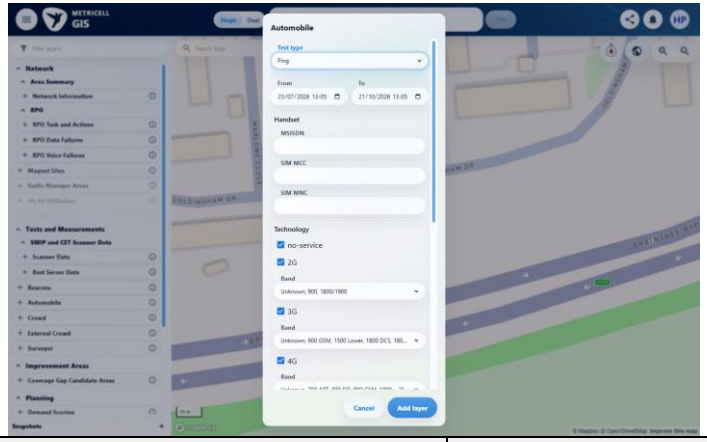
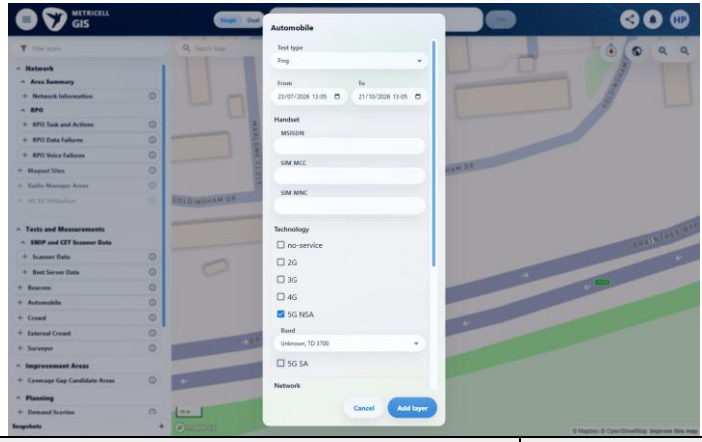
Criterion 3 evidence: With 5G NSA as the only selected technology, opening a Ping point displays details for that selected point without an error state.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

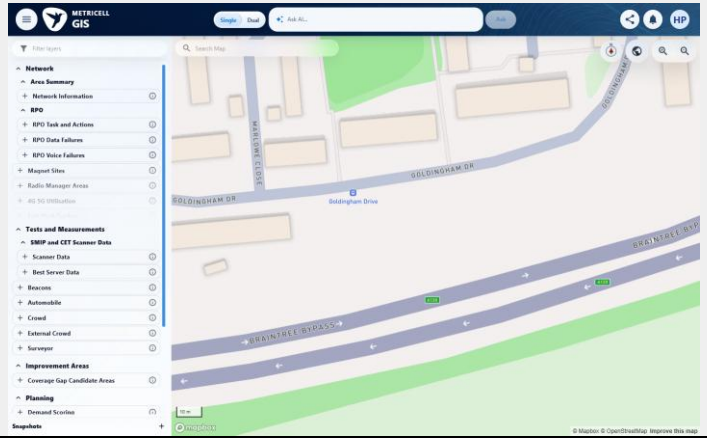
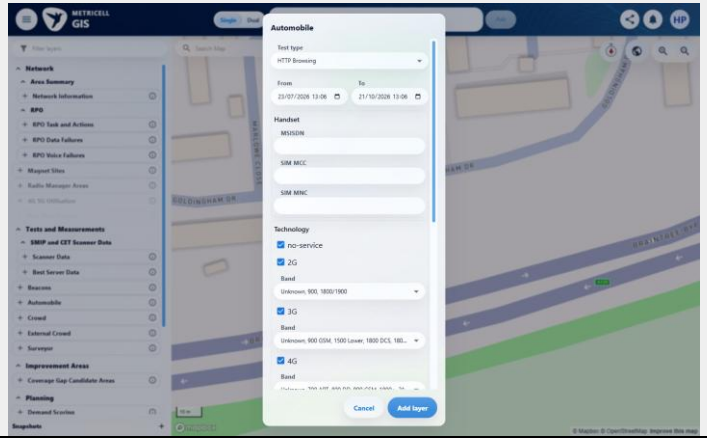
E15 - Before configure (criterion-3-before-configure.png)

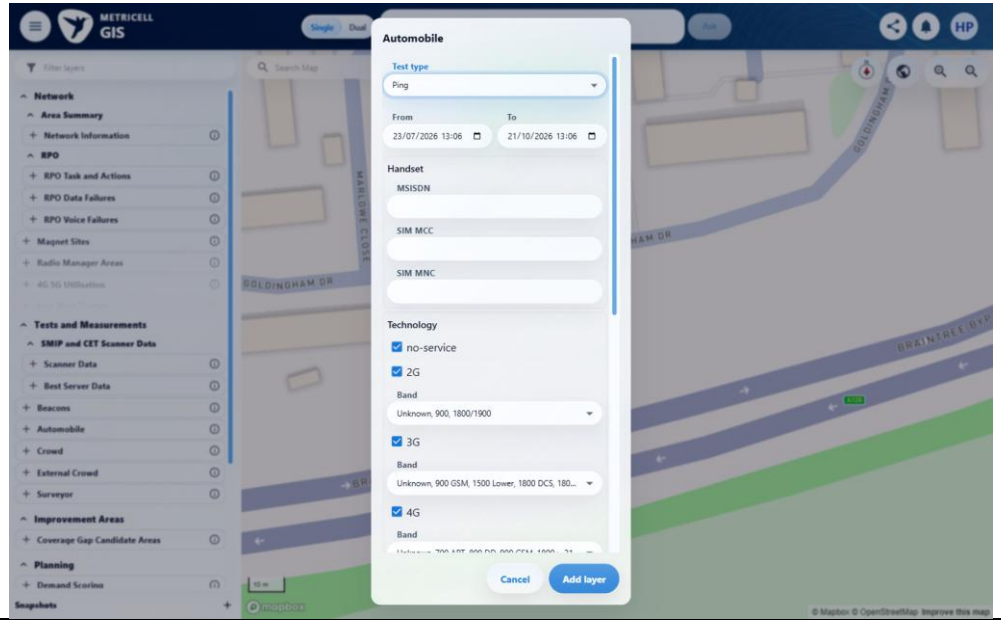


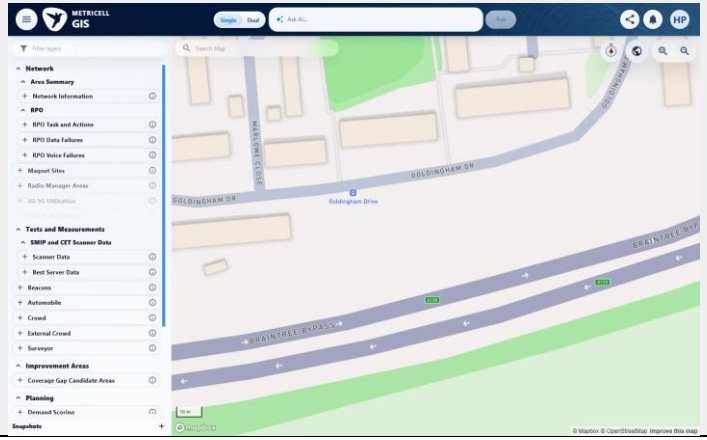
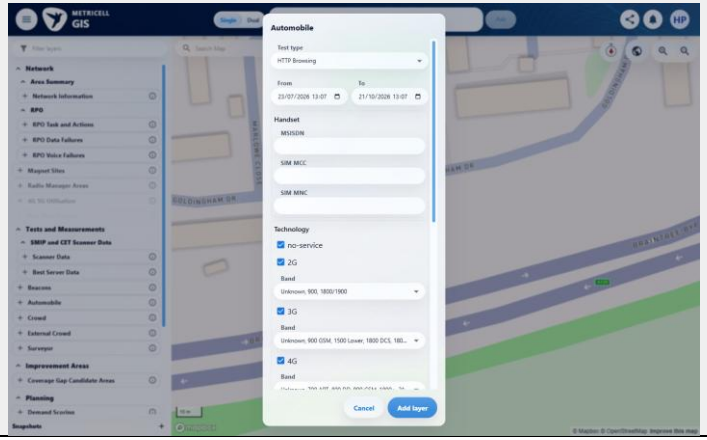
E16 - Configuration (criterion-3-configuration.png)

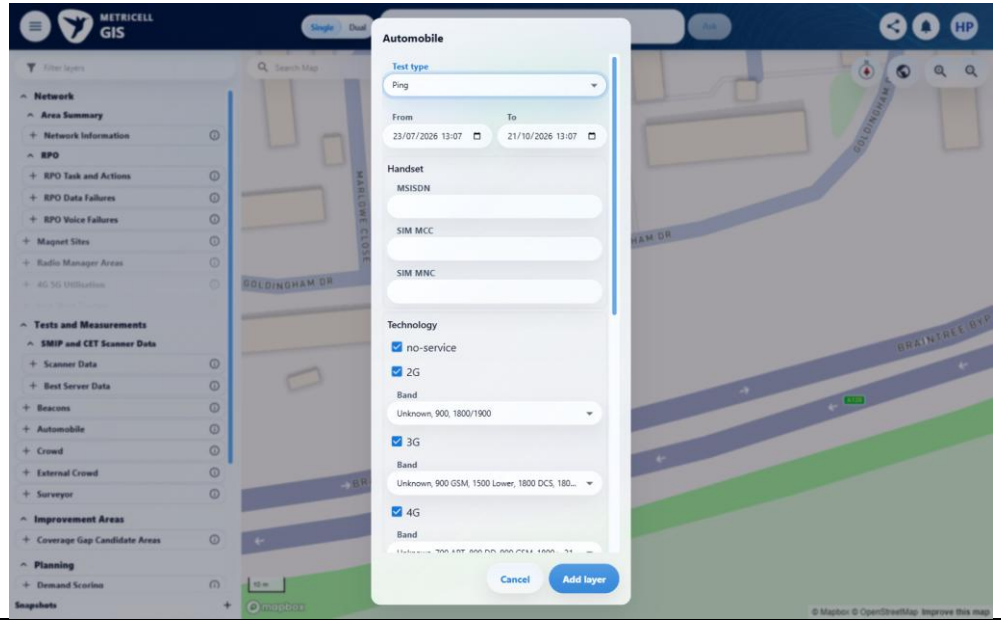


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 3 continued: With 5G NSA as the only selected technology, opening a Ping point displays details for that selected point without an error state. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E17 - Before technology selection (criterion-3-before-technology-selection.png)**  **E18 - Final (criterion-3-final.png)** 				
4.0.0	While Ping details are loading, the detail view shows a loading state.	While Ping details are loading, the detail view shows a loading state.	criterion-4-final.png shows Automobile/Ping configuration, not a loading detail view. The failed aggregate detail service prevented establishing a safe individual detail request and genuine recovery; no loading capture or simulation was performed. Evidence: E19, E20, E21	Blocked
Criterion 4 assessment: criterion-4-final.png shows Automobile/Ping configuration, not a loading detail view. The failed aggregate detail service prevented establishing a safe individual detail request and genuine recovery; no loading capture or simulation was performed. Testing notes: Automobile exposes Ping in its nested Test type choices. GET /api/platform/automobile/ping/points returned HTTP 200 with aggregate markers; POST /api/platform/automobile/ping/cluster-details returned HTTP 500 on initial selection and a separate fresh map selection at zoom 18. The visible Automobile Ping details panel showed 'Unable to load point details.' No individual point's successful details/attributes or detail-read request could be established. Dependent checks were stopped without repeating the known failing request for every criterion. This is a service/data prerequisite blocker, not evidence of an incorrect Ping measurement. Loading was not captured or simulated. A safe selected-record detail read and genuine recovery prerequisite were not established; aggregate request failure is not proof of the individual detail loading state. Stopped dependent point-detail testing due to the already reproduced aggregate detail service failure; did not repeat its failing request.				

ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 4 evidence: While Ping details are loading, the detail view shows a loading state. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E19 - Before configure (criterion-4-before-configure.png)**  **E20 - Configuration (criterion-4-configuration.png)** 				

ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 4 continued: While Ping details are loading, the detail view shows a loading state. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E21 - Final (criterion-4-final.png)** 				

ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
5.0.0	When Ping details are unavailable, the detail view shows a no-data state.	When Ping details are unavailable, the detail view shows a no-data state.	criterion-5-final.png shows Automobile/Ping configuration, not a no-data detail view. The failed aggregate detail service prevented reaching individual details. Empty map-point responses do not establish detail no-data behaviour, and no authoritative empty individual-detail contract was available; no simulation was performed. Evidence: E19, E22, E23	Blocked
Criterion 5 assessment: criterion-5-final.png shows Automobile/Ping configuration, not a no-data detail view. The failed aggregate detail service prevented reaching individual details. Empty map-point responses do not establish detail no-data behaviour, and no authoritative empty individual-detail contract was available; no simulation was performed. Testing notes: Automobile exposes Ping in its nested Test type choices. GET /api/platform/automobile/ping/points returned HTTP 200 with aggregate markers; POST /api/platform/automobile/ping/cluster-details returned HTTP 500 on initial selection and a separate fresh map selection at zoom 18. The visible Automobile Ping details panel showed 'Unable to load point details.' No individual point's successful details/attributes or detail-read request could be established. Dependent checks were stopped without repeating the known failing request for every criterion. This is a service/data prerequisite blocker, not evidence of an incorrect Ping measurement. Empty responses from map point searches at some viewports are not a no-data detail response. No authoritative empty individual-detail response contract was established, so no synthetic no-data response was used. Stopped dependent point-detail testing due to the already reproduced aggregate detail service failure; did not repeat its failing request.				
Criterion 5 evidence: When Ping details are unavailable, the detail view shows a no-data state. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E19 - Before configure (criterion-5-before-configure.png)**  **E22 - Configuration (criterion-5-configuration.png)** 				

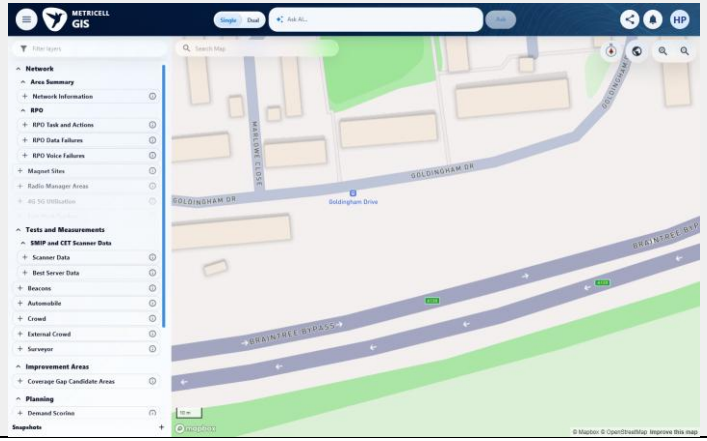
ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 5 continued: When Ping details are unavailable, the detail view shows a no-data state. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E23 - Final (criterion-5-final.png)** 				

ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
6.0.0	When Ping details fail to load, the detail view shows an error state and does not display data as if it belonged to the selected point.	When Ping details fail to load, the detail view shows an error state and does not display data as if it belonged to the selected point.	criterion-6-final.png shows Automobile/Ping configuration only. criterion-1-cluster-error.png and criterion-1-final.png show an aggregate-level error without detail fields, but individual point-detail failure and absence of stale or incorrect selected-point data were not established. A successful distinct-record baseline was unavailable because the detail service prerequisite failed; no simulation was performed. Evidence: E19, E24, E25	Blocked

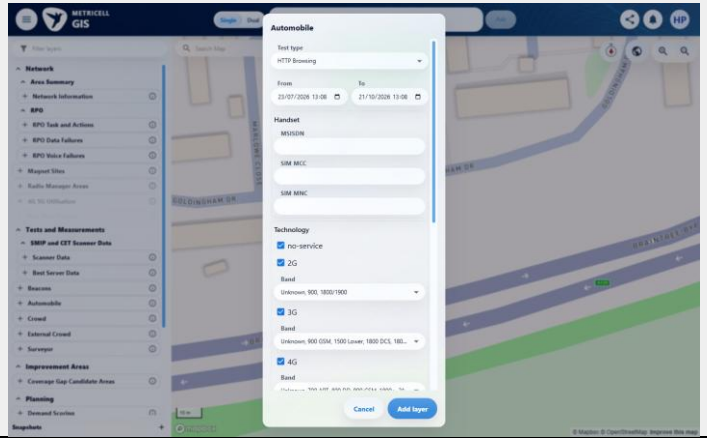
Criterion 6 assessment: criterion-6-final.png shows Automobile/Ping configuration only. criterion-1-cluster-error.png and criterion-1-final.png show an aggregate-level error without detail fields, but individual point-detail failure and absence of stale or incorrect selected-point data were not established. A successful distinct-record baseline was unavailable because the detail service prerequisite failed; no simulation was performed.
Testing notes: Automobile exposes Ping in its nested Test type choices. GET /api/platform/automobile/ping/points returned HTTP 200 with aggregate markers; POST /api/platform/automobile/ping/cluster-details returned HTTP 500 on initial selection and a separate fresh map selection at zoom 18. The visible Automobile Ping details panel showed 'Unable to load point details.' No individual point's successful details/attributes or detail-read request could be established. Dependent checks were stopped without repeating the known failing request for every criterion. This is a service/data prerequisite blocker, not evidence of an incorrect Ping measurement. The aggregate-level error panel showed an error with no detail fields, but the individual point-detail error path and absence of incorrect/stale point data were not established. No successful distinct record could be loaded as the prerequisite baseline. No simulated error used. Stopped dependent point-detail testing due to the already reproduced aggregate detail service failure; did not repeat its failing request.

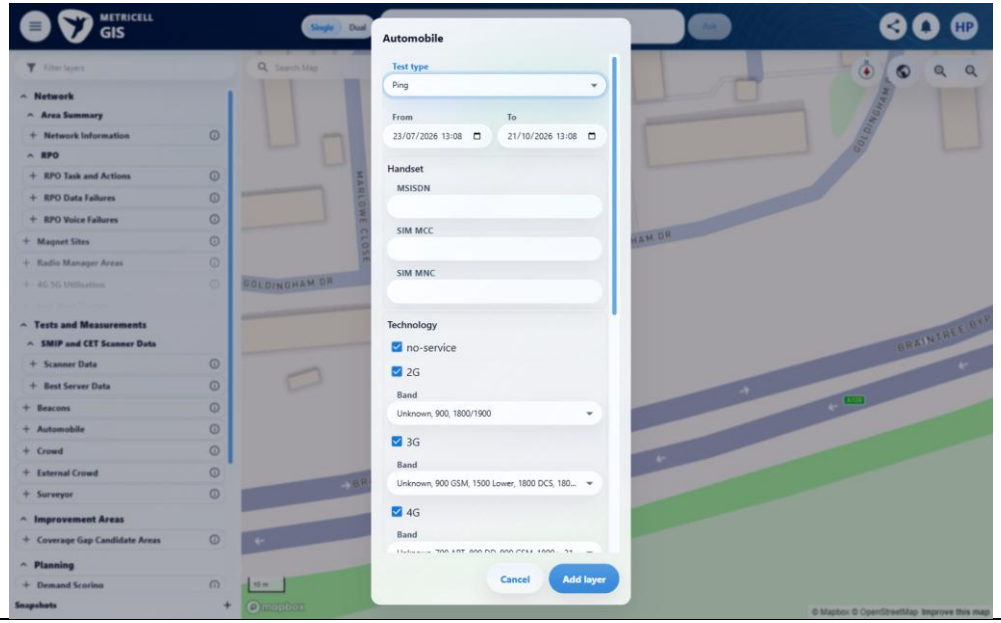
Criterion 6 evidence: When Ping details fail to load, the detail view shows an error state and does not display data as if it belonged to the selected point.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

E19 - Before configure (criterion-6-before-configure.png)



E24 - Configuration (criterion-6-configuration.png)



ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 6 continued: When Ping details fail to load, the detail view shows an error state and does not display data as if it belonged to the selected point. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E25 - Final (criterion-6-final.png)** 				

metricell
Better Connected

About Metricell

Metricell is on a mission to deliver connectivity. We work with our customers to design, deliver and manage wireless communication networks – with a shared ambition of achieving flawless network experience. We've been responsible for many first-to-market products, and our technology is characterised by the relentless pursuit of automation and digitalisation.

Our geospatial intelligence tools traverse a wide variety of business processes – from Test & Measurement to Customer Experience Management – and we're pioneers in Crowdsourcing and Digital Self Care. Our technology is today in use by a range of customers; thousands of their personnel; and millions of subscribers worldwide.

Find out more at www.metricell.com

