Automated Test Case Document

Jira Ticket: TEST2-83

Document Classification:	Company Confidential
Document Ref:	Automated Test Case Document
Version:	1.0
Date:	19/10/2026
Document Author:	Automated TEST2 Evidence Review
Document Owner:	Quality Assurance / Metricell

This document and its content is copyright of Metricell Limited @ 2026 all rights reserved. All information contained herein is the intellectual property of Metricell Limited and should be treated as confidential. Any external redistribution of reproduction of part or all of the contents in any form is prohibited unless expressly agreed with Metricell Limited in writing. Any reproduced content must include the following statement; "Part or all of the content contained herein is copyright of Metricell Limited @ 2026 all rights reserved".

Table of Contents

1 Revision History 2
2 Test Cycle Information 3
3 Test Summary 4
4 Test Cases 6
About Metricell 26

1 Revision History

Version	Date	Revision Author	Summary of Changes
[1.0]	19/10/2026	TEST2 QA Automation	Generated from TEST2 evidence review

2 Test Cycle Information

Tester:	**Automated**
Jira Ticket:	TEST2-83
Environment:	o2intelligence-v4-dev.metricell.com
Browser Details:	Google Chrome 155.0.8059.85
Date of Test:	19/10/2026
Limitations during Testing:	9 blocked; 0 inconclusive criterion(s). Reviewed all nine canonical criteria against attempt-001. Service point detail prerequisites remain blocked by the reported persistent point-retrieval HTTP 500; screenshots show the reachable layer states, not a Service detail dialog or visible HTTP error. No confirmed detail-presentation defect can be inferred. Criterion 1: Persistent upstream Service point retrieval failure reproduced across independent criterion runs. Cannot verify returned serving-cell information without a loaded Service point detail dialog. The point list was inaccessible, not positively established as empty. Restored the test-added layer selection; unrelated layers and panels were preserved. Persistent environment/data access requires investigation before these prerequisites can be met. Criterion 2: Persistent upstream Service point retrieval failure reproduced across independent criterion runs. Cannot establish a Service point response containing neighbours or inspect distinct neighbour sections. The point list was inaccessible, not positively established as empty. Restored the test-added layer selection; unrelated layers and panels were preserved. Persistent environment/data access requires investigation before these prerequisites can be met. Criterion 3: Persistent upstream Service point retrieval failure reproduced across independent criterion runs. Cannot establish a Service point response without neighbours. The failed point-list request is not evidence of a valid empty-neighbour response. The point list was inaccessible, not positively established as empty. Restored the test-added layer selection; unrelated layers and panels were preserved. Persistent environment/data access requires investigation before these prerequisites can be met. Criterion 4: Persistent upstream Service point retrieval failure reproduced across independent criterion runs. Cannot load Service detail rows, so neither sorting order nor filtering matching rows could be exercised. The point list was inaccessible, not positively established as empty. Restored the test-added layer selection; unrelated layers and panels were preserved. Persistent environment/data access requires investigation before these prerequisites can be met. Criterion 5: Persistent upstream Service point retrieval failure reproduced across independent criterion runs. Cannot load Service point details for any of 2G, 3G, 4G, 5G NSA or 5G SA; layer legend labels are not point-detail KPI evidence. The point list was inaccessible, not positively established as empty. Restored the test-added layer selection; unrelated layers and panels were preserved. Persistent environment/data access requires investigation before these prerequisites can be met. Criterion 6: Persistent upstream Service point retrieval failure reproduced across independent criterion runs. With only 5G SA selected, Service point retrieval still returns HTTP 500. No 5G SA point could be opened. The point list was inaccessible, not positively established as empty. Restored the test-added layer selection; unrelated layers and panels were preserved. Persistent environment/data access requires investigation before these prerequisites can be met. Criterion 7: Persistent upstream Service point retrieval failure reproduced across independent criterion runs. Cannot initiate Service detail loading because upstream point retrieval fails. Map/layer loading is not

	the required detail-presentation loading state. The point list was inaccessible, not positively established as empty. Restored the test-added layer selection; unrelated layers and panels were preserved. Persistent environment/data access requires investigation before these prerequisites can be met. Criterion 8: Persistent upstream Service point retrieval failure reproduced across independent criterion runs. Cannot establish unavailable Service point details. Failed upstream requests do not establish a no-data detail response. The point list was inaccessible, not positively established as empty. Restored the test-added layer selection; unrelated layers and panels were preserved. Persistent environment/data access requires investigation before these prerequisites can be met. Criterion 9: Persistent upstream Service point retrieval failure reproduced across independent criterion runs. Cannot open a Service point and trigger a detail-loading failure. The observed HTTP 500 is on point retrieval, not a shared detail-dialog request; no conclusion about its error state or incorrect-data handling is possible. The point list was inaccessible, not positively established as empty. Restored the test-added layer selection; unrelated layers and panels were preserved. Persistent environment/data access requires investigation before these prerequisites can be met. Criterion 9: The first GIS attempt timed out locating exact text Automobile because the visible catalogue entry was Automobile (1). Configuration was then reached, but the browser session was interrupted before the attempt completed. Continued from a fresh launcher and captured a new initial state. Defects (No.) counts directly contradicted criteria, not unique Jira bugs; blockers and inconclusive evidence count as zero.
Overall review outcome:	Blocked
Browser URL(s) recorded after criteria:	https://o2intelligence-v4-dev.metricell.com/gis

3 Test Summary

Area of test	Pass	Fail	Defects (No.)
1. Given a Service point's details have loaded in the shared point-detail dialog, the standard detail presentation shows the returned serving-cell information.	N	N	0
2. Given the loaded Service point details include neighbour-cell data, each returned neighbour appears in its own distinct section beneath the serving-cell information.	N	N	0
3. Given the loaded Service point details contain no neighbour-cell data, serving-cell information remains visible and no empty neighbour section appears.	N	N	0
4. Given displayed Service point detail rows are available, sorting the rows changes their visible order according to the selected sort, and filtering them shows only rows matching the selected filter.	N	N	0

Area of test	Pass	Fail	Defects (No.)
5. Given a Service point's reported radio generation is 2G, 3G, 4G, 5G NSA, or 5G SA, the visible KPI names are appropriate to that generation.	N	N	0
6. Given 5G SA is selected and the user opens a Service point in the shared point-detail dialog, the Service point detail presentation loads without an error state.	N	N	0
7. Given Service point details are loading, the detail presentation shows a loading state.	N	N	0
8. Given Service point details are unavailable, the detail presentation shows a no-data state.	N	N	0
9. Given loading Service point details fails, the detail presentation shows an error state and does not show incorrect detail data.	N	N	0

4 Test Cases

Each test maps to a criterion and decisive browser evidence. Inconclusive results are reported as Failed.


4.1 Tests

Preconditions:	V4 access and ticket conditions.	***Associated Requirements:***	Ticket criteria below.	Automation Notes:	Screenshots below each criterion; full log retained locally.


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
1.0.0	Given a Service point's details have loaded in the shared point-detail dialog, the standard detail presentation shows the returned serving-cell information.	Given a Service point's details have loaded in the shared point-detail dialog, the standard detail presentation shows the returned serving-cell information.	criterion-1-final.png shows the Automobile - Service layer and legend, with no loaded Service detail dialog; returned serving-cell information cannot be assessed. Tester results report persistent HTTP 500 from /api/platform/automobile/service/points; this network status is not visible in the PNG. The Service point retrieval prerequisite is unavailable. Evidence: E01, E02, E03	Blocked


Criterion 1 evidence: Given a Service point's details have loaded in the shared point-detail dialog, the standard detail presentation shows the returned serving-cell information.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

E01 - After open automobile (criterion-1-after-open-automobile.png)

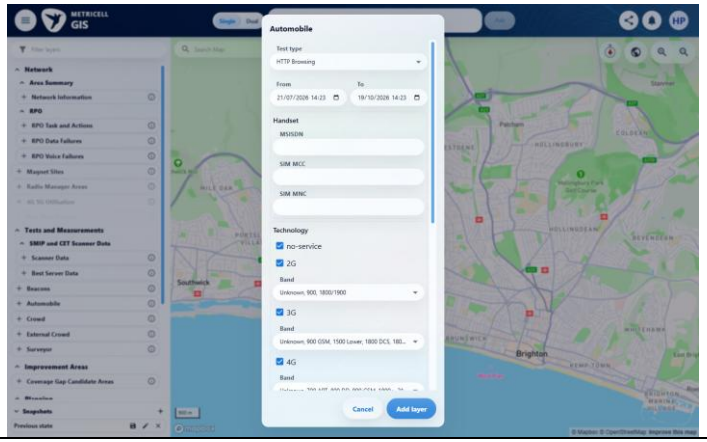

E02 - Before select service (criterion-1-before-select-service.png)

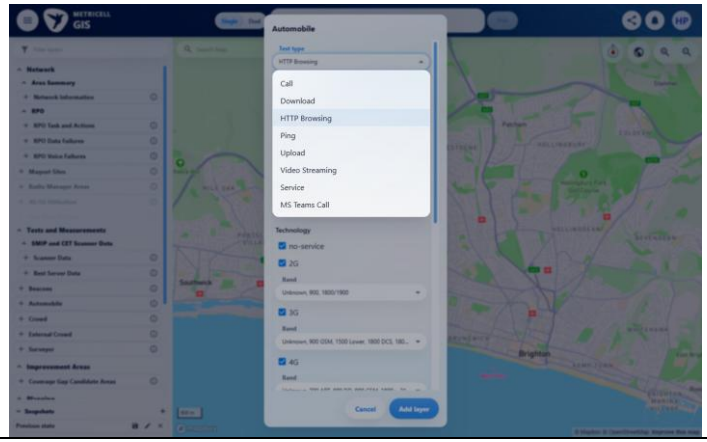


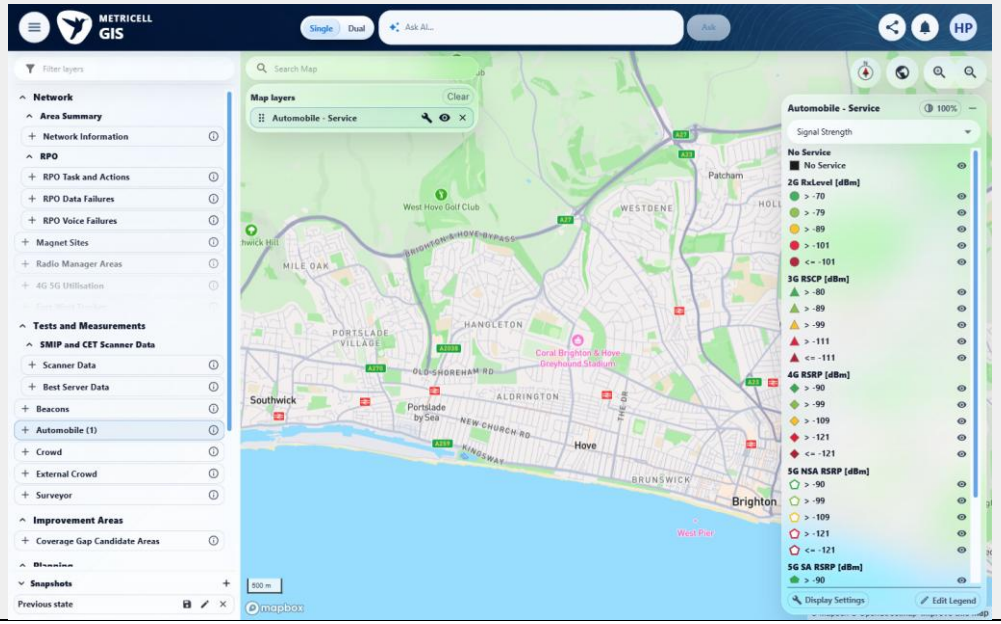ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 1 continued: Given a Service point's details have loaded in the shared point-detail dialog, the standard detail presentation shows the returned serving-cell information. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E03 - Final (criterion-1-final.png)** 				


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
2.0.0	Given the loaded Service point details include neighbour-cell data, each returned neighbour appears in its own distinct section beneath the serving-cell information.	Given the loaded Service point details include neighbour-cell data, each returned neighbour appears in its own distinct section beneath the serving-cell information.	criterion-2-final.png shows the Service layer and legend without a Service detail dialog; no response containing neighbours is available to assess distinct neighbour sections. Tester results report persistent HTTP 500 from /api/platform/automobile/service/points; this network status is not visible in the PNG. The Service point retrieval prerequisite is unavailable. Evidence: E04, E05, E03	Blocked


Criterion 2 evidence: Given the loaded Service point details include neighbour-cell data, each returned neighbour appears in its own distinct section beneath the serving-cell information.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

E04 - After open automobile (criterion-2-after-open-automobile.png)

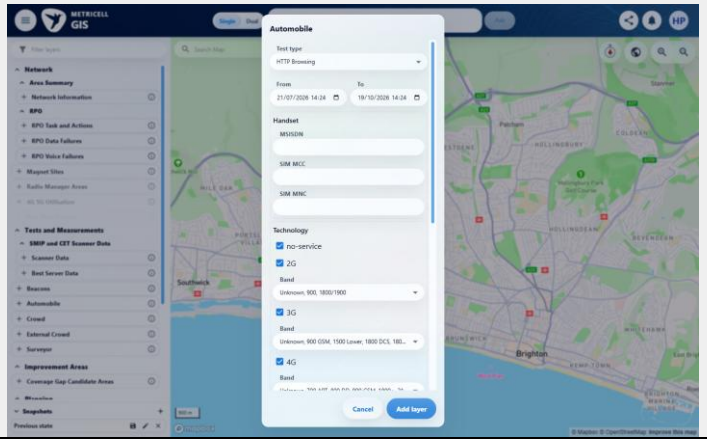

E05 - Before select service (criterion-2-before-select-service.png)

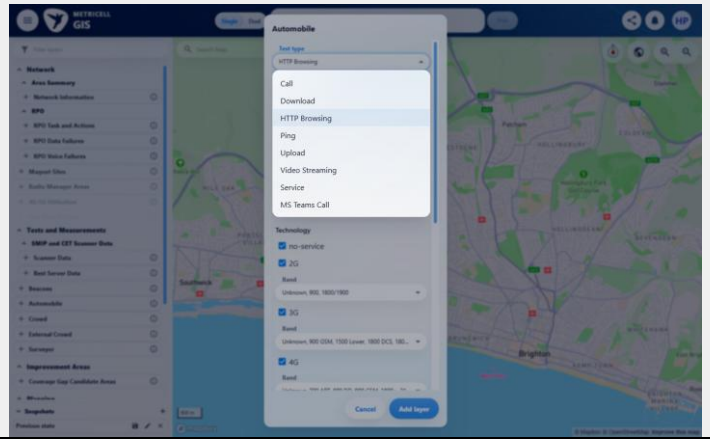


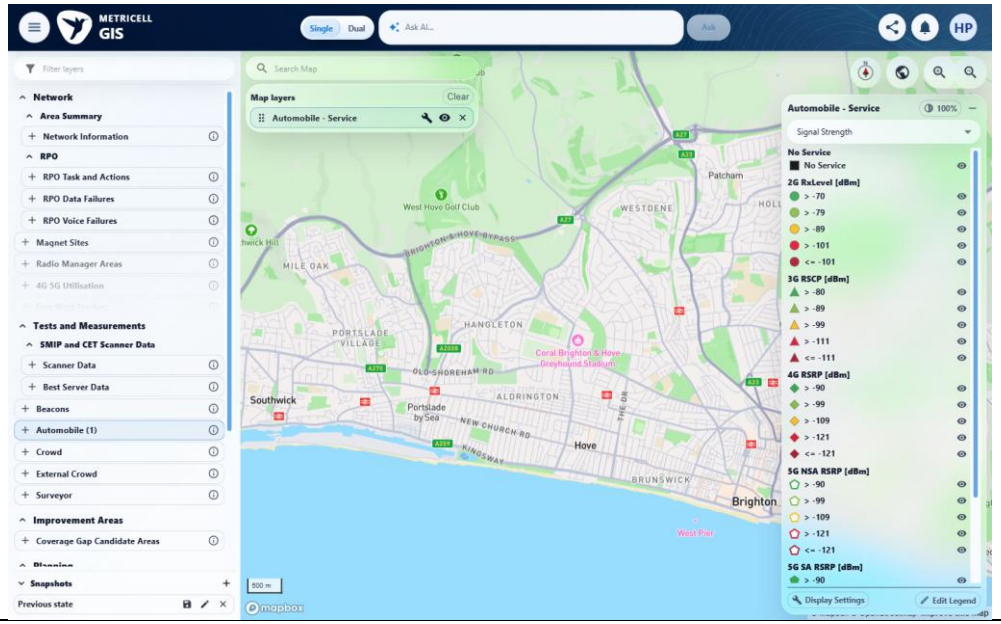ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 2 continued: Given the loaded Service point details include neighbour-cell data, each returned neighbour appears in its own distinct section beneath the serving-cell information. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E03 - Final (criterion-2-final.png)** 


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
3.0.0	Given the loaded Service point details contain no neighbour-cell data, serving-cell information remains visible and no empty neighbour section appears.	Given the loaded Service point details contain no neighbour-cell data, serving-cell information remains visible and no empty neighbour section appears.	criterion-3-final.png shows no Service detail dialog; it does not establish a valid response without neighbours or prove absence of an empty neighbour section. Tester results report persistent HTTP 500 from /api/platform/automobile/service/points; this network status is not visible in the PNG. The Service point retrieval prerequisite is unavailable. Evidence: E06, E07, E03	Blocked


Criterion 3 evidence: Given the loaded Service point details contain no neighbour-cell data, serving-cell information remains visible and no empty neighbour section appears.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

E06 - After open automobile (criterion-3-after-open-automobile.png)

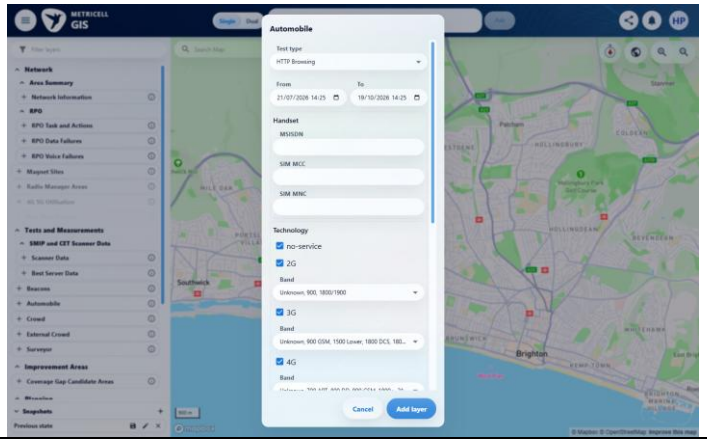

E07 - Before select service (criterion-3-before-select-service.png)

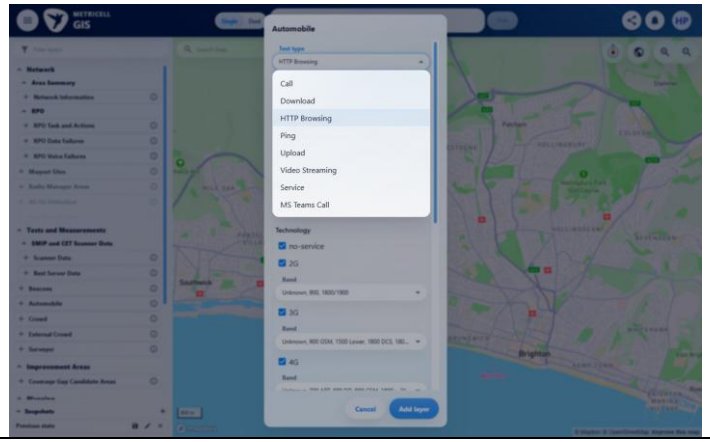

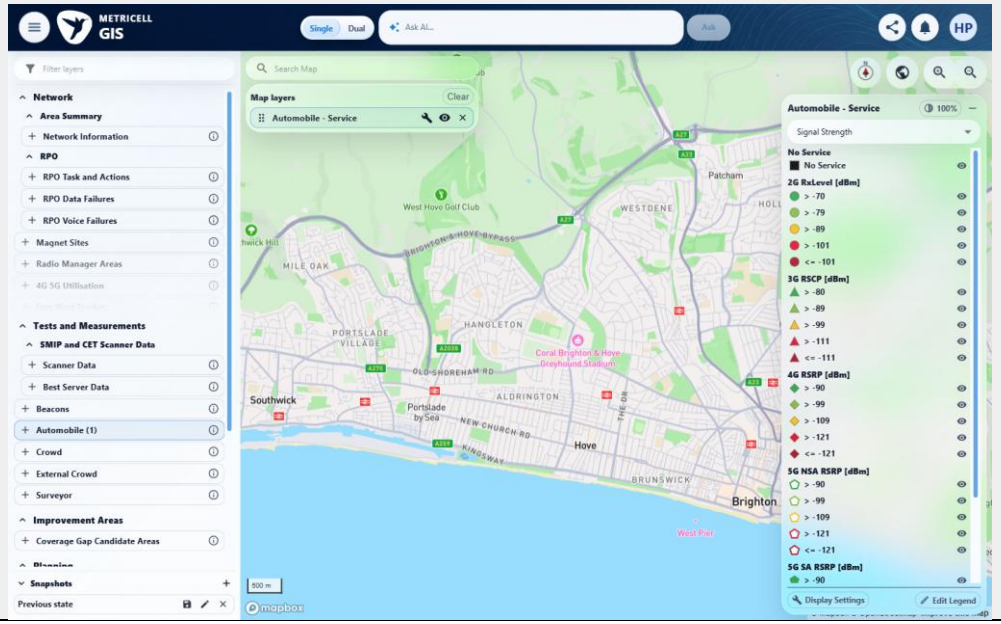
ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 3 continued: Given the loaded Service point details contain no neighbour-cell data, serving-cell information remains visible and no empty neighbour section appears. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E03 - Final (criterion-3-final.png)** 				

ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
4.0.0	Given displayed Service point detail rows are available, sorting the rows changes their visible order according to the selected sort, and filtering them shows only rows matching the selected filter.	Given displayed Service point detail rows are available, sorting the rows changes their visible order according to the selected sort, and filtering them shows only rows matching the selected filter.	criterion-4-final.png shows the Service layer legend without Service detail rows; neither sorting order nor filtering can be exercised. Tester results report persistent HTTP 500 from /api/platform/automobile/service/points; this network status is not visible in the PNG. The Service point retrieval prerequisite is unavailable. Evidence: E08, E09, E03	Blocked


Criterion 4 evidence: Given displayed Service point detail rows are available, sorting the rows changes their visible order according to the selected sort, and filtering them shows only rows matching the selected filter.


Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

E08 - After open automobile (criterion-4-after-open-automobile.png)

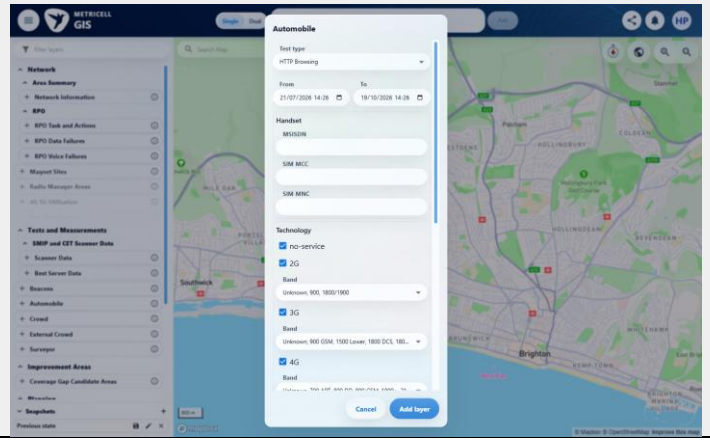

E09 - Before select service (criterion-4-before-select-service.png)

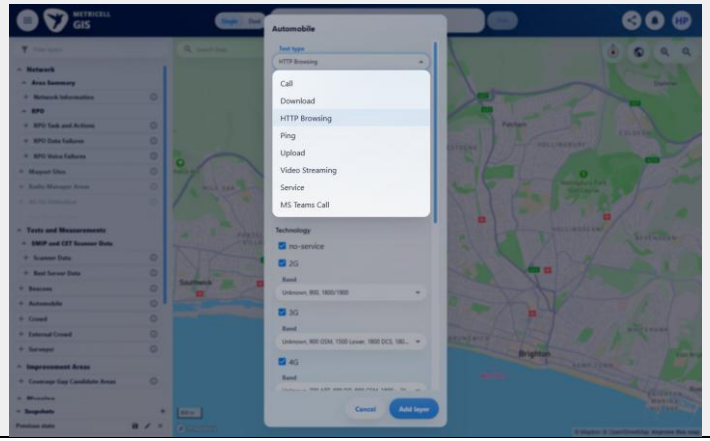


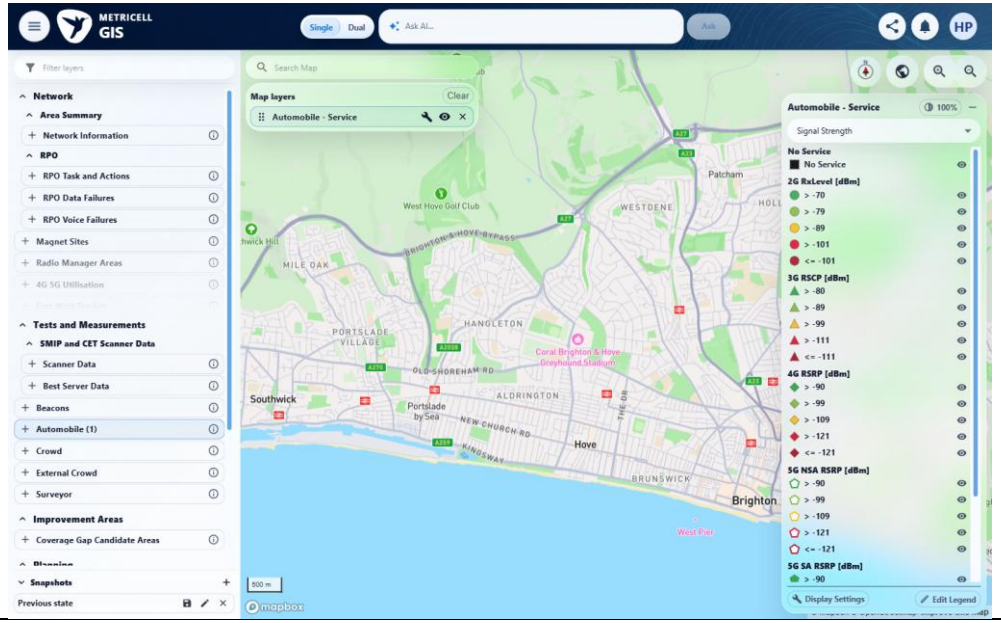ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 4 continued: Given displayed Service point detail rows are available, sorting the rows changes their visible order according to the selected sort, and filtering them shows only rows matching the selected filter. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E03 - Final (criterion-4-final.png)** 				


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
5.0.0	Given a Service point's reported radio generation is 2G, 3G, 4G, 5G NSA, or 5G SA, the visible KPI names are appropriate to that generation.	Given a Service point's reported radio generation is 2G, 3G, 4G, 5G NSA, or 5G SA, the visible KPI names are appropriate to that generation.	criterion-5-final.png shows Service legend KPI labels alongside a Surveyor - Call layer, without Service point details; it cannot establish generation-specific detail KPI names. Tester results report persistent HTTP 500 from /api/platform/automobile/service/points; this network status is not visible in the PNG. The Service point retrieval prerequisite is unavailable. Evidence: E10, E11, E12	Blocked

Criterion 5 evidence: Given a Service point's reported radio generation is 2G, 3G, 4G, 5G NSA, or 5G SA, the visible KPI names are appropriate to that generation.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis


E10 - After open automobile (criterion-5-after-open-automobile.png)

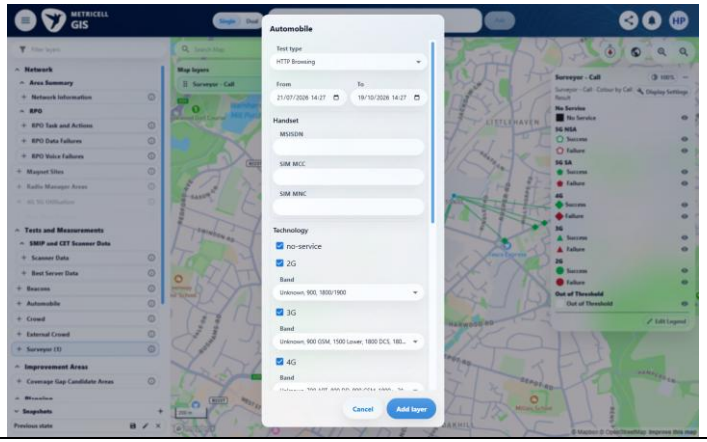

E11 - Before select service (criterion-5-before-select-service.png)

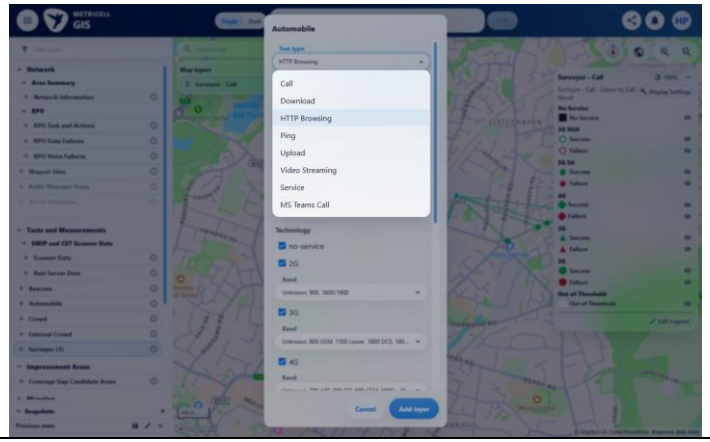


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 5 continued: Given a Service point's reported radio generation is 2G, 3G, 4G, 5G NSA, or 5G SA, the visible KPI names are appropriate to that generation. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E12 - Final (criterion-5-final.png)**				

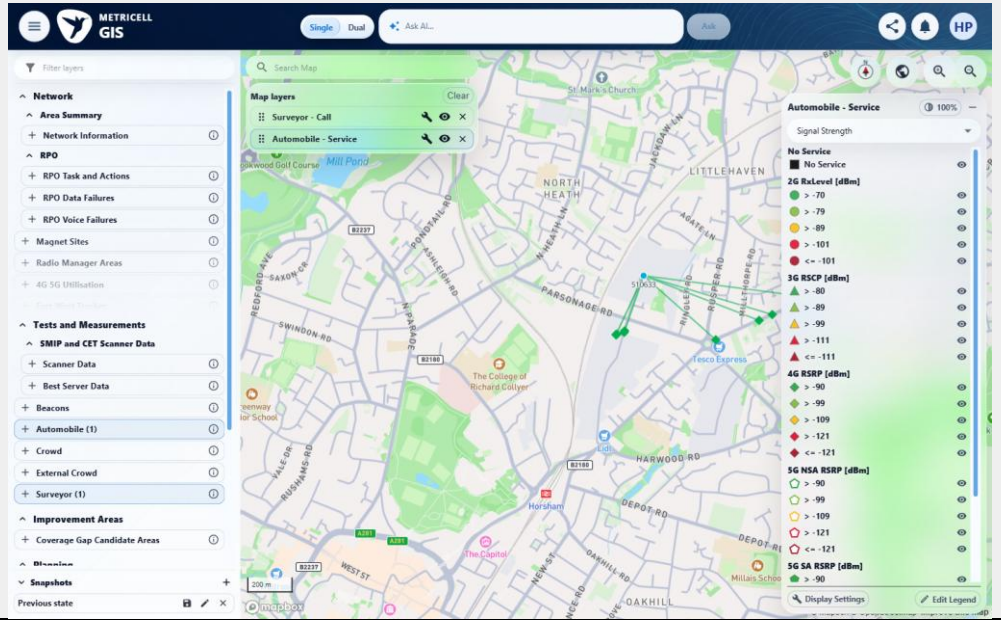


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
6.0.0	Given 5G SA is selected and the user opens a Service point in the shared point-detail dialog, the Service point detail presentation loads without an error state.	Given 5G SA is selected and the user opens a Service point in the shared point-detail dialog, the Service point detail presentation loads without an error state.	criterion-6-after-select-only-5g-sa.png visibly selects only 5G SA, but criterion-6-final.png shows the Service layer legend without a Service detail dialog; 5G SA detail loading remains unavailable. Tester results report persistent HTTP 500 from /api/platform/automobile/service/points; this network status is not visible in the PNG. The Service point retrieval prerequisite is unavailable. Evidence: E13, E14, E15, E16	Blocked



Criterion 6 evidence: Given 5G SA is selected and the user opens a Service point in the shared point-detail dialog, the Service point detail presentation loads without an error state.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

E13 - After open automobile (criterion-6-after-open-automobile.png)

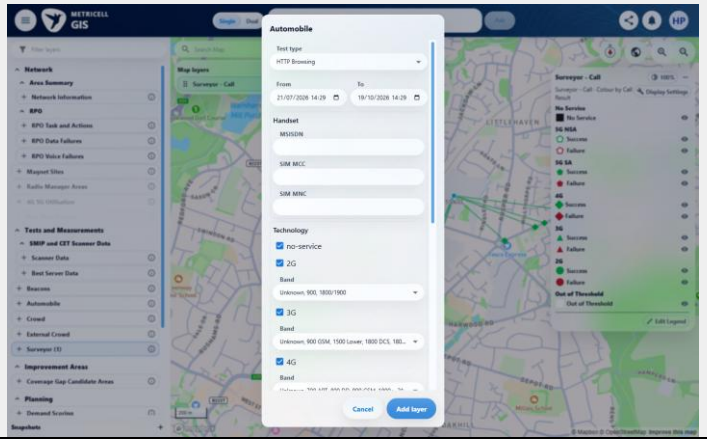

E14 - Before select service (criterion-6-before-select-service.png)

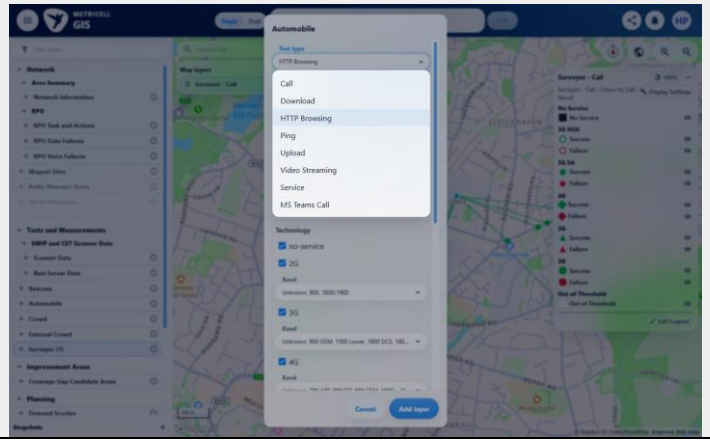


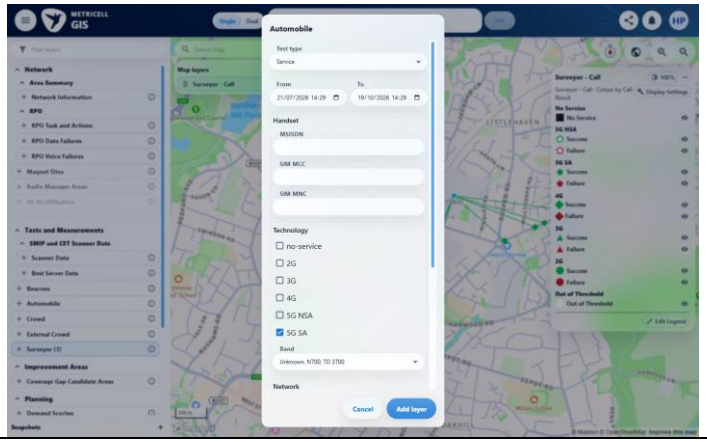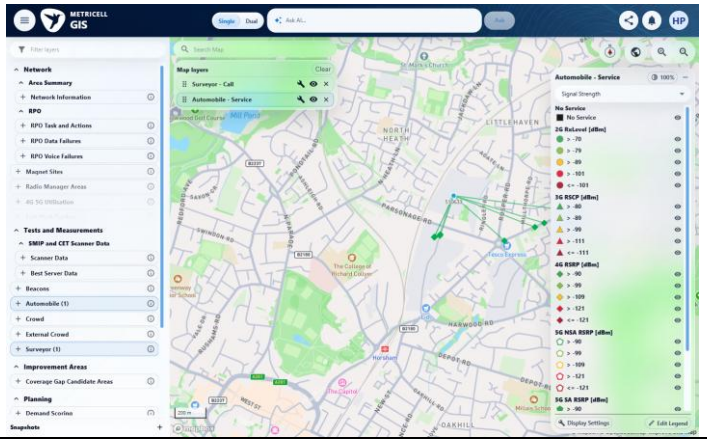ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 6 continued: Given 5G SA is selected and the user opens a Service point in the shared point-detail dialog, the Service point detail presentation loads without an error state. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E15 - After select only 5g sa (criterion-6-after-select-only-5g-sa.png)**  **E16 - Final (criterion-6-final.png)** 				


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
7.0.0	Given Service point details are loading, the detail presentation shows a loading state.	Given Service point details are loading, the detail presentation shows a loading state.	criterion-7-final.png shows the Service legend and a Surveyor cluster table, without a Service detail loading presentation; upstream point retrieval prevented the required detail request. Tester results report persistent HTTP 500 from /api/platform/automobile/service/points; this network status is not visible in the PNG. The Service point retrieval prerequisite is unavailable. Evidence: E17, E18, E19	Blocked

Criterion 7 evidence: Given Service point details are loading, the detail presentation shows a loading state.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis


E17 - After open automobile (criterion-7-after-open-automobile.png)

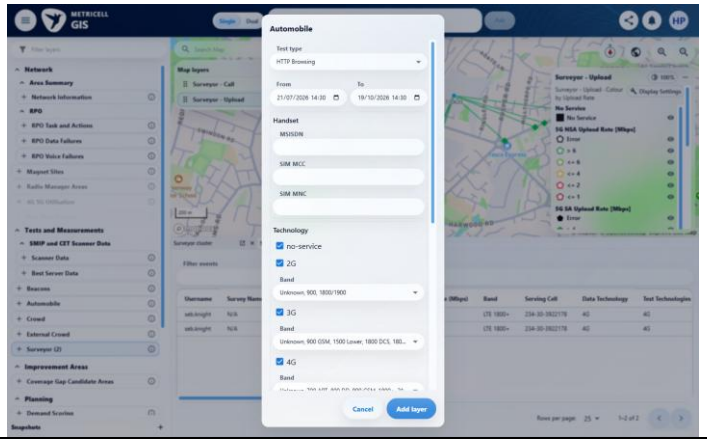

E18 - Before select service (criterion-7-before-select-service.png)

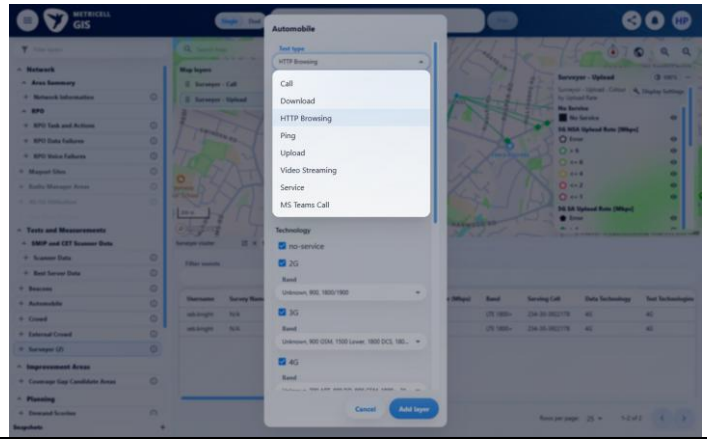


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 7 continued: Given Service point details are loading, the detail presentation shows a loading state. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E19 - Final (criterion-7-final.png)**				

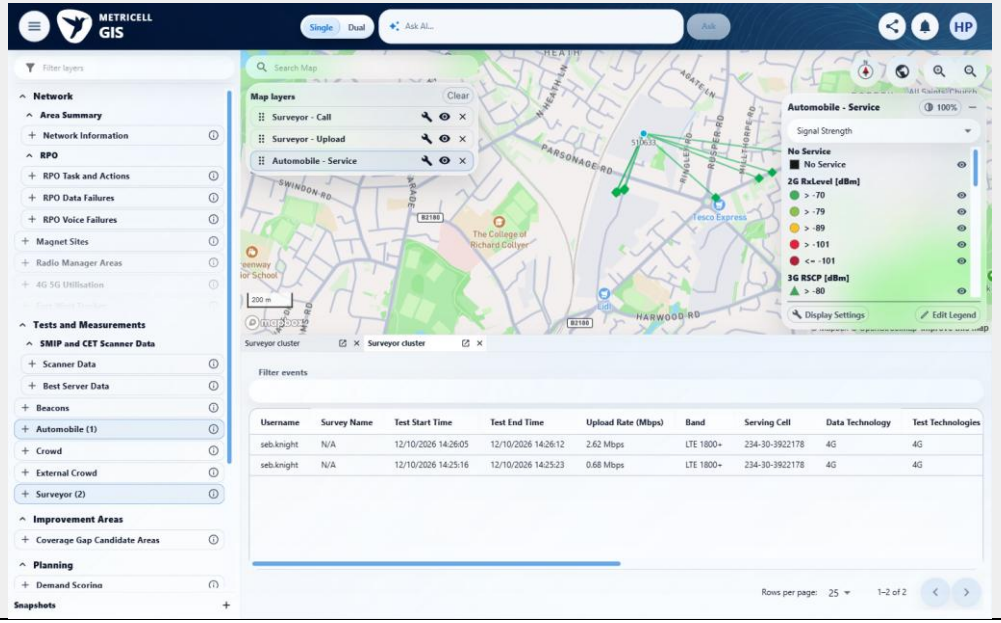


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
8.0.0	Given Service point details are unavailable, the detail presentation shows a no-data state.	Given Service point details are unavailable, the detail presentation shows a no-data state.	criterion-8-final.png shows the Service legend and a Surveyor cluster table, without a Service detail no-data presentation; failed point retrieval does not establish unavailable detail data. Tester results report persistent HTTP 500 from /api/platform/automobile/service/points; this network status is not visible in the PNG. The Service point retrieval prerequisite is unavailable. Evidence: E20, E21, E19	Blocked


Criterion 8 evidence: Given Service point details are unavailable, the detail presentation shows a no-data state.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis

E20 - After open automobile (criterion-8-after-open-automobile.png)

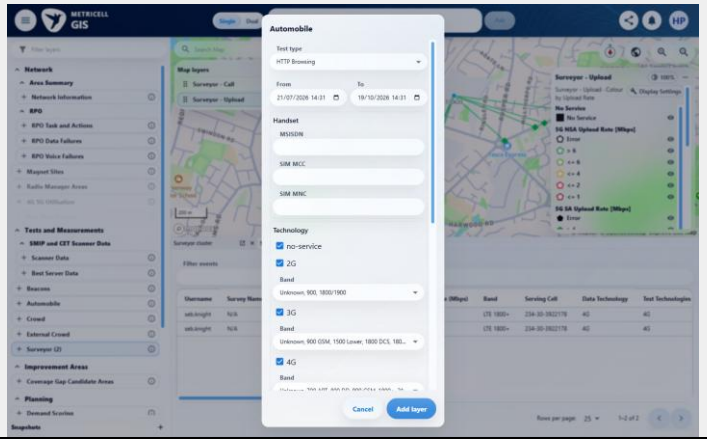

E21 - Before select service (criterion-8-before-select-service.png)

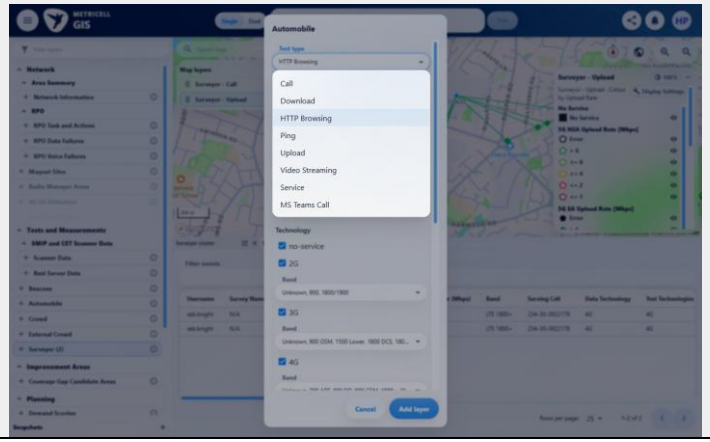


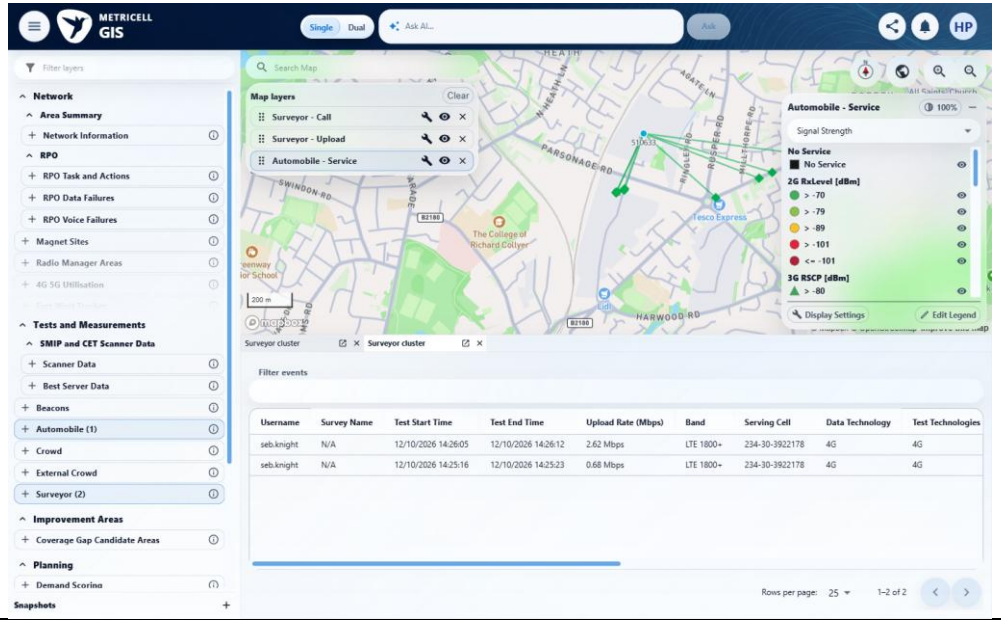ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 8 continued: Given Service point details are unavailable, the detail presentation shows a no-data state. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E19 - Final (criterion-8-final.png)** 				


ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
9.0.0	Given loading Service point details fails, the detail presentation shows an error state and does not show incorrect detail data.	Given loading Service point details fails, the detail presentation shows an error state and does not show incorrect detail data.	criterion-9-restart-final.png shows the recovered run reached the Service layer and legend without a Service detail dialog; point-retrieval failure cannot establish a detail-request error state or incorrect-data handling. Tester results report persistent HTTP 500 from /api/platform/automobile/service/points; this network status is not visible in the PNG. The Service point retrieval prerequisite is unavailable. Evidence: E22, E23, E24, E25, E26	Blocked



Criterion 9 evidence: Given loading Service point details fails, the detail presentation shows an error state and does not show incorrect detail data.
Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis


E22 - After open automobile (criterion-9-after-open-automobile.png)

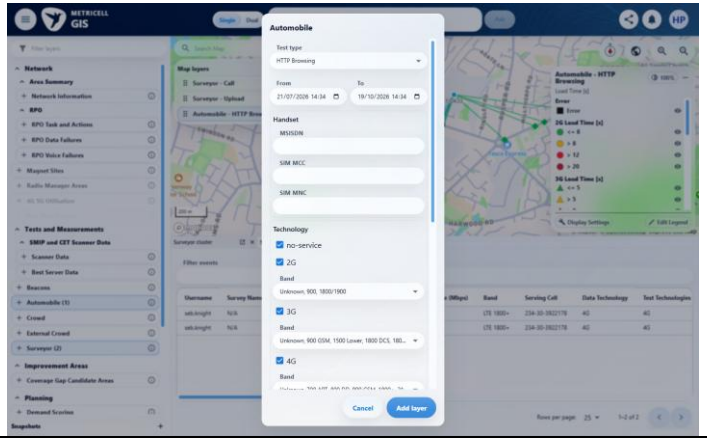

E23 - Before select service (criterion-9-before-select-service.png)

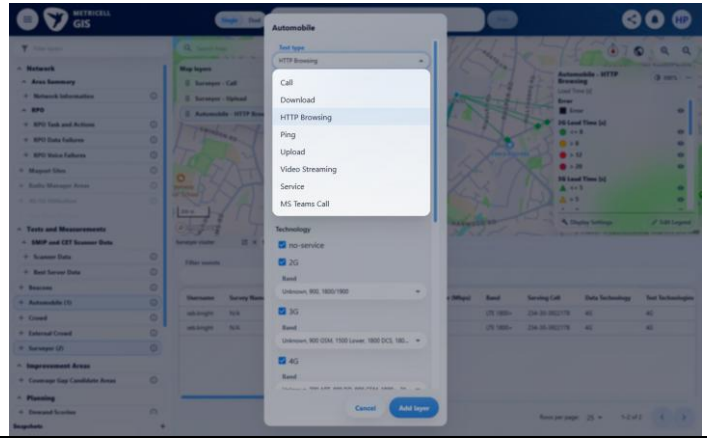


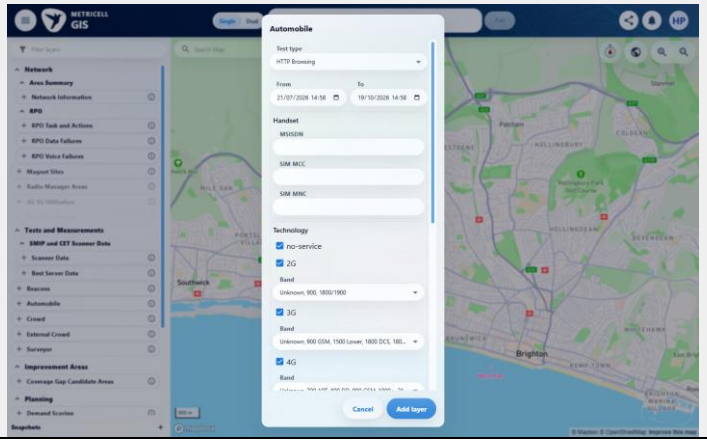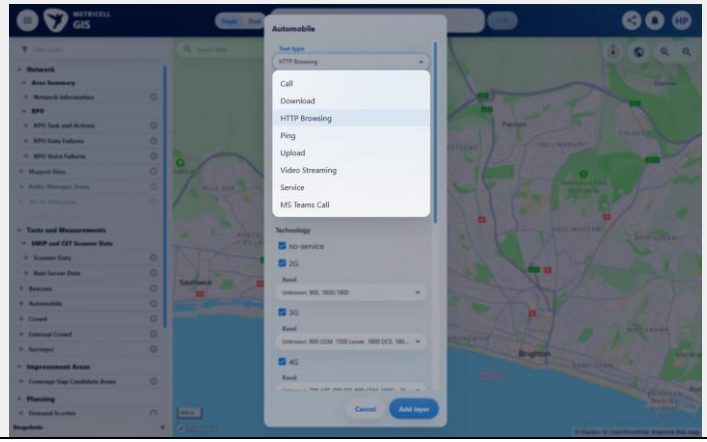ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 9 continued: Given loading Service point details fails, the detail presentation shows an error state and does not show incorrect detail data. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E24 - Restart after open automobile (criterion-9-restart-after-open-automobile.png)**  **E25 - Restart before select service (criterion-9-restart-before-select-service.png)**  			

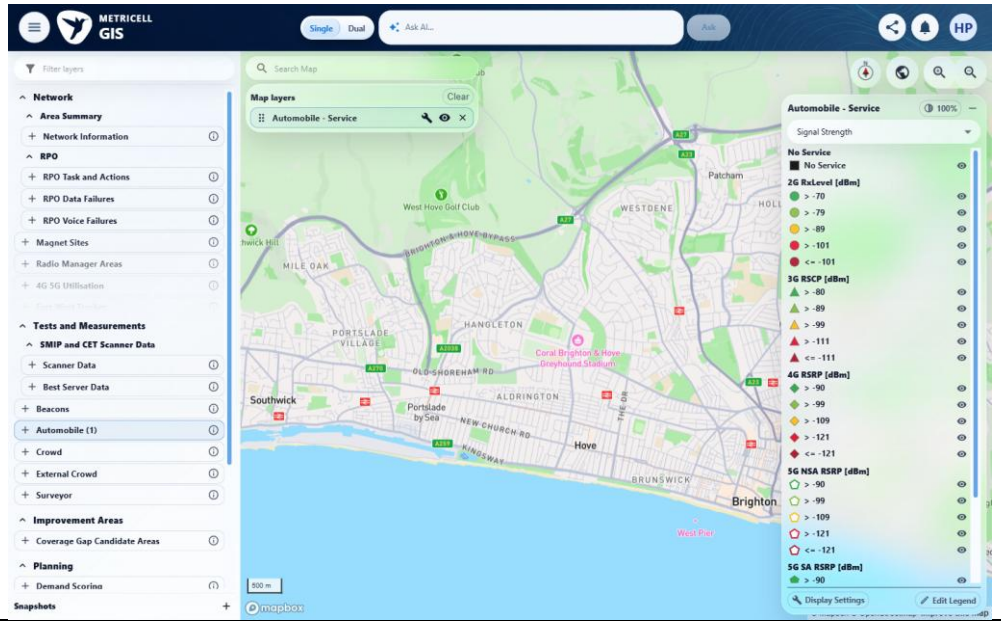
ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Criterion 9 continued: Given loading Service point details fails, the detail presentation shows an error state and does not show incorrect detail data. **Browser URL recorded after criterion: https://o2intelligence-v4-dev.metricell.com/gis** **E26 - Restart final (criterion-9-restart-final.png)**				

ID / Criterion	Criteria Tested	Expected Result	Actual Result / Evidence Path	Outcome
Supporting setup captures - full attempt evidence remains in the local evidence folder				

E27 - After open gis (criterion-1-after-open-gis.png)

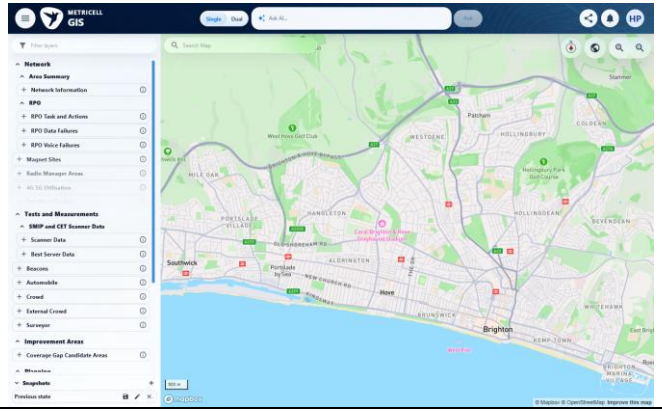

E28 - After open gis (criterion-2-after-open-gis.png)

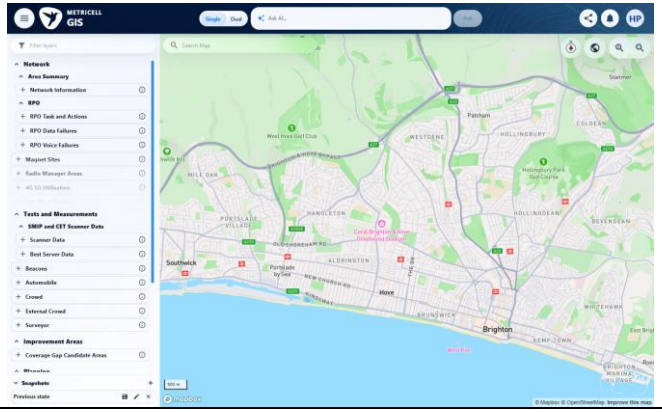

metricell
Better Connected

About Metricell

Metricell is on a mission to deliver connectivity. We work with our customers to design, deliver and manage wireless communication networks – with a shared ambition of achieving flawless network experience. We've been responsible for many first-to-market products, and our technology is characterised by the relentless pursuit of automation and digitalisation.

Our geospatial intelligence tools traverse a wide variety of business processes – from Test & Measurement to Customer Experience Management – and we're pioneers in Crowdsourcing and Digital Self Care. Our technology is today in use by a range of customers; thousands of their personnel; and millions of subscribers worldwide.

Find out more at www.metricell.com

