

# Sorting N Elements Using Quantum Entanglement Sets

Ammar Odeh , Khaled Elleithy, Marwah Almasri, Abrar Alajlan

Department of Computer Science and Engineering

University of Bridgeport

Bridgeport, CT 06604

{aodeh, elleithy, maalmasr,aalajlan, }@bridgeport.edu

**Abstract**— To search for an element in an unsorted database, it requires  $O(N)$  operations using classical computers, where it takes only  $O(\sqrt{N})$  operations in quantum systems. In this paper, we provide an in-depth look at the existing quantum searching algorithms and emphasize the quantum entanglement feature to propose a new technique for sorting N elements and thus improve the sorting process.

**Keywords**- Quantum searching algorithms, Quantum entanglement, element probability.

## I. INTRODUCTION

Quantum computation has gained a lot of attention especially for the need of searching unsorted database in a faster way rather than using the classical search mechanisms. Many search problems have been investigated in the computer science field, which can be solved by speeding up the searching algorithms [1]. Grover introduced one of the most important quantum searching algorithms, which is faster than the well-known classical searching algorithms [2].

In classical computers, each bit can be represented by either zero or one, whereas quantum systems employ a Qubit that contains both zero and one simultaneously with different probabilities. This phenomenon is called superposition, which helps to perform several tasks at the same time and much faster than traditional computing [3] , [4]. Grover's algorithm can be very beneficial for data searching from unsorted dataset in a diverse nature. For searching in N elements, Grover's algorithm takes only  $O(\sqrt{n})$  steps compared to  $O(N)$  steps in classical computers [5, 6].

Quantum entanglement technique is considered being one of the most important properties of a quantum computer, which enables Qubits to simultaneously handle two states. An entangled state can only be accomplished, when two qubits or more are able to communicate with each other. In other words, we can specify bit(s) depending on the measured value of the other bit(s). It is obvious that in case of two qubits, have four combination values 00,01,10,11 are conveyed simultaneously (superposition). Moreover, quantum systems should be able to allocate any combination patterns for these possible values. For example, when combining the values of 00 and 11, if one state of any single qubit is defined, the second state of the related qubit automatically will be known which is called entangled states. Entangled states indicated that these states could not be separated into different states. Thus, any

entangled state always has to be a superposition state; however, a superposition state is not always an entangled state [7].

Since, quantum computing systems are still in their infancy phases of growth, the experimental trials of searching algorithms need quantum hardware to perform tasks simultaneously. The proposed algorithm in this paper combines some of the quantum features with searching techniques in order to speed up the searching process in conventional environments. This paper provides a new technique that employs quantum entanglement property to sort N elements.

This paper is organized as follows. Section II, presents the related work of existing quantum searching algorithms. In section III, quantum-searching applications are discussed. Section IV, provides the proposed algorithm. Finally, section V, offers findings and analysis of the proposed algorithm.

## II. RELATED WORK

Authors in [8] demonstrated the hardware implementation of the main quantum operators that are used in quantum algorithm gates stimulation on classical computers. The authors used efficient software for the purpose of simulation. The paper presents the hardware used to perform all the functions needed in Grover's quantum search algorithm. In addition, [9] provides a numerical simulation of Grover's quantum search algorithm using microwave devices and frequencies as an implementation solution due to the technical problems and the high cost of quantum components. The paper concluded that, at a microwave resonator, an electromagnetic field can be 0 and 1 depending on the selection of the predetermined field level.

Poto *et. al.* [10] introduced a new algorithm called quantum existence testing algorithm, which is an exceptional case of quantum counting. This algorithm is useful for searching structured and unstructured databases because it uses classical logarithmic techniques. The authors in [11] discussed new approaches that solve the problem of finding the minimum and the maximum values among a set of integers with time complexity of  $O(1)$ . This approach is successful and effective in the case of using low size quantum registers.

Furthermore, quantum computers are more powerful than classical computers due to the

entanglement principle. One of the most interesting quantum computers is duality quantum computer. In this kind of computers, the gates are not unitary which give more flexibility especially for unsorted database search [12]. Another quantum search algorithm called Quantum walk based search algorithm is described in [13]. This algorithm can solve many problems such as element distinctness, restricted range associativity, matrix product verification and group commutativity [13].

Earlier designs of parallel algorithms were constructed in [14]. It is shown that if two oracles have been performed simultaneously on a group of entangled qubits, it would speed up the computation by  $\sqrt{2}$  times faster than the sequential quantum search. Moreover, for any fixed  $\sqrt{N}$ , the probability of parallel search is a 22 thousands times faster compared with sequential search. A new parallel search algorithm was proposed in [15] where the authors introduced a new technique to improve the performance of the existing quantum search algorithms in case of non-uniform data. The study concluded that the parallel technique demonstrated its ability to handle almost all cases whether the data is uniform or not. Moreover, the paper discussed some hard algorithmic problems such as order finding, factoring and many others that require excessive resources for solving them.

### III. PROPOSED ALGORITHM

In our proposed algorithm we sort an array of  $N$  elements using quantum properties. Entanglement of bits is one of the quantum powerful characteristic where we can determine one bit if we know the other one. For example in  $\{00, 11\}$ , if the first bit is zero, then the second bit will be zero. By using these properties, we can sort our data in ascending or descending order. Our methodology depends on 3 bits and adds an extra bit to the most significant bit and then we separate them into 2 groups by using the divide and conquer algorithm to solve the problem. For example in quicksort and merge sort algorithms, both of them divide the problem into smaller pieces until the smallest unit is reached which enables us to sort the data.

Our sorting algorithm consists of the following steps as shown in Figure 1:

1. Receive  $N$  numbers.
2. Convert all Numbers into binary representation.
3. Insert 1 to the most significant bit for each number
4. Create two sets  $\{11, 10\}$  where we know the first bit if we know the second bit. In our state, if the value is 0, then first bit will be 1. If the second bit is 1, then first will be 1.
5. Now we divide our number set into 2 groups.
6. Remove the most 2 significant bits.
7. Repeat step number 3 until we have a single bit then we apply quantum single bit comparator gate.

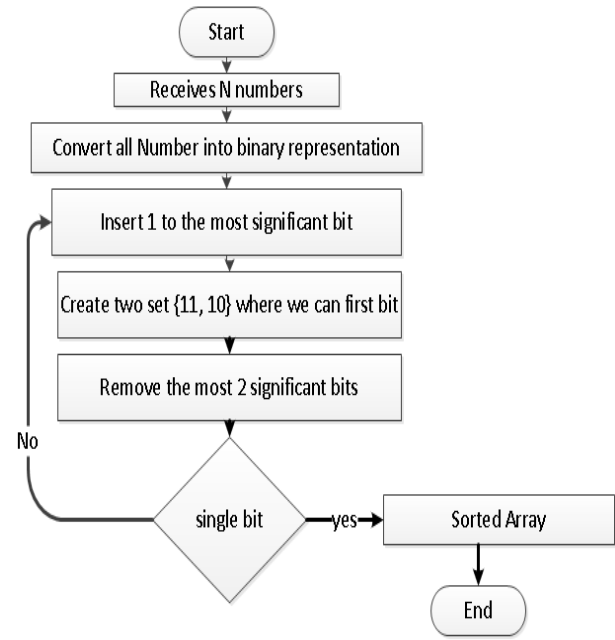


Figure 1. Sorted Algorithm Flow chart

Example:-

Step1:- $\{0, 7, 2, 3, 1, 4, 5, 6\}$

Step2:- $\{000, 111, 010, 011, 001, 100, 101, 110\}$

Step3:- $\{1000, 1111, 1010, 1011, 1001, 1100, 1101, 1110\}$

Step4:- classify our value into 2 sets  $\{10, 11\}$  where  $10 < 11$

Step5:-

Set1 :=  $\{1000, 1010, 1011, 1001\} = \{0, 2, 3, 1\}$ .

Set 2 :=  $\{1111, 1100, 1101, 1110\} = \{7, 4, 5, 6\}$ .

Step 6: we remove the most 2 significant bits then

Set1 :=  $\{00, 10, 11, 01\}$

Set2 :=  $\{11, 00, 01, 10\}$

Step 7: repeat step 3 until we have single bits.

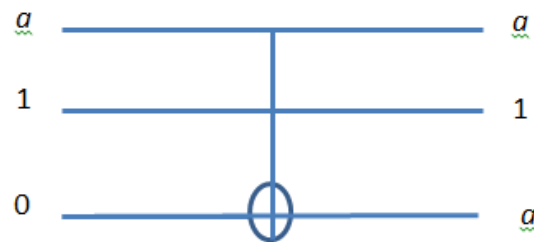


Figure 2. Toffoli Gate

To improve our algorithm, we will use Toffoli Quantum gate where the first input is 1 and the second input will be  $\{0, 1\}$  as shown in Figure 2. Details of the example are shown in Figure 3.

By using special design for Toffoli gate, we can check the second bit in a very fast strategy where we have two Outputs and the result will be in which half it belongs. Table I Shows the output results and input value for each step.

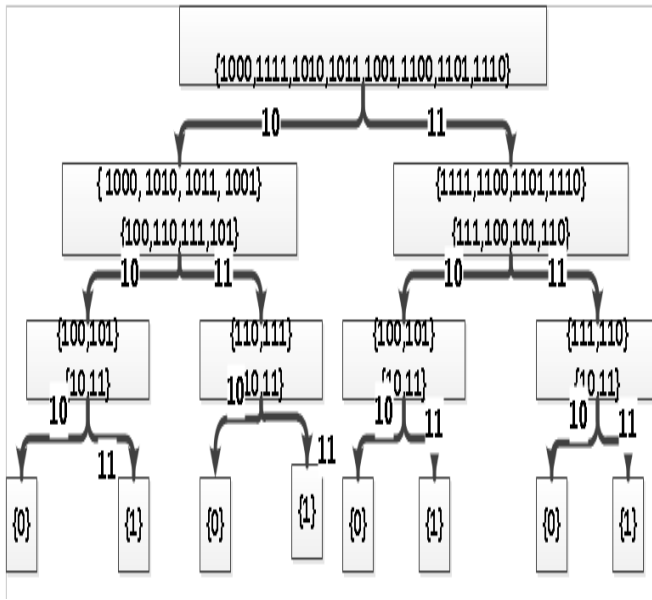


Figure 3. Tree representation

The number of compressions in our algorithm for  $N$  elements will be  $N \log N$ . In worst case analysis, it will be  $N^2$  and in the best case will be 1. But if we improve it by using QuPhaRegisters for each branch of our decision tree, it will produce  $(N-2) \log(N-2)$ . In this case, we will deal with some parallelism mechanism. In our algorithm each level of our decision tree will add 1 to the most significant bit.

In Table II, we present some of the classical sorting algorithms and compare with our algorithm. Quantum Tree algorithm can reduce time complexity like quick sort. Moreover applying parallelism on the next input for tree level, improves time complexity.

Table I. Output results and input value

Input a	0	1
Value of b	1	1
Output	0	1
Conclusion	10	11

Table II. Big O for sorting algorithms

Sort Algorithms	Time Complexity	Operation
Bubble Sort	$O(N^2)$	Exchanging
Insertion Sort	$O(N^2)$	Insertion
Merge Sort	$O(N \log n)$	Merging
Heap sort	$O(N \log n)$	Selection
Quick sort	$O(N \log n)$	Partition
Proposed algorithm	$O((N-2) \log(N-2))$	Partition

## IV. CONCLUSION

In this paper, we presented some quantum searching algorithms and discussed some quantum concepts. Many applications apply sorting data algorithms. The main idea of our paper represents Quantum efficiency for sorting data. By applying divide and conquer concept, we employ an interesting Quantum concept which is entanglement of bits. Then we partition our data into two groups for the next level, by repeating the division process we reach a sorted data array. The presented algorithm although has  $O(n \log n)$  time complexity and performs very well on smaller data sets.

## REFERENCES

- [1] L. K. Grover, "A fast quantum mechanical algorithm for database search," in *Proceedings of the twenty-eighth annual ACM symposium on Theory of computing*, 1996, pp. 212-219.
- [2] L. K. Grover, "Quantum mechanics helps in searching for a needle in a haystack," *Physical review letters*, vol. 79, pp. 325-328, 1997.
- [3] A. Singh and S. Singh, "Applying quantum search to automated test pattern generation for VLSI circuits," *International Journal of Quantum Information*, vol. 1, pp. 79-91, 2003.
- [4] A. Mutiara and R. Refianti, "Simulation of Grover's Algorithm Quantum Search in a Classical Computer," *International Journal of Computer Science*, vol. 8, 1994.
- [5] H. Miyajima, N. Shigei, and K. Arima, "Some quantum search algorithms for arbitrary initial amplitude distribution," in *Natural Computation (ICNC), 2010 Sixth International Conference on*, 2010, pp. 603-608.
- [6] D. S. Oliveira, P. Melo de Sousa, and R. V. Ramos, "Quantum search algorithm using quantum bit string comparator," in *Telecommunications Symposium, 2006 International*, 2006, pp. 582-585.
- [7] D. Bruß, "Characterizing entanglement," *Journal of Mathematical Physics*, vol. 43, pp. 4237-4251, 2002.
- [8] D. Porto, S. Ulyanov, and S. Panfilov, "Hardware implementation of fast quantum searching algorithms and its application in quantum soft computing and intelligent control," in *Automation Congress, 2004. Proceedings. World*, 2004, pp. 117-122.
- [9] R. Nevels, J. Jeong, and P. Hemmer, "Microwave simulation of Grover's quantum search algorithm," *Antennas and Propagation Magazine, IEEE*, vol. 48, pp. 38-47, 2006.
- [10] S. Imre, "Quantum Existence Testing and Its Application for Finding Extreme Values in Unsorted Databases," *Computers, IEEE Transactions on*, vol. 56, pp. 706-710, 2007.
- [11] M. S. Emami, M. R. Fattahi, and H. Keshmiri, "Comparison between New Quantum Approaches for Finding the Minimum or the Maximum of an

- Unsorted Set of Integers," in *Computer and Information Science, 2008. ICIS 08. Seventh IEEE/ACIS International Conference on*, 2008, pp. 41-46.
- [12] G. L. Long, "Searching an unsorted database in quantum computers and duality quantum computers," in *Natural Computation, 2009. ICNC'09. Fifth International Conference on*, 2009, pp. 588-592.
- [13] M. Santha, "Quantum walk based search algorithms," in *Theory and Applications of Models of Computation*, ed: Springer, 2008, pp. 31-46.
- [14] K. Arima, N. Shigei, and H. Miyajima, "A Proposal of a Quantum Search Algorithm," in *Computer Sciences and Convergence Information Technology, 2009. ICCIT'09. Fourth International Conference on*, 2009, pp. 1559-1564.
- [15] R. Vidya, H. Phaneendra, and M. Shivakumar, "Quantum algorithms and hard problems," in *Cognitive Informatics, 2006. ICCI 2006. 5th IEEE International Conference on*, 2006, pp. 783-787.
- [16] J. Maziero, H. Guzman, L. Céleri, M. Sarandy, and R. Serra, "Quantum and classical thermal correlations in the XY spin-1/2 chain," *Physical Review A*, vol. 82, p. 012106, 2010.
- [17] D. S. Oliveira and R. V. Ramos, "Quantum bit string comparator: circuits and applications," *Quantum Computers and Computing*, vol. 7, pp. 17-26, 2007.