

EDS Lab Assignments

Practical5

Name: Harshal Dhanait

PRN:202501040049

5.1.1 Stacked Plot

Problem Statement:

Create a stacked area plot to visualize the temperature variations for three different cities (City A, City B, and City C) across the months of the year. The temperature data is provided for each city in the editor.

Your task is to:

- Create a stacked area plot using the data.
- Label the x-axis as "Month", the y-axis as "Temperature", and provide the title "Temperature Variation" for the plot.
- Display the plot showing the temperature variation for each city throughout the months of the year.

Code:

```
import matplotlib.pyplot as plt
import pandas as pd
```

```
# Data for Months and Temperature for three cities
```

```
data = {
    'Month': ['January', 'February', 'March', 'April', 'May', 'June', 'July', 'August',
'September', 'October', 'November', 'December'],
    'City_A_Temperature': [5, 7, 10, 13, 17, 20, 22, 21, 18, 12, 8, 6],
    'City_B_Temperature': [2, 3, 5, 6, 10, 14, 16, 17, 12, 9, 5, 3],
    'City_C_Temperature': [3, 4, 6, 8, 9, 12, 15, 14, 10, 7, 4, 2]
}
```


```
# Write your code...
```

```
df = pd.DataFrame(data)
```

```
plt.stackplot(df['Month'], df['City_A_Temperature'], df['City_B_Temperature'],
df['City_C_Temperature'])
plt.xlabel('Month')
plt.ylabel('Temperature')
plt.title('Temperature Variation')
```

```
plt.legend(loc = 'upper left')
plt.show()
```

Output:

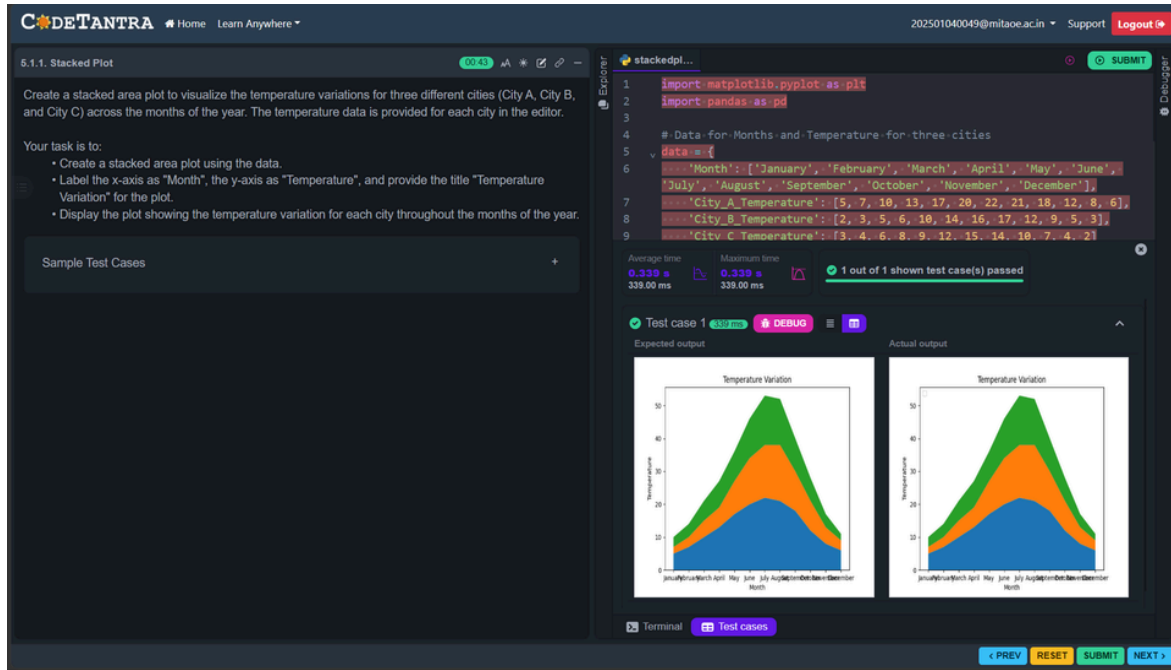

5.2.1 Titanic Dataset

Problem Statement:

Write a Python program to analyze and visualize data from the Titanic dataset based on the following instructions:

Dataset Information:

The dataset is stored in a CSV file named `titanic.csv` and has been loaded using the pandas library. It contains the following columns:

- Pclass: Passenger class (1 = First, 2 = Second, 3 = Third).
- Gender: Gender of the passenger (male/female).
- Age: Age of the passenger.
- Survived: Survival status (0 = Did not survive, 1 = Survived).
- Fare: Ticket fare paid by the passenger.

Visualization:

To represent these trends, you will create 5 visualizations using Matplotlib. The visualizations should be arranged in a 3x2 grid (3 rows and 2 columns).

Visualization Details:

Write the code to create a series of visualizations as follows:

Bar Plot (Pclass Distribution):

- Create a bar plot to show the distribution of passengers across the different passenger classes (Pclass).
- Use the color `skyblue` for the bars.
- Title the plot as "**Passenger Class Distribution**".
- Label the x-axis as "**Pclass**" and the y-axis as "**Count**".

Pie Chart (Gender Distribution):

- Create a pie chart to display the distribution of male and female passengers.
- Use `lightblue` for males and `lightcoral` for females.
- Include percentages on the slices (use `autopct='%1.1f%%'`).
- Title the plot as "**Gender Distribution**".

Histogram (Age Distribution):

- Create a histogram to visualize the distribution of passengers' ages.
- Use `lightgreen` for the bars with black edges (`edgecolor = 'black'`).
- Set the number of bins to **8** for the histogram.
- Title the plot as "**Age Distribution**".
- Label the x-axis as "**Age**" and the y-axis as "**Frequency**".

Bar Plot (Survival Count):

- Create a bar plot to show the count of passengers who survived and those who did not, based on the Survived column.
- Use the colors `lightblue` for survivors (1) and `lightcoral` for non-survivors (0).
- Title the plot as "**Survival Count**".
- Label the x-axis as "**Survived (0 = No, 1 = Yes)**" and the y-axis as "**Count**".

Scatter Plot (Fare vs Age):

- Create a scatter plot to visualize the relationship between the Fare and Age of passengers.
- Use `orange` for the data points.

- Title the plot as "**Fare vs Age**".
- Label the x-axis as "**Age**" and the y-axis as "**Fare**".

Code:

```
import pandas as pd
import matplotlib.pyplot as plt

# Load the Titanic dataset from the CSV file
df = pd.read_csv('titanic.csv')

# Set up the figure for 5 subplots
fig, axes = plt.subplots(3, 2, figsize=(12, 12))

# Plot 1: Count of passengers by class
axes[0, 0].bar(df['Pclass'].value_counts().index, df['Pclass'].value_counts(),
               color='skyblue')
axes[0, 0].set_title("Passenger Class Distribution")
axes[0, 0].set_xlabel("Pclass")
axes[0, 0].set_ylabel("Count")

# Plot 2: Gender distribution
axes[0, 1].pie(df['Gender'].value_counts(), labels=df['Gender'].value_counts().index,
               autopct='%1.1f%%', colors=['lightblue', 'lightcoral'])
axes[0, 1].set_title("Gender Distribution")

# Plot 3: Age distribution
axes[1, 0].hist(df['Age'].dropna(), bins=8, color='lightgreen', edgecolor='black')
axes[1, 0].set_title("Age Distribution")
axes[1, 0].set_xlabel("Age")
axes[1, 0].set_ylabel("Frequency")

# Plot 4: Survival count
axes[1, 1].bar(df['Survived'].value_counts().index, df['Survived'].value_counts(),
               color=['lightblue', 'lightcoral'])
axes[1, 1].set_title("Survival Count")
axes[1, 1].set_xlabel("Survived (0 = No, 1 = Yes)")
axes[1, 1].set_ylabel("Count")

# Plot 5: Fare vs Age
axes[2, 0].scatter(df['Age'], df['Fare'], color='orange', edgecolors='black')
axes[2, 0].set_title("Fare vs Age")
axes[2, 0].set_xlabel("Age")
```

```
axes[2, 0].set_ylabel("Fare")
```

```
plt.tight_layout()
```

```
plt.show()
```

Output:

CODETANTRA Home Learn Anywhere 202501040049@mitaoe.ac.in Support Logout

5.2.1. Titanic Dataset

Write a Python program to analyze and visualize data from the Titanic dataset based on the following instructions:

Dataset Information:
The dataset is stored in a CSV file named `titanic.csv` and has been loaded using the `pandas` library. It contains the following columns:

- `Pclass`: Passenger class (1 = First, 2 = Second, 3 = Third).
- `Gender`: Gender of the passenger (male/female).
- `Age`: Age of the passenger.
- `Survived`: Survival status (0 = Did not survive, 1 = Survived).
- `Fare`: Ticket fare paid by the passenger.

Visualization:
To represent these trends, you will create 5 visualizations using Matplotlib. The visualizations should be arranged in a 3x2 grid (3 rows and 2 columns).

Visualization Details:
Write the code to create a series of visualizations as follows:

Bar Plot (Pclass Distribution):

- Create a bar plot to show the distribution of passengers across the different passenger classes (`Pclass`).
- Use the color `skyblue` for the bars.
- Title the plot as "Passenger Class Distribution".
- Label the x-axis as "Pclass" and the y-axis as "Count".

Pie Chart (Gender Distribution):


- Create a pie chart to display the distribution of male and female passengers.
- Use `lightblue` for males and `lightcoral` for females.
- Include percentages on the slices (use `autopct='%1.1f%%'`).
- Title the plot as "Gender Distribution".

Code Editor:


```
1 import pandas as pd
2 import matplotlib.pyplot as plt
3
4 # Load the Titanic dataset from the CSV file
5 df = pd.read_csv('titanic.csv')
6
7 # Set up the figure for 5 subplots
8 fig, axes = plt.subplots(3, 2, figsize=(12, 12))
9
10 # write the code...
```

Test Results:
Average time: 1.013 s, Maximum time: 1.013 s, 1 out of 1 shown test case(s) passed.

Expected output:



Actual output:



Terminal Test cases

< PREV RESET SUBMIT NEXT >

5.2.2 Histogram of Passenger Information of Titanic

Problem Statement:

Write a Python code to plot a histogram for the distribution of the 'Age' column from the Titanic dataset. The histogram should display the frequency of different age ranges with the following specifications:

1. Use **30 bins** for the histogram.
2. Set the **edge color** of the bars to **black (k)**.
3. Label the x-axis as '**Age**' and the y-axis as '**Frequency**'.
4. Add the title "**Age Distribution**" to the histogram.

Code:

```
import pandas as pd
import matplotlib.pyplot as plt

# Load the Titanic dataset
data = pd.read_csv('Titanic-Dataset.csv')

# Data Cleaning
data['Age'].fillna(data['Age'].median(), inplace=True)
data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
data.drop('Cabin', axis=1, inplace=True)

# Convert categorical features to numeric
data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)

# Write your code here for Histogram
plt.hist(data['Age'], bins = 30, edgecolor = 'k')
plt.title("Age Distribution")
plt.xlabel('Age')
plt.ylabel("Frequency")
plt.show()
```

Output:

CODETANTRA

Home Learn Anywhere

202501040049@mitaoe.ac.in Support Logout

5.2.2. Histogram of passenger information of Titanic

00:00

Write a Python code to plot a histogram for the distribution of the 'Age' column from the Titanic dataset. The histogram should display the frequency of different age ranges with the following specifications:

1. Use 30 bins for the histogram.
2. Set the edge color of the bars to black (k).
3. Label the x-axis as 'Age' and the y-axis as 'Frequency'.
4. Add the title "Age Distribution" to the histogram.

The Titanic dataset contains columns as shown below,

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Sample Data:

```
PassengerId, Survived, Pclass, Name, Sex, Age, SibSp, Parch, Ticket, Fare, Cabin, Embarked
1,0,1,"Braund, Mr. Owen Harris",male,22,1,0,0,21171,7.25,,S
2,1,1,"Cumings, Mrs. John Bradley (Florence Briggs Thayer)",female,38,1,0,PC 17599,71.2833,C85,C
3,1,1,"Heikkinen, Miss. Laina",female,26,0,0,STON/O2, 3101282,7.925,,S
4,1,1,"Allcott, Mrs. Josephine (Ellen Davis)",female,35,1,0,113803,53.1,C123,S
5,0,1,"Allen, Mr. William Henry",male,35,0,0,17460,0.09,,S
6,0,1,"Brown, Mr. Tom",male,0,0,35087,0.4583,Q
7,0,1,"McCarthy, Mr. Timothy J",male,34,0,0,17463,51.6625,E46,S
8,0,1,"Wilson, Master Gosta Leonard",male,1,1,1,349909,21.015,,S
9,1,1,"Abelson, Mrs. Oscar W (Ellenest Vilhelmina Berg)",female,27,0,2,347742,11.1333,,S
10,1,2,"Garcia, Mrs. Nicholas (Marta Antona)",female,18,1,0,237736,16.0708,,C
```

Note: Refer to the visible test case for better reference.

Histogram...

1
2
3
4
5
6
7
8
9

import pandas as pd
import matplotlib.pyplot as plt

Load the Titanic dataset
data = pd.read_csv('Titanic-Dataset.csv')

Data Cleaning
data['Age'].fillna(data['Age'].median(), inplace=True)

Average time: 0.308 s
Maximum time: 0.308 s
308.00 ms

1 out of 1 shown test case(s) passed

Test case 1

Expected output

Actual output

Age Distribution

Age Distribution

Age

Age

Frequency

Frequency

Terminal

Test cases

PREV RESET SUBMIT NEXT

5.2.3 Bar Plot of Survival Rate of Passengers

Problem Statement:

Write a Python code to plot a bar chart that shows the count of passengers who survived and did not survive in the Titanic dataset. The chart should display the following specifications:

1. Use the '**Survived**' column to show the count of survivors (0 = Did not survive, 1 = Survived).
2. Set the chart type to '**bar**'.
3. Add the title "**Survival Count**" to the chart.
4. Label the x-axis as '**Survived**' and the y-axis as '**Count**'.

Code:

```
import pandas as pd
import matplotlib.pyplot as plt

# Load the Titanic dataset
data = pd.read_csv('Titanic-Dataset.csv')

# Data Cleaning
data['Age'].fillna(data['Age'].median(), inplace=True)
data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
data.drop('Cabin', axis=1, inplace=True)

# Convert categorical features to numeric
data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)

# Write your code here for Bar Plot for Survival Rate
survival_counts = data['Survived'].value_counts()
survival_counts.plot(kind='bar')
plt.title('Survival Count')
plt.xlabel('Survived')
plt.ylabel('Count')
plt.show()
```


Output:

5.2.3. Bar plot of survival rate of passengers

0424

Write a Python code to plot a bar chart that shows the count of passengers who survived and did not survive in the Titanic dataset. The chart should display the following specifications:
1. Use the 'Survived' column to show the count of survivors (0 = Did not survive, 1 = Survived).
2. Set the chart type to 'bar'.
3. Add the title 'Survival Count' to the chart.
4. Label the x-axis as 'Survived' and the y-axis as 'Count'.

The Titanic dataset contains columns as shown below.

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Sample Data:

```
PassengerId, Survived, Pclass, Name, Sex, Age, SibSp, Parch, Ticket, Fare, Cabin, Embarked
1,0,3,"Braund, Mr. Owen Hart",male,22,1,0,A/5 21171,7.25,,S
2,1,1,"Cumings, Mrs. John Bradley",female,38,1,0,PC 17599,71.2833,C85,C
3,1,3,"Heikkinen, Miss. Laina",female,26,0,0,STON/O2. 3101282,7.92,,S
4,1,1,"Kulkile, Mrs. Jacques Heath (Llly May Peel)",female,35,1,0,113803,53.1,C123,S
5,0,3,"Allen, Mr. William Henry",male,35,0,0,173450,8.05,,S
6,0,3,"Noran, Mr. James",male,0,0,330877,0.4583,,Q
7,0,1,"McCarthy, Mr. Timothy J",male,54,0,0,17463,51.0625,E46,S
8,0,3,"Palsson, Nector. Gosta Leonard",male,2,1,1,343909,21.075,,S
9,1,3,"Johnson, Mrs. Oscar W (Ellenest Vilhelmsdottir)",female,27,0,2,347742,11.1333,S
10,1,2,"Nasser, Mrs. Nicholas (Makie Akhew)",female,14,1,0,127736,30.0700,,C
```

Note: Refer to the visible test case for better reference.

BarPlotOf...

SUBMIT

1
2
3
4
5
6
7
8

import pandas as pd
import matplotlib.pyplot as plt

Load the Titanic dataset
data = pd.read_csv('Titanic-Dataset.csv')

Data Cleaning
data = data.dropna()

Average time: 0.327 s
Maximum time: 0.327 s
327.00 ms

1 out of 1 shown test case(s) passed

Test case 1

DEBUG

Expected output

Actual output

Survival Count

Terminal

Test cases

PREV

RESET

SUBMIT

NEXT

5.2.4 Bar Plot for Survival by Gender

Problem Statement:

Write a Python code to plot a stacked bar chart that shows the count of passengers who survived and did not survive, grouped by gender, in the Titanic dataset. The chart should display the following specifications:

1. Group the data by the '**Sex**' column, then use the **value_counts()** function to count the occurrences of survivors (0 = Did not survive, 1 = Survived) for each gender.
2. Use a **stacked bar chart** to display the survival counts.
3. Add the title "**Survival by Gender**" to the chart.
4. Label the x-axis as '**Gender**' and the y-axis as '**Count**'.
5. The legend should indicate '**Not Survived**' and '**Survived**'.

Code:

```
import pandas as pd
import matplotlib.pyplot as plt

# Load the Titanic dataset
data = pd.read_csv('Titanic-Dataset.csv')

# Data Cleaning
data['Age'].fillna(data['Age'].median(), inplace=True)
data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
data.drop('Cabin', axis=1, inplace=True)

# Convert categorical features to numeric
data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)

# Write your code here for Bar Plot for Survival by Gender
survived_counts = data.groupby('Sex')['Survived'].value_counts().unstack()
survived_counts.plot(kind = 'bar', stacked = True)

plt.title('Survival by Gender')
plt.xlabel('Gender')
plt.ylabel('Count')
plt.legend(['Not Survived', 'Survived'])
plt.show()
```

Output:

CODETANTRA

Home Learn Anywhere

202501040049@mitaoe.ac.in Support Logout

5.2.4. Bar Plot for Survival by Gender

08:51

Write a Python code to plot a stacked bar chart that shows the count of passengers who survived and did not survive, grouped by gender, in the Titanic dataset. The chart should display the following specifications:

1. Group the data by the 'Sex' column, then use the `value_counts()` function to count the occurrences of survivors (0 = Did not survive, 1 = Survived) for each gender.
2. Use a stacked bar chart to display the survival counts.
3. Add the title "Survival by Gender" to the chart.
4. Label the x-axis as 'Gender' and the y-axis as 'Count'.
5. The legend should indicate 'Not Survived' and 'Survived'.

The Titanic dataset contains columns as shown below,

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked
1	0	3	Braund, Mr. Owen Harris	male	22	1	0	A/5 21171	7.25		S
2	1	1	Cummings, Mrs. John Bradley (Florence Briggs Thayer)	female	38	1	0	PC 17599	71.2833	C85	C
3	1	3	Heikkinen, Miss. Laina	female	26	0	0	STON/O2	31.00		S
4	1	1	Falkenber, Mrs. J. (Jane Marshall)	female	35	1	0	113803	53.1	C123	S
5	0	3	O'Brien, Mr. William Henry	male	35	0	0	373450	6.45		S
6	0	3	Brown, Mr. James	male	0	0	0	10877	6.45		S
7	0	1	McCarthy, Mr. Timothy J.	male	54	0	0	51	86.25	E46	S
8	0	1	Palsson, Master. Gosta Leonard	male	2	1	1	349909	21.075		S
9	1	1	Johnson, Mrs. Oscar W (Elisabeth Vilhelmina Berg)	female	27	0	2	347742	11.1333		S
10	1	2	Beesley, Mrs. Nicholas (Adeline Archibald)	female	14	1	0	237736	30.0708		C

Sample Data:

```
PassengerId, Survived, Pclass, Name, Sex, Age, SibSp, Parch, Ticket, Fare, Cabin, Embarked
1,0,3,"Braund, Mr. Owen Harris",male,22,1,0,A/5 21171,7.25,,S
2,1,1,"Cummings, Mrs. John Bradley (Florence Briggs Thayer)",female,38,1,0,PC 17599,71.2833,C85,C
3,1,3,"Heikkinen, Miss. Laina",female,26,0,0,STON/O2 3101282,7.925,,S
4,1,1,"Falkenber, Mrs. J. (Jane Marshall)",female,35,1,0,113803,53.1,C123,S
5,0,3,"O'Brien, Mr. William Henry",male,35,0,0,373450,6.45,,S
6,0,3,"Brown, Mr. James",male,0,0,10877,6.45,,S
7,0,1,"McCarthy, Mr. Timothy J.",male,54,0,0,51,86.25,E46,S
8,0,1,"Palsson, Master. Gosta Leonard",male,2,1,1,349909,21.075,,S
9,1,1,"Johnson, Mrs. Oscar W (Elisabeth Vilhelmina Berg)",female,27,0,2,347742,11.1333,,S
10,1,2,"Beesley, Mrs. Nicholas (Adeline Archibald)",female,14,1,0,237736,30.0708,,C
```

BarPlotOf...

1 import pandas as pd
2 import matplotlib.pyplot as plt
3
4 # Load the Titanic dataset
5 data = pd.read_csv('Titanic-Dataset.csv')
6
7 # Data Cleaning
8 data['Age'].fillna(data['Age'].median(), inplace=True)
9 data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
10 # Save the cleaned dataset to a new file
11 data.to_csv('Titanic-Cleaned.csv', index=False)

Average time: 0.357 s
Maximum time: 0.357 s
1 out of 1 shown test case(s) passed

Test case 1
Expected output
Actual output

Terminal Test cases

< PREV RESET SUBMIT NEXT >

5.2.5 Bar Plot for Survival by Pclass

Problem Statement:

Write a Python code to plot a stacked bar chart that shows the count of passengers who survived and did not survive, grouped by passenger class (**Pclass**), in the Titanic dataset. The chart should display the following specifications:

- 1.Group the data by the **Pclass** column and count the number of survivors (0 = Did not survive, 1 = Survived) for each class using **value_counts()**.
- 2.Use a **stacked bar chart** to display the survival counts.
- 3.Add the title "**Survival by Pclass**" to the chart.
- 4.Label the x-axis as '**Pclass**' and the y-axis as '**Count**'.
- 5.The legend should indicate '**Not Survived**' and '**Survived**'.

Code:

```
import pandas as pd
import matplotlib.pyplot as plt

# Load the Titanic dataset
data = pd.read_csv('Titanic-Dataset.csv')

# Data Cleaning
data['Age'].fillna(data['Age'].median(), inplace=True)
data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
data.drop('Cabin', axis=1, inplace=True)

# Convert categorical features to numeric
data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)

# Write your code here for Bar Plot for Survival by Pclass
survival_counts = data.groupby('Pclass')['Survived'].value_counts().unstack().fillna(0)

survival_counts.plot(kind = 'bar', stacked=True)

plt.title('Survival by Pclass')
plt.xlabel('Pclass')
plt.ylabel('Count')

plt.legend(['Not Survived', 'Survived'])
plt.show()
```

Output:

CODETANTRA

Home Learn Anywhere

202501040049@mltaoe.ac.in Support Logout

6.2.5. Bar Plot for Survival by Pclass

0422

Write a Python code to plot a stacked bar chart that shows the count of passengers who survived and did not survive, grouped by passenger class (Pclass), in the Titanic dataset. The chart should display the following specifications:

1. Group the data by the Pclass column and count the number of survivors (0 = Did not survive, 1 = Survived) for each class using `value_counts()`.
2. Use a stacked bar chart to display the survival counts.
3. Add the title "Survival by Pclass" to the chart.
4. Label the x-axis as 'Pclass' and the y-axis as 'Count'.
5. The legend should indicate 'Not Survived' and 'Survived'.

The Titanic dataset contains columns as shown below,

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked	
1	0	3	Braund, Mr. Owen Harris	male	22	1	0	A/5 21171	7.25	5		
2	1	1	Gundeg, Mrs. John Bradley (Florence Briggs Thayer)	female	38	1	0	PC 17599	71.2833	C85	C	
3	1	1	Heikkinen, Miss. Laina	female	26	0	0	STON/O2	31.00182	7	5	
4	1	1	Kivela, Mr. Juho	male	32	0	0	9641	53.1	113803	53	1
5	0	3	Allen, Mr. William Henry	male	35	0	0	373450	8.05	5		
6	0	3	Thorne, Mr. James	male	0	0	0	110877	8.4583	0		
7	0	1	McCarthy, Mr. Timothy J	male	54	0	0	17463	51.8625	E46	5	
8	0	1	Palsson, Master. Gosta Leonard	male	2	1	1	349909	21.075	5		
9	1	1	Johnson, Mrs. Oscar W (Elisabeth Vilhelmina Berg)	female	27	0	2	347742	11.1333	5		
10	1	2	Nasser, Mrs. Nicholas (Adelie Acheson)	female	14	1	0	237736	30.0708	C		

Sample Data:

```
PassengerId, Survived, Pclass, Name, Sex, Age, SibSp, Parch, Ticket, Fare, Cabin, Embarked
1,0,3,"Braund, Mr. Owen Harris",male,22,1,0,A/5 21171,7.25,,5
2,1,1,"Gundeg, Mrs. John Bradley (Florence Briggs Thayer)",female,38,1,0,PC 17599,71.2833,C85,C
3,1,1,"Heikkinen, Miss. Laina",female,26,0,0,STON/O2 3101282,7.925,,5
4,1,1,"Kivela, Mr. Juho",male,32,0,0,9641,53.1,113803,53,1,C123,5
5,0,3,"Allen, Mr. William Henry",male,35,0,0,373450,8.05,,5
6,0,3,"Thorne, Mr. James",male,0,0,110877,8.4583,,0
7,0,1,"McCarthy, Mr. Timothy J",male,54,0,0,17463,51.8625,E46,5
8,0,1,"Palsson, Master. Gosta Leonard",male,2,1,1,349909,21.075,,5
9,1,1,"Johnson, Mrs. Oscar W (Elisabeth Vilhelmina Berg)",female,27,0,2,347742,11.1333,,5
10,1,2,"Nasser, Mrs. Nicholas (Adelie Acheson)",female,14,1,0,237736,30.0708,,C
```

BarPlotOf...

1import pandas as pd
2import matplotlib.pyplot as plt
3
4# Load the Titanic dataset
5data = pd.read_csv('Titanic-Dataset.csv')
6
7# Data Cleaning
8data['Age'].fillna(data['Age'].median(), inplace=True)
9data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
10data['Survived'] = data['Survived'].astype(int)
11

Average time: 0.401 s, Maximum time: 0.401 s, 1 out of 1 shown test case(s) passed

Test case 1: PASS, DEBUG

Expected output:

Actual output:

Terminal, Test cases

PREV, RESET, SUBMIT, NEXT

5.2.6 Bar Plot for Survival by Embarked

Problem Statement:

Write a Python code to plot a stacked bar chart showing the survival count for passengers based on their embarkation location in the Titanic dataset.

The chart should display the following specifications:

1. Use the **Embarked** column to determine the embarkation location. After converting this column into dummy variables (using **pd.get_dummies()**), plot the survival count based on the **Embarked_Q** column (representing passengers who embarked from Queenstown) in relation to survival.
2. Set the chart type to 'bar' and make it stacked.
3. Add the title "**Survival by Embarked** " to the chart.
4. Label the x-axis as '**Embarked**' and the y-axis as '**Count**'.
5. Include a legend to distinguish between survivors and non-survivors (label the legend as '**Survived**' and '**Not Survived**').

Code:

```
import pandas as pd
import matplotlib.pyplot as plt

# Load the Titanic dataset
data = pd.read_csv('Titanic-Dataset.csv')

# Data Cleaning
data['Age'].fillna(data['Age'].median(), inplace=True)
data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
data.drop('Cabin', axis=1, inplace=True)

# Convert categorical features to numeric
data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)

# Write your code here for Bar Plot for Survival by Embarked
survival_counts = data.groupby('Embarked_Q')
                        ['Survived'].value_counts().unstack().fillna(0)

survival_counts.plot(kind = 'bar', stacked = True)
plt.title('Survival by Embarked')
plt.xlabel('Embarked')
plt.ylabel('Count')
plt.legend(['Not Survived', 'Survived'])
plt.show()
```

Output:

CODETANTRA

Home Learn Anywhere

202501040049@mitaoe.ac.in Support Logout

5.2.6. Bar Plot for Survival by Embarked

03:11

Write a Python code to plot a stacked bar chart showing the survival count for passengers based on their embarkation location in the Titanic dataset.

The chart should display the following specifications:

1. Use the Embarked column to determine the embarkation location. After converting this column into dummy variables (using `pd.get_dummies()`), plot the survival count based on the Embarked_Q column (representing passengers who embarked from Queenstown) in relation to survival.
2. Set the chart type to 'bar' and make it stacked.
3. Add the title "Survival by Embarked" to the chart.
4. Label the x-axis as 'Embarked' and the y-axis as 'Count'.
5. Include a legend to distinguish between survivors and non-survivors (label the legend as 'Survived' and 'Not Survived').

The Titanic dataset contains columns as shown below,

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Sample Data:

```
PassengerId, Survived, Pclass, Name, Sex, Age, SibSp, Parch, Ticket, Fare, Cabin, Embarked
1,0,3, Braund, Mr. Owen Harris, male, 22, 1, 0, A/5 21171, 7.25, , S
2,1,1, Gunning, Mrs. John Bradley (Florence Briggs Thayer), female, 38, 1, 0, PC 17599, 71.2833, C85, C
3,1,3, McKenna, Miss. Laina, female, 26, 0, 0, S101/O2 3101282, 7.925, , S
4,1,1, Petrella, Mrs. Jacques Heath (Lily May Peel), female, 35, 1, 0, 113803, 53.1, C123, S
5,0,3, Allen, Mr. William Henry, male, 35, 0, 0, 174350, 8.05, , S
6,0,3, Brown, Mr. James, male, 0, 0, 38877, 8.4543, , Q
7,0,1, McCarthy, Mr. Timothy J., male, 54, 0, 0, 17460, 51.8625, E46, S
8,0,1, Palsson, Herman. Gustaf, male, 2, 1, 1, 345909, 21.075, , S
9,1,3, Anderson, Mrs. Thekla (Ellen) O'Brien, female, 39, 0, 0, 169915, 15.52, , C
```

BarPlotOf...

import matplotlib.pyplot as plt

Load the Titanic dataset

data = pd.read_csv('Titanic-Dataset.csv')

Data Cleaning

data['Age'].fillna(data['Age'].median(), inplace=True)

data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)

data.drop('Cabin', axis=1, inplace=True)

Average time: 0.391 s, Maximum time: 0.391 s, 1 out of 1 shown test case(s) passed

Test case 1

Expected output

Actual output

Survival by Embarked

Survival by Embarked

Terminal

Test cases

PREV RESET SUBMIT NEXT

5.2.7 Box Plot for Age Distribution

Problem Statement:

Write a Python code to plot a boxplot that shows the distribution of the 'Age' column from the Titanic dataset across different passenger classes. The boxplot should display the following specifications:

1. Use the **Pclass** column to group the data for the boxplot.
2. Set the title of the plot to "**Age by Pclass**".
3. Remove the default subtitle with **plt.suptitle("")**.
4. Label the x-axis as '**Pclass**' and the y-axis as '**Age**'.

Code:

```
import pandas as pd
import matplotlib.pyplot as plt

# Load the Titanic dataset
data = pd.read_csv('Titanic-Dataset.csv')

# Data Cleaning
data['Age'].fillna(data['Age'].median(), inplace=True)
data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
data.drop('Cabin', axis=1, inplace=True)

# Convert categorical features to numeric
data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)

# Write your code here for Box Plot for Age by Pclass

data.boxplot(column = 'Age', by = 'Pclass')
plt.title('Age by Pclass')
plt.suptitle("")
plt.xlabel('Pclass')
plt.ylabel('Age')
plt.show()
```


Output:

CODETANTRA

Home Learn Anywhere

202501040049@mitaoe.ac.in Support Logout

5.2.7. Box plot for Age Distribution

03:55

Write a Python code to plot a boxplot that shows the distribution of the 'Age' column from the Titanic dataset across different passenger classes. The boxplot should display the following specifications:

1. Use the Pclass column to group the data for the boxplot.
2. Set the title of the plot to "Age by Pclass".
3. Remove the default subtitle with plt.suptitle().
4. Label the x-axis as 'Pclass' and the y-axis as 'Age'.

The Titanic dataset contains columns as shown below.

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked
1	0	3	Braund, Mr. Owen Harris	male	22	1	0	A/5 21171	7.25	S	
2	1	1	Galeys, Mrs. John Bradley (Florence Briggs Thayer)	female	38	1	0	PC 17599	71.2833	C85	C
3	1	3	McKenna, Miss. Laine	female	26	0	0	STON/O2	31.00		S
4	1	1	Heikkinen, Mrs. Teuvo Antti	female	26	1	0	113803	53.1	C123	S
5	0	3	Allen, Mr. William Henry	male	35	0	0	373450	8.66		S
6	0	3	Harmon, Mr. Isaac	male	0	0	0	130877	0.4583		Q
7	0	1	McCarthy, Mr. Timothy J	male	54	0	0	17463	51.8625	E46	S
8	0	3	Nilsson, Master. Gustaf Leonard	male	2	1	1	349900	21.075		S
9	1	1	Johnson, Mrs. Oscar W (Ellenest Vilhelmina Berg)	female	27	0	2	347742	11.1333		S
10	1	2	Basson, Mrs. Nicholas (Adela Schom)	female	14	1	0	237736	30.0708		C

Sample Data:

```
PassengerId, Survived, Pclass, Name, Sex, Age, SibSp, Parch, Ticket, Fare, Cabin, Embarked
1,0,3,Braund, Mr. Owen Harris,male,22,1,0,A/5 21171,7.25,,S
2,1,1,Galeys, Mrs. John Bradley (Florence Briggs Thayer),female,38,1,0,PC 17599,71.2833,C85,C
3,1,3,McKenna, Miss. Laine,female,26,0,0,STON/O2 31.00,,S
4,1,1,Heikkinen, Mrs. Teuvo Antti,female,26,1,0,113803,53.1,C123,S
5,0,3,Allen, Mr. William Henry,male,35,0,0,373450,8.66,,S
6,0,3,Harmon, Mr. Isaac,male,0,0,0,130877,0.4583,,Q
7,0,1,McCarthy, Mr. Timothy J,male,54,0,0,17463,51.8625,E46,S
8,0,3,Nilsson, Master. Gustaf Leonard,male,2,1,1,349900,21.075,,S
9,1,1,Johnson, Mrs. Oscar W (Ellenest Vilhelmina Berg),female,27,0,2,347742,11.1333,,S
10,1,2,Basson, Mrs. Nicholas (Adela Schom),female,14,1,0,237736,30.0708,,C
```

Note: Refer to the visible test case for better reference.

BoxPlotF...

SUBMIT

1

2

3

4

5

6

7

8

9

import pandas as pd

import matplotlib.pyplot as plt

Load the Titanic dataset

data = pd.read_csv('Titanic-Dataset.csv')

Data Cleaning

data['Age'].fillna(data['Age'].median(), inplace=True)

data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)

Average time

0.376 s

376.00 ms

Maximum time

0.376 s

376.00 ms

1 out of 1 shown test case(s) passed

Test case 1

DEBUG

Expected output

Actual output

Age by Pclass

Age by Pclass

Terminal

Test cases

< PREV

RESET

SUBMIT

NEXT >

5.2.8 Box Plot for Age by Survived

Problem Statement:

Write a Python code to plot a boxplot that shows the distribution of the 'Age' column from the Titanic dataset based on whether passengers survived or not. The boxplot should display the following specifications:

1. Use the **Survived** column to group the data for the boxplot (0 = Did not survive, 1 = Survived).
2. Set the title of the plot to **"Age by Survival"**.
3. Remove the default subtitle with **plt.suptitle("")**.
4. Label the x-axis as **'Survived'** and the y-axis as **'Age'**.

Code:

```
import pandas as pd
import matplotlib.pyplot as plt

# Load the Titanic dataset
data = pd.read_csv('Titanic-Dataset.csv')

# Data Cleaning
data['Age'].fillna(data['Age'].median(), inplace=True)
data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
data.drop('Cabin', axis=1, inplace=True)

# Convert categorical features to numeric
data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)

# Write your code here for Box Plot for Age by Survived

plt.figure(figsize = (8,6))
data.boxplot(column = 'Age', by = 'Survived')
plt.title('Age by Survival')
plt.suptitle("")
plt.xlabel('Survived')
plt.ylabel('Age')
plt.show()
```

Output:

CODETANTRA

Home Learn Anywhere

202501040049@mitaoe.ac.in Support Logout

5.2.8. Box Plot for Age by Survived

Write a Python code to plot a boxplot that shows the distribution of the 'Age' column from the Titanic dataset based on whether passengers survived or not. The boxplot should display the following specifications:

1. Use the Survived column to group the data for the boxplot (0 = Did not survive, 1 = Survived).
2. Set the title of the plot to "Age by Survival".
3. Remove the default subtitle with plt.suptitle("").
4. Label the x-axis as 'Survived' and the y-axis as 'Age'.

The Titanic dataset contains columns as shown below.

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Sample Data:

```
PassengerId, Survived, Pclass, Name, Sex, Age, SibSp, Parch, Ticket, Fare, Cabin, Embarked
1,0,3,"Braund, Mr. Owen Henry", male, 22,1,0,A/5 21171,7.25,,5
2,1,3,"Gunnag, Mrs. John Bradley (Florence Briggs Thayer)", female, 36,1,0,PC 17599,71.2833,C85,C
3,1,3,"Heikkinen, Miss. Laina", female, 26,0,0,STON/O2 3101282,7.925,,5
4,1,1,"Vierikko, Mrs. Jacques Mathieu (Ellie Mary Booth)", female, 35,1,0,113803,53.1,C123,S
5,0,3,"Allen, Mr. William Henry", male, 35,0,0,173509,5.00,,5
6,0,3,"Hansen, Mr. Joonas", male, 29,0,38877,8.6531,Q
7,0,1,"McCarthy, Mr. Timothy J", male, 34,0,0,17463,51.8625,E46,S
8,0,3,"Palsson, Master. Gosta Leonard", male, 2,1,1,349909,21.075,,5
9,1,3,"Johnson, Mrs. Oscar W (Elizabeth Vilhelmina Berg)", female, 27,0,2,347742,11.1333,,5
10,1,2,"Nasser, Mrs. Nicholas (Adelie Aches)", female, 14,1,0,237736,30.0700,,C
```

Note: Refer to the visible test case for better reference.


BoxPlotF...

```
1 import pandas as pd
2 import matplotlib.pyplot as plt
3
4 # Load the Titanic dataset
5 data = pd.read_csv("Titanic-Dataset.csv")
6
7 # Data Cleaning
8 data["Age"].fillna(data["Age"].median(), inplace=True)
9 data["Embarked"].fillna(data["Embarked"].mode()[0], inplace=True)
10 data.dropna(inplace=True)
```


Average time: 0.328 s
Maximum time: 0.328 s
1 out of 1 shown test case(s) passed

Test case 1

Expected output



Actual output



Terminal Test cases

PREV RESET SUBMIT NEXT

5.2.9 Box Plot for Fare by Pclass

Problem Statement:

Write a Python code to plot a boxplot that shows the distribution of the 'Fare' column from the Titanic dataset based on the passenger class (Pclass). The boxplot should display the following specifications:

1. Use the **Pclass** column to group the data for the boxplot.
2. Set the title of the plot to "**Fare by Pclass**".
3. Remove the default subtitle with **plt.suptitle("")**.
4. Label the x-axis as '**Pclass**' and the y-axis as '**Fare**'.

Code:

```
import pandas as pd
import matplotlib.pyplot as plt

# Load the Titanic dataset
data = pd.read_csv('Titanic-Dataset.csv')

# Data Cleaning
data['Age'].fillna(data['Age'].median(), inplace=True)
data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
data.drop('Cabin', axis=1, inplace=True)

# Convert categorical features to numeric
data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)

# Write your code here for Box Plot for Fare by Pclass

plt.figure(figsize=(8,6))
data.boxplot(column='Fare', by = 'Pclass')
plt.title('Fare by Pclass')
plt.suptitle("")
plt.xlabel('Pclass')
plt.ylabel('Fare')
plt.show()
```

Output:

CODETANTRA

Home Learn Anywhere

202501040049@mitaoe.ac.in Support Logout

5.2.9. Box Plot for Fare by Pclass

Write a Python code to plot a boxplot that shows the distribution of the 'Fare' column from the Titanic dataset based on the passenger class (Pclass). The boxplot should display the following specifications:
1. Use the Pclass column to group the data for the boxplot.
2. Set the title of the plot to "Fare by Pclass".
3. Remove the default subtitle with plt.suptitle("").
4. Label the x-axis as 'Pclass' and the y-axis as 'Fare'.

The Titanic dataset contains columns as shown below,

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked
1	0	3	Brands, Mr. Owen Harris	male	22	1	0	A/5 21171	7.25	S	
2	1	1	Ward, Mrs. John Bradley (Florence Briggs Thayer)	female	38	1	0	PC 17599	71.2833	C85	C
3	1	3	McKimm, Miss. Laina	female	26	0	0	STON/O2. 3101282	7.925	S	
4	1	1	Heath, Mrs. Jacques Heath (Lllydd Elvyn)	female	35	1	0	113803	53.1	C123	S
5	0	3	Allen, Mr. William Henry	male	35	0	0	97460	8.66	S	
6	0	3	Rowe, Mr. James	male	0	0	0	330877	0.4533	Q	
7	0	1	McCarthy, Mr. Timothy J.	male	54	0	0	17463	51.8625	E46	S
8	0	3	Wilson, Master. Gust (Gordon)	male	2	3	1	349909	21.075	S	
9	1	1	Johansen, Mrs. Oscar W (Ellenest Vilhelmine Berg)	female	27	0	2	347742	11.1333	S	
10	1	2	Basson, Mrs. Nicholas (Adeline Achard)	female	14	1	0	237736	30.0708	C	

Sample Data:

PassengerId, Survived, Pclass, Name, Sex, Age, SibSp, Parch, Ticket, Fare, Cabin, Embarked
1,0,3,Brands, Mr. Owen Harris,male,22,1,0,A/5 21171,7.25,,S
2,1,1,Ward, Mrs. John Bradley (Florence Briggs Thayer),female,38,1,0,PC 17599,71.2833,C85,C
3,1,3,McKimm, Miss. Laina,female,26,0,0,STON/O2. 3101282,7.925,,S
4,1,1,Heath, Mrs. Jacques Heath (Lllydd Elvyn),female,35,1,0,113803,53.1,C123,S
5,0,3,Allen, Mr. William Henry,male,35,0,0,97460,8.66,,S
6,0,3,Rowe, Mr. James,male,0,0,330877,0.4533,Q
7,0,1,McCarthy, Mr. Timothy J.,male,54,0,0,17463,51.8625,E46,S
8,0,3,Wilson, Master. Gust (Gordon),male,2,3,1,349909,21.075,,S
9,1,1,Johansen, Mrs. Oscar W (Ellenest Vilhelmine Berg),female,27,0,2,347742,11.1333,,S
10,1,2,Basson, Mrs. Nicholas (Adeline Achard),female,14,1,0,237736,30.0708,,C

Note: Refer to the visible test case for better reference.

BoxPlotF...

```
4 #Load the Titanic dataset
5 data = pd.read_csv('Titanic-Dataset.csv')
6
7 #Data Cleaning
8 data['Age'].fillna(data['Age'].median(), inplace=True)
9 data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
10 data.drop('Cabin', axis=1, inplace=True)
11
12 #Convert categorical features to numeric
13 data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
```

Average time: 0.293 s, 293.00 ms | Maximum time: 0.293 s, 293.00 ms | 1 out of 1 shown test case(s) passed

Test case 1 | Expected output: Fare by Pclass boxplot | Actual output: Fare by Pclass boxplot

Terminal | Test cases

PREV RESET SUBMIT NEXT

5.2.10 Scatter Plot for Age vs. Fare

Problem Statement:

Write a Python code to plot a scatter plot showing the relationship between the 'Age' and 'Fare' columns in the Titanic dataset. The scatter plot should display the following specifications:

1. Use the **Age** column for the x-axis and the **Fare** column for the y-axis.
2. Set the title of the plot to "**Age vs. Fare**".
3. Label the x-axis as '**Age**' and the y-axis as '**Fare**'.

Code:

```
import pandas as pd
import matplotlib.pyplot as plt

# Load the Titanic dataset
data = pd.read_csv('Titanic-Dataset.csv')

# Data Cleaning
data['Age'].fillna(data['Age'].median(), inplace=True)
data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
data.drop('Cabin', axis=1, inplace=True)

# Convert categorical features to numeric
data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)

# Write your code here for Box Plot for Fare by Pclass

plt.figure()
plt.scatter(data['Age'], data['Fare'])
plt.title('Age vs. Fare')
plt.xlabel('Age')
plt.ylabel('Fare')
plt.show()
```

Output:

CODETANTRA

Home Learn Anywhere

202501040049@mitaoe.ac.in Support Logout

5.2.10. Scatter Plot for Age vs. Fare

Write a Python code to plot a scatter plot showing the relationship between the 'Age' and 'Fare' columns in the Titanic dataset. The scatter plot should display the following specifications:
1. Use the Age column for the x-axis and the Fare column for the y-axis.
2. Set the title of the plot to "Age vs. Fare".
3. Label the x-axis as 'Age' and the y-axis as 'Fare'.

The Titanic dataset contains columns as shown below.

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Sample Data:

PassengerId, Survived, Pclass, Name, Sex, Age, SibSp, Parch, Ticket, Fare, Cabin, Embarked
1,0,3,"Braund, Mr. Owen Harris",male,22,1,0,A/5 21171,7.25,,S
2,1,1,"Cumings, Mrs. John Bradley (Florence Briggs Thayer)",female,38,1,0,PC 17599,71.283,C85,C
3,1,3,"Heikkinen, Miss. Laina",female,26,0,0,STON/O2. 3101282,7.925,,S
4,1,1,"Futrelle, Mrs. Jacques Heath (Llano Mrs. Felt)",female,35,1,0,113803,53.1,C123,S
5,0,3,"Allen, Mr. William Henry",male,35,0,0,373450,8.05,,S
6,0,3,"Brown, Mr. Sam",male,0,0,330877,0.4583,,Q
7,0,1,"McCarthy, Mr. Timothy J",male,54,0,0,17463,21.8625,E46,S
8,0,3,"Palsson, Master. Gosta Leonard",male,2,1,1,349909,21.075,,S
9,1,3,"Johnson, Mrs. Oscar W (Elisabeth Vilhelmina Berg)",female,27,0,2,347742,11.1333,,S
10,1,2,"Nasser, Mrs. Nicholas (Adeline Archambault)",female,14,1,0,237736,30.0708,,C

Note: Refer to the visible test case for better reference.

Sample Test Cases

AgeFareS...

1 import pandas as pd
2 import matplotlib.pyplot as plt
3
4 # Load the Titanic dataset
5 data = pd.read_csv('Titanic-Dataset.csv')
6
7 # Data Cleaning
8 data['Age'].fillna(data['Age'].median(), inplace=True)
9 data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
10 data.drop('Cabin', axis=1, inplace=True)

Average time 0.243 s
Maximum time 0.243 s
1 out of 1 shown test case(s) passed

Test case 1
Expected output
Actual output

Age vs. fare
Age vs. fare

Terminal Test cases

PREV RESET SUBMIT NEXT

5.2.11 Scatter Plot for Age vs. Fare by Survived

Problem Statement:

Write a Python code to plot a scatter plot showing the relationship between the 'Age' and 'Fare' columns in the Titanic dataset, with points color-coded by survival status. The scatter plot should display the following specifications:

1. Use the **Age** column for the x-axis and the **Fare** column for the y-axis.
2. Color the points based on the **Survived** column: **Red** for passengers who did not survive (**Survived = 0**). **Blue** for passengers who survived (**Survived = 1**).
3. Set the title of the plot to "**Age vs. Fare by Survival**".
4. Label the x-axis as '**Age**' and the y-axis as '**Fare**'.

Code:

```
import pandas as pd
import matplotlib.pyplot as plt

# Load the Titanic dataset
data = pd.read_csv('Titanic-Dataset.csv')

# Data Cleaning
data['Age'].fillna(data['Age'].median(), inplace=True)
data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
data.drop('Cabin', axis=1, inplace=True)

# Convert categorical features to numeric
data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)

# Write your code here for Scatter Plot for Age vs. Fare by Survived

colors = data['Survived'].map({0: 'red', 1: 'blue'})
plt.scatter(data['Age'], data['Fare'], c=colors)

plt.title("Age vs. Fare by Survival")
plt.xlabel('Age')
plt.ylabel('Fare')
plt.show()
```


Output:

CODETANTRA

Home Learn Anywhere

202501040049@mitaoe.ac.in Support Logout

5.2.11. Scatter Plot for Age vs. Fare by Survived

033

AA

*

Write a Python code to plot a scatter plot showing the relationship between the 'Age' and 'Fare' columns in the Titanic dataset, with points color-coded by survival status. The scatter plot should display the following specifications:

1. Use the Age column for the x-axis and the Fare column for the y-axis.
2. Color the points based on the Survived column: Red for passengers who did not survive (Survived = 0). Blue for passengers who survived (Survived = 1).
3. Set the title of the plot to "Age vs. Fare by Survival".
4. Label the x-axis as 'Age' and the y-axis as 'Fare'.

The Titanic dataset contains columns as shown below.

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Sample Data:

```
PassengerId, Survived, Pclass, Name, Sex, Age, SibSp, Parch, Ticket, Fare, Cabin, Embarked
1,0,3,"Braund, Mr. Owen Harris",male,22,1,0,A/5 21171,7.25,,S
2,1,1,"Cumings, Mrs. John Bradley (Florence Briggs Thayer)",female,38,1,0,PC 17599,71.2833,C85,C
3,1,3,"Heikkinen, Miss. Laina",female,26,0,0,STON/O2 3101282,7.925,,S
4,1,1,"Nottelle, Mrs. Jacques Heath (Lily May Peel)",female,35,1,0,113803,53.1,C123,S
5,0,3,"Allen, Mr. William Henry",male,35,0,0,373450,8.05,,S
6,0,3,"Moran, Mr. James",male,0,0,130877,0.4583,,Q
7,0,1,"McCarthy, Mr. Timothy J",male,54,0,0,17463,51.8625,E46,S
8,0,1,"Malison, Master. Sosta Leonard",male,2,1,1,249909,21.075,,S
9,1,1,"Johnson, Mrs. Oscar W (Ellisabeth Vilhelmina Berg)",female,27,0,2,347742,11.1333,,S
10,1,2,"Nasser, Mrs. Nicholas (Adelie Nasser)",female,14,1,0,237736,30.0708,,C
```

Note: Refer to the visible test case for better reference.

AgeFareS...

SUBMIT

1

2

3

4

5

6

7

8

9

```
1 import pandas as pd
2 import matplotlib.pyplot as plt
3
4 # Load the Titanic dataset
5 data = pd.read_csv("Titanic-Dataset.csv")
6
7 # Data Cleaning
8 data["Age"].fillna(data["Age"].median(), inplace=True)
9 data["Embarked"].fillna(data["Embarked"].mode()[0], inplace=True)
```

Average time

0.261 s

Maximum time

0.261 s

1 out of 1 shown test case(s) passed

Test case 1

Expected output

Actual output

Age vs. Fare by Survival

Age vs. Fare by Survival

Terminal

Test cases

PREV

RESET

SUBMIT