@AadishMandal

JavaScript → frontend of web apps

JavaScript → (mobile apps)

JavaScript → (desktop apps)

JavaScript → servers

JavaScript → ml

logic, interactivity

HTML + CSS + JS

@AadishMandal

→ JS is a programming language. → Guild logic

↓ (EcmaScript)

↳ capability to make decisions.

↳ Smartly do task repetition

@AadishMandal

→ Backend → $\underbrace{\text{java, C++, golang, ruby, python, C\#}}_{\text{JS}}$ .....

@AadishMandal

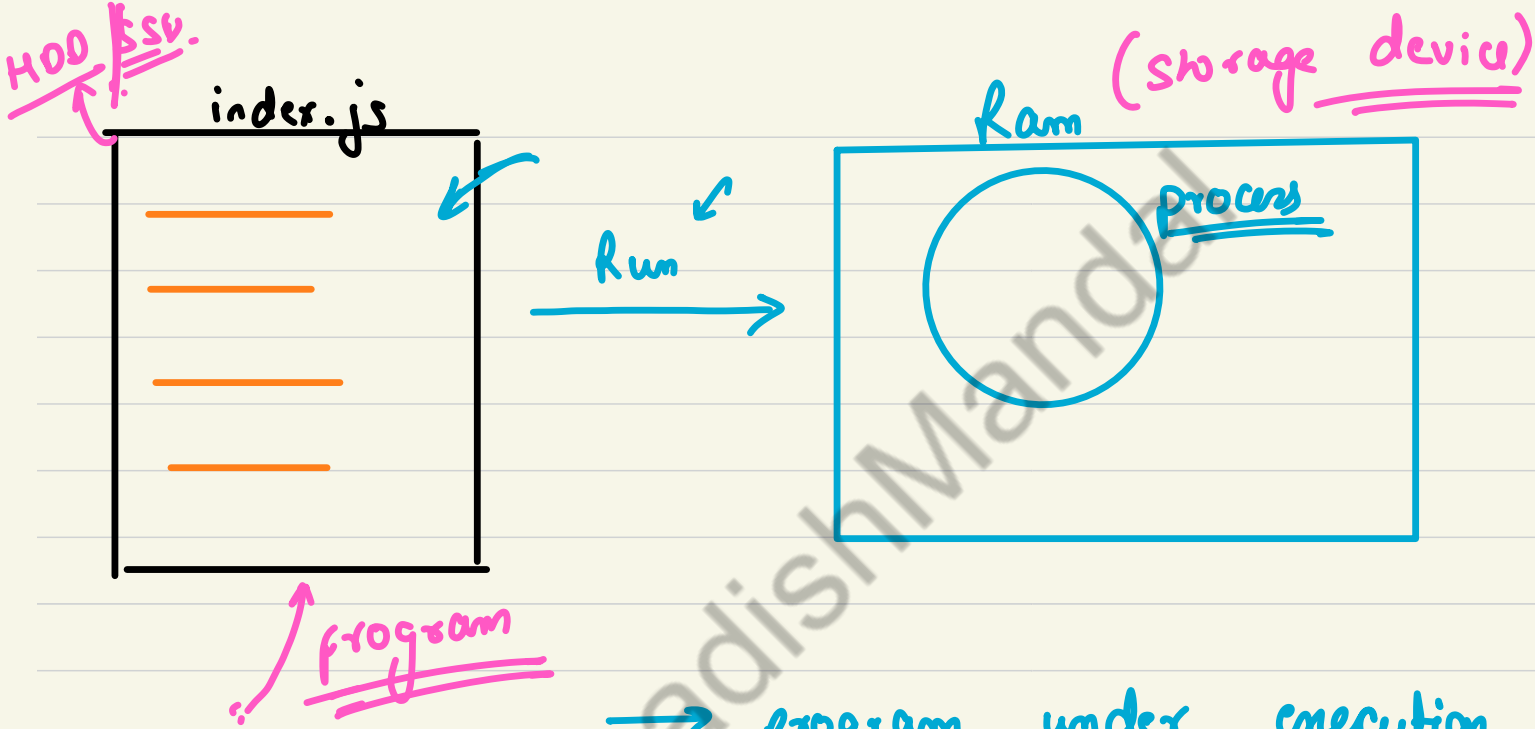

→ program under execution is called process.

@AadishMandal

→ to store data in our JS code, we can use something called as variables.

these are kind of buckets.

JS process in the RAM

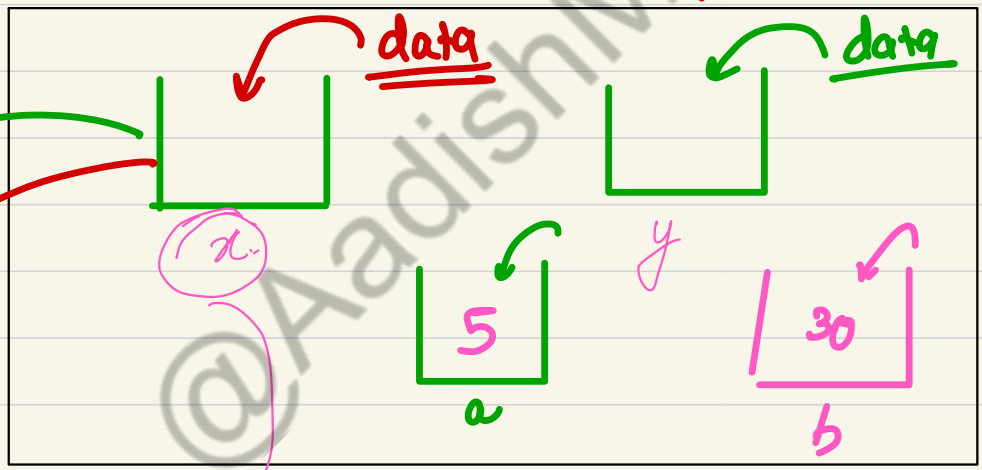

bucket

every bucket has it's own name

Variable name

fetch, update & store the data in your variables.

@AadishMandal

let name = ~

var name = ~

const name = ~.

console.log(x);

it will print the value stored inside x.

@AadishMandal

Datatypes

datatypes define the classification of diff diff type of values we can store in our program.

- → number
- → string → to store random text → " ~~~~~~ "
- → undefined
- → boolean → true, false
- ⋮

@AadishMandal

→ Rules for naming variables in JS:

→ variable name can contain english alphabets, digits, underscore & dollar. No other char can be used.

→ Variable name cannot start with a number/digit.

→ variable names are case sensitive.

↳ money — ↳ Money —

↳ MONEY — ↳ mONEY —

→ you cannot use a keyword for a variable name.

let, for, if, else, var ....

@AadishMandal