@AadishMandal

Datatypes In JS

1) Numbers → 8, -10, 33, 4.562, 0, -0, NaN

not a number

2) Strings → " hello world "

text

3) Boolean → true

false

@AadishMandal

Paper roll

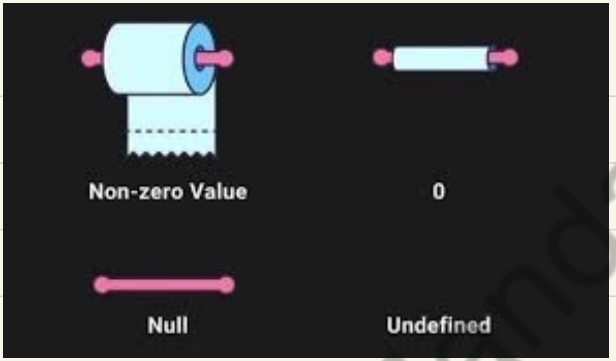

4) null → null represents no value or nothing. i.e, variable is declared & defined also but with an empty value i.e. null

5) undefined → it shows a variable who has been declared but never defined.

@AadishMandal

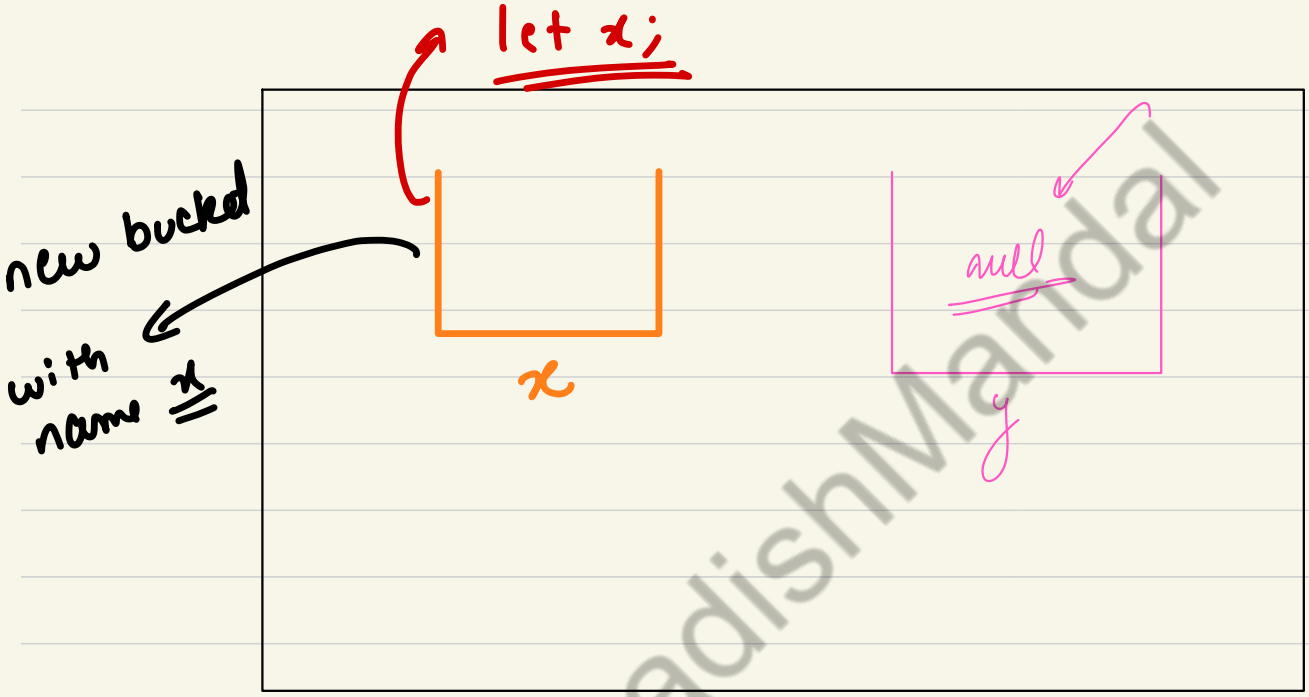

let user;

@AadishMandal

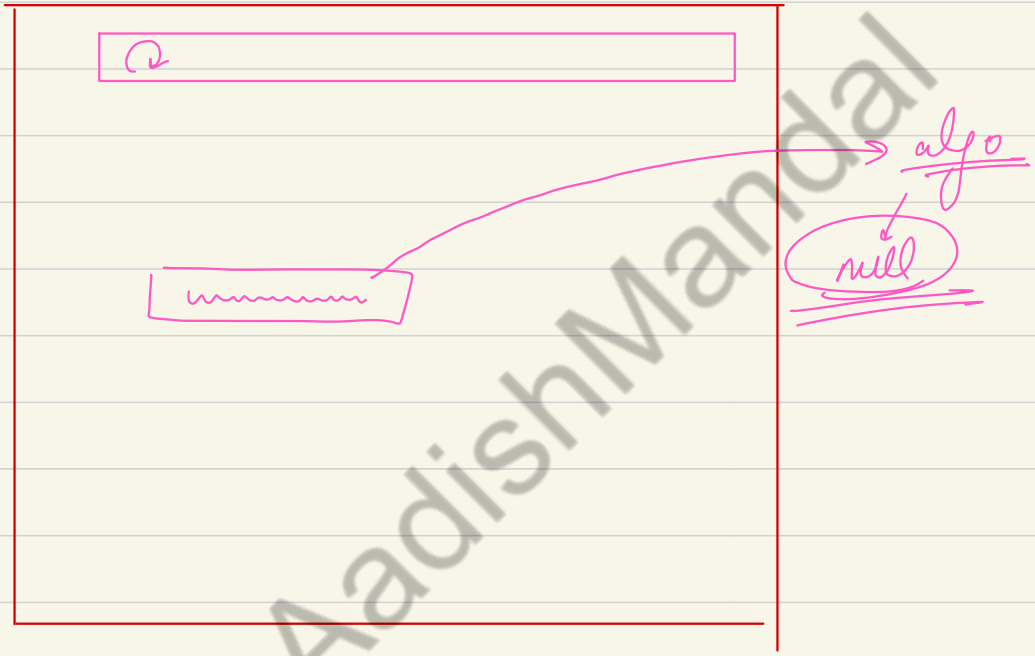

@AadishMandal

6) BigInt

In JS (as per my latest info) a normal number can store maximum $(2^{53}-1)$ and minimum $(-2^{53}-1)$

for numbers beyond this range, we use BigInt.

To make a no. BigInt, we write the number & append a 'n' at last.

let x = 312506899999888n;

@AadishMandal

Object: → it

fb ← insta X linkedin

let fb = ___

let insta = ___

⋮

@AadishMandal

Key values

{ fb : 3000 ,

"insta" : 10000 ,

X : 15000 ,

linkedin : 7000

}

(keys are unique)

(Symbol)

(Skip)

Symbol("___")

@AadishMandal

using programming lang. we can do computations.

→ Operators →

Operators are Symbols that can do Some computation or calculation. ex → + , − , == , *

@AadishMandal

Ex → +

This plus operator if used with 2 numbers adds them up.

operator

2 + 3

operand

operand

5

@AadishMandal

Arithmetic Operators → used with numbers.

2 + 3 → add 2 and 3

2 − 3 → subtract 2 and 3

2 * 3 → multiply 2 and 3

2 / 3 → divides 2 with 3, gives you the quotient.

modulo

2 % 3 → remainder of division of 2 & 3

@AadishMandal

2 ** 3 → calculate 2^3

@AadishMandal

assignment operator :

let x = 10;

these help us to assign value to a variable.

= → equals → let x = 10;

let x = 10;

you want to add 5 to x & store the result in x.

@AadishMandal

first way

let $x = 10;$

let $y = x + 5;$

$x = y;$

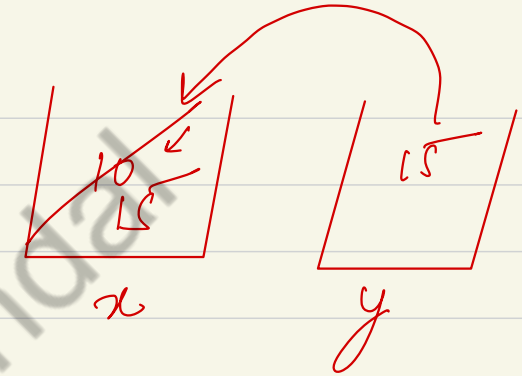

@AadishMandal

Second way

```
let x = 10;
x = x + 5;
```



3rd way

```
let x = 10;
x += 5;
```

Shortcut

@AadishMandal

$x = x - 2 \longrightarrow x -= 2$

$x = x * 3 \longrightarrow x *= 3$

$x = x / 5 \longrightarrow x /= 5$

$x = x \% 3 \longrightarrow x \% = 3$

$x = x ** 5 \longrightarrow x ** = 5$

assign. operator

@AadishMandal

T1 or T2

Netflix

(Kapil Sharma Show)

@AadishMandal

→ only those users who →

1) are registered on netflix, AND

2) those who have paid for subscription AND

@AadishMandal

logical operators → Logical Comp

↳ AND OR NOT

&& || !

→ operands of a logical operator are always boolean. If we donot pass boolean then JS automatically convert them to boolean.

@AadishMandal

AND

x && y		
false	false	→ false
false	true	→ false
true	false	→ false
true	true	→ true

@AadishMandal

Or

x	||	y		
false		false	→	false
false		true	→	true
true		false	→	true
true		true	→	true

@AadishMandal

not

!

x	$\longrightarrow$	$!x$
true		false
false		true

@AadishMandal