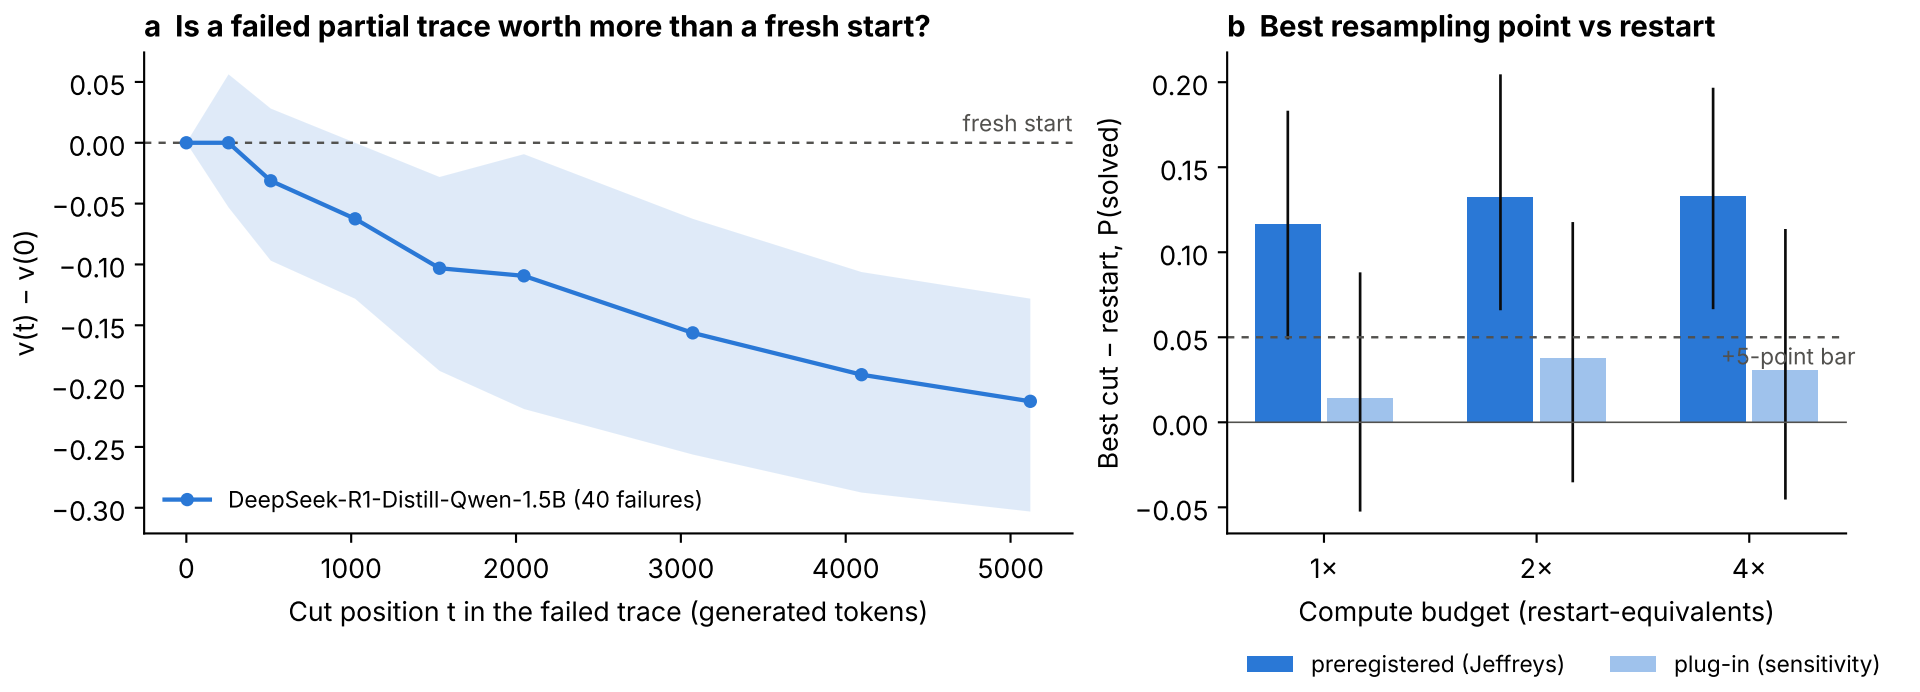
a Is a failed partial trace worth more than a fresh start?
0.05
0.00
−0.05
−0.10
−0.15
−0.20
−0.25
−0.30
v(t) − v(0)
fresh start
DeepSeek-R1-Distill-Qwen-1.5B (40 failures)
0
1000
2000
3000
4000
5000
Cut position t in the failed trace (generated tokens)
b Best resampling point vs restart
0.20
0.15
0.10
0.05
0.00
−0.05
Best cut − restart, P(solved)
+5-point bar
1×
2×
4×
Compute budget (restart-equivalents)
preregistered (Jeffreys)
plug-in (sensitivity)