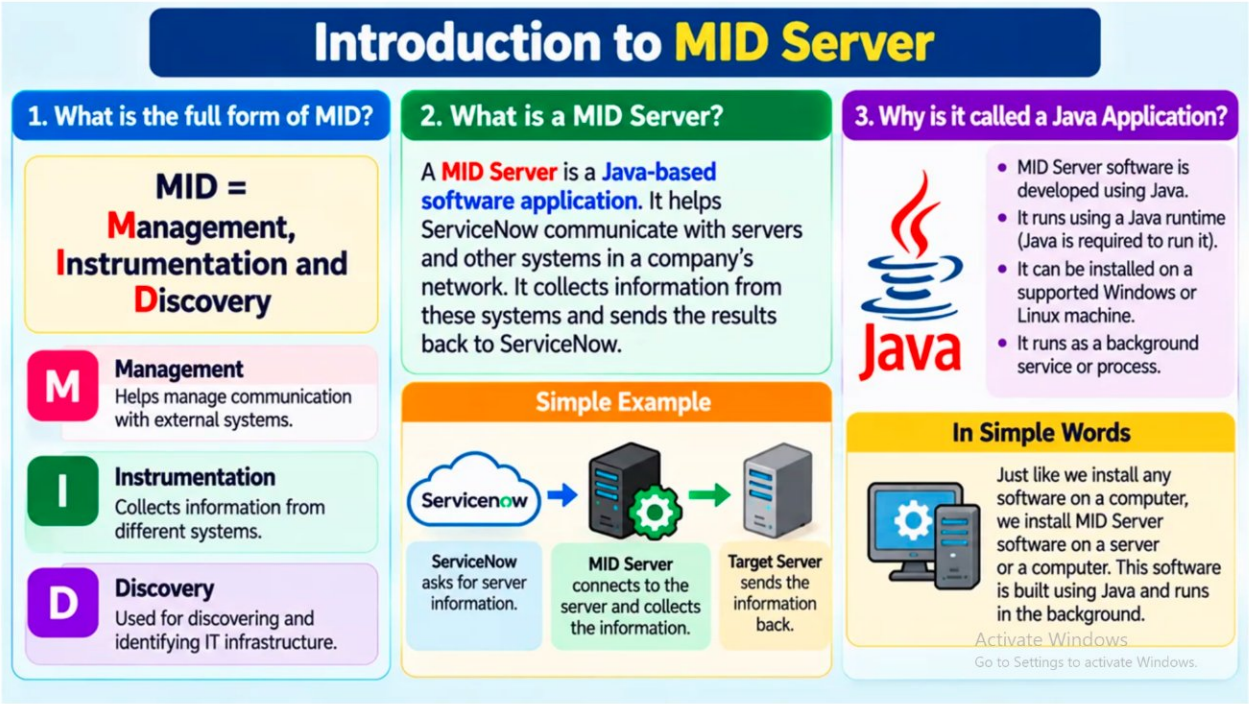


Question : so mid server is installed on where? in a servicenow instance ? or any ci like server database etc ? in very short

Answer : **MID Server is NEVER installed inside the ServiceNow instance.**

It is a Java application installed **inside your local company network / server** (on a Windows or Linux machine/CI).

- **Where it runs:** On a host server/laptop inside your internal network (behind your firewall).
-
- **Why:** ServiceNow Cloud Instance directly local IP addresses (192.168.x.x) tak nahi pahunch sakta. MID Server network ke andar baith kar devices scan karta hai aur result HTTPS over Port 443 ke through ServiceNow instance ko bhejta hai.

Question : kya hmm discovery bina mid server ke nhi kar skte ? inv eyr short
Answer : **Nahi, bilkul nahi!**

ServiceNow Discovery bina MID Server ke **kabhibhi nahi ho sakti**.

ServiceNow ek **Cloud Instance** hai, toh woh aapke local network (Firewall ke andar ke private IPs jaise 192.168.x.x) ko directly scan nahi kar sakta. Network ke andar jhaankne aur OS-level commands (WMI/SSH) chalane ke liye **MID Server mandatory hai**.

Question outbound integration me mid server ?

Answer : Haan, **dono baatein ekdam sahi hain**! Aao confusion clear karte hain:

- **Pehli baat (Clear hai):** MID Server **ServiceNow Instance me install nahi hota**, balki **Aapki Company ke network (Host Laptop/VM)** me install hota hai.
-
- **Dusri baat (Network Connectivity):** Jab aap kisi **External Third-Party** se integrate karte ho:
-
    - MID Server abhi bhi **Aapki Company ke host server** par hi chal raha hai.
    -
    - Agar wo Third-Party System **Public Internet par open nahi hai** (unka server private network me hai), toh aapki company aur us third-party company ke beech **VPN ya Dedicated Network Line (Direct Connect)** setup hoti hai.
    -
    - Aapka MID Server usi VPN pipeline ke throw third-party ke server tak pahunch kar data fetch kar leta hai.
    -

Bottom Line: MID Server humesha **Aapki Organization ke infrastructure** par hi install hoga. Woh sirf ek **bridge (messenger)** ka kaam karta hai jo ServiceNow Cloud Instance ki baat sunta hai aur local network / connected VPN network par jaakar woh kaam karke wapas ServiceNow ko report deta hai!

Question : Ek real life scenerio se mid server jab hoga or jab nhi hoga me dono baari baari smjhao : discover, integration
Answer :
Chalo ek real-life example (**Bank System**) se samajhte hain:

Scenario 1: Discovery (Laptop / Server Scan)

Suppose ek Bank ka Office hai jisme 500 Servers aur Laptops hain. Inka IP range `10.0.0.1` se `10.0.0.500` tak hai (jo private network / firewall ke andar hain).

A. Jab MID Server **NAHI** Hai:

1. ServiceNow Cloud (Internet par) request bhejta hai: *"Mujhe `10.0.0.15` Server ka OS aur Hardware detail do."*
2. Request Bank ke Firewall par aakar ruk jaati hai.
3. **Result:** ServiceNow private IP `10.0.0.15` tak pahunch hi nahi pata. Discovery **Fail** ho jaati hai.

B. Jab MID Server **HAI**:

1. Bank ke internal office ke ek laptop/VM par MID Server installed hai.
2. MID Server ServiceNow Cloud se poochta hai: *"Mere liye koi kaam hai?"* ServiceNow kehta hai: *"Haan, internal network me `10.0.0.1` se `10.0.0.500` tak scan karo."*
3. MID Server internal network ke andar hi reh kar WMI/SSH commands se saare 500 laptops/servers scan kar leta hai.
4. MID Server sara scan data (CPU, RAM, OS) ek safe bag me pack karke Outbound Port 443 ke zariye ServiceNow Cloud ko bhej deta hai.
5. **Result:** CMDB me saare servers successfully populate ho jaate hain.

Scenario 2: Integration (Internal HR System / SAP)

Suppose Bank ka apna ek **Internal HR System** (On-Premise Database) hai jo sirf Bank ke wi-fi/LAN par chalta hai, internet par open nahi hai.

A. Jab MID Server **NAHI** Hai:

1. Service Catalog se ek employee new laptop request karta hai.
2. ServiceNow Cloud REST API Call karta hai: `[https://internal-hr.bank.local/getEmployeeDetails](https://internal-hr.bank.local/getEmployeeDetails)`.
3. Internet ko `.local` ya internal domain samajh hi nahi aata, aur firewall request block kar deta hai.
4. **Result:** Integration **Fail** ho jata hai, employee data sync nahi hota.

B. Jab MID Server **HAI**:

1. ServiceNow Cloud apne MID Server ko bolta hai: *"Mujhe Internal HR System se Employee #102 ka data lakar do."*
2. MID Server (jo pehle se internal network ke andar baitha hai) local LAN par request maarta hai: `[https://internal-hr.bank.local/getEmployeeDetails](https://internal-hr.bank.local/getEmployeeDetails)`.
3. HR System MID Server ko data de deta hai kyunki dono same internal network me hain.
4. MID Server wo data HTTPS ke through ServiceNow Cloud Instance ko deliver kar deta hai.
5. **Result:** Integration successful ho jata hai aur ServiceNow me employee profile update ho jaati hai!

Question : tumne bola snow cloud apne mid server ko bolta hai , and baad me bola ki mid server jo phle se internal network ke andar baiha hai, to kya ye dono alag alag mid servers hai kya 2?

Answer : **Nahi, ye 2 alag-alag MID Servers nahi hain — ye bilkul EK HI MID Server hai!**

Dono sentences me same single MID Server ki baat ho rahi hai. Samajhne ke liye iska working sequence dekho:

1. **"MID Server jo internal network ke andar baitha hai":** Iska matlab hai ki MID Server physically aapke company/bank ke local server (Windows/Linux machine) par installed aur running state me hai.
2.
3. **"ServiceNow Cloud apne MID Server ko bolta hai":** ServiceNow Cloud Instance internet par hota hai. Jab ServiceNow ko koi task karna hota hai, toh wo ECC Queue (sys_exec_queue) ke zariye us single MID Server ko instruction bhejta hai.
4.
5. **Execution:** Instructions milte hi wohi MID Server aapke internal LAN par HR System (https://internal-hr.bank.local) ko request maarta hai aur result ServiceNow Cloud ko wapas bhej deta hai.
6.

Ek hi MID Server **dono side se connected** rehta hai — internet side se ServiceNow Cloud se, aur internal side se aapke local systems/APIs se.

Question : ye mid server snow ke instance se kaise connected hua ? in very short
Answer : MID Server ServiceNow instance se **Polling Mechanism (ECC Queue)** ke throw connected rehta hai:

1. **Outbound Connection (Port 443):** MID Server aapke internal network se HTTPS (Port 443) ke zariye ServiceNow instance ko hamesha **Long Polling / Heartbeat** request bhejta hai.
2.
3. **ECC Queue (sys_exec_queue):** ServiceNow instance ke andar ek table hoti hai. Jab instance ko koi kaam karwana hota hai, toh woh request ECC Queue ke **Output** section me daal deta hai.
4.
5. **Execution & Return:** MID Server us Output message ko read/fetch karta hai, local network par kaam execute karta hai, aur result ko ECC Queue ke **Input** section me wapas push kar deta hai.
6.

Key Point: Connection **hamesha MID Server initiate karta hai** (inside-to-outside). Instant firewall inbound rules open karne ki zaroorat nahi padti.

Question : ecc queue koi table hai kya ? and snow ecc me request bhejta hai jo mid server ke paas jati hai then mid server iss request ko kiske paas bhejta hai and vapas snow instance ko kaise deta hai in very short

Answer : **Haan, ECC Queue ek Table hai:** ServiceNow me iska table name `ecc_queue` hai. Ye basically ek inbox/outbox storage system hai jo Instance aur MID Server ke beech messaging ke liye kaam karta hai.

1.
2. **Full Flow (Kaam Kaise Hota Hai):**
3.
    - **SNOW -> ECC Queue:** ServiceNow instance ek record create karta hai `ecc_queue` table ke **Output** section me (e.g., *"Is IP* `10.0.0.15` *ko scan karo"*).
    - **MID Server Query Fetch karta hai:** MID Server har kuch seconds me HTTPS (Port 443) ke zariye `ecc_queue` ko poll (check) karta hai aur output request ko utha leta hai.
    - **MID Server -> Target System:** MID Server iss request ko **Target System** (jaise Local Laptop, On-Premise Server, Windows Device, ya Internal REST API) ke paas bhejta hai using protocols like WMI, SSH, SNMP, ya HTTP/HTTPS.
    - **Target -> MID Server:** Target System result/data (jaise CPU, RAM, OS details, ya API response) MID Server ko wapas lautata hai.
    - **MID Server -> SNOW:** MID Server us response data ko pack karke ServiceNow ke `ecc_queue` table ke **Input** section me insert kar deta hai.
    - **SNOW Processing:** ServiceNow ka Business Rule / Script Input queue ko process karke CMDB ya Target Record ko update kar deta hai.

Question : in short sab btado jo abb tak smjhaya
Answer : Aapne ab tak MID Server, Discovery, aur Integrations ke baare me jo samjha hai, uska quick **Summary Flow**:

1. MID Server Kya Hai aur Kahan Install Hota Hai?

- MID Server ek **Java Application** hai.
- Ye **ServiceNow Instance par nahi**, balki **company ke internal private network** (host laptop/VM) par install hota hai.
- Ye ServiceNow Cloud aur Local Private Network (`192.168.x.x`) ke beech **Bridge/Mediator** ka kaam karta hai.

2. MID Server ServiceNow Instance Se Kaise Connect Hota Hai?

- **ECC Queue Table (`ecc_queue`):** ServiceNow Instance me `ecc_queue` naam ki ek table (Inbox/Outbox) hoti hai.

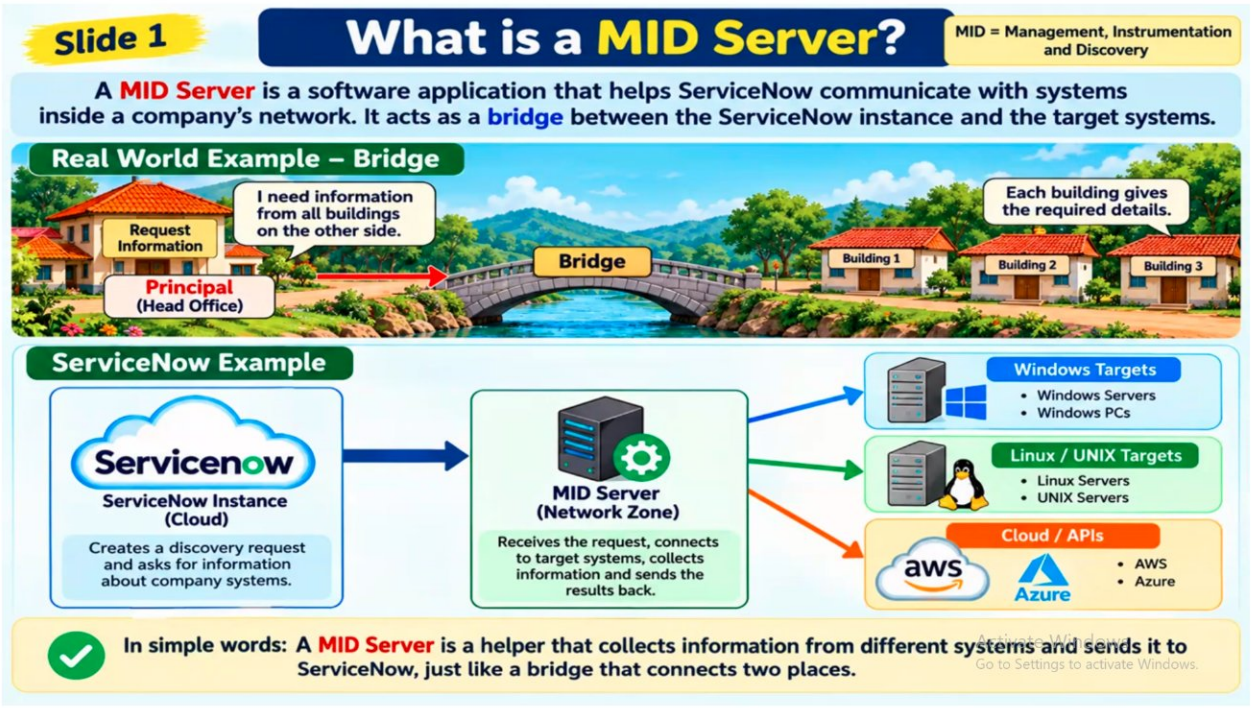
-
- **Polling Mechanism:** MID Server Port 443 (HTTPS) ke zariye har kuch seconds me `ecc_queue` table ko check (poll) karta rehta hai.
-
- Connection **hamesh MID Server initiate karta hai** (Inside-to-Outside), isliye local network ke firewall inbound rules bypass ho jaate hain.
-

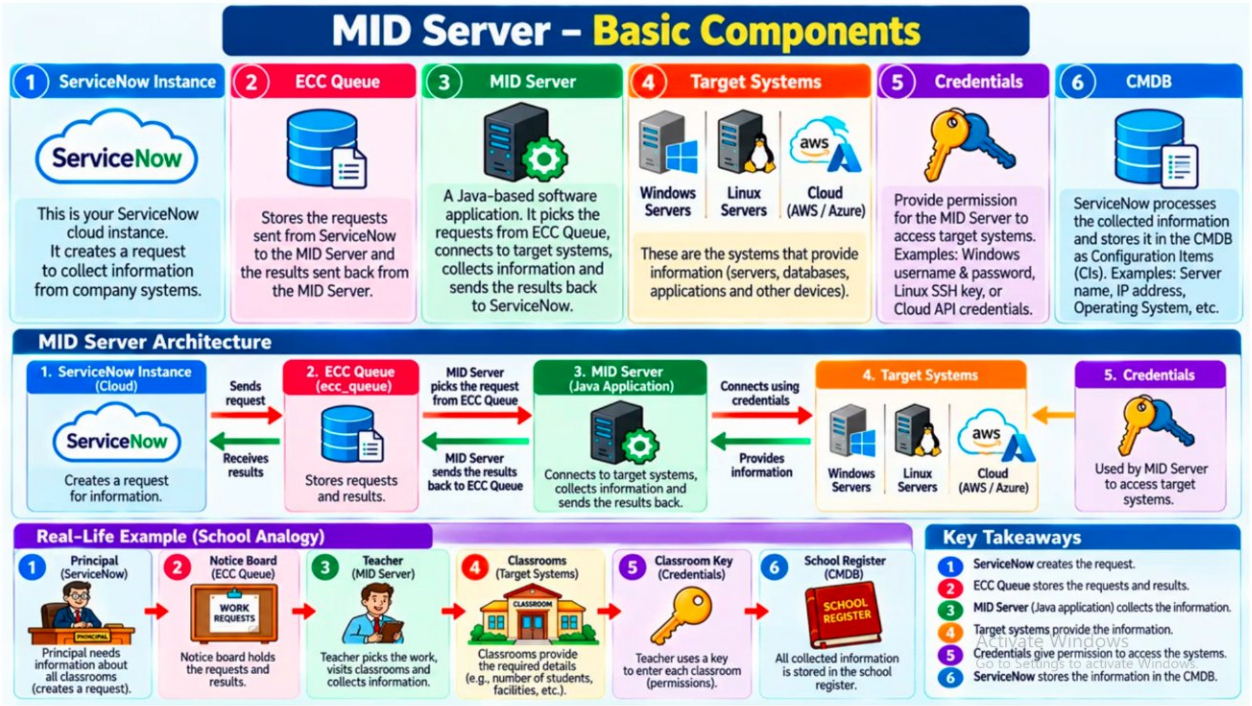
3. Complete Data Flow (Step-by-Step)

1. **SNOW -> ECC Queue:** ServiceNow instance `ecc_queue` (Output) me request daalta hai.
2.
3. **ECC Queue -> MID Server:** MID Server polling karke us request ko fetch karta hai.
4.
5. **MID Server -> Target Device/API:** MID Server aapke internal network me Target System (Laptops, Servers, या Internal APIs) ko hit karta hai (using WMI, SSH, SNMP, REST).
6.
7. **Target -> MID Server:** Target system MID Server ko response/data deta hai.
8.
9. **MID Server -> SNOW:** MID Server us response ko `ecc_queue` (Input) me push karta hai, jahan se ServiceNow use CMDB ya ticket me update kar deta hai.

4. Discovery vs Integration me Utility

Feature	Discovery	Outbound Integration
Main Action	Local IPs scan karke hardware/OS details collect karna	Private Network me hosted internal APIs (jaise SAP, HR system) ko hit karna
Protocols Used	WMI, WinRM, SSH, SNMP	REST / SOAP APIs (HTTP/HTTPS)
Purpose	CMDB populate/update karna	Internal systems ke sath real-time data sync karna





NOTE : Bank ke paas khud ka snow instance hoga, hmari team uss snow ke instance se jo mid server milega usko configure krega bank ke liye jiss se abb uss mid server ke paas uss snow ka bhi access hoga and uss bank ke cis and internal system ka bhi access hoga. And then kaam start hota hai . Aap log us MID Server ko Bank ke internal server/VM par install karte ho.

Haan, 100% bilkul aisi hi working hoti hai! Aapne real-world project delivery ka flow ekdam sahi pakda hai.

Iska exact industry workflow dekho step-by-step:

Step-by-Step Flow:

1. **Bank ka ServiceNow Instance:**
2.
    - Bank ke paas apna dedicated ServiceNow Instance hota hai (e.g., bankname.service-now.com).
    -
3. **Aapki Team ka Setup Task:**
4.
    - Aapki team Bank ke instance ke MID Server > Downloads section se MID Server installer ZIP download karti hai.
    -
    - Aap log us MID Server ko Bank ke internal server/VM par install karte ho.
    -
5. **Bridge Active Hota Hai:**
6.
    - **Instance Access:** MID Server config.xml me Bank ke ServiceNow URL aur credentials set hone ki wajah se instance se connect (poll) ho jata hai.
    -
    - **Internal Network Access:** Woh Server Bank ke private network ke andar baitha hai, toh uske paas Bank ke local CIs (Laptops, Servers, Switches) aur internal applications (SAP, HR Portal) ka direct local access hota hai.
    -
7. **Validation & Kaam Start:**
8.
    - Instance par jaakar MID Server ko **Validate** kar diya jata hai.
    -
    - Ab aapki team Discovery schedules run karti hai ya Outbound REST/SOAP Integrations set karti hai. MID Server dono sides (Bank Cloud Instance + Bank Internal Infrastructure) ke beech secure messenger ka kaam karne lagta hai.

ECC QUEUE MEANS EXTERNAL COMMUNICATION CHANNEL QUEUE

MID Server Requirements – Windows Desktop

Requirement	Details
Operating System	Windows 11 Desktop (64-bit)
Processor (CPU)	4-core processor (recommended)
RAM	8 GB or more (recommended)
Hard Disk	Around 40 GB free space (recommended)
Java	Java runtime included with the MID Server package
ServiceNow Instance	Active ServiceNow instance
MID Server User	User account with the **mid_server** role
Internet Connection	Desktop must connect to ServiceNow (Internet access)
Port 80 (HTTP)	Used to access target websites that support HTTP
MID Server Software	Download the compatible Windows MID Server package

Note: These are simple requirements for learning and practice. Windows 11 compatibility must be checked for your MID Server build. Port 80 is used only when the MID Server needs to access a website using HTTP.

Activate Windows
Go to Settings to activate Windows.

ServiceNow Discovery – Simple Introduction

1 What is Discovery?

ServiceNow Discovery is a tool that automatically finds IT devices and collects their information.

It can find devices like servers, computers and network devices.
It collects details such as device name, IP address, operating system and more.

Simple Example (School)



Teacher visits all classrooms, collects the information and gives the report. In the same way, ServiceNow Discovery finds IT devices and collects their information.

2 Why Are We Using Discovery?

1. **Find devices automatically** — No need to check every device manually.
2. **Save time** — Collect information from many devices quickly.
3. **Reduce manual mistakes** — No need to type all details yourself.
4. **Identify changes** — Detect new devices and changes to existing devices.
5. **Update the CMDB** — Helps maintain correct and current information about IT devices.

3 What Can Discovery Find?

- **Servers** — Windows, Linux
- **Computers** — Desktops, Laptops
- **Network Devices** — Routers, Switches, Firewalls
- **Printers** — Network Printers
- **Databases** — SQL Server, Oracle
- **Applications** — Installed Software
- **Cloud Resources** — AWS, Azure

Details Collected (Example)

Device Name	: SERVER01
IP Address	: 192.168.1.10
Operating System	: Windows Server 2022
CPU	: 4 Cores
RAM	: 8 GB
Installed Software	: Example Application

4 Simple Real-Time Example

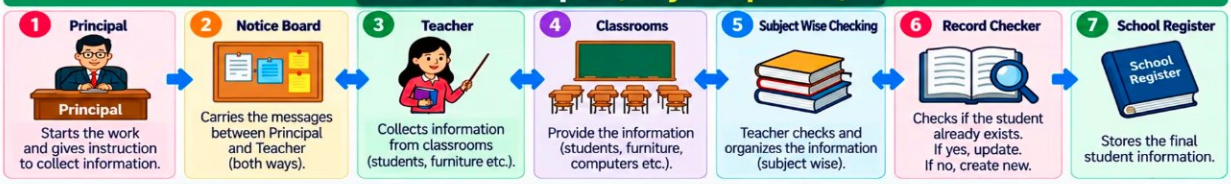
1. **Start Discovery in ServiceNow**
2. **MID Server** connects to devices and collects information
3. **Target Devices** provide their information
4. **ServiceNow updates** the CMDB with the discovered information

In Simple Words:
Discovery finds devices
→ MID Server collects details
→ ServiceNow updates CMDB.

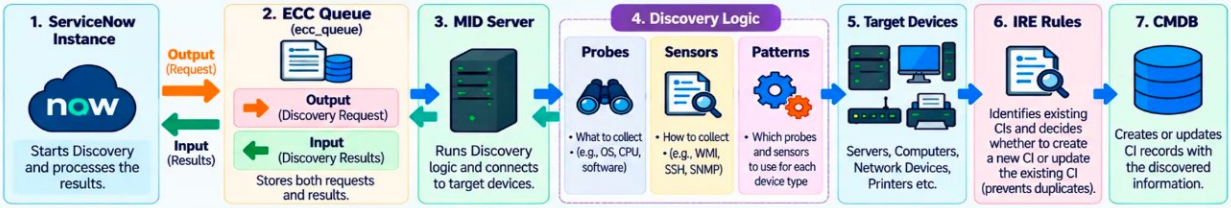
Activate Windows
Go to Settings to activate Windows.

Key point : discovery doen't guarantee every device will be found, because those devices must be in scope, supported and accessible. Only those devices will found. Out of the scope devices won't be found.

School Example (Easy Comparison)



ServiceNow Discovery – Complete Architecture



Components and Their Purpose (Very Simple)

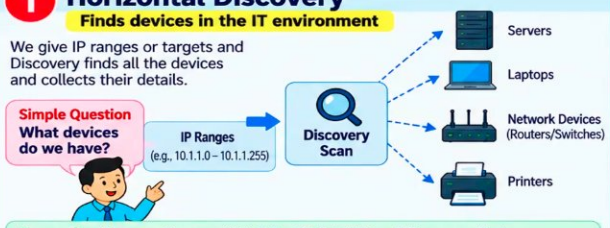
No.	Component	Simple Explanation	School Example	Direction / Flow
1	ServiceNow Instance	Starts the Discovery process and processes the results.	Principal starts the work.	Sends request (Output) and receives results (Input).
2	ECC Queue	Stores both Discovery requests and results (Output & Input).	Notice Board carries messages (both ways).	Output: Instance → ECC → MID Input: MID → ECC → Instance.
3	MID Server	Runs Discovery logic and connects to target devices.	Teacher collects information.	Receives from ECC and connects to devices.
4	Probes	Decide what information to collect from devices.	Teacher decides what to ask (e.g., student name).	Used by MID Server.
4	Sensors	Know how to collect the information (e.g., WMI, SSH, SNMP).	Teacher knows how to ask (e.g., question method).	Run through MID Server.
4	Patterns	Decide which probes and sensors to use for each device type.	Subject wise plan (e.g., for computer, ask these questions).	Run through MID Server.
5	Target Devices	Provide the information (e.g., server details, software, configuration).	Classrooms provide the information.	MID Server collects from these devices.
6	IRE Rules	Checks if the CI already exists and decides to create a new one or update.	Record checker checks if the student already exists.	Processes after data is collected.
7	CMDB	Stores the final discovered information as CI records.	School register stores final student information.	Updated by IRE.

Types of Discovery in ServiceNow ITOM (Very Simple Explanation)

1 Horizontal Discovery

Finds devices in the IT environment

We give IP ranges or targets and Discovery finds all the devices and collects their details.

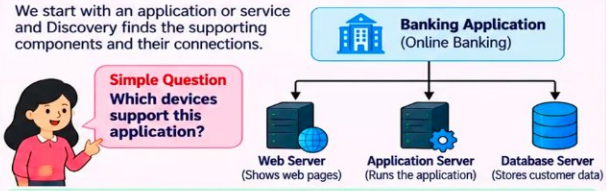


Example: We scan IP range 10.1.1.0 – 10.1.1.255 and Discovery finds Windows servers, Linux servers, routers, switches, printers etc.

2 Top-Down Discovery (Service Mapping)

Finds application dependencies

We start with an application or service and Discovery finds the supporting components and their connections.



Example: We start with the Banking application and Service Mapping finds the web server, application server, database server and shows how they are connected.

Difference Between Horizontal and Top-Down Discovery

Point	Horizontal Discovery	Top-Down Discovery (Service Mapping)
Main Purpose	Find devices in the environment	Find application dependencies
Starting Point	IP ranges or targets	Application or service
What it Finds	Servers, network devices, printers, etc.	Components supporting an application
Result in CMDB	Infrastructure CIs (devices)	Infrastructure CIs + Relationships (Service Map)
Simple Question	What devices do we have?	Which devices support this application?

Other Common Types (or Methods) of Discovery

3 IP Based Discovery

Finds devices using IP addresses or IP ranges.

Example: Discover devices in 10.1.1.0 – 10.1.1.255

4 Cloud Discovery

Finds resources in cloud environments like AWS, Azure and Google Cloud.

Example: Discover EC2 instances in AWS.

5 Agentless Discovery

Collects information without installing any agent on the target.

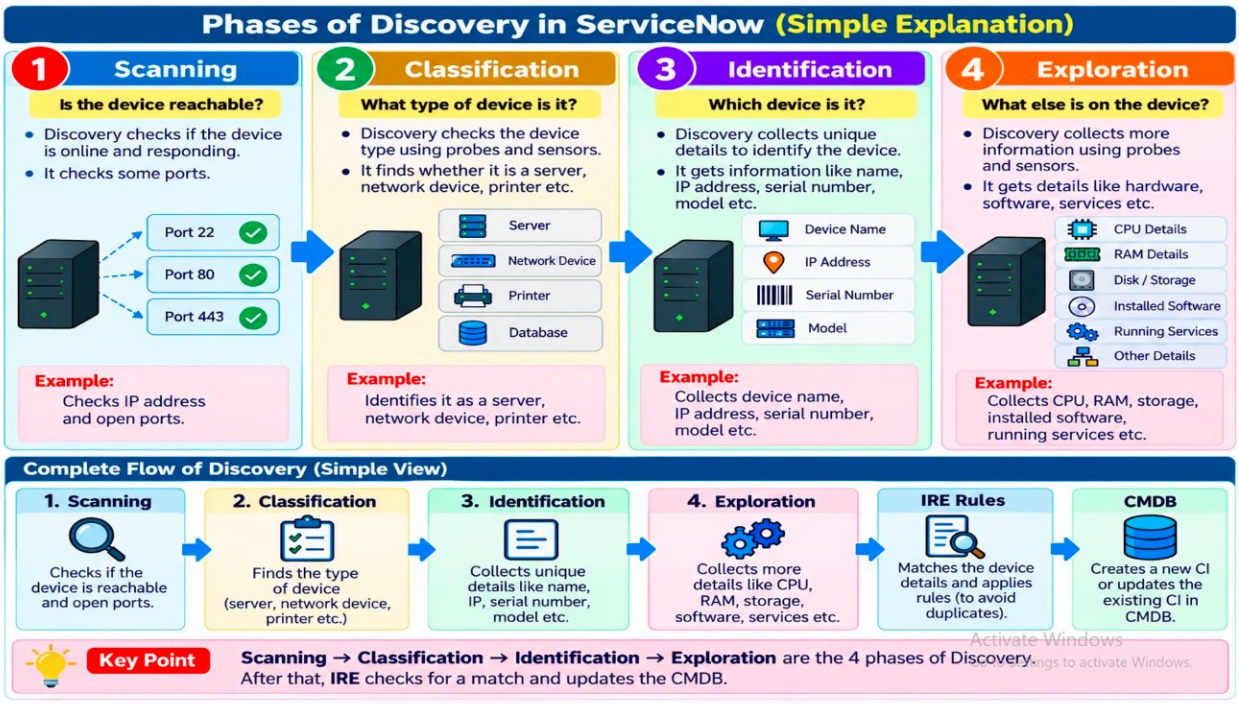
Example: Uses WMI, SSH, SNMP, HTTP, etc.

6 Agent Based Discovery

Uses a small agent installed on the target device to collect information.

Example: Used when agent installation is allowed.

Activate Windows



Probes is for collect the data.
Scanning phase is also called as shazam phase.

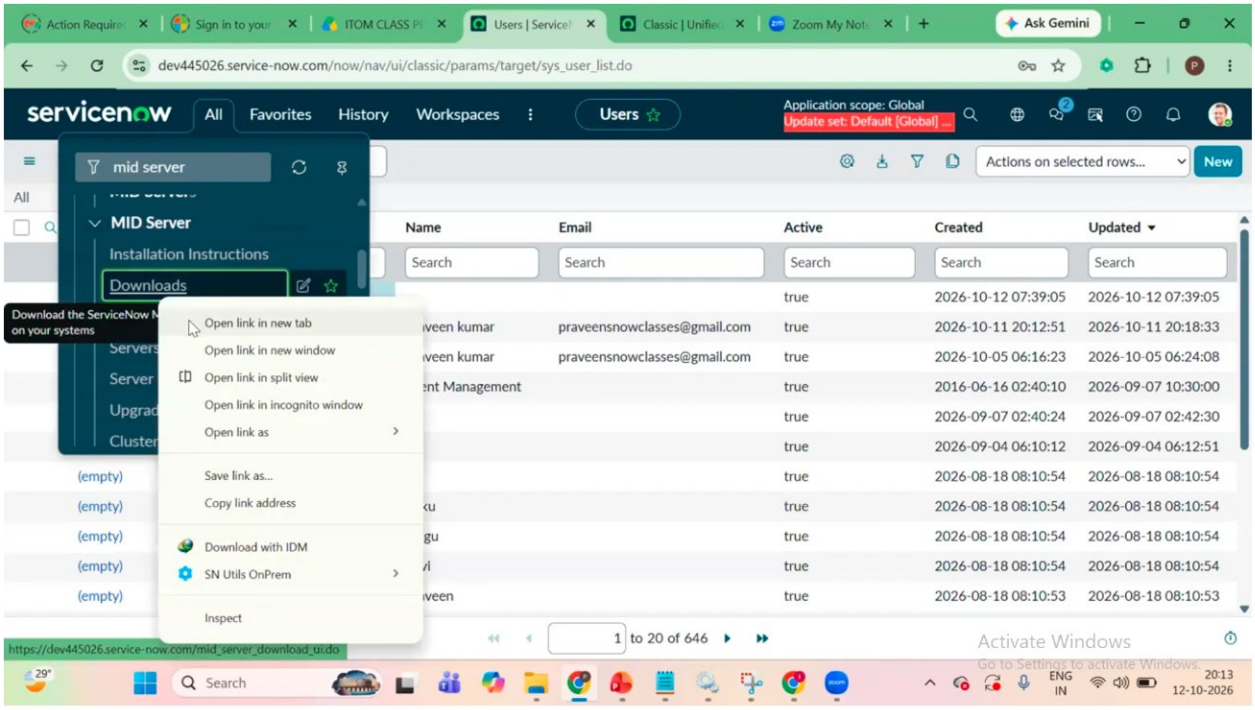
"Probes is for collect the data" — Correct: Probes ServiceNow ke instructions/commands hote hain jo MID Server execute karta hai target systems par, taaki actual data (jaise CPU, RAM, OS, processes) collect ho sake.
"Scanning phase is also called as shazam phase" — Correct: Discovery ka sabse pehla phase **Scanning phase** hi hota hai, jisme MID Server targets ko ping karta hai aur open ports scan karta hai. Is scanning process ko ServiceNow Discovery me internally **Shazam** ke naam se jana jata hai.

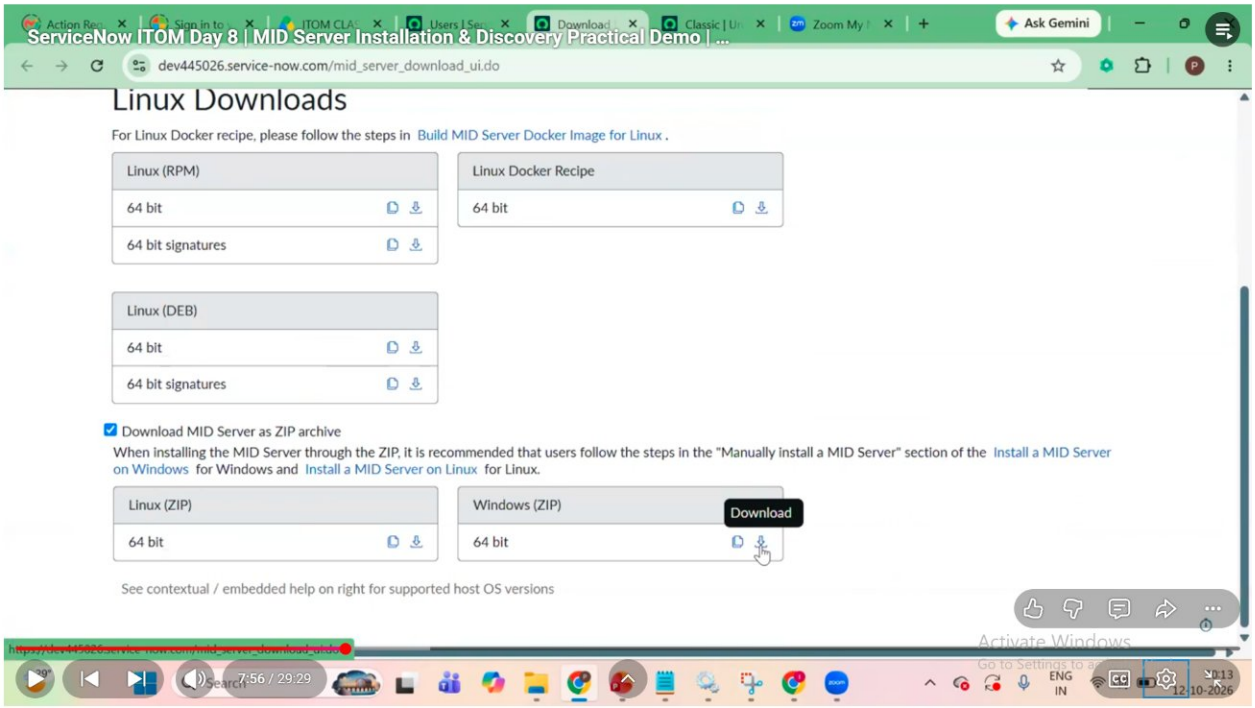
****

MID SERVER INSTALLATION AND DISCOVERY DEMO

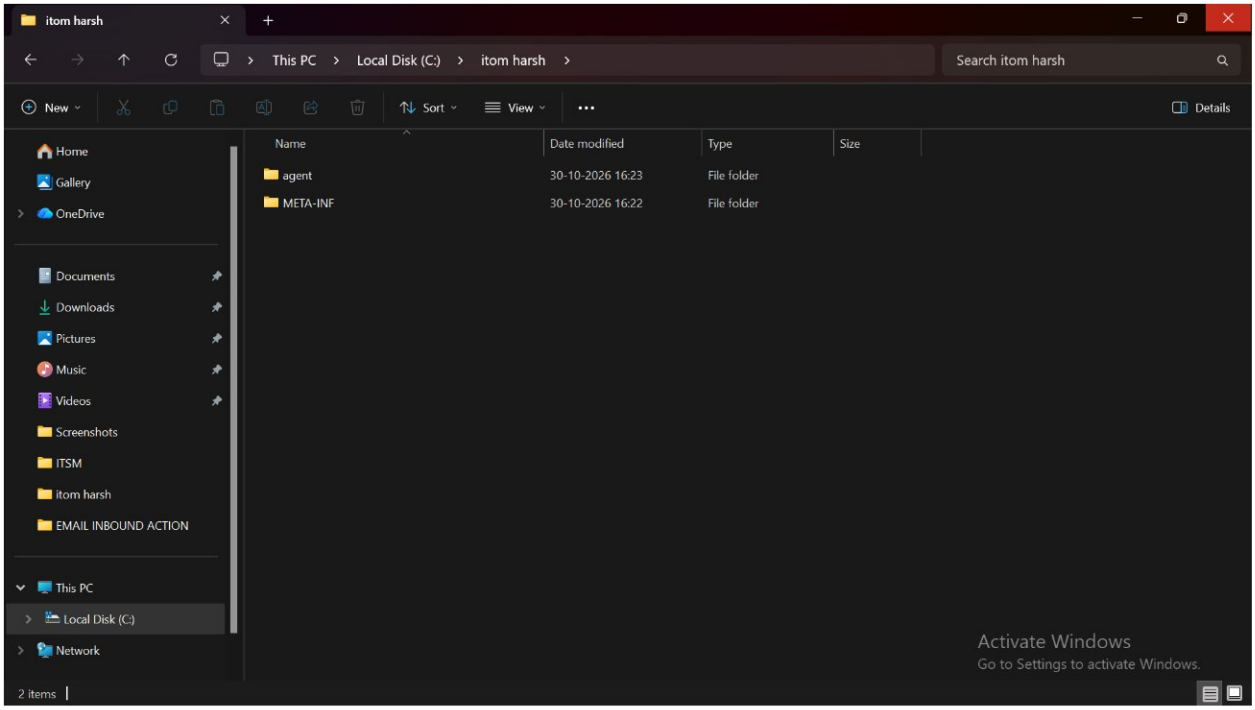
1. Create a mid server user which is dedicated only for the mid server and give that user mid_server role. Set a password for this user.

   User id : Harsh2003
   Password : MIDserver@123
   Instance : dev215079
   Role : mid_server

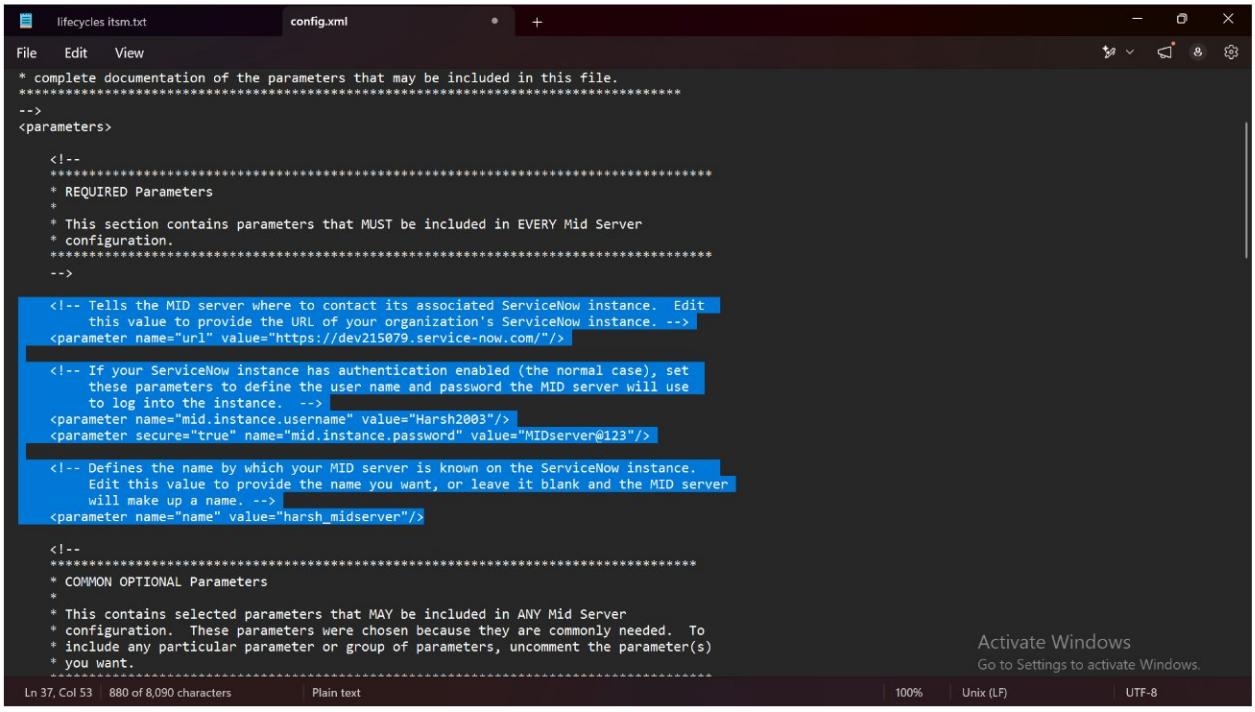
2. 



3. Now create a folder in c drive i named that itom harsh and extract this zip there.

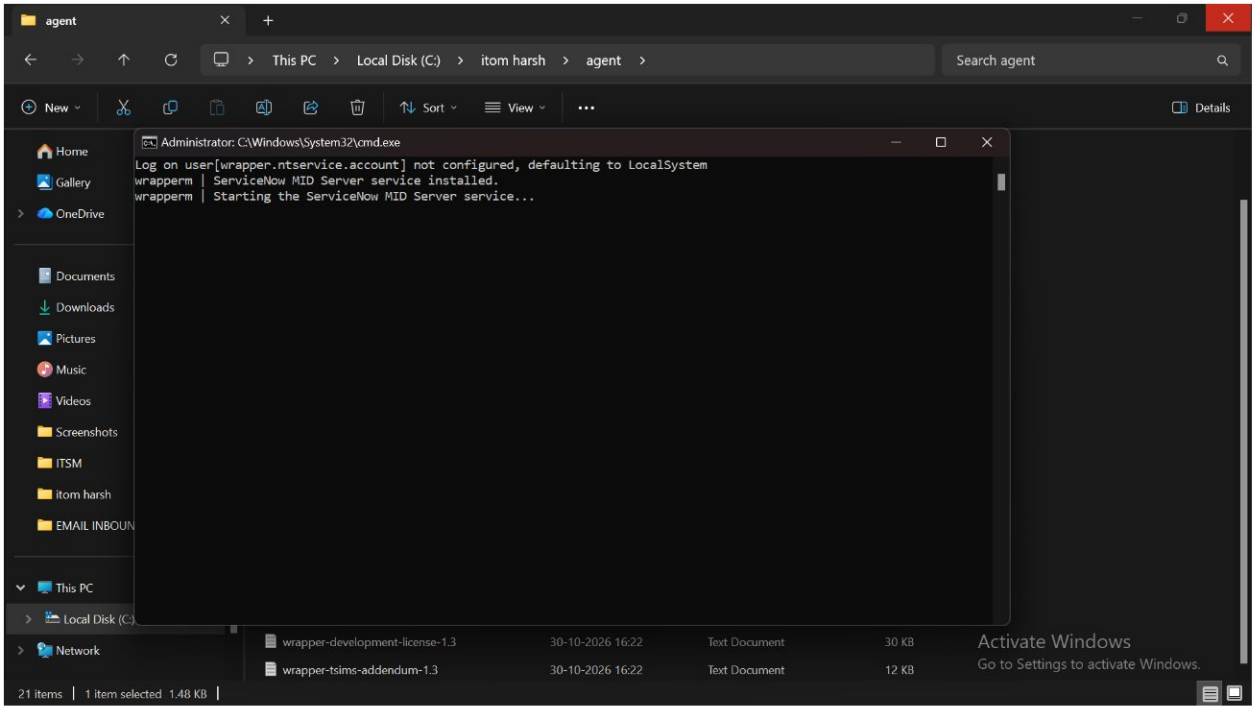


4. Then agent > config me jaake config ko txt file me kholna and apna instance number, mid server user, mid server user password, and last me jo mid server ka naam dena ho vo dedena.

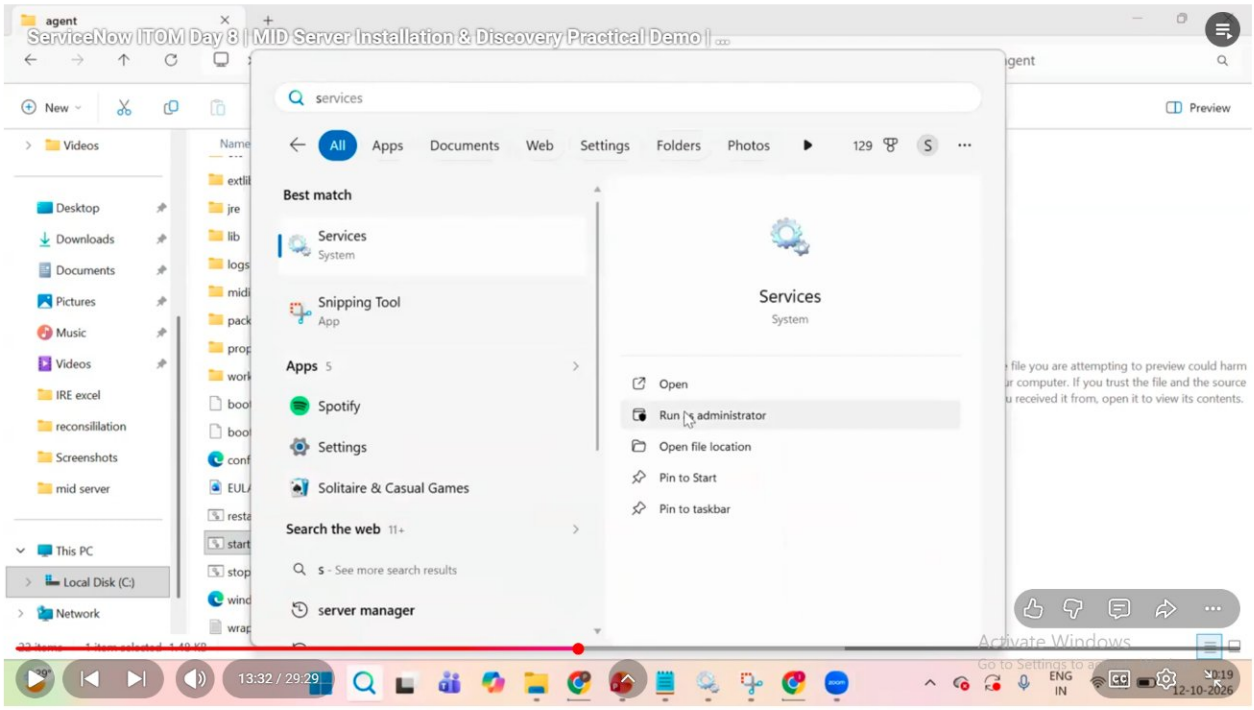


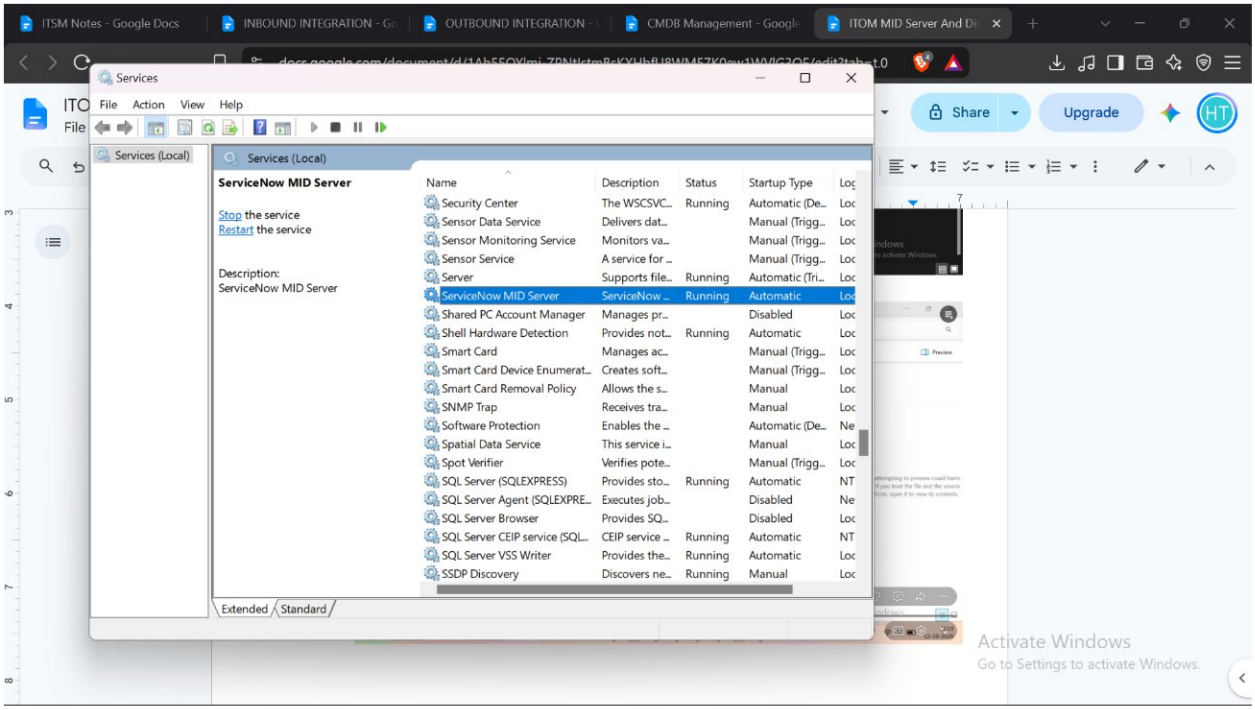
I gave my midserver name as harsh_midserver

5. Then agent folder me start file pe right click krke run as administrator krdo

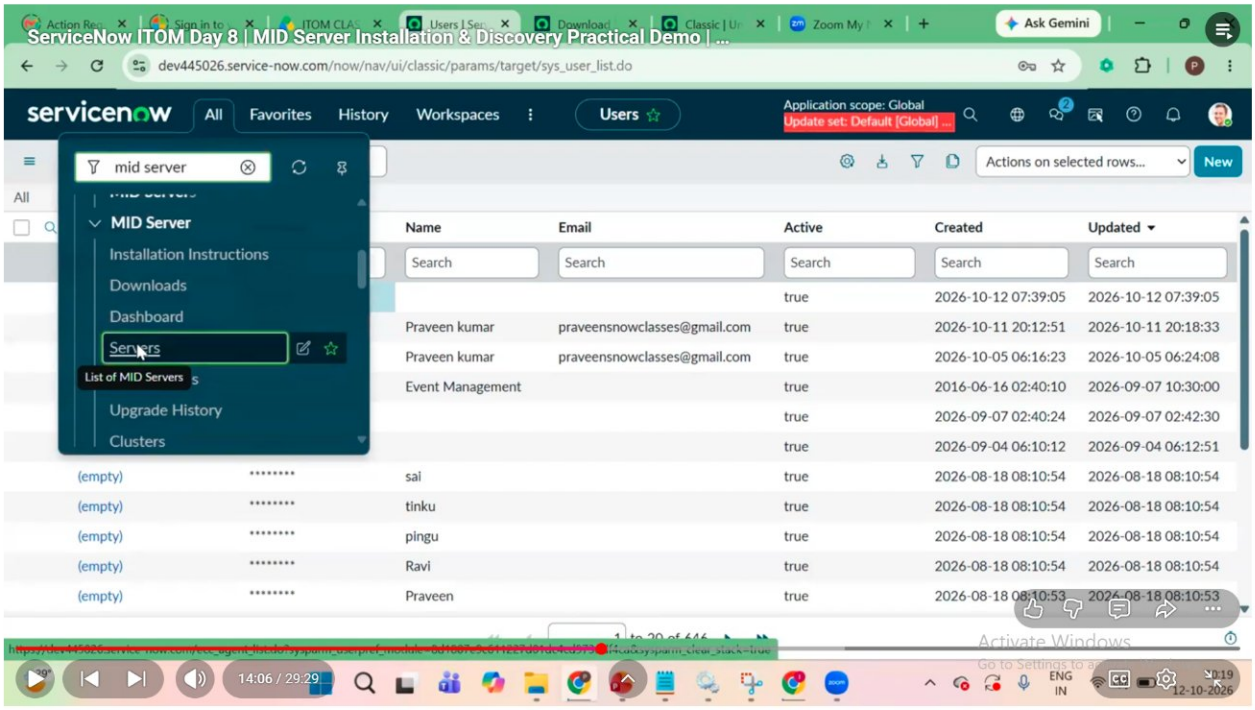
6. 

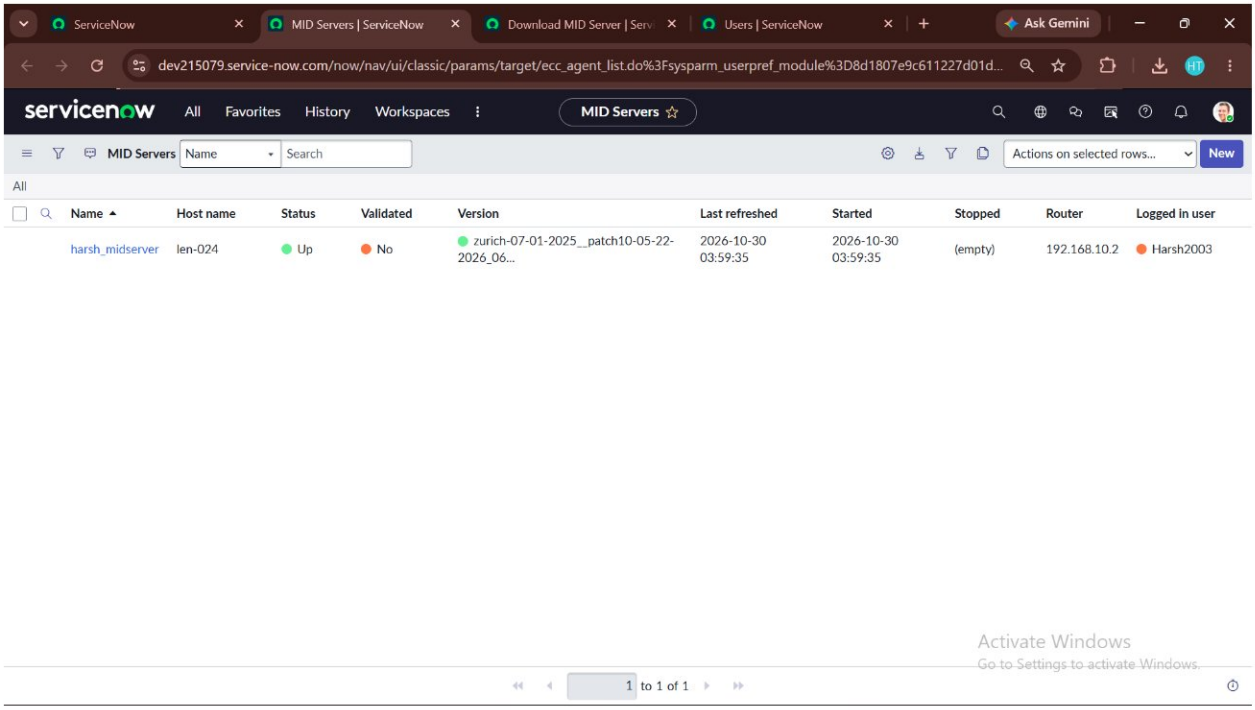
Checking ke liye ki ye run hua ki nhi, services me jao :



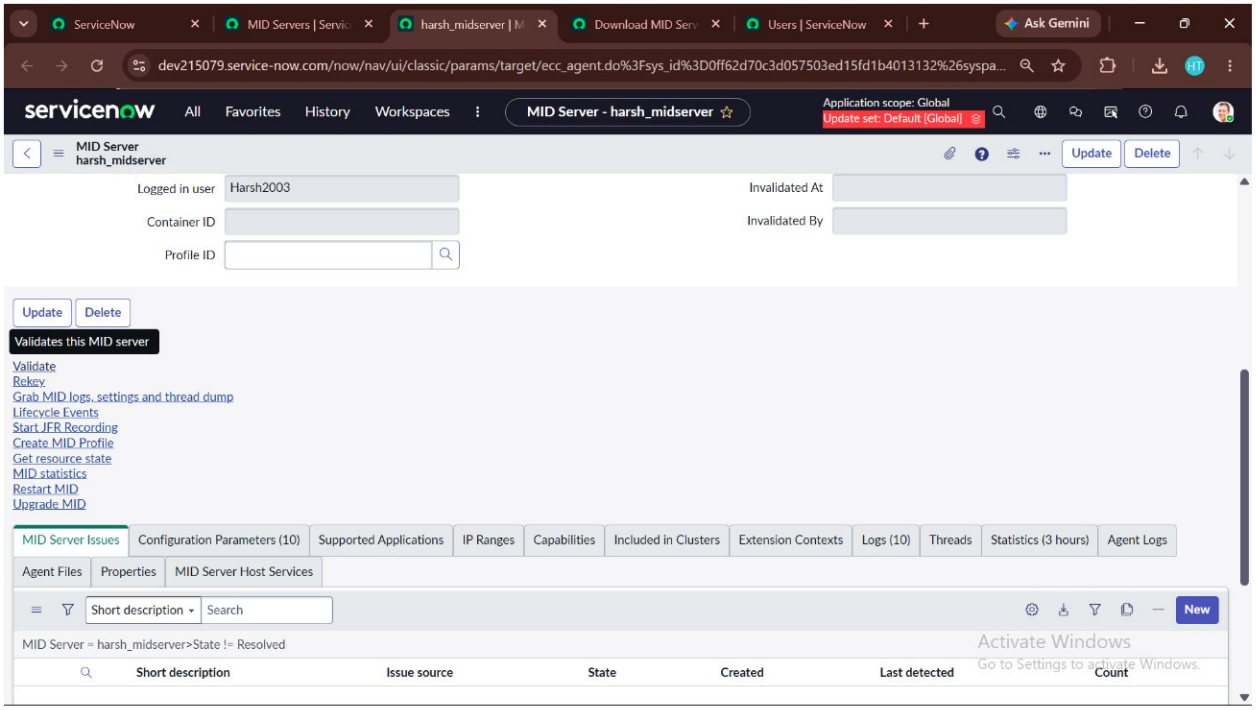


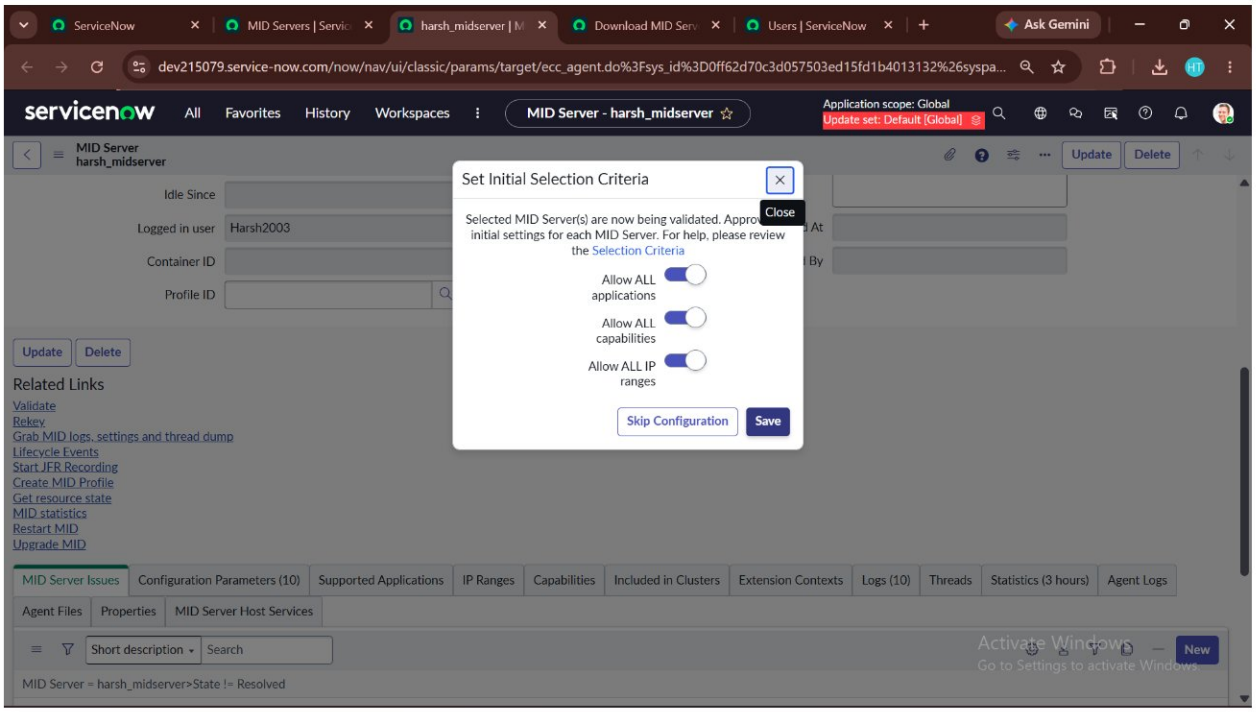
Then mid server ke server me jao :

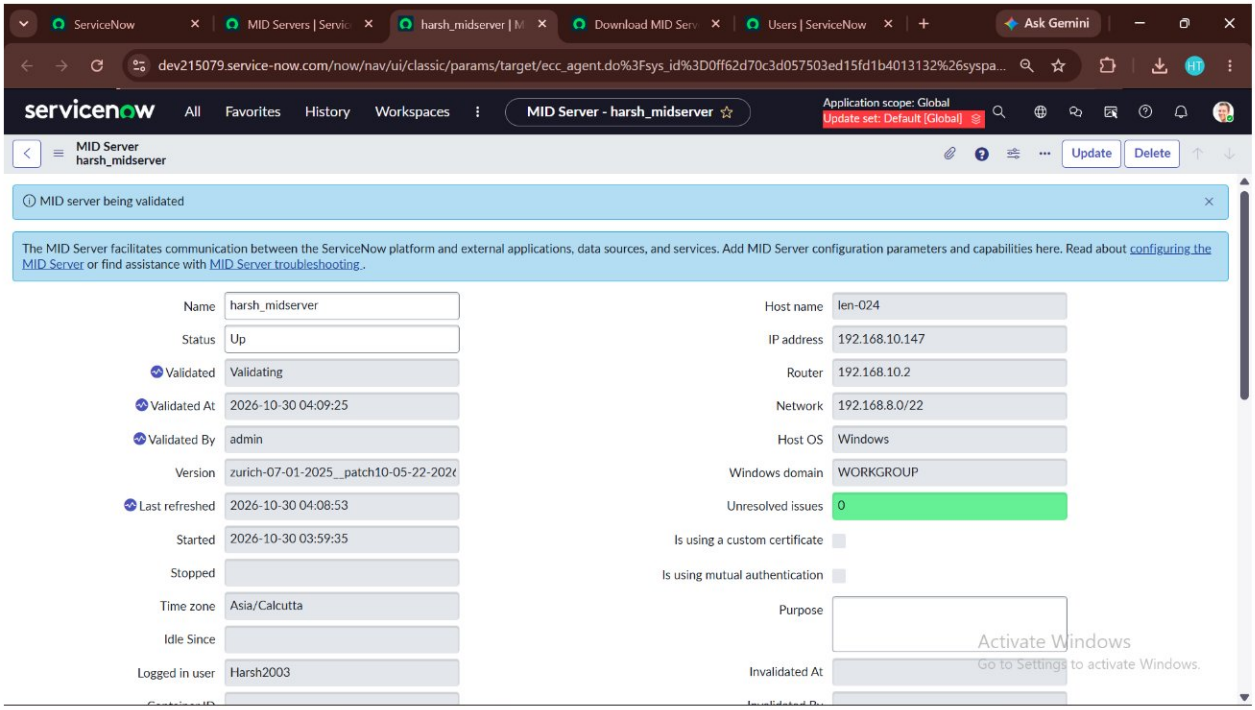


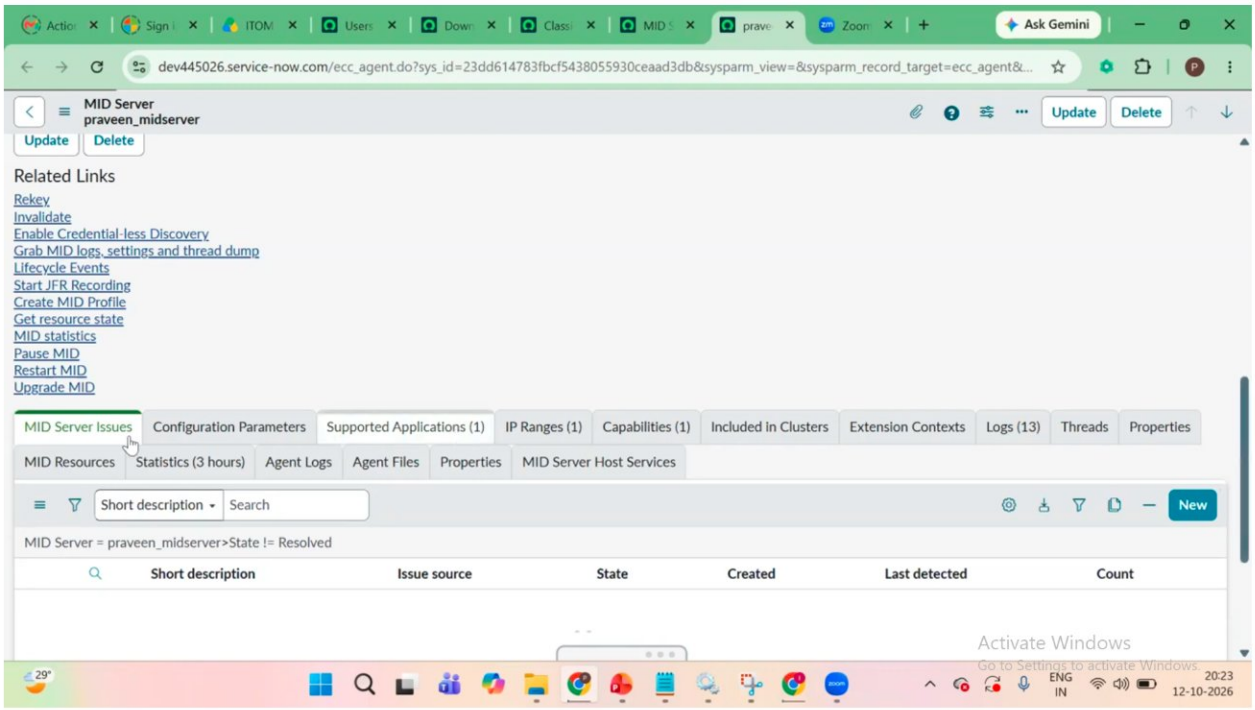


Then iss server ko validate kro :

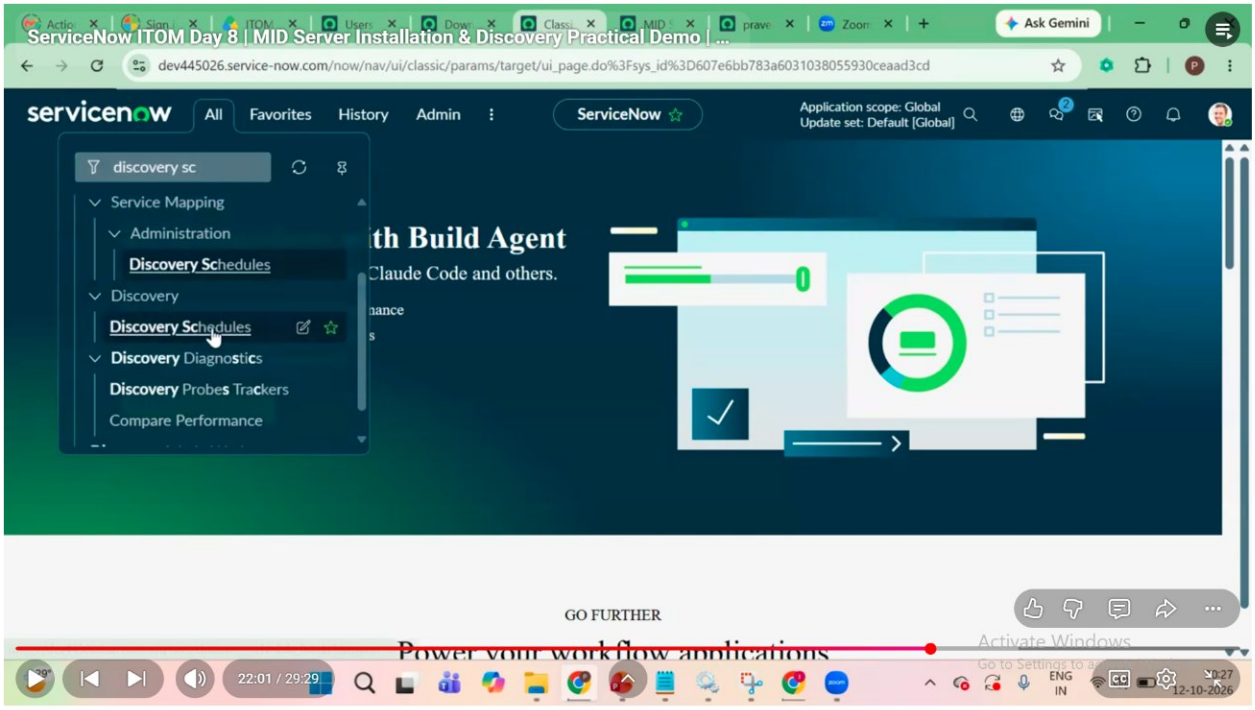

ServiceNow
MID Servers | Servic
harsh_midserver | M
Download MID Serv
Users | ServiceNow
Ask Gemini
dev215079.service-now.com/now/nav/ui/classic/params/target/ecc_agent.do%3Fsys_id%3D0ff62d70c3d057503ed15fd1b4013132%26syspa...
servicenow
All
Favorites
History
Workspaces
MID Server - harsh_midserver
Application scope: Global
Update set: Default [Global]
MID Server
harsh_midserver
Update
Delete
Logged in user
Harsh2003
Container ID
Profile ID
Invalidated At
Invalidated By
Update
Delete
Validates this MID server
Validate
Rekey
Grab MID logs, settings and thread dump
Lifecycle Events
Start JFR Recording
Create MID Profile
Get resource state
MID statistics
Restart MID
Upgrade MID
MID Server Issues
Configuration Parameters (10)
Supported Applications
IP Ranges
Capabilities
Included in Clusters
Extension Contexts
Logs (10)
Threads
Statistics (3 hours)
Agent Logs
Agent Files
Properties
MID Server Host Services
Short description
Search
New
MID Server = harsh_midserver>State != Resolved
Short description
Issue source
State
Created
Last detected
Count
Activate Windows
Go to Settings to activate Windows.

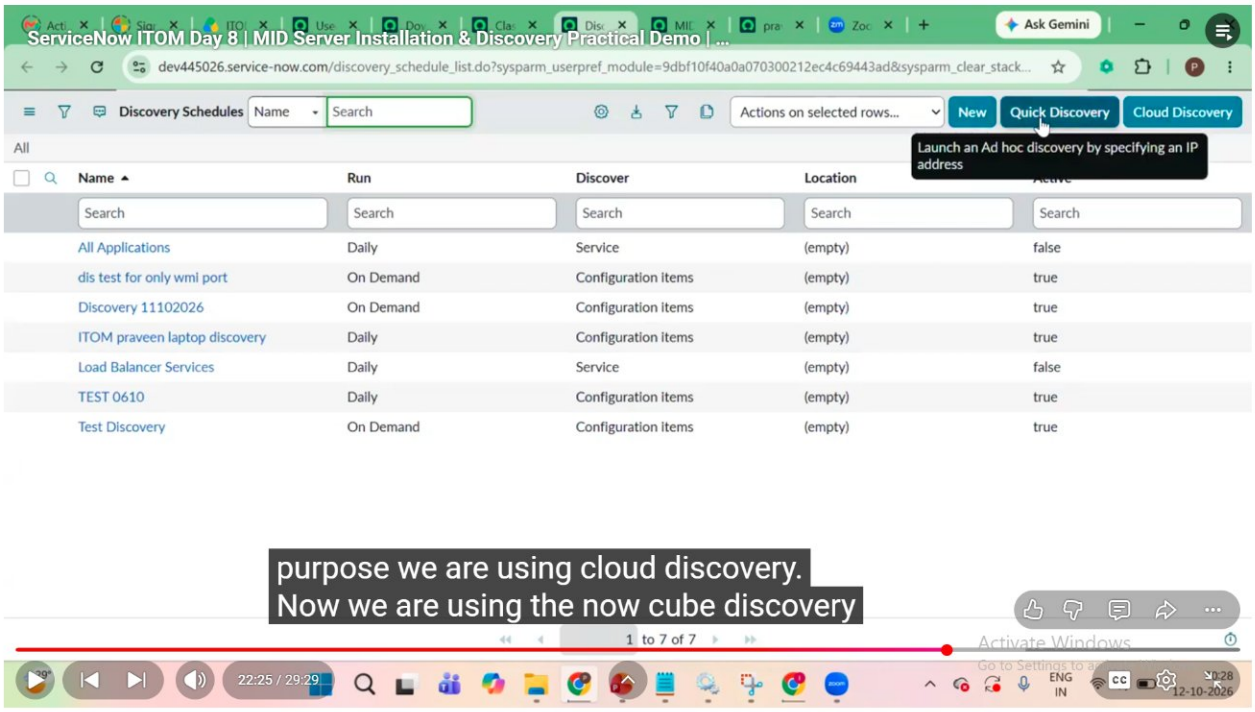

ServiceNow
MID Servers | Servic
harsh_midserver | M
Download MID Serv
Users | ServiceNow
Ask Gemini
dev215079.service-now.com/now/nav/ui/classic/params/target/ecc_agent.do%3Fsys_id%3D0ff62d70c3d057503ed15fd1b4013132%26syspa...
servicenow
All
Favorites
History
Workspaces
MID Server - harsh_midserver
Application scope: Global
Update set: Default [Global]
MID Server
harsh_midserver
Update
Delete
Set Initial Selection Criteria
Close
Selected MID Server(s) are now being validated. Approv
initial settings for each MID Server. For help, please review
the Selection Criteria
Allow ALL applications
Allow ALL capabilities
Allow ALL IP ranges
Skip Configuration
Save
Idle Since
Logged in user
Harsh2003
Container ID
Profile ID
Update
Delete
Related Links
Validate
Rekey
Grab MID logs, settings and thread dump
Lifecycle Events
Start JFR Recording
Create MID Profile
Get resource state
MID statistics
Restart MID
Upgrade MID
MID Server Issues
Configuration Parameters (10)
Supported Applications
IP Ranges
Capabilities
Included in Clusters
Extension Contexts
Logs (10)
Threads
Statistics (3 hours)
Agent Logs
Agent Files
Properties
MID Server Host Services
Short description
Search
New
MID Server = harsh_midserver>State != Resolved
Activate Windows
Go to Settings to activate Windows.

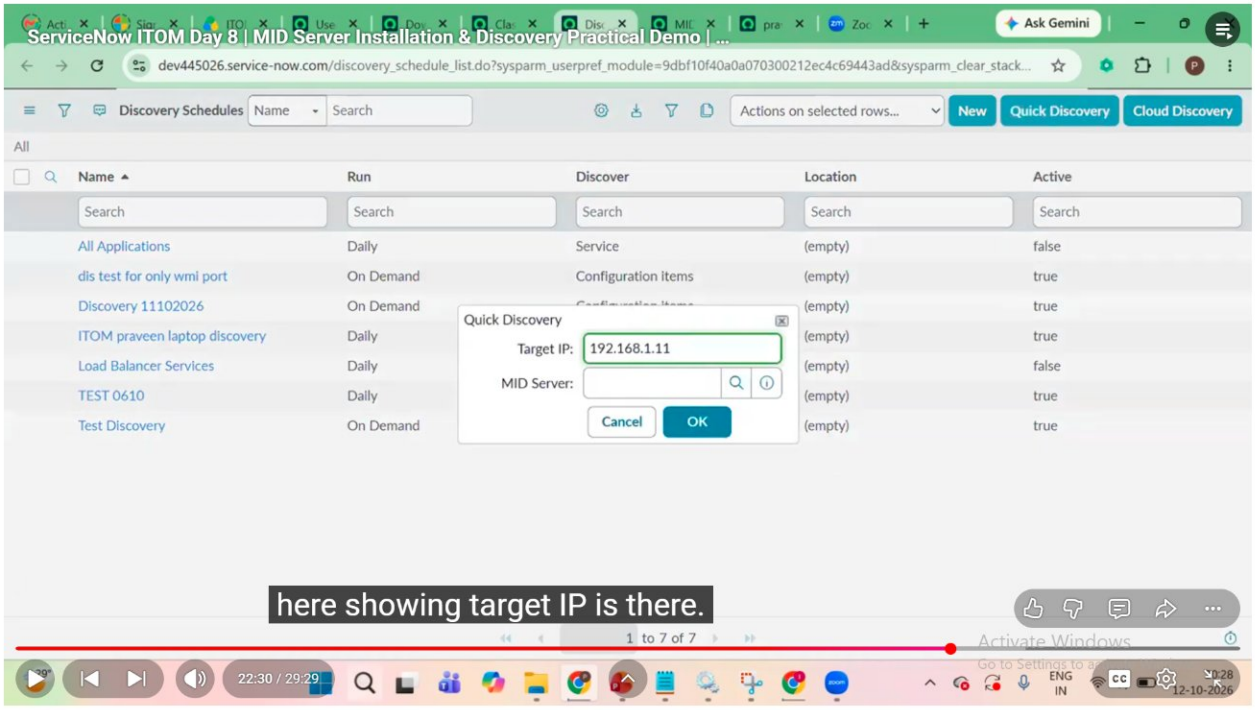


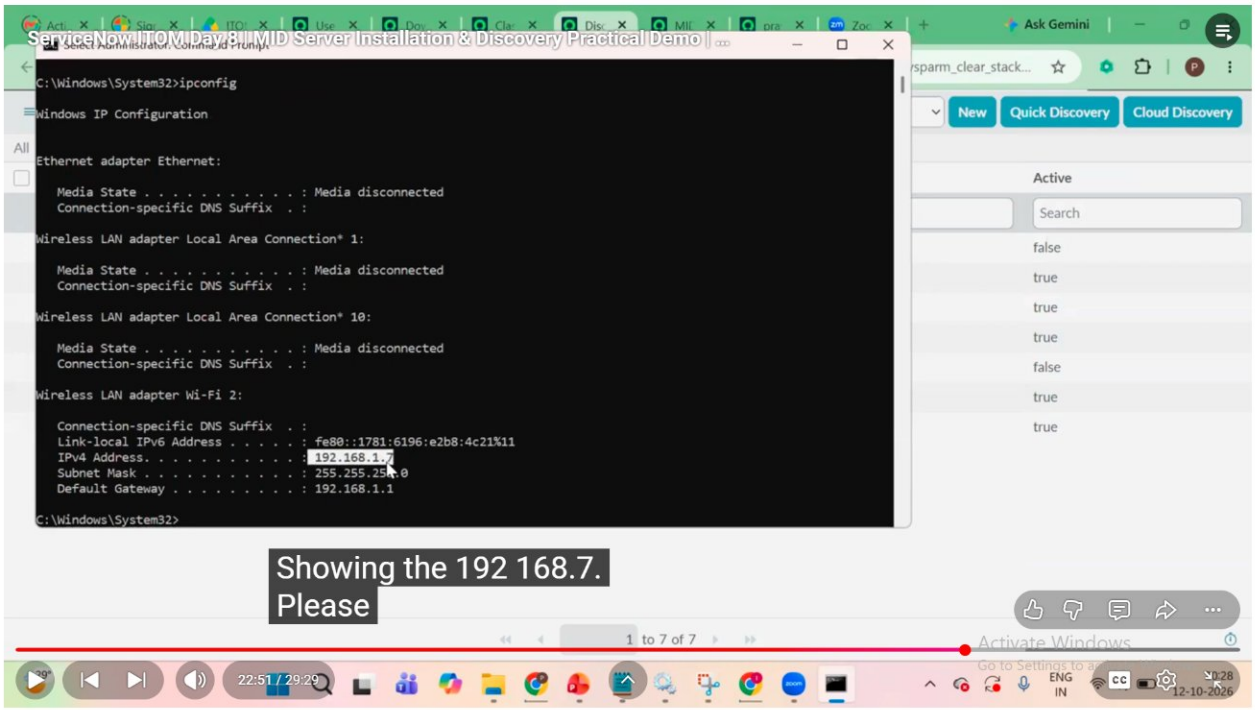


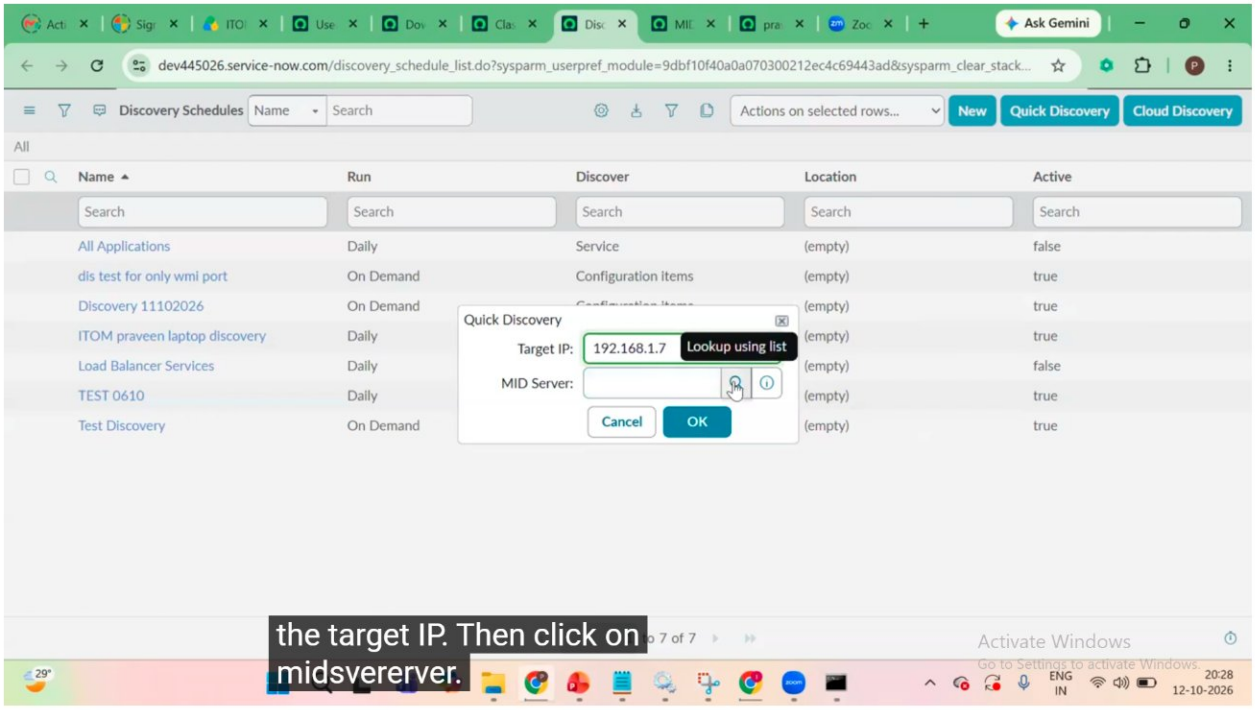
Now do discovery :

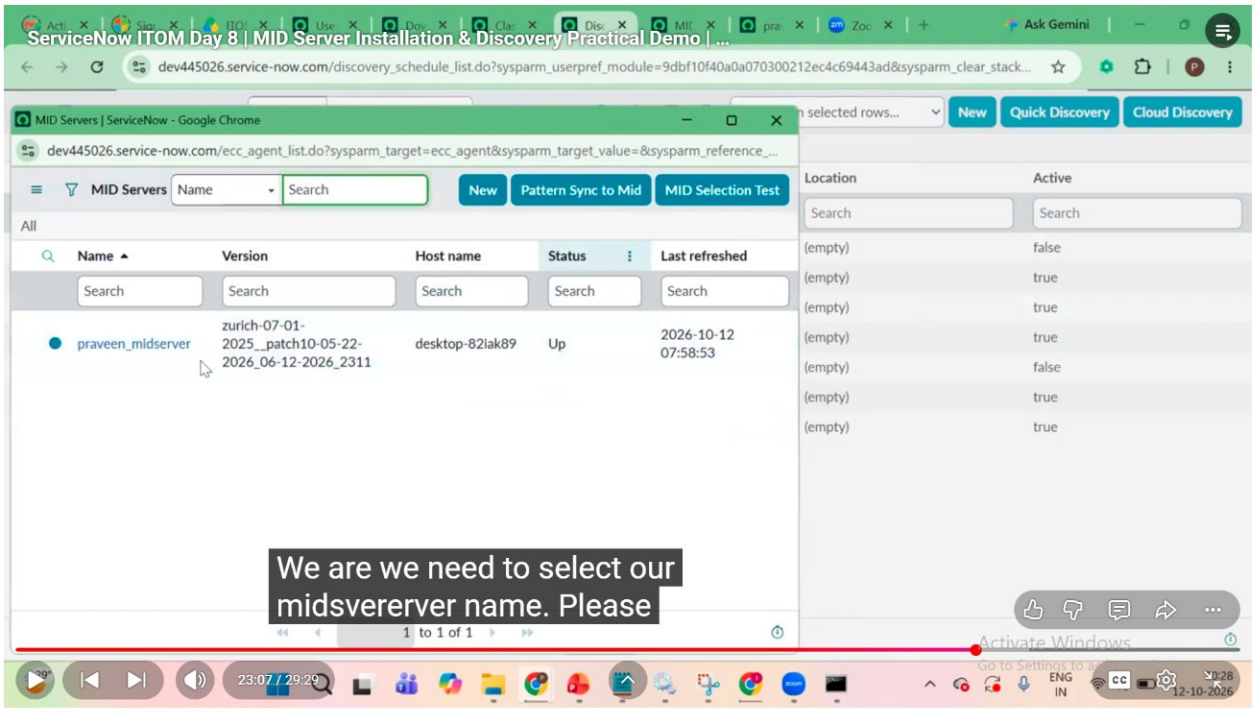

ServiceNow ITOM Day 8 | MID Server Installation & Discovery Practical Demo | ...
dev445026.service-now.com/now/nav/ui/classic/params/target/ui_page.do%3Fsys_id%3D607e6bb783a6031038055930ceaad3cd
servicenow
All
Favorites
History
Admin
ServiceNow
Application scope: Global
Update set: Default [Global]
discovery sc
Service Mapping
Administration
Discovery Schedules
Discovery
Discovery Schedules
Discovery Diagnostics
Discovery Probes Trackers
Compare Performance
th Build Agent
Claude Code and others.
GO FURTHER
Power your workflow applications
22:01 / 29:29

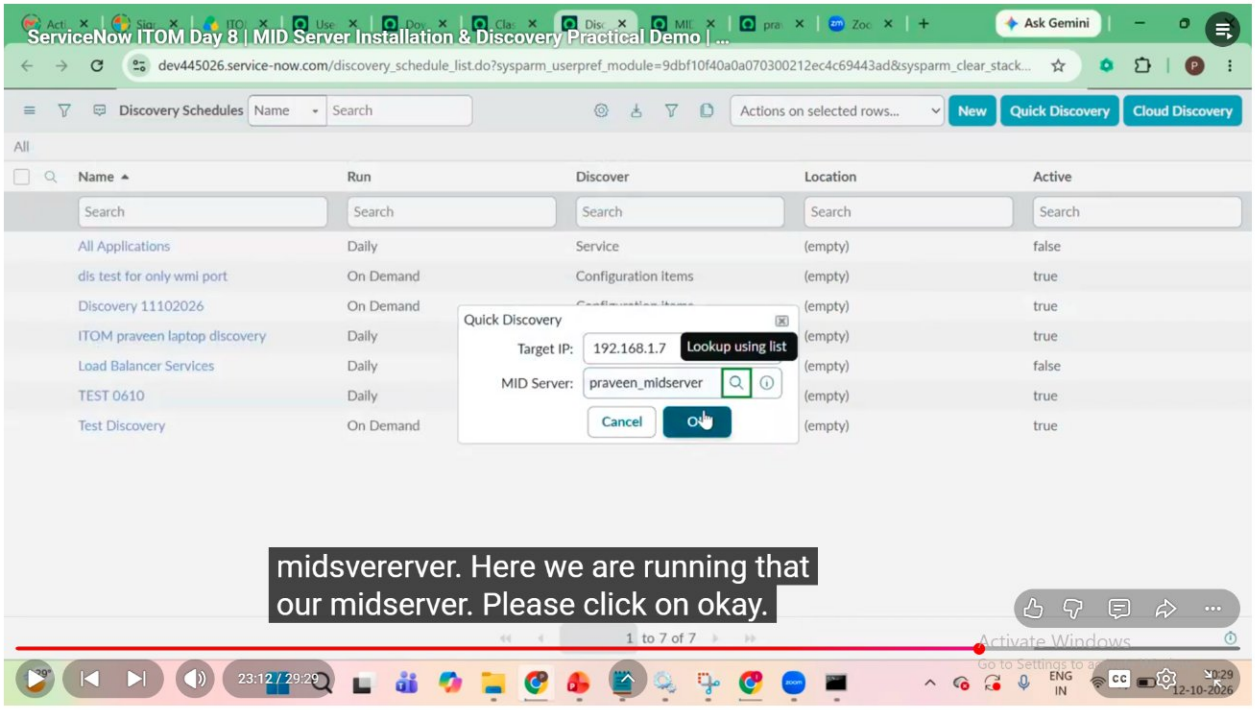

ServiceNow ITOM Day 8 | MID Server Installation & Discovery Practical Demo | ...
dev445026.service-now.com/discovery_schedule_list.do?sysparm_userpref_module=9dbf10f40a0a070300212ec4c69443ad&sysparm_clear_stack...
Discovery Schedules
Name
Search
Actions on selected rows...
New
Quick Discovery
Cloud Discovery
Launch an Ad hoc discovery by specifying an IP address
All
Name
Run
Discover
Location
Search
All Applications Daily Service (empty) false
dis test for only wmi port On Demand Configuration items (empty) true
Discovery 11102026 On Demand Configuration items (empty) true
ITOM praveen laptop discovery Daily Configuration items (empty) true
Load Balancer Services Daily Service (empty) false
TEST 0610 Daily Configuration items (empty) true
Test Discovery On Demand Configuration items (empty) true
purpose we are using cloud discovery.
Now we are using the now cube discovery
1 to 7 of 7
22:25 / 29:29


ServiceNow ITOM Day 8 | MID Server Installation & Discovery Practical Demo | ...
dev445026.service-now.com/discovery_schedule_list.do?sysparm_userpref_module=9dbf10f40a0a070300212ec4c69443ad&sysparm_clear_stack...
Discovery Schedules
Name
Search
Actions on selected rows...
New
Quick Discovery
Cloud Discovery
All
Name
Run
Discover
Location
Active
All Applications
Daily
Service
(empty)
false
dis test for only wmi port
On Demand
Configuration items
(empty)
true
Discovery 11102026
On Demand
(empty)
true
ITOM praveen laptop discovery
Daily
(empty)
true
Load Balancer Services
Daily
(empty)
false
TEST 0610
Daily
(empty)
true
Test Discovery
On Demand
(empty)
true
Quick Discovery
Target IP:
192.168.1.11
MID Server:
Cancel
OK
1 to 7 of 7
here showing target IP is there.
22:30 / 29:29

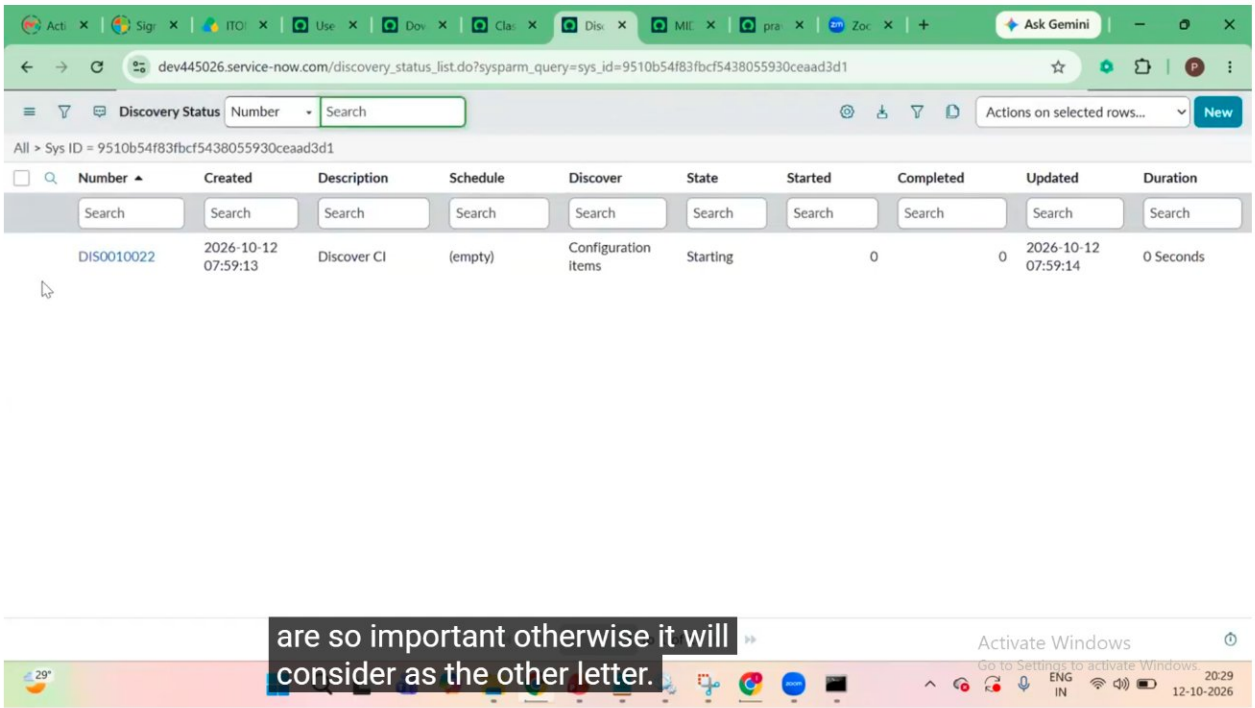

ServiceNow ITOM Day 8 | MID Server Installation & Discovery Practical Demo | ...
C:\Windows\System32>ipconfig
Windows IP Configuration
Ethernet adapter Ethernet:
Media State . . . . . : Media disconnected
Connection-specific DNS Suffix . :
Wireless LAN adapter Local Area Connection* 1:
Media State . . . . . : Media disconnected
Connection-specific DNS Suffix . :
Wireless LAN adapter Local Area Connection* 10:
Media State . . . . . : Media disconnected
Connection-specific DNS Suffix . :
Wireless LAN adapter Wi-Fi 2:
Connection-specific DNS Suffix . :
Link-local IPv6 Address . . . . . : fe80::1781:6196:e2b8:4c21%11
IPv4 Address. . . . . : 192.168.1.7
Subnet Mask . . . . . : 255.255.255.0
Default Gateway . . . . . : 192.168.1.1
C:\Windows\System32>
Showing the 192 168.7.
Please
1 to 7 of 7
22:51 / 29:29


Ask Gemini
dev445026.service-now.com/discovery_schedule_list.do?sysparm_userpref_module=9dbf10f40a0a070300212ec4c69443ad&sysparm_clear_stack...
Discovery Schedules
Name
Search
Actions on selected rows...
New
Quick Discovery
Cloud Discovery
All
Name
Run
Discover
Location
Active
All Applications
Daily
Service
(empty)
false
dis test for only wmi port
On Demand
Configuration items
(empty)
true
Discovery 11102026
On Demand
(empty)
true
ITOM praveen laptop discovery
Daily
(empty)
true
Load Balancer Services
Daily
(empty)
false
TEST 0610
Daily
(empty)
true
Test Discovery
On Demand
(empty)
true
Quick Discovery
Target IP:
192.168.1.7
Lookup using list
MID Server:
Cancel
OK
the target IP. Then click on midsvererver.
Activate Windows
Go to Settings to activate Windows.
ENG
IN
20:28
12-10-2026

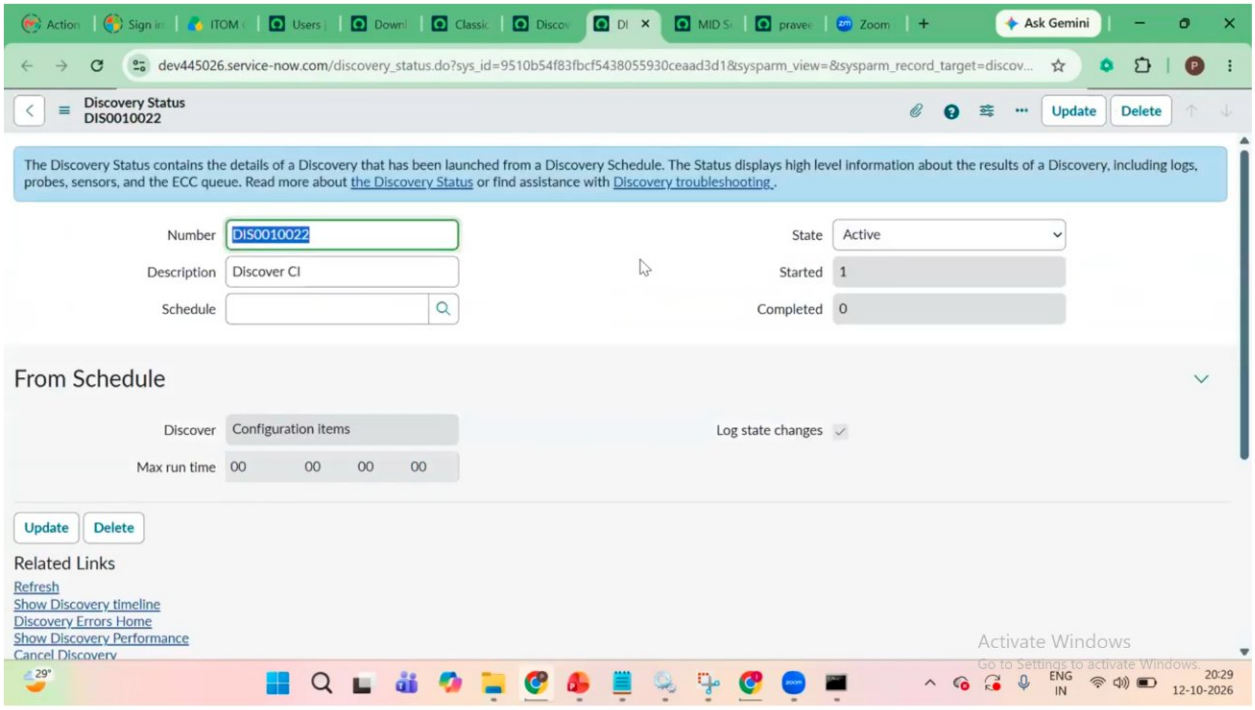

ServiceNow ITOM Day 8 | MID Server Installation & Discovery Practical Demo | ...
Ask Gemini
dev445026.service-now.com/discovery_schedule_list.do?sysparm_userpref_module=9dbf10f40a0a070300212ec4c69443ad&sysparm_clear_stack...
New
Quick Discovery
Cloud Discovery
MID Servers | ServiceNow - Google Chrome
dev445026.service-now.com/ecc_agent_list.do?sysparm_target=ecc_agent&sysparm_target_value=&sysparm_reference_...
MID Servers
Name
Search
New
Pattern Sync to Mid
MID Selection Test
All
Name
Version
Host name
Status
Last refreshed
praveen_midserver
zurich-07-01-2025__patch10-05-22-2026_06-12-2026_2311
desktop-82iak89
Up
2026-10-12 07:58:53
1 to 1 of 1
Location
Active
(empty)
false
(empty)
true
(empty)
true
(empty)
true
(empty)
false
(empty)
true
(empty)
true
We are we need to select our midsvererver name. Please
Activate Windows
Go to Settings to a
23:07 / 29:29
ENG
IN
12-10-2026

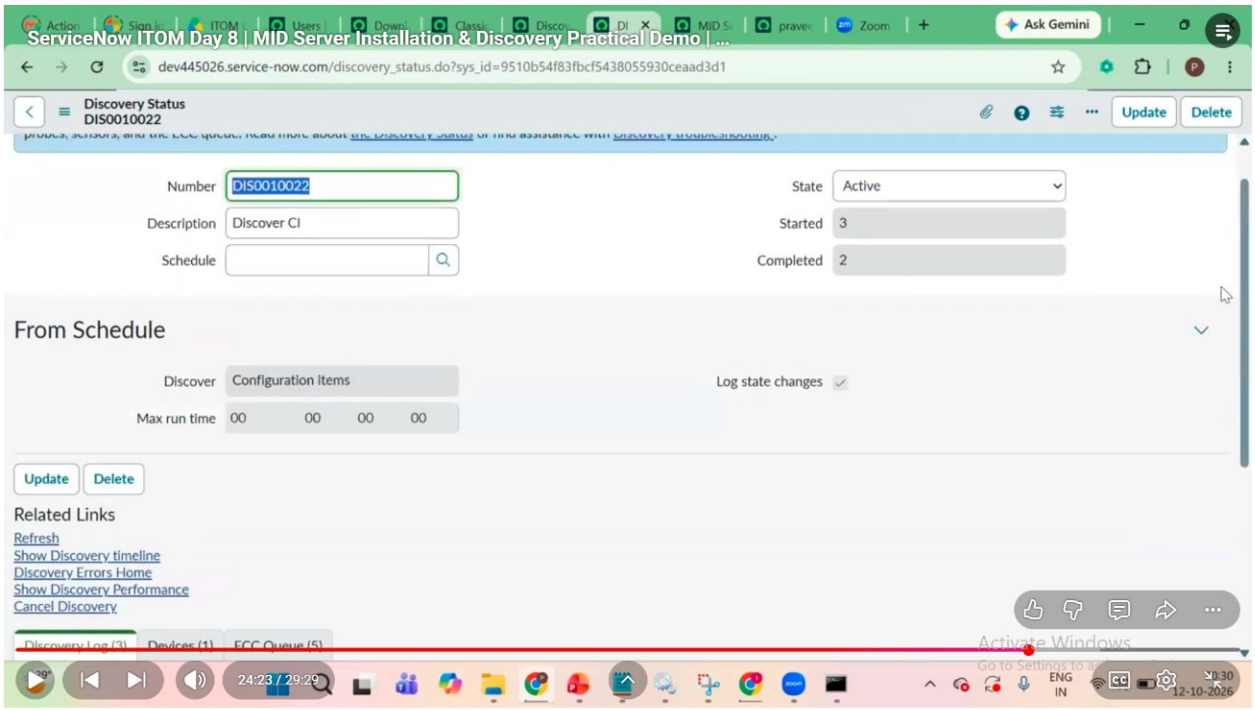


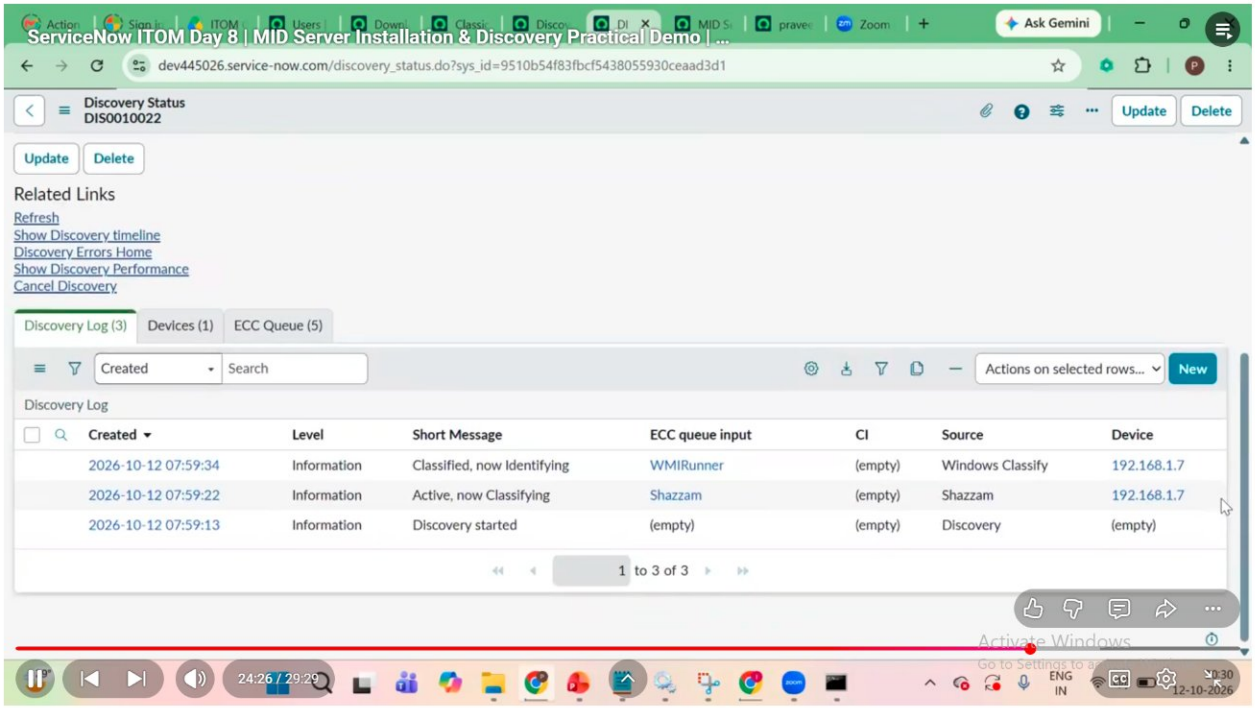
midsvererver. Here we are running that our midserver. Please click on okay.

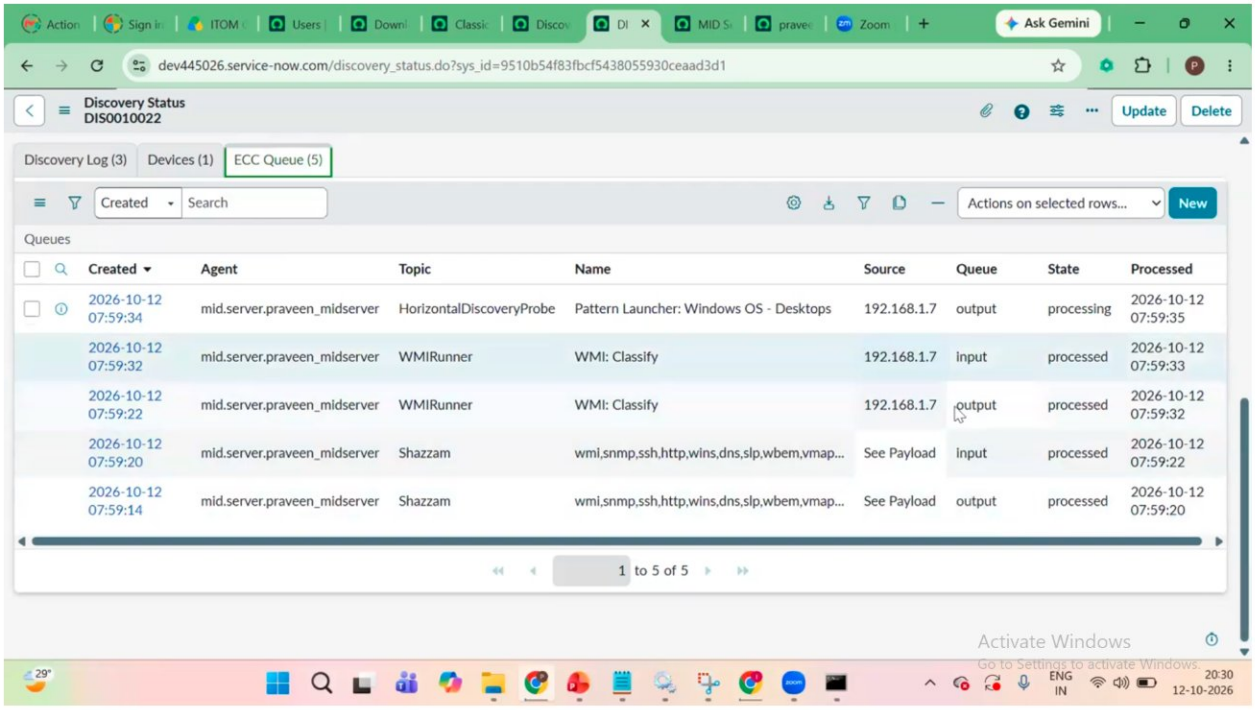


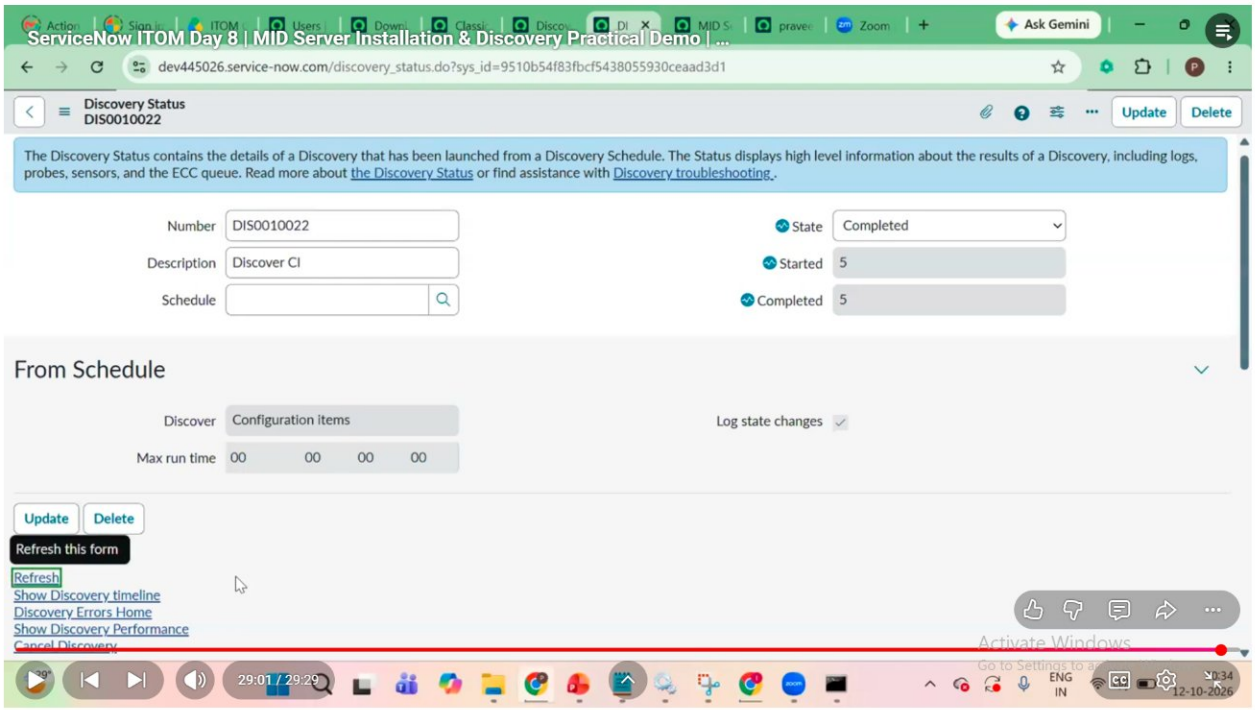
are so important otherwise it will consider as the other letter.

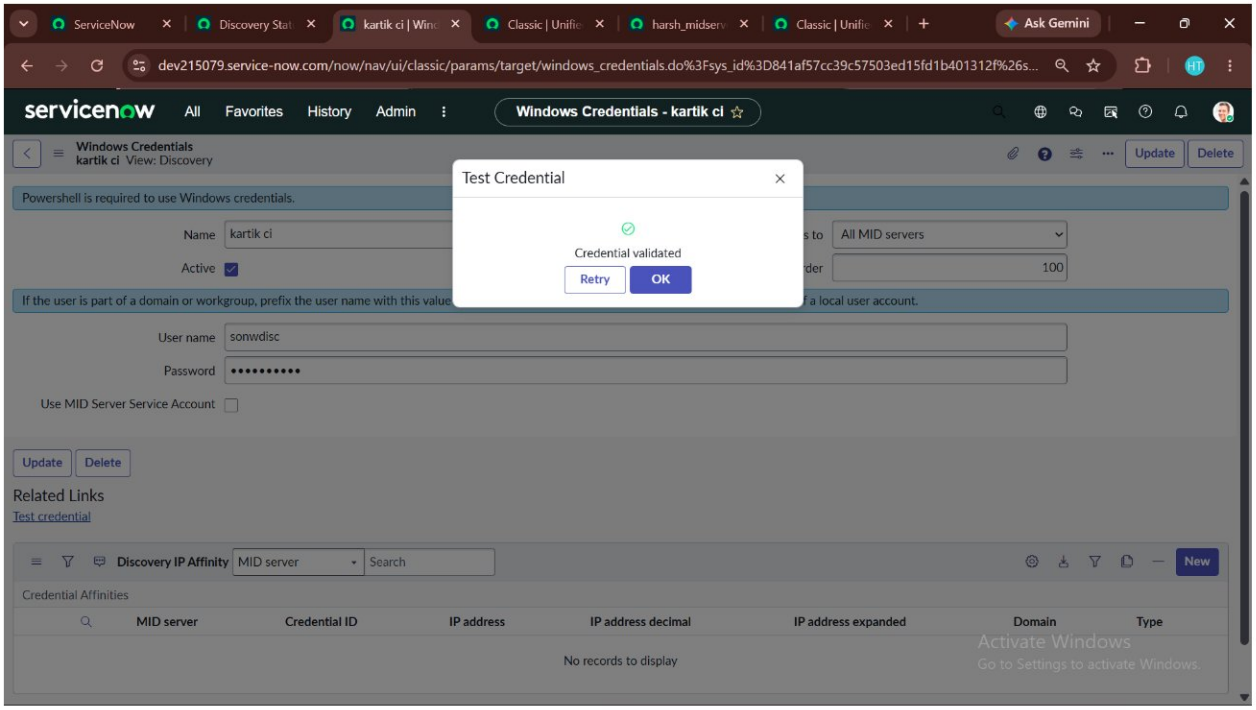

Ask Gemini
dev445026.service-now.com/discovery_status.do?sys_id=9510b54f83fbcf5438055930ceaad3d1&sysparm_view=&sysparm_record_target=discov...
Discovery Status
DIS0010022
Update
Delete
The Discovery Status contains the details of a Discovery that has been launched from a Discovery Schedule. The Status displays high level information about the results of a Discovery, including logs, probes, sensors, and the ECC queue. Read more about the Discovery Status or find assistance with Discovery troubleshooting.
Number
DIS0010022
Description
Discover CI
Schedule
State
Active
Started
1
Completed
0
From Schedule
Discover
Configuration items
Log state changes
Max run time
00 00 00 00
Update
Delete
Related Links
Refresh
Show Discovery timeline
Discovery Errors Home
Show Discovery Performance
Cancel Discovery
Activate Windows
Go to Settings to activate Windows.
ENG
IN
20:29
12-10-2026

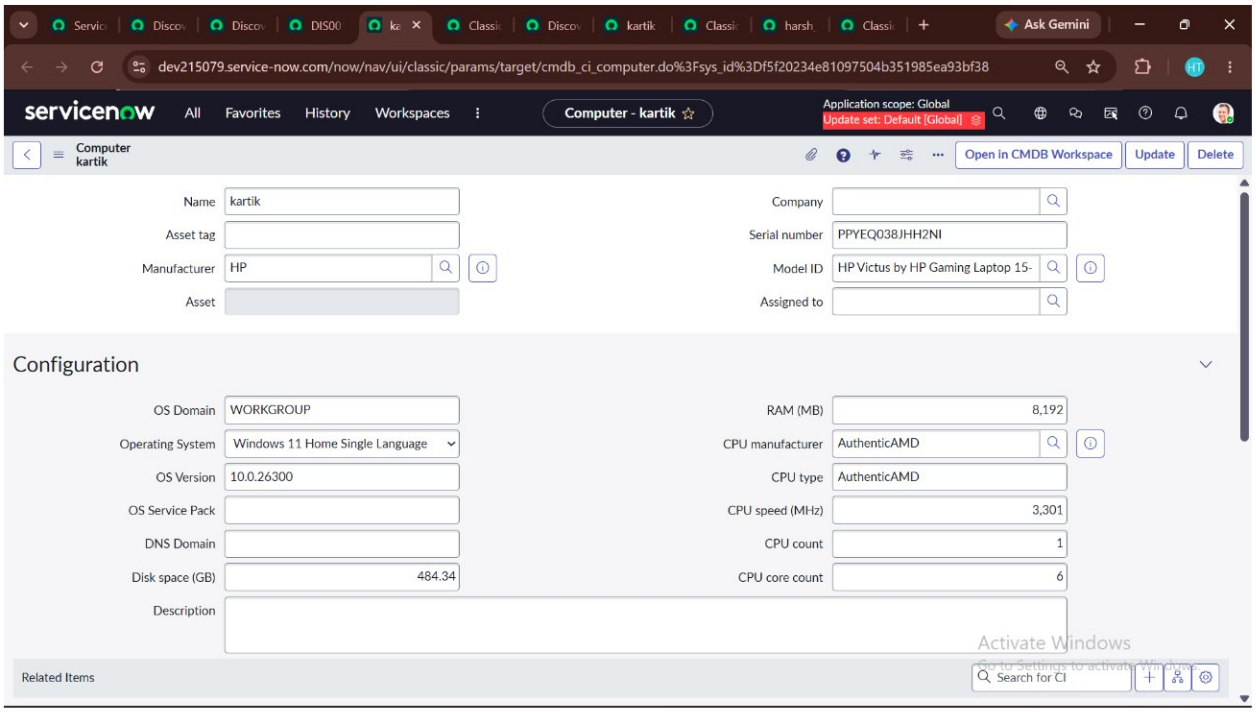

ServiceNow ITOM Day 8 | MID Server Installation & Discovery Practical Demo | ...
Ask Gemini
dev445026.service-now.com/discovery_status.do?sys_id=9510b54f83fbcf5438055930ceaad3d1
Discovery Status
DIS0010022
Update
Delete
Number
DIS0010022
Description
Discover CI
Schedule
State
Active
Started
3
Completed
2
From Schedule
Discover
Configuration items
Log state changes
Max run time
00 00 00 00
Update
Delete
Related Links
Refresh
Show Discovery timeline
Discovery Errors Home
Show Discovery Performance
Cancel Discovery
Discovery Log (3)
Devices (1)
ECC Queue (5)
24:23 / 29:29
Activate Windows
ENG
IN
12-10-2026

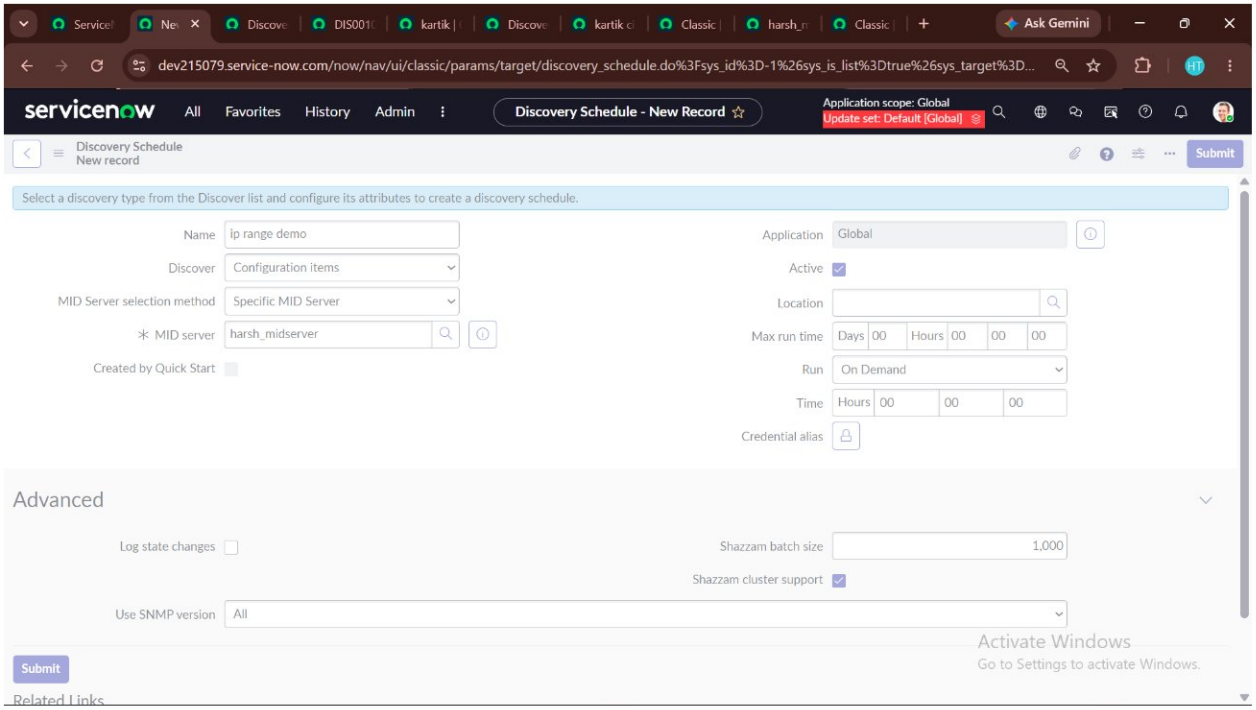

ServiceNow ITOM Day 8 | MID Server Installation & Discovery Practical Demo | ...
dev445026.service-now.com/discovery_status.do?sys_id=9510b54f83fbcf5438055930ceaad3d1
Discovery Status
DIS0010022
Update
Delete
Related Links
Refresh
Show Discovery timeline
Discovery Errors Home
Show Discovery Performance
Cancel Discovery
Discovery Log (3)
Devices (1)
ECC Queue (5)
Created
Search
Actions on selected rows...
New
Discovery Log
Created
Level
Short Message
ECC queue input
CI
Source
Device
2026-10-12 07:59:34
Information
Classified, now Identifying
WMIRunner
(empty)
Windows Classify
192.168.1.7
2026-10-12 07:59:22
Information
Active, now Classifying
Shazzam
(empty)
Shazzam
192.168.1.7
2026-10-12 07:59:13
Information
Discovery started
(empty)
(empty)
Discovery
(empty)
1 to 3 of 3
Activate Windows
24:26 / 29:29

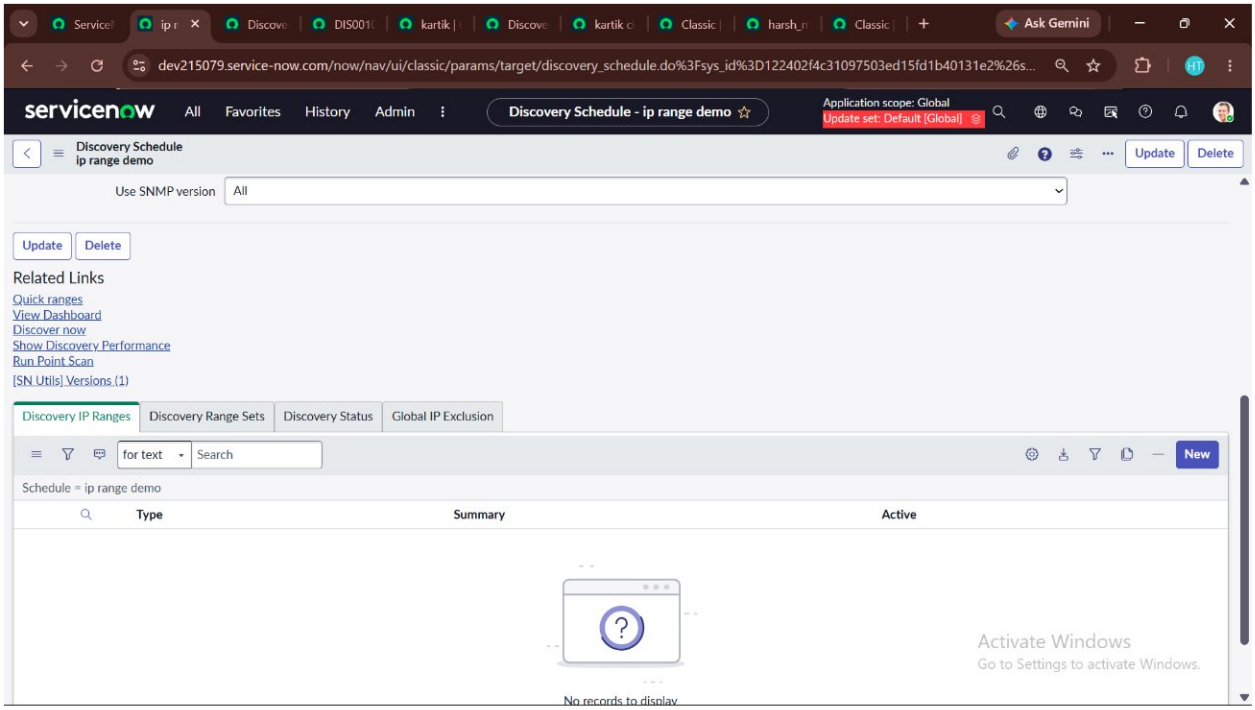

dev445026.service-now.com/discovery_status.do?sys_id=9510b54f83fbcf5438055930ceaad3d1
Discovery Status
DIS0010022
Update
Delete
Discovery Log (3)
Devices (1)
ECC Queue (5)
Created
Search
Actions on selected rows...
New
Queues
Created
Agent
Topic
Name
Source
Queue
State
Processed
2026-10-12 07:59:34
mid.server.praveen_midserver
HorizontalDiscoveryProbe
Pattern Launcher: Windows OS - Desktops
192.168.1.7
output
processing
2026-10-12 07:59:35
2026-10-12 07:59:32
mid.server.praveen_midserver
WMIRunner
WMI: Classify
192.168.1.7
input
processed
2026-10-12 07:59:33
2026-10-12 07:59:22
mid.server.praveen_midserver
WMIRunner
WMI: Classify
192.168.1.7
output
processed
2026-10-12 07:59:32
2026-10-12 07:59:20
mid.server.praveen_midserver
Shazzam
wmi,snmp,ssh,http,wins,dns,slp,wbem,vmap...
See Payload
input
processed
2026-10-12 07:59:22
2026-10-12 07:59:14
mid.server.praveen_midserver
Shazzam
wmi,snmp,ssh,http,wins,dns,slp,wbem,vmap...
See Payload
output
processed
2026-10-12 07:59:20
1 to 5 of 5
Activate Windows
Go to Settings to activate Windows.

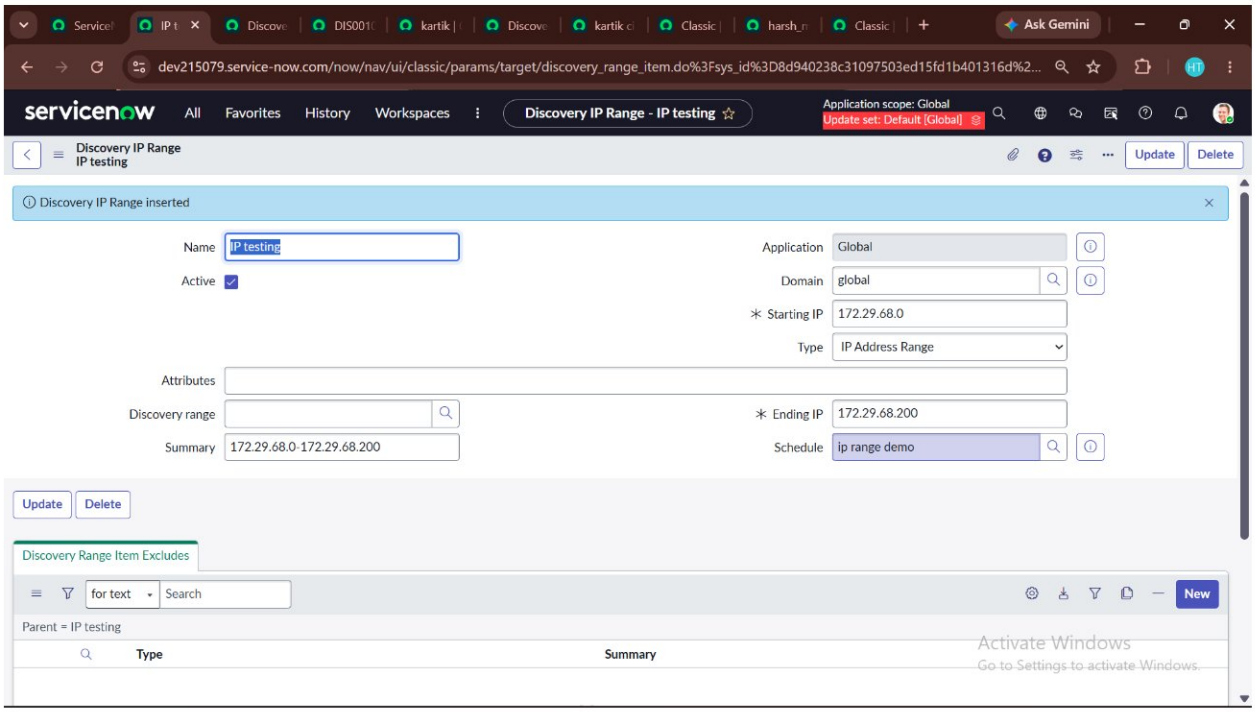

ServiceNow ITOM Day 8 | MID Server Installation & Discovery Practical Demo | ...
dev445026.service-now.com/discovery_status.do?sys_id=9510b54f83fbcf5438055930ceaad3d1
Discovery Status
DIS0010022
Update
Delete
The Discovery Status contains the details of a Discovery that has been launched from a Discovery Schedule. The Status displays high level information about the results of a Discovery, including logs, probes, sensors, and the ECC queue. Read more about the Discovery Status or find assistance with Discovery troubleshooting.
Number
DIS0010022
Description
Discover CI
Schedule
State
Completed
Started
5
Completed
5
From Schedule
Discover
Configuration items
Log state changes
Max run time
00 00 00 00
Update
Delete
Refresh this form
Refresh
Show Discovery timeline
Discovery Errors Home
Show Discovery Performance
Cancel Discovery
29:01 / 29:29
Activate Windows

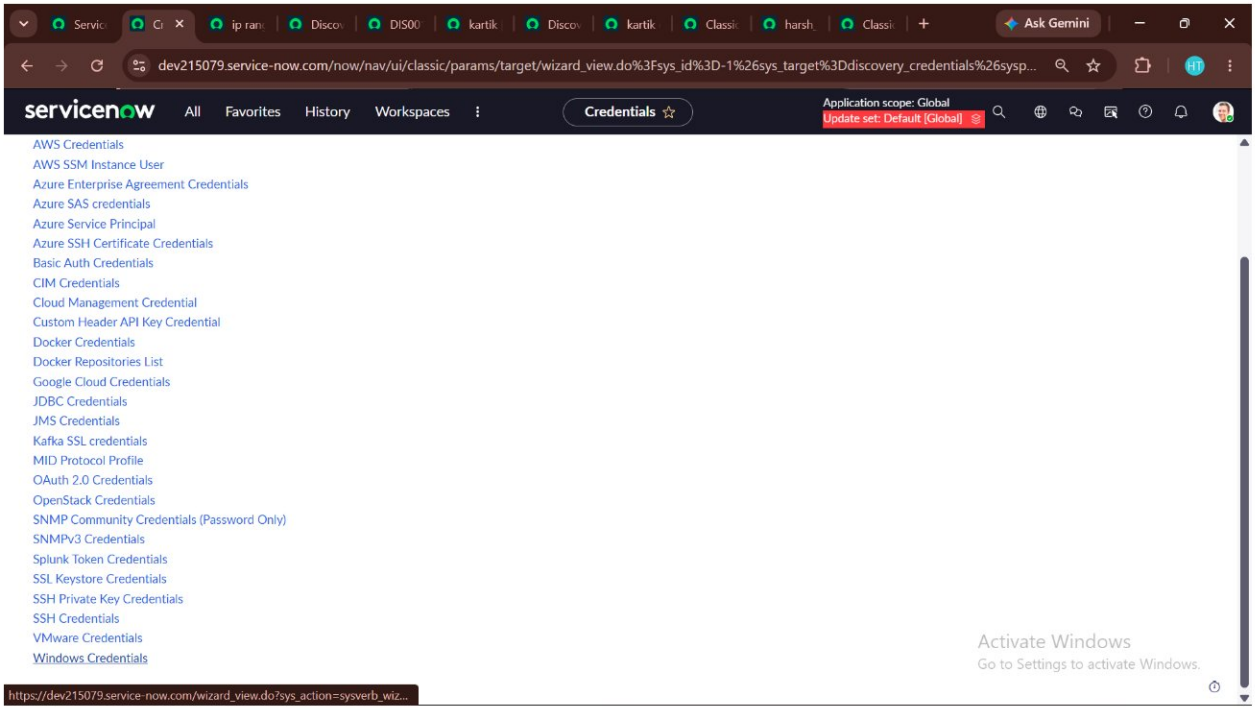

ServiceNow
Discovery Stat
kartik ci | Win
Classic | Unifie
harsh_midserv
Classic | Unifie
Ask Gemini
dev215079.service-now.com/now/nav/ui/classic/params/target/windows_credentials.do%3Fsys_id%3D841af57cc39c57503ed15fd1b401312f%26s...
servicenow
All
Favorites
History
Admin
Windows Credentials - kartik ci
Windows Credentials
kartik ci View: Discovery
Update
Delete
Test Credential
Credential validated
Retry
OK
Powershell is required to use Windows credentials.
Name
kartik ci
Active
All MID servers
100
If the user is part of a domain or workgroup, prefix the user name with this value
a local user account.
User name
sonwdisc
Password
Use MID Server Service Account
Update
Delete
Related Links
Test credential
Discovery IP Affinity
MID server
Search
New
Credential Affinities
MID server
Credential ID
IP address
IP address decimal
IP address expanded
Domain
Type
No records to display
Activate Windows
Go to Settings to activate Windows.

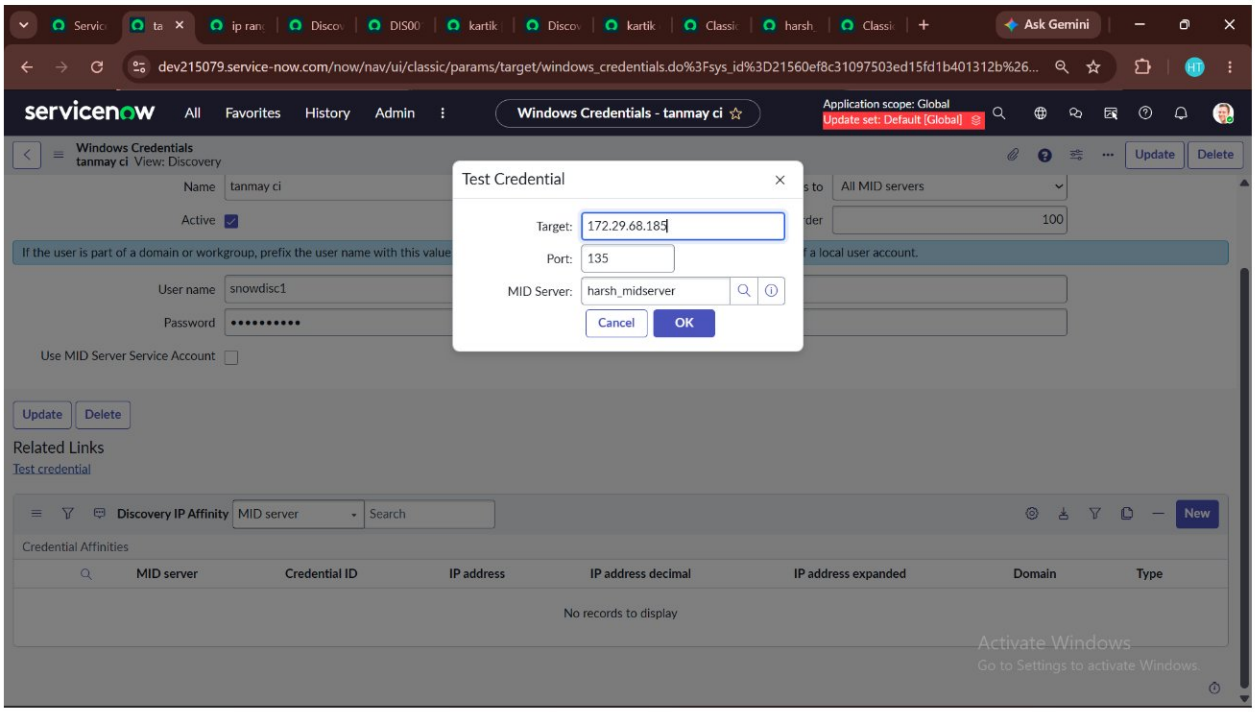

Ask Gemini
dev215079.service-now.com/now/nav/ui/classic/params/target/cmdb_ci_computer.do%3Fsys_id%3Df5f20234e81097504b351985ea93bf38
servicenow
All
Favorites
History
Workspaces
Computer - kartik
Application scope: Global
Update set: Default [Global]
Computer
kartik
Open in CMDB Workspace
Update
Delete
Name
kartik
Asset tag
Manufacturer
HP
Asset
Company
Serial number
PPYEQ038JHH2NI
Model ID
HP Victus by HP Gaming Laptop 15-
Assigned to
Configuration
OS Domain
WORKGROUP
Operating System
Windows 11 Home Single Language
OS Version
10.0.26300
OS Service Pack
DNS Domain
Disk space (GB)
484.34
Description
RAM (MB)
8,192
CPU manufacturer
AuthenticAMD
CPU type
AuthenticAMD
CPU speed (MHz)
3,301
CPU count
1
CPU core count
6
Related Items
Search for CI
Activate Windows

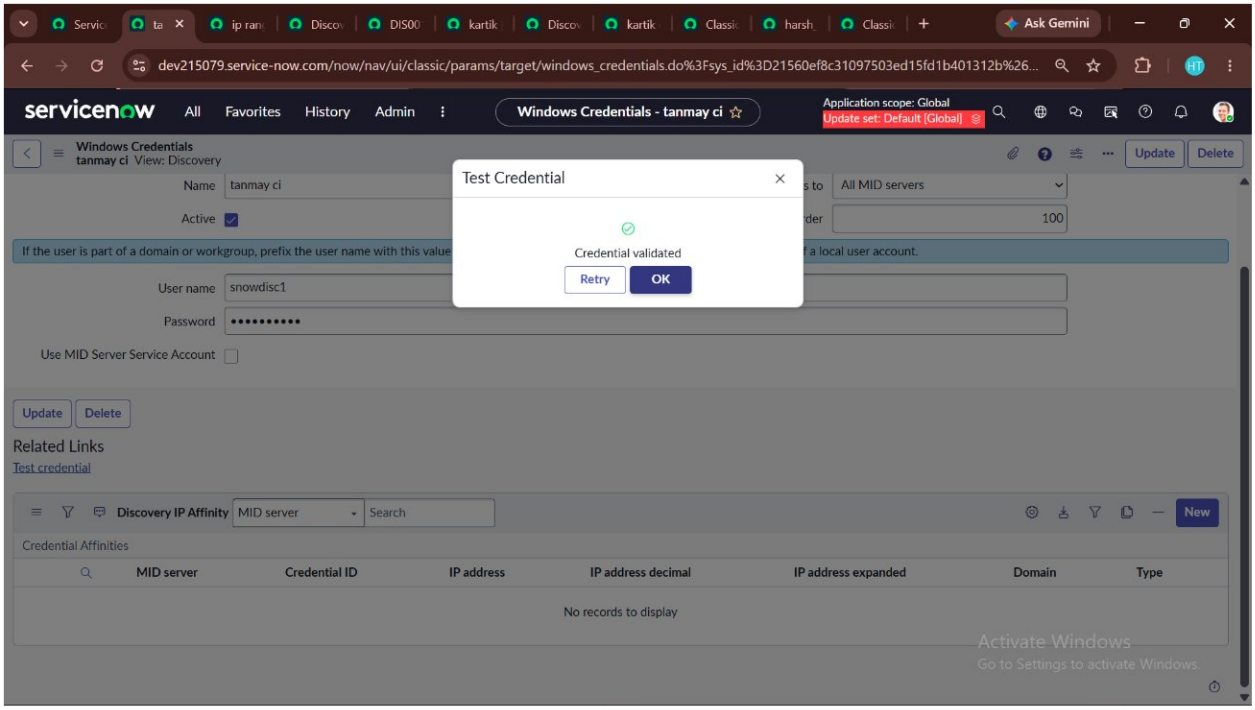

Ask Gemini
dev215079.service-now.com/now/nav/ui/classic/params/target/discovery_schedule.do%3Fsys_id%3D-1%26sys_is_list%3Dtrue%26sys_target%3D...
servicenow
All
Favorites
History
Admin
Discovery Schedule - New Record
Application scope: Global
Update set: Default [Global]
Discovery Schedule
New record
Submit
Select a discovery type from the Discover list and configure its attributes to create a discovery schedule.
Name
ip range demo
Discover
Configuration items
MID Server selection method
Specific MID Server
MID server
harsh_midserver
Created by Quick Start
Application
Global
Active
Location
Max run time
Days 00 Hours 00 00 00
Run
On Demand
Time
Hours 00 00 00
Credential alias
Advanced
Log state changes
Shazzam batch size
1,000
Shazzam cluster support
Use SNMP version
All
Activate Windows
Go to Settings to activate Windows.
Submit
Related Links

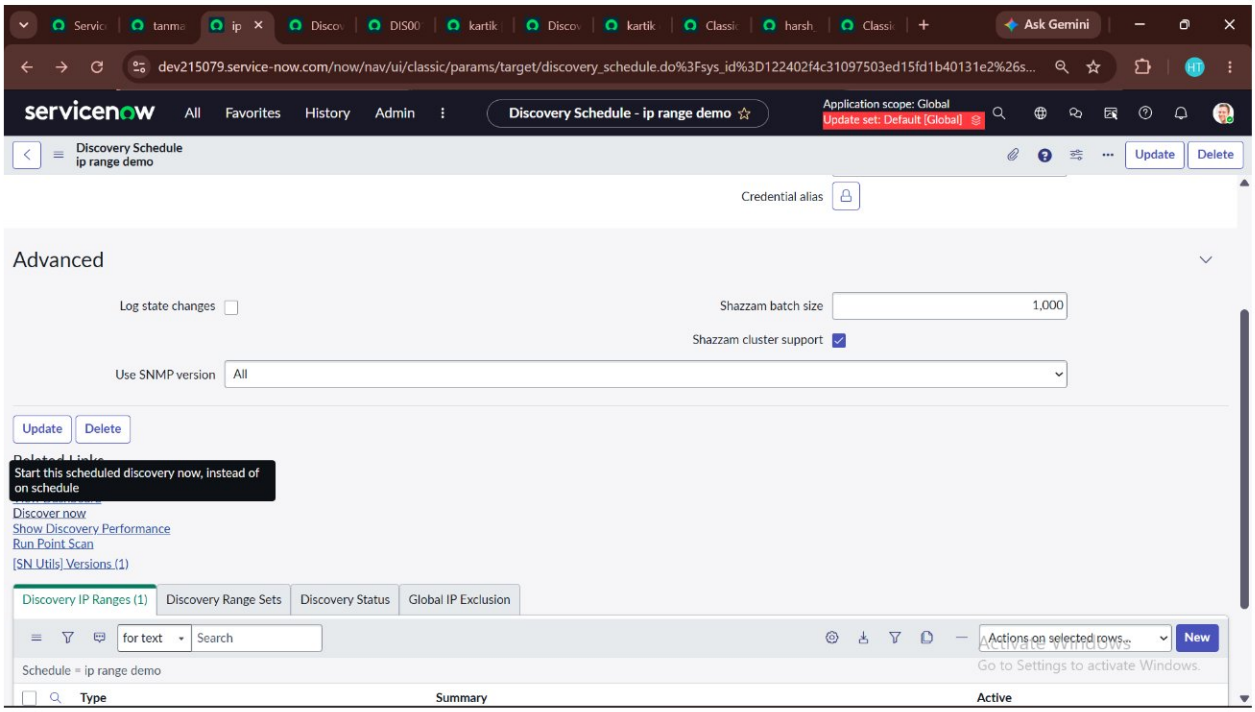

dev215079.service-now.com/now/nav/ui/classic/params/target/discovery_schedule.do%3Fsys_id%3D122402f4c31097503ed15fd1b40131e2%26s...
servicenow
All
Favorites
History
Admin
Discovery Schedule - ip range demo
Application scope: Global
Update set: Default [Global]
Discovery Schedule
ip range demo
Update
Delete
Use SNMP version
All
Update
Delete
Related Links
Quick ranges
View Dashboard
Discover now
Show Discovery Performance
Run Point Scan
[SN Utils] Versions (1)
Discovery IP Ranges
Discovery Range Sets
Discovery Status
Global IP Exclusion
for text
Search
New
Schedule = ip range demo
Type
Summary
Active
No records to display
Activate Windows
Go to Settings to activate Windows.

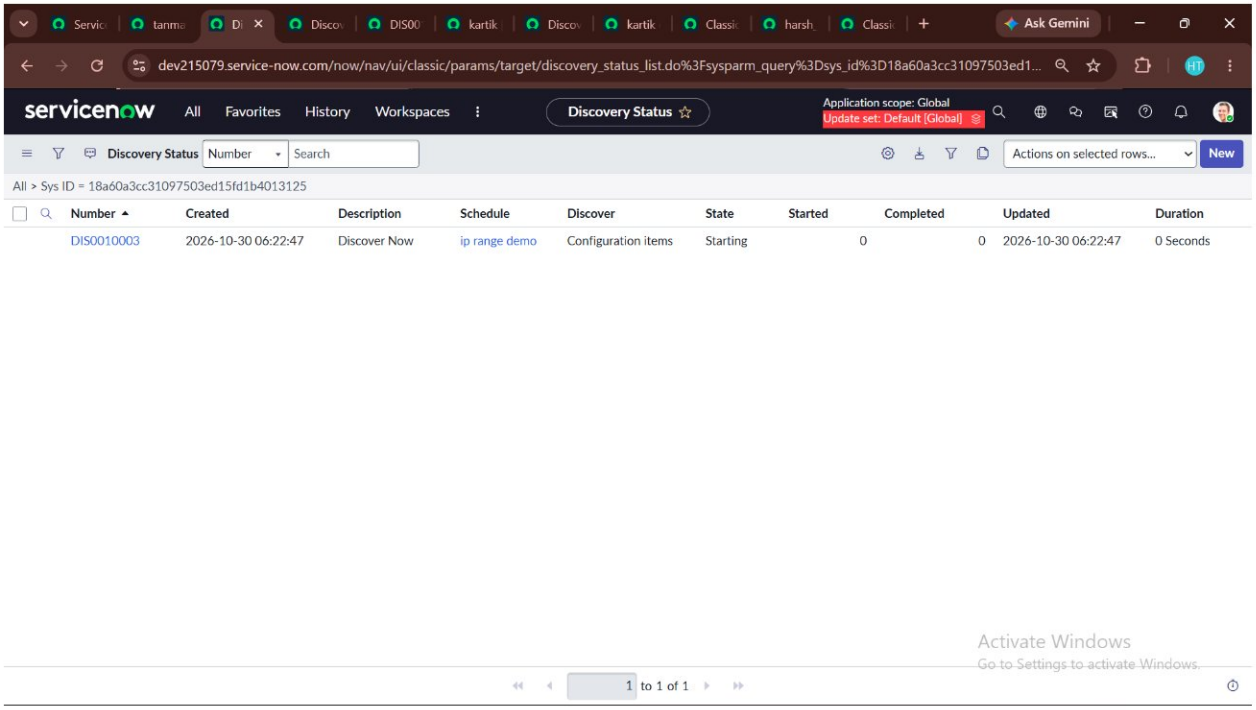

dev215079.service-now.com/now/nav/ui/classic/params/target/discovery_range_item.do%3Fsys_id%3D8d940238c31097503ed15fd1b401316d%2...
servicenow
All
Favorites
History
Workspaces
Discovery IP Range - IP testing
Application scope: Global
Update set: Default [Global]
Discovery IP Range
IP testing
Update
Delete
Discovery IP Range inserted
Name
IP testing
Active
Application
Global
Domain
global
Starting IP
172.29.68.0
Type
IP Address Range
Attributes
Discovery range
Ending IP
172.29.68.200
Summary
172.29.68.0-172.29.68.200
Schedule
ip range demo
Update
Delete
Discovery Range Item Excludes
for text
Search
New
Parent = IP testing
Type
Summary
Activate Windows
Go to Settings to activate Windows.

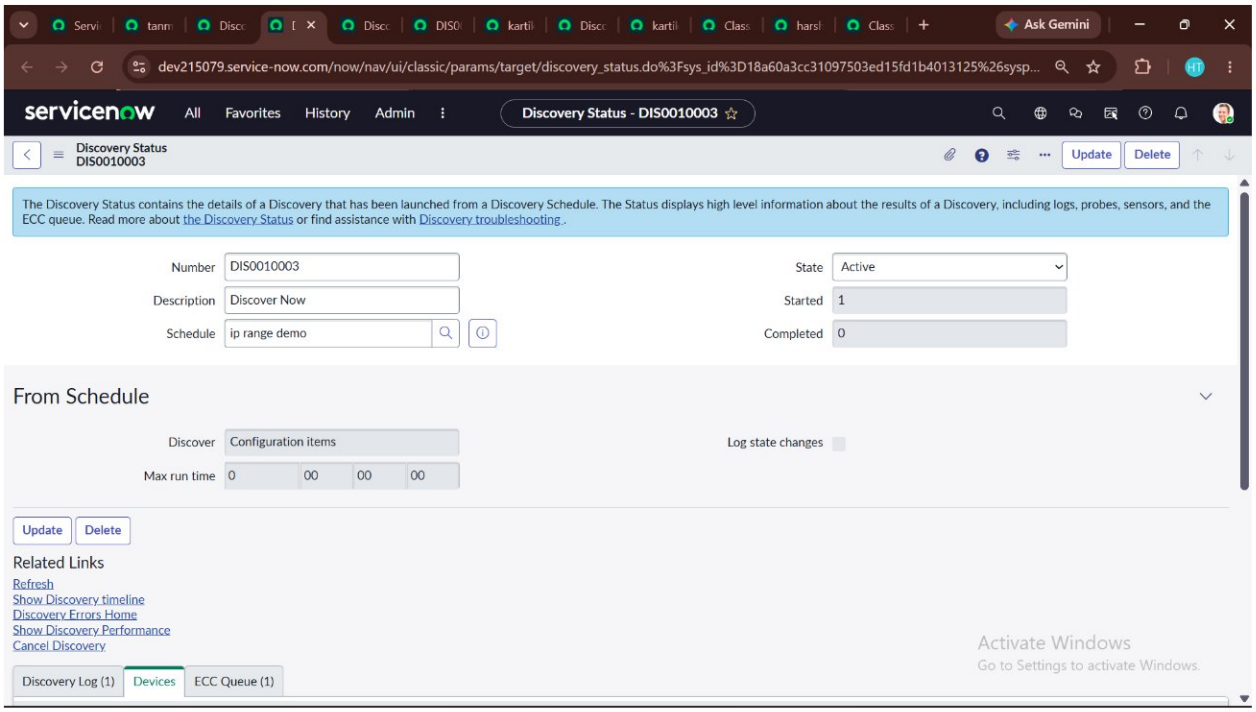

dev215079.service-now.com/now/nav/ui/classic/params/target/wizard_view.do%3Fsys_id%3D-1%26sys_target%3Ddiscovery_credentials%26sysp...
servicenow
All
Favorites
History
Workspaces
Credentials
Application scope: Global
Update set: Default [Global]
AWS Credentials
AWS SSM Instance User
Azure Enterprise Agreement Credentials
Azure SAS credentials
Azure Service Principal
Azure SSH Certificate Credentials
Basic Auth Credentials
CIM Credentials
Cloud Management Credential
Custom Header API Key Credential
Docker Credentials
Docker Repositories List
Google Cloud Credentials
JDBC Credentials
JMS Credentials
Kafka SSL credentials
MID Protocol Profile
OAuth 2.0 Credentials
OpenStack Credentials
SNMP Community Credentials (Password Only)
SNMPv3 Credentials
Splunk Token Credentials
SSL Keystore Credentials
SSH Private Key Credentials
SSH Credentials
VMware Credentials
Windows Credentials
Activate Windows
Go to Settings to activate Windows.
https://dev215079.service-now.com/wizard_view.do?sys_action=sysverb_wiz...

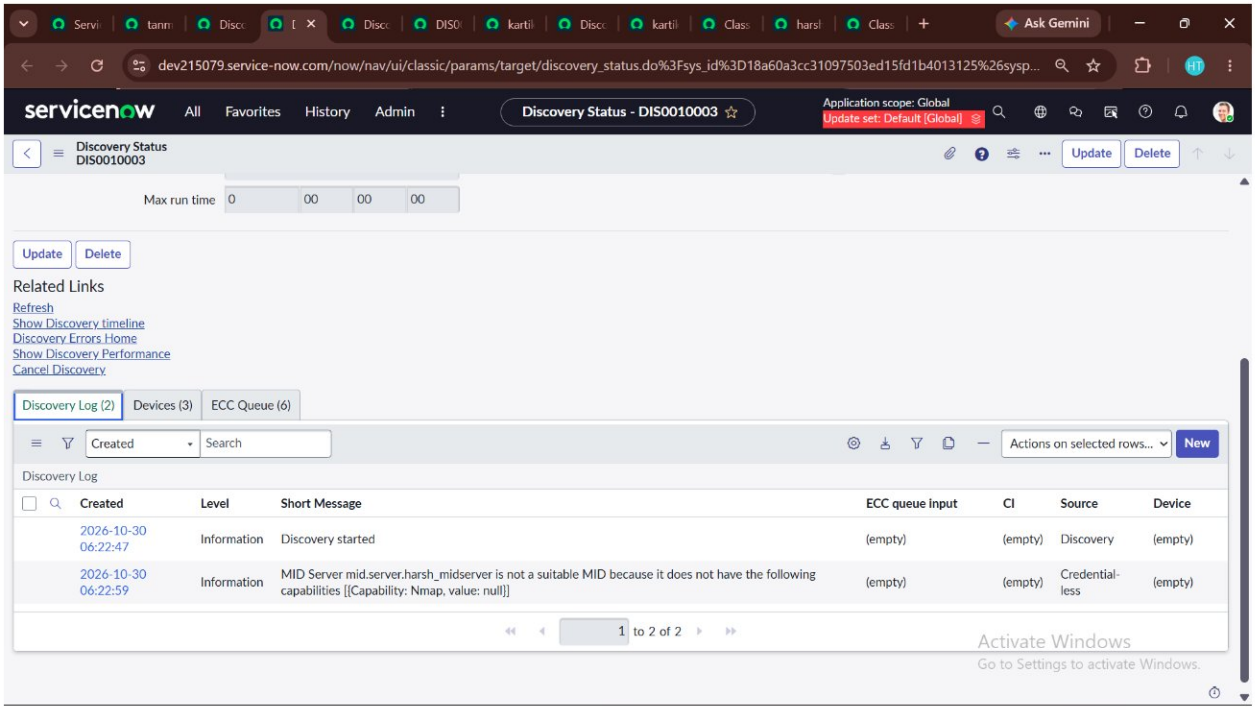

dev215079.service-now.com/now/nav/ui/classic/params/target/windows_credentials.do%3Fsys_id%3D21560ef8c31097503ed15fd1b401312b%26...
servicenow
All
Favorites
History
Admin
Windows Credentials - tanmay ci
Application scope: Global
Update set: Default [Global]
Windows Credentials
tanmay ci View: Discovery
Update
Delete
Name
tanmay ci
Active
All MID servers
100
If the user is part of a domain or workgroup, prefix the user name with this value
a local user account.
User name
snowdisc1
Password
Use MID Server Service Account
Update
Delete
Related Links
Test credential
Test Credential
Target:
172.29.68.185
Port:
135
MID Server:
harsh_midserver
Cancel
OK
Discovery IP Affinity
MID server
Search
New
Credential Affinities
MID server
Credential ID
IP address
IP address decimal
IP address expanded
Domain
Type
No records to display
Activate Windows
Go to Settings to activate Windows.


Windows Credentials - tanmay ci
Test Credential
Credential validated
Retry
OK
Name tanmay ci
Active
User name snowdisc1
Password
Use MID Server Service Account
Update
Delete
Related Links
Test credential
Discovery IP Affinity
MID server
Search
New
Credential Affinities
MID server
Credential ID
IP address
IP address decimal
IP address expanded
Domain
Type
No records to display
Activate Windows
Go to Settings to activate Windows.


Discovery Schedule - ip range demo
Discovery Schedule
ip range demo
Update
Delete
Credential alias
Advanced
Log state changes
Shazzam batch size
1,000
Shazzam cluster support
Use SNMP version
All
Update
Delete
Start this scheduled discovery now, instead of on schedule
Discover now
Show Discovery Performance
Run Point Scan
[SN Utils] Versions (1)
Discovery IP Ranges (1)
Discovery Range Sets
Discovery Status
Global IP Exclusion
for text
Search
Actions on selected rows...
New
Schedule = ip range demo
Type
Summary
Active
Activate Windows
Go to Settings to activate Windows.


dev215079.service-now.com/now/nav/ui/classic/params/target/discovery_status_list.do%3Fsysparm_query%3Dsys_id%3D18a60a3cc31097503ed1...
servicenow
All
Favorites
History
Workspaces
Discovery Status
Application scope: Global
Update set: Default [Global]
Discovery Status
Number
Search
Actions on selected rows...
New
All > Sys ID = 18a60a3cc31097503ed15fd1b4013125
Number
Created
Description
Schedule
Discover
State
Started
Completed
Updated
Duration
DIS0010003
2026-10-30 06:22:47
Discover Now
ip range demo
Configuration items
Starting
0
0
2026-10-30 06:22:47
0 Seconds
Activate Windows
Go to Settings to activate Windows.
1 to 1 of 1


dev215079.service-now.com/now/nav/ui/classic/params/target/discovery_status.do%3Fsys_id%3D18a60a3cc31097503ed15fd1b4013125%26sysp...
servicenow
All
Favorites
History
Admin
Discovery Status - DIS0010003
Discovery Status
DIS0010003
Update
Delete
The Discovery Status contains the details of a Discovery that has been launched from a Discovery Schedule. The Status displays high level information about the results of a Discovery, including logs, probes, sensors, and the ECC queue. Read more about the Discovery Status or find assistance with Discovery troubleshooting .
Number
DIS0010003
Description
Discover Now
Schedule
ip range demo
State
Active
Started
1
Completed
0
From Schedule
Discover
Configuration items
Log state changes
Max run time
0
00
00
00
Update
Delete
Related Links
Refresh
Show Discovery timeline
Discovery Errors Home
Show Discovery Performance
Cancel Discovery
Discovery Log (1)
Devices
ECC Queue (1)
Activate Windows
Go to Settings to activate Windows.



nmap se credentials less hmm krte hai but ye basic info hi depayega
IP CREDENTIAL BASED DISCOVERY :
Note :
Sare devices same network se connect hone chahiye (cyntexa wifi se naa connect ho koi)
Target devices ke firewalls off kro.

1. First credentials bnalo, put target device username and password there.
2. Then verify credentials krlo , then validate krdega
3. Then discovery schedule me jaake , quick discovery se vo ip daal ke check krlo, vo chal jayega.
4. Then mujhe ip range based bhi karni thi, uske liye discovery schedule me jaake ip ranges set kardo , then test krlo discovery. Devices dikha dega.

IMPORTANT NOW LEARNING COURSES FOR DISCOVERY :
DISCOVERY FUNDAMENTALS
DISCOVERY ADVANCED
SERVICE MAPPING FUNDAMENTALS
SERVICE MAPPING ADVANCED