
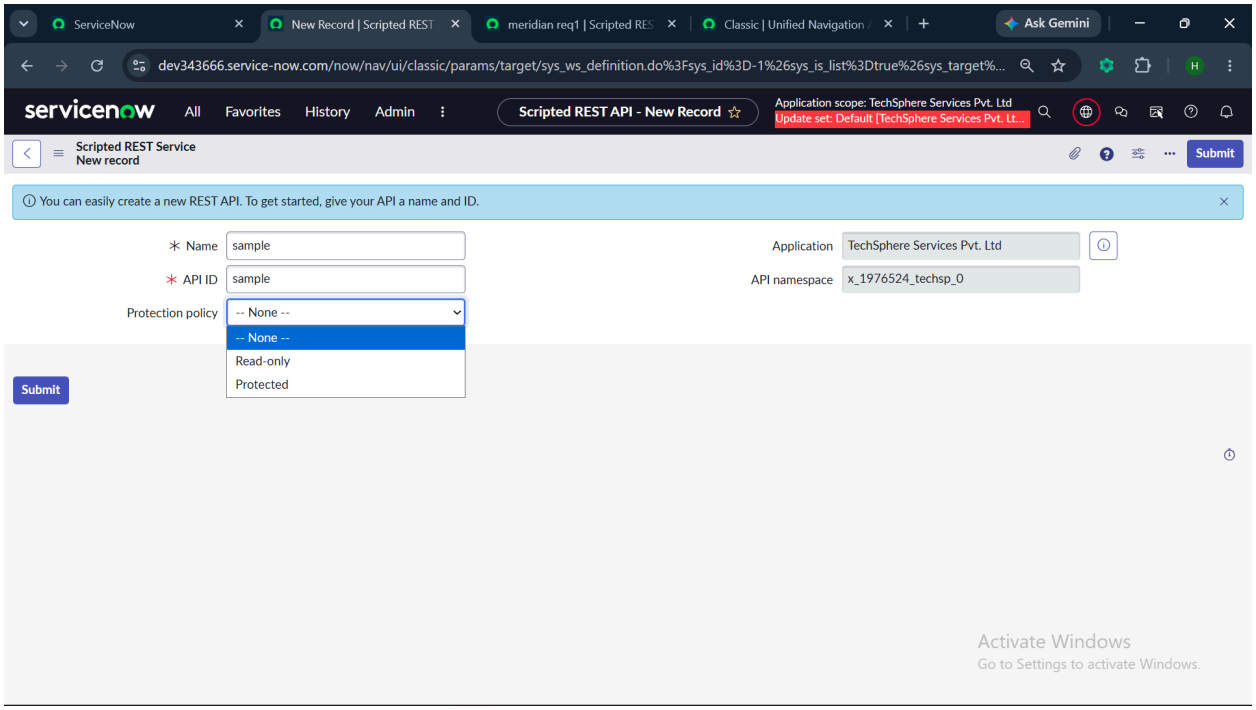


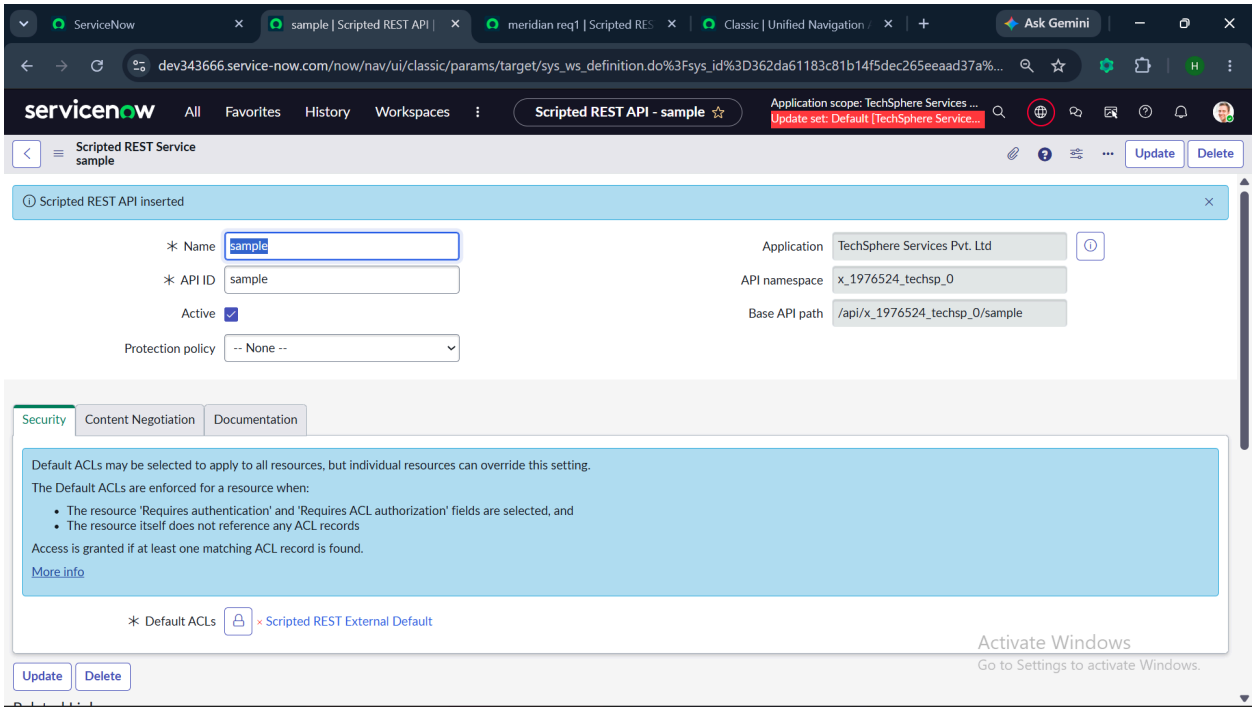

Aapki approach **aadhi sahi** hai, par poori nahi.

Integration mein **2 main directions** hoti hain (Inbound aur Outbound), lekin iske andar aur bhi components hote hain:


1. **Inbound Integration (Incoming):** Third-party system ServiceNow ko hit karta hai (e.g., Scripted REST API, Import Sets, Web Services).
2.
3. **Outbound Integration (Outgoing):** ServiceNow kisi third-party system ko hit karta hai (e.g., REST Message, SOAP Message, IntegrationHub Flow Designer).
4.
5. **Data Transformation & Mapping:** Dono side ke data ko match karne ke liye (Transform Maps, Scripting, Data Stream Actions).
6.
7. **Authentication & Security:** Basic Auth, OAuth 2.0, API Keys, Mid Server (Internal network ke liye).
8.


In short: Direction do hi hain (Inbound/Outbound), lekin integration complete tab hota hai jab aap Security, Authentication, aur Data Mapping ko bhi include karte ho.

In short:

`Scripted REST External Default` ek **ACL (Access Control)** rule hai, role nahi.

- **Iska kaam:** Yeh check karta hai ki external user ke paas minimum `snc_external` role hai ya nahi.
-
- **Kyun chahiye:** Third-party integration user (jaise Jira/Postman) ko iss API ko hit karne ki Permission (Authorization) dene ke liye.

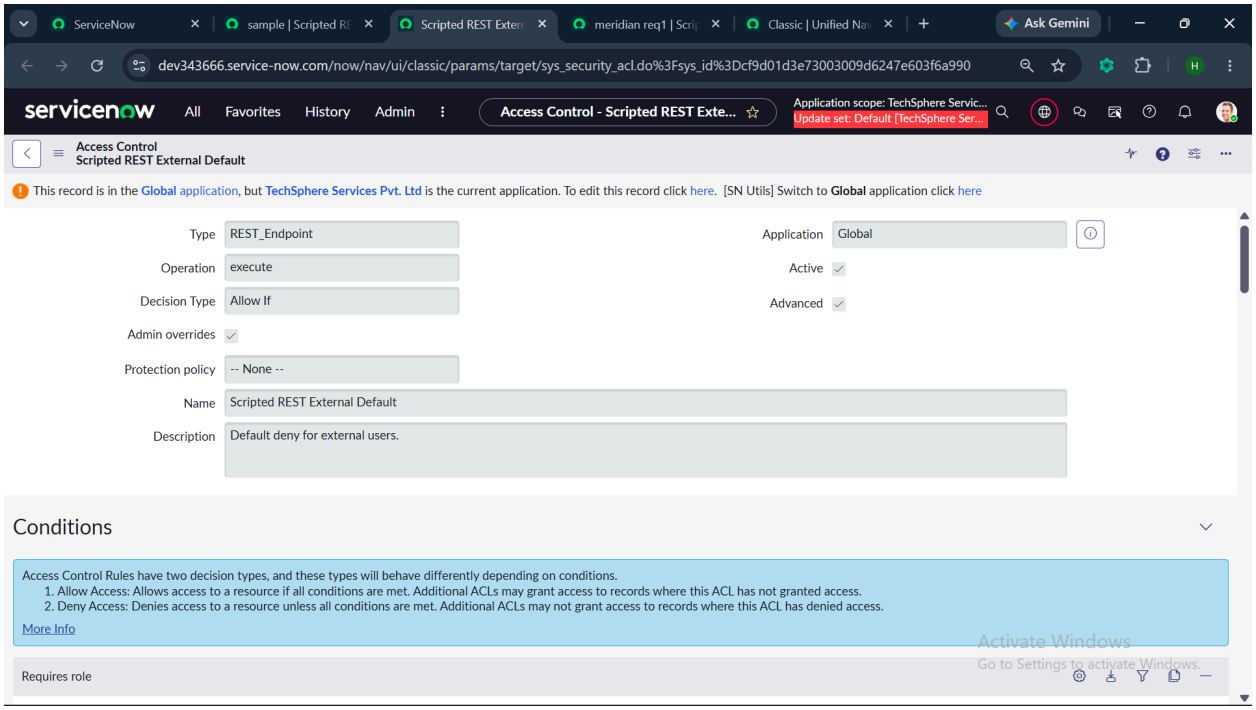

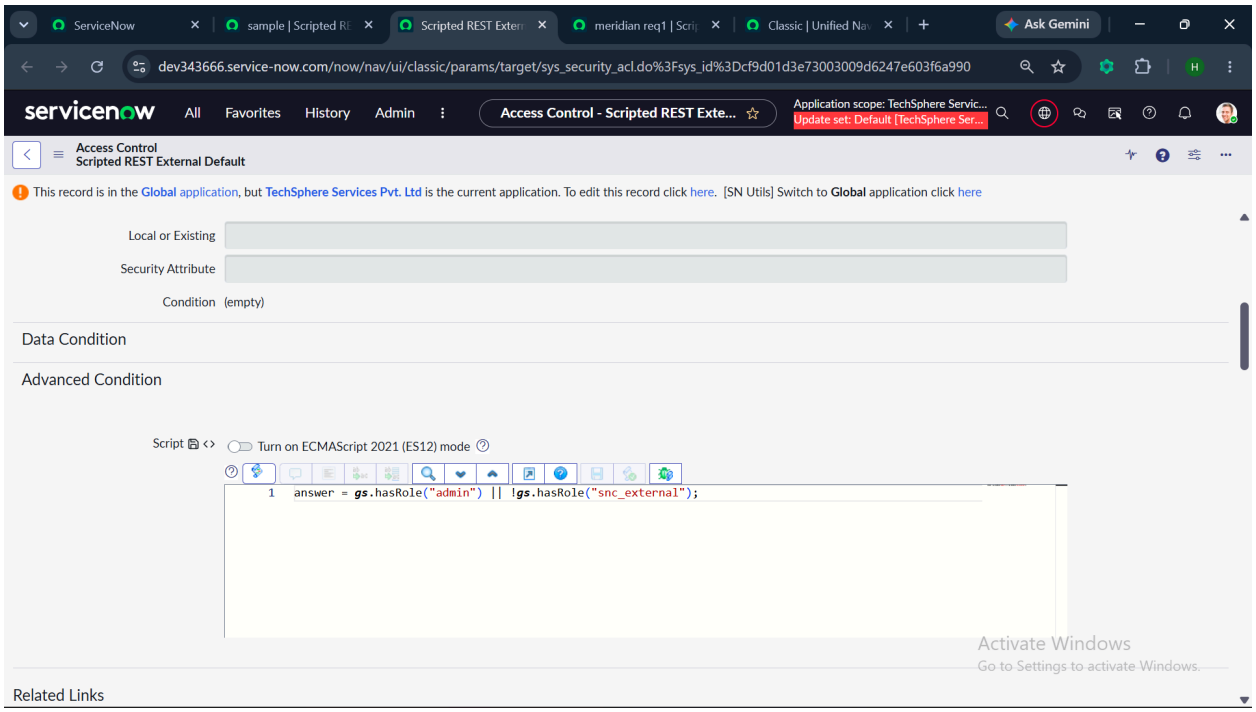

Teeno tabs ka matlab and fields ka breakdown easy Hinglish short summary ke saath:

1. Security Tab

- **Matlab:** Yeh decide karta hai ki iss API ko hit karne ke liye user ke paas kya **permissions (ACLs/Roles)** hone chahiye.
-

- **Default ACLs:** Yahan aap ACL select karte ho. Agar request bhejne wale user ke paas yeh ACL/Role nahi hoga, toh ServiceNow request ko **403 Forbidden** error de dega.
-
- **Example:** VIP entry guard — Bina valid ID/Role ke API access nahi milegi.
-

2. Content Negotiation Tab

- **Matlab:** Yeh decide karta hai ki API **kya data format accept karegi (Request)** aur **kya format wapas degi (Response)** (e.g., JSON ya XML).
-

Fields breakdown:

- **Override default supported request formats (Checkbox):**
-
    - **Matlab:** By default ServiceNow `JSON`, `XML`, `Text` teeno accept karta hai. Agar aapko restricted custom formats lagane hain, toh isko check karke custom list set kar sakte ho.
    -
- **Default supported request formats:**
-
    - **Matlab:** Incoming data ka format (Header: `Content-Type`).
    -
    - **Example:** External app ServiceNow ko JSON format (`application/json`) mein payload bhej sakti hai.
    -
- **Override default supported response formats (Checkbox):**
-
    - **Matlab:** By default response formats ko modify/restrict karne ke liye isko check karte hain.
    -
- **Default supported response formats:**
-
    - **Matlab:** Outgoing data ka format (Header: `Accept`).
    -
    - **Example:** External app ko ServiceNow response mein JSON bheje ya XML.
    -

3. Documentation Tab

- **Matlab:** Iss API ki guide/manual information provide karne ke liye hoti hai taaki dusre developers ko pata chale API kya karti hai.
-

Fields breakdown:


- **Short description:**


-
    - **Matlab:** API ka 1-line summary status.
    -
    - **Example:** *"API to create and fetch incident details for Jira integration."*
    -
- **Documentation link:**
-
    - **Matlab:** Kisi external/internal detailed guide ka URL (Confluence, PDF, ya website link).
    -
    - **Example:** https://wiki.company.com/docs/incident-api-guide

Scripted REST API page ke bottom par dikhne wale **Related Links** ka short breakdown:

- **Enable versioning:**
-
    - **Matlab:** API ke multiple versions (e.g., v1, v2) manage karne ke liye.
    -
    - **Use Case:** Jab aap Old integration break kiye bina API mein naya logic release karna chahte ho.
    -
- **Explore REST API:**
-
    - **Matlab:** ServiceNow ke built-in **REST API Explorer** tool ko open karta hai.
    -
    - **Use Case:** Isse aap apni API ko Bina Postman ke, direct ServiceNow ke andar hi test (hit) kar sakte ho.
    -
- **API analytics:**
-
    - **Matlab:** API ka usage dashboard/report dikhata hai.
    -
    - **Use Case:** Kitni requests aayi, kitne error (4xx/5xx) aaye, aur response time kitna tha yeh check karne ke liye.
    -
- **[SN Utils] Versions (1):**

-
    - **Matlab:** Yeh **SN Utils** (Chrome Browser Extension) ka extra feature hai, native ServiceNow feature nahi hai.
    -
    - **Use Case:** Iss record ke purane versions / history ko quickly compare ya restore karne ke liye.

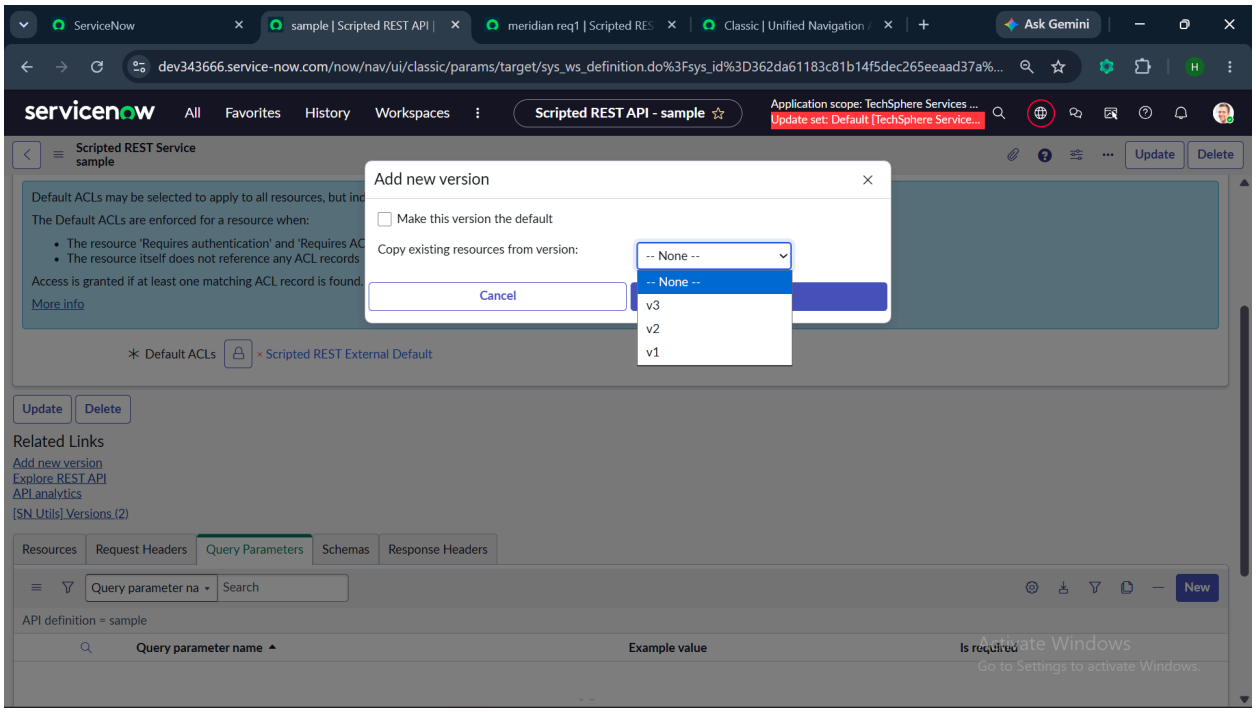


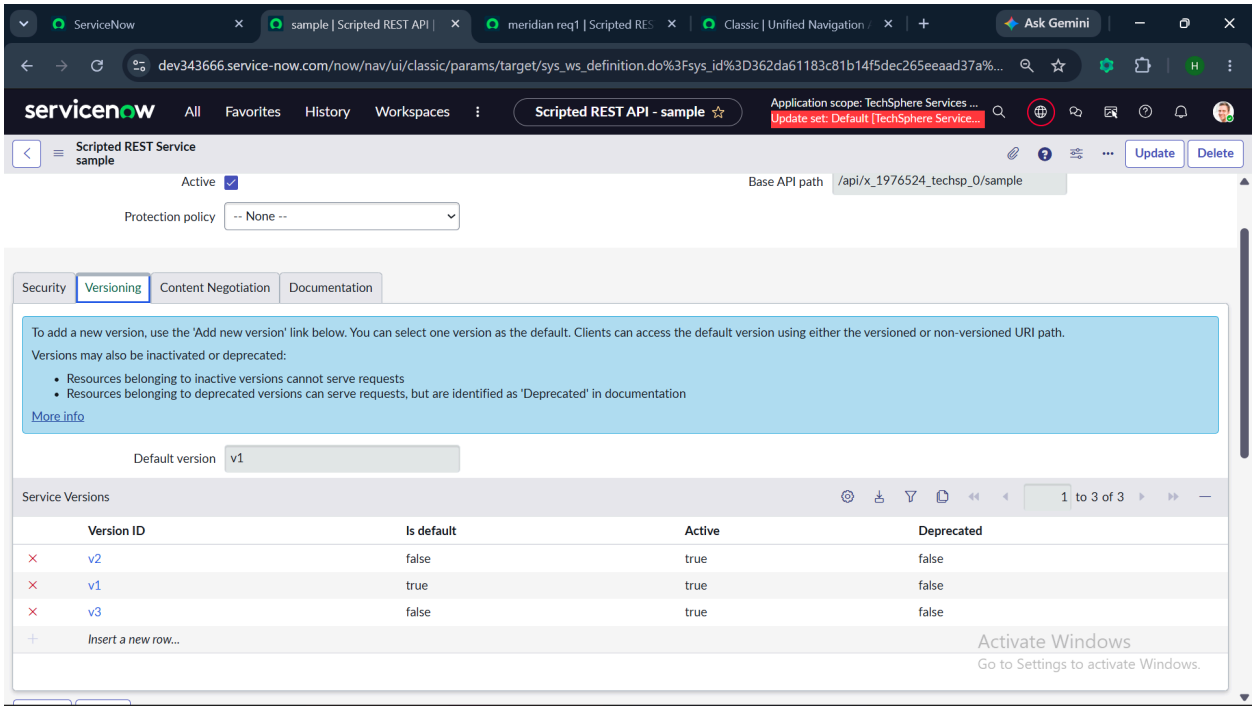

Iss **Versioning** tab ka matlab hai apni Scripted REST API ke alag-alag active/inactive versions (v1, v2, v3) ko ek hi jagah se manage karna.

Key Terms (In Very Short):

- **Default version (v1):** Jab third-party app URL mein version nahi likhti (e.g., /api/.../sample), toh ServiceNow automatic v1 hit karata hai.
-
- **Is default:** Dikhata hai konsa version fallback default hai (sirf 1 hi true ho sakta hai).
-
- **Active:**
-
    - true: Yeh version API requests accept karega.
    -
    - false: Version block ho jayega (request hit hone par error aayega).
    -
- **Deprecated:**
-
    - true: Version abhi bhi kaam (execute) karega, par documentation mein marked ho jayega ki *"Yeh purana hai, ise use karna band karo"*.

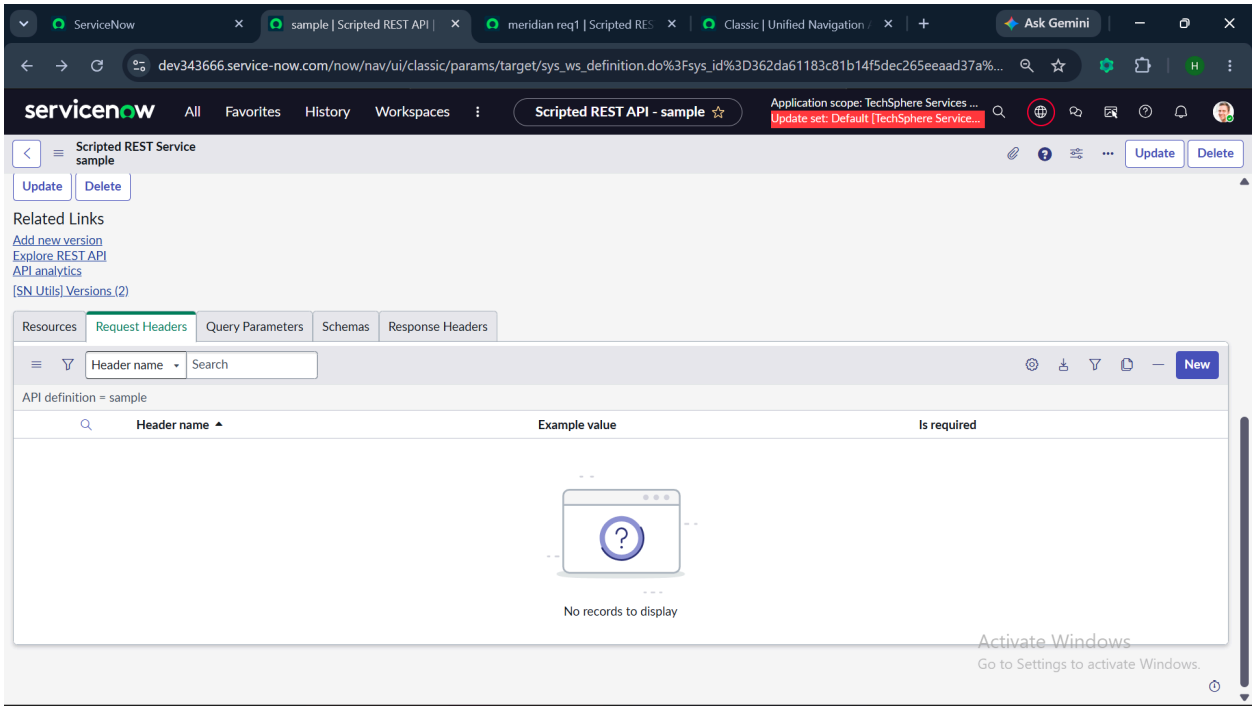

In 5 bottom tabs ka scripted REST API mein short explanation:

- **1. Resources:**
-
    - **Matlab:** Main API Endpoints jahan actual HTTP Method (GET, POST, PUT, DELETE) aur script/logic likha jata hai.
    -
    - **Example:** `/getIncidents` (GET) ya `/createIncident` (POST) ke endpoints banana.
    -
- **2. Request Headers:**
-
    - **Matlab:** Define karta hai ki incoming HTTP request ke saath kaunse extra headers compulsory/allowed hain.
    -
    - **Example:** Pass करना `Custom-Auth-Token` ya `Client-ID`.
    -
- **3. Query Parameters:**
-
    - **Matlab:** URL variables jo filter karne ke liye use hote hain (`?key=value`).
    -
    - **Example:** `/incidents?category=hardware` mein `category` parameter define karna.

- **4. Schemas:**
  - **Matlab:** JSON/XML Request aur Response ka structure/data format define karta hai.
  - **Example:** Payload mein `short_description` (string) aur `priority` (integer) hi aani chahiye.
- **5. Response Headers:**
  - **Matlab:** Define karta hai ki ServiceNow response bhejte waqt kaunse custom headers return karega.
  - **Example:** Return mein `X-Total-Count: 50` bhejhana.

Iss form par **Scripted REST Header** define karne ke 2 main purpose hain:

1. **Custom Metadata Receive Karna:**
2. Third-party app (e.g., Postman/Jira) jab request bhejegi, toh HTTP Header mein custom extra info pass kar sakti hai (jaise authentication key, source system ID, ya transaction ID).
3.
4. **API Documentation (REST API Explorer):**
5. Yahan header create karne se ServiceNow ke **REST API Explorer** aur documentation mein yeh header automatically reflect hone lagta hai, jisse dusre developers ko pata chal jata hai ki request ke saath kaunsa header bhejna hai.
6.

Form Fields ka Short Breakdown:

- **Header name:**
  - **Matlab:** HTTP Header ka exact key name jo incoming request mein expect kiya ja raha hai.
  - **Example:** `x-client-id` ya `x-correlation-id`.
- **API definition:**

    - **Matlab:** Yeh header kis main Scripted REST API (sample) ke sath attach hai (auto-filled).
    -
- **Short description:**
-
    - **Matlab:** Documentation ke liye ki iss header ka kaam kya hai.
    -
    - **Example:** *"Pass the unique tracking ID from the external system."*
    -
- **Example value:**
-
    - **Matlab:** Testing/Documentation ke liye sample value.
    -
    - **Example:** JIRA-12345.
    -

Easy Example 📦

Maano Postman se request aati hai aur aap check karna chahte ho ki request kis app se aayi hai:

- **Header Name:** x-source-system
-
- **Value Sent:** Jira
-
- **Script Usage:** Aap script mein request.getHeader('x-source-system') karke yeh value read kar sakte ho.


QUESTION : agar m ye naa bhi bnau to bhi to resource section me request se ye query nikal skta hu>>?
ANSWER: **Haan, bilkul!** Aap isko yahan bina define kiye bhi resource script mein directly request.queryParams se extract kar sakte ho.

Toh fir isko yahan define karne ka kya fayda?

1. **REST API Explorer & Documentation:** Jab aap ya koi aur developer ServiceNow ka **Explore REST API** tool use karega, toh wahan yeh query parameter **auto-suggest / visible** ho jayega.
2.
3. **Validation & Requirements:** Yahan define karne se aap parameter ko **Required (Mandatory)** mark kar sakte ho, taaki agar caller parameter na bheje toh system API script run karne se pehle hi validate kar le.
4.

In short:

- **Technical Functionality:** Code execution ke liye isko yahan create karna **compulsory nahi hai**.
-
- **Best Practice:** Professional documentation, team understanding aur API Explorer UI testing ke liye isko define kiya jata hai.

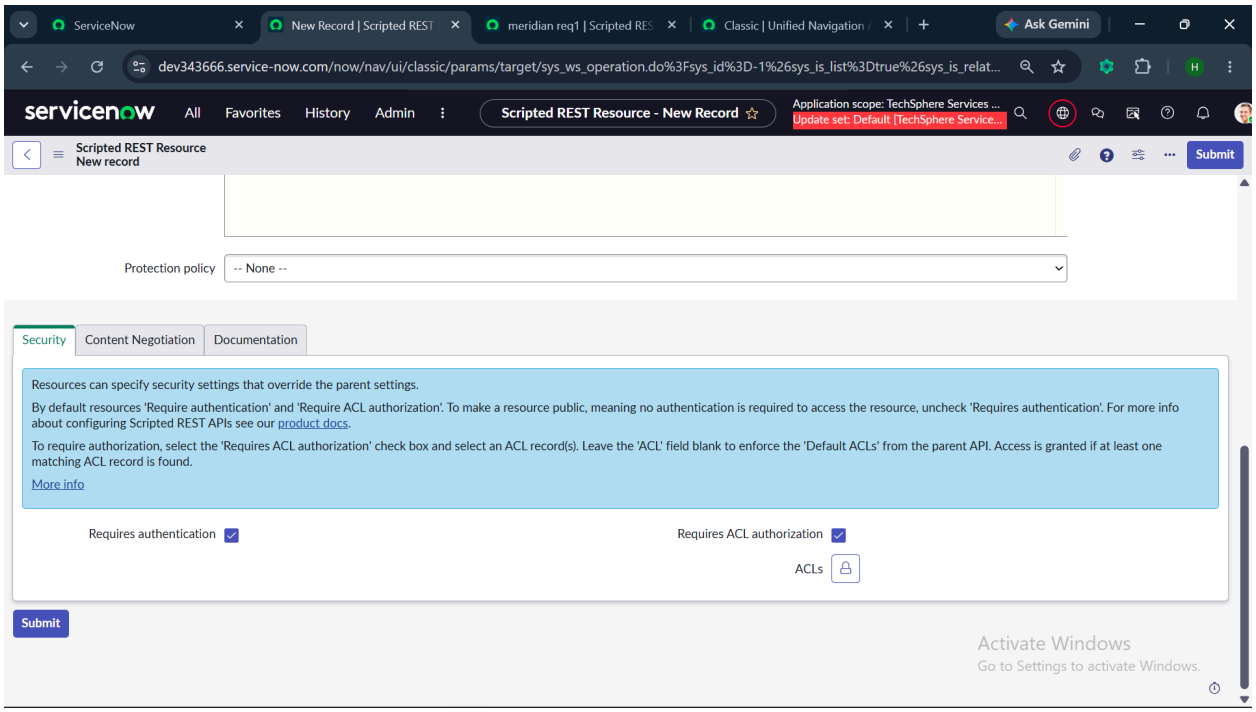

Scripted REST Resource ke **Security Tab** wale dono checkboxes ka clear meaning aur examples:

1. Requires authentication

- **Meaning:** Yeh check karta hai ki incoming request ke paas valid ServiceNow credentials (Username/Password ya OAuth Token) hain ya nahi.
-
- **Checked (True):** Requests ko login/authentication clear karna padega, warna **401 Unauthorized** error aayega.
-
- **Unchecked (False):** API public ban jati hai—bina kisi username/password ke koi bhi hit kar sakta hai.
-
- **Example:**
-
    - *Checked:* Standard business API (jaise Incident create karna).
    -

    - *Unchecked:* Public Webhook jahan external system anonymous HTTP notifications bhejta hai.
    -

2. Requires ACL authorization


- **Meaning:** User authenticated hone ke baad, kya uske paas required **Roles/ACL permissions** hain iss specific endpoint ko access karne ke liye?
-
- **Checked (True):** ServiceNow check karega ki user ke paas niche ACLs field mein defined role/permission hai ya nahi. Agar role nahi mila toh **403 Forbidden** error aayega.
-
- **Unchecked (False):** Koi bhi valid authenticated user (jiske paas active account hai) iss resource ko hit kar sakta hai, bhale hi uske paas specific integration role na ho.
-
- **Example:**
-


    - *Checked:* Normal restricted API jisme administrative tasks hote hain.
    -
    - *Unchecked:* Internal utility API jisko sabhi valid ServiceNow users hit kar sakein.
    -

Matrix Summary


Scenario	Username/Password Required?	Special Role/ACL Required?	Result
Both Checked	Yes	Yes	Maximum security (Standard API)
Auth Checked, ACL Unchecked	Yes	No	Any valid ServiceNow user can access


Both Unchecked	No	No	Completely Public API (Open endpoint)

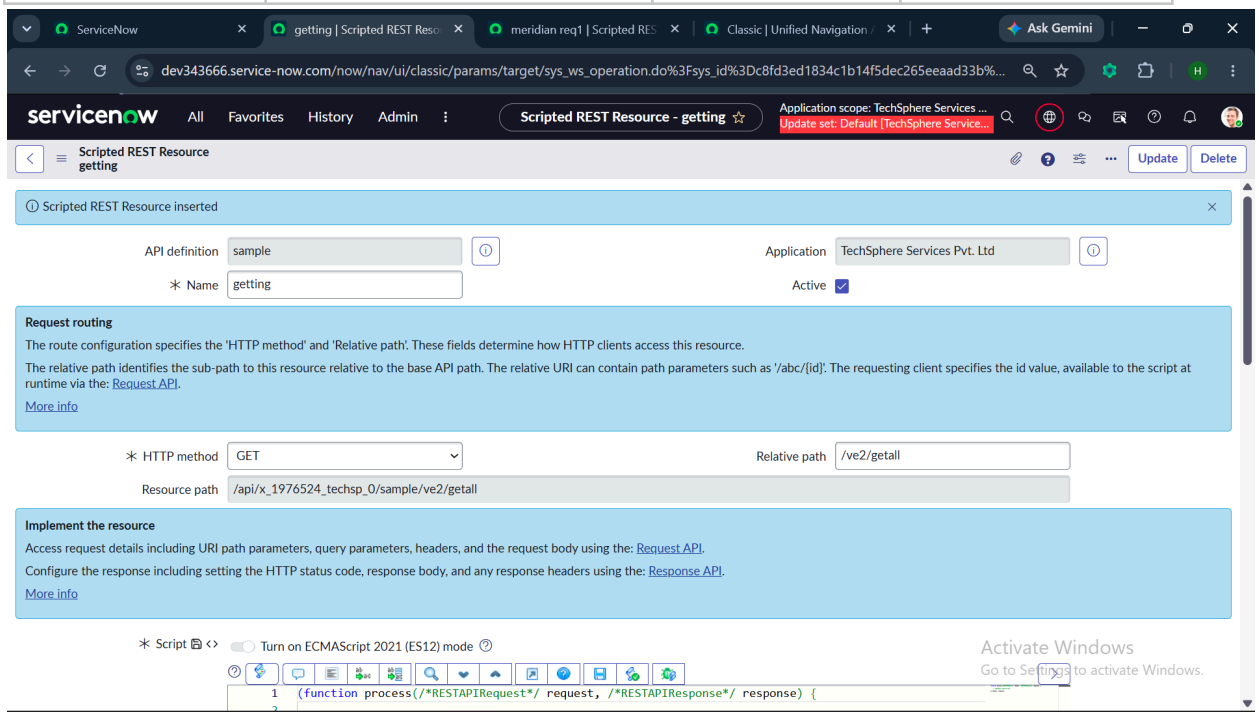

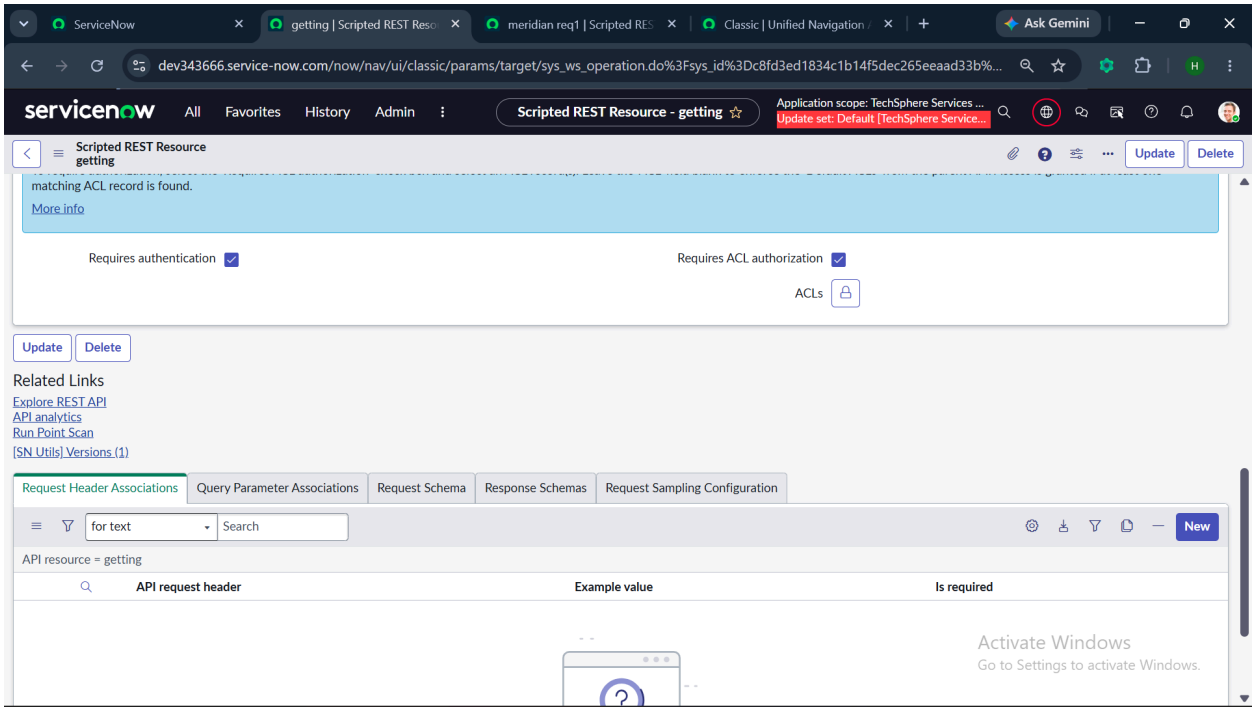

IMP. AISE VERSIONING KRNI HOTI H:

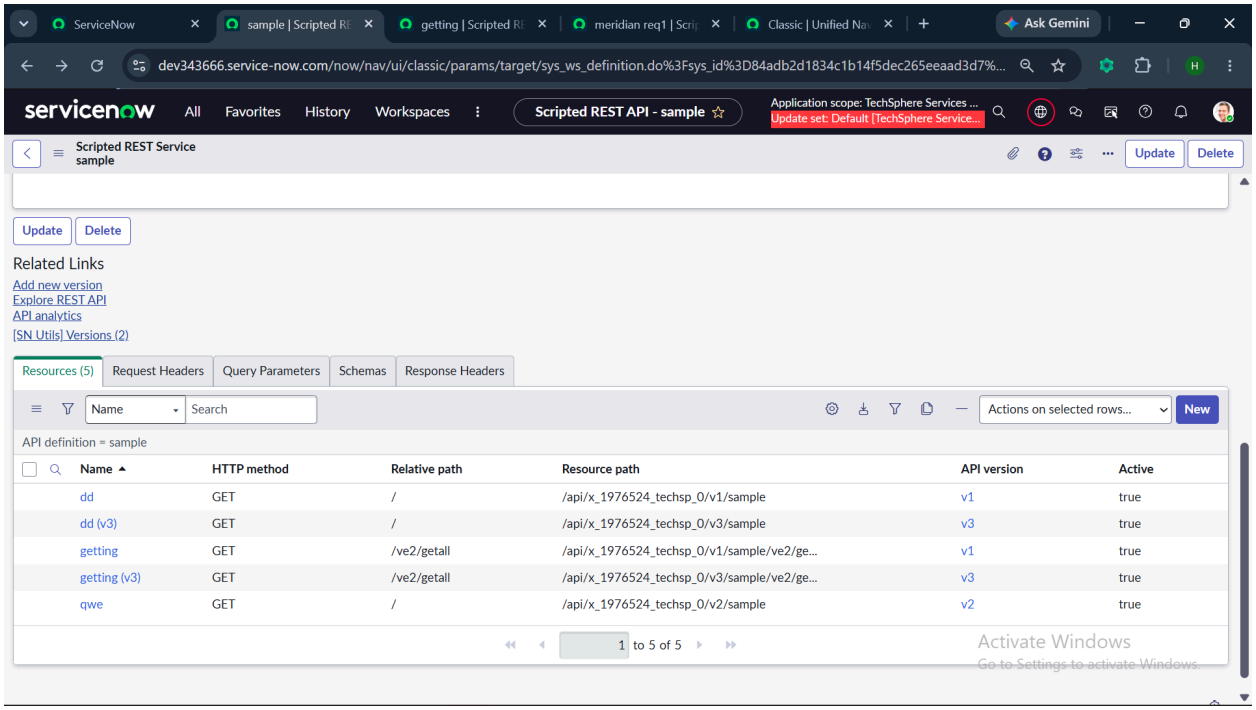

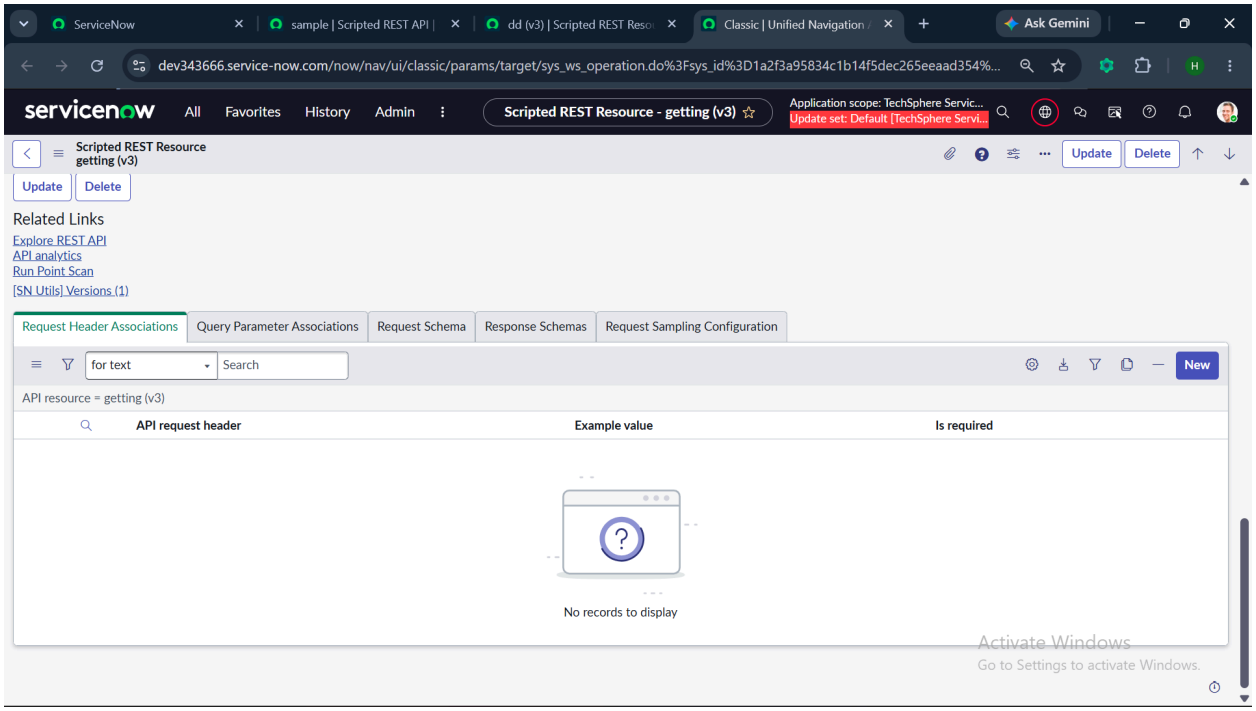

Scripted REST **Resource** level ke in tabs ka short Hinglish summary:

- **Request Header Associations:**
-

    - **Matlab:** Parent API ke banaye hue custom Headers mein se iss specific Resource (getting (v3)) ke sath kaunse headers attach/link karne hain.
    -
- **Query Parameter Associations:**
-
    - **Matlab:** Parent API ke query parameters mein se iss resource par kaunse Query Parameters link karne hain aur unhe mandatory/optional banana hai.
    -
- **Request Schema:**
-
    - **Matlab:** Iss Specific Resource mein aane wale **Request Body (JSON)** ka valid format/structure assign karna.
    -
- **Response Schemas:**
-
    - **Matlab:** Iss Resource se wapas jane wale **Response Body (JSON)** ka format/structure define/map karna.
    -
- **Request Sampling Configuration:**
-
    - **Matlab:** API requests ki logging/analytics sample karne ki setting (Debugging aur performance measure karne ke liye).

Run Point Scan

Run Point Scan ServiceNow ka ek code analysis/quality check tool feature hai (jo HealthScan / Instance Scan engine use karta hai).

Easy Hinglish Explanation:

- **Matlab:** Jab aap Scripted REST API ya Resource mein apna JavaScript code likhte ho, toh **Run Point Scan** par click karne se ServiceNow aapke uss specific code ko **scan** karta hai.
-
- **Kya Check Karta Hai:**
-

1. **Coding Best Practices:** Aapne sahi ServiceNow APIs use ki hain ya nahi.
2.

3. **Performance Issues:** Koi heavy loop (`while(gr.next())` ke andar queries) ya bad performance script toh nahi hai.
4.
5. **Security Vulnerabilities:** Code mein koi security loopholes toh nahi hain.
6.

Real-World Example 🔍

Maano aapne script mein `gr.setValue()` ki jagah `gr.autoSysFields(false)` galat tarike se use kar liya ya direct Hardcoded SysIDs daal di.

Jab aap **Run Point Scan** par click karoge, toh yeh aapko ek **Scan Result/Finding** generate karke de dega ki: *"Line 5 par aapne performance/security guideline break ki hai, isko fix karo."*

NOTE:
Nahi, raw JSON string nahi dega.

Yeh already parsed **Native JavaScript Object** dega.

- **Stringify format:** `"{ \"short_description\": \"WiFi issue\" }"` ❌
-
- **JSON string:** `"{ \"short_description\": \"WiFi issue\" }"` ❌
-
- **JavaScript Object (`request.body.data`):** `{ short_description: "WiFi issue" }` ✅
-

Result: Aap directly `request.body.data.short_description` se value access kar sakte ho.

QUESTION : gr.initialize();
gr.short_description = requestBody.short_description;
gr.comments = requestBody.comments || "Created via REST API";
var sysId = gr.insert();, maan lo caller field me abel tuter dena chahta hu and postaman se mane direct abel tuter bheja to kya ye caller field me abel hi set krdega yaa fir mujhe sysid dena hoga postman me abel ki ? n very shot

ANSWER :
Directly `caller_id = "Abel Tuter"` likhne par **set nahi hoga** (field blank rah jayegi), kyunki `caller_id` ek **Reference Field** hai.

ServiceNow reference fields mein record ki **sys_id** expect karta hai.

Solutions:

1. **Option 1 (Best Practice - Postman se SysID bhejo):**
2. Postman payload mein Abel Tuter ki `sys_id` bhej do:

```
{
  "caller_id": "6816f79cc0a8016401c5a33be04be441"
}
```

3. Script: `gr.caller_id = requestBody.caller_id;`
4.
5. **Option 2 (Agar Postman se Name hi bhejna hai):**
6. Script mein pehle Name se SysID lookup karwao:

```
var userGr = new GlideRecord('sys_user');
if (userGr.get('name', requestBody.caller_id)) {
   gr.caller_id = userGr.getValue('sys_id');
}
```

Agar Postman se direct **"Abel Tuter"** naam aa raha hai, toh script mein **`setDisplayValue()`** use karke direct name set ho jayega:

JavaScript
gr.caller_id.setDisplayValue(requestBody.caller_id); // "Abel Tuter" pass karne par bhi auto-map ho jayega

- **`getDisplayValue()`**: Value read/get karne ke liye.
- **`setDisplayValue()`**: Name se Direct Reference Field set karne ke liye (Bina sys_id ke).

IMPORTANT ERROR ;

Is **500 Internal Server Error** ka main reason aapke code ki line 6 par **`.nil()`** ka galat use hai:

JavaScript
if(!reqBody.short_description.nil()){ // ❌ BUG HERE!

Reason:

- `.nil()` method sirf **GlideRecord fields** (jaise `gr.short_description.nil()`) par chalta hai.

- `reqBody.short_description` ek **Plain JavaScript Object / String** hai, koi GlideRecord object nahi hai.
- Is wajeh se JS script crush ho rahi hai aur Server 500 Exception de raha hai.

Important :
`gr.caller_id.setDisplayValue(reqBody.caller_id);` ✅ (Element-level method — jo chal gaya)
`gr.setDisplayValue(fieldName, value)` ❌ (Aisa koi GlideRecord syntax nahi hota)


Correct Syntax Options:


- **Name/String se set karna ho:**
- JavaScript

gr.caller_id.setDisplayValue(reqBody.caller_id); // ✅ Works

-
-
- **Sys_ID se direct set karna ho:**
- JavaScript
- gr.setValue('caller_id', reqBody.caller_id); // ✅ Works (if caller_id is Sys_ID)
-

MOST IMP WHERE I STUCK :
QUESTION :

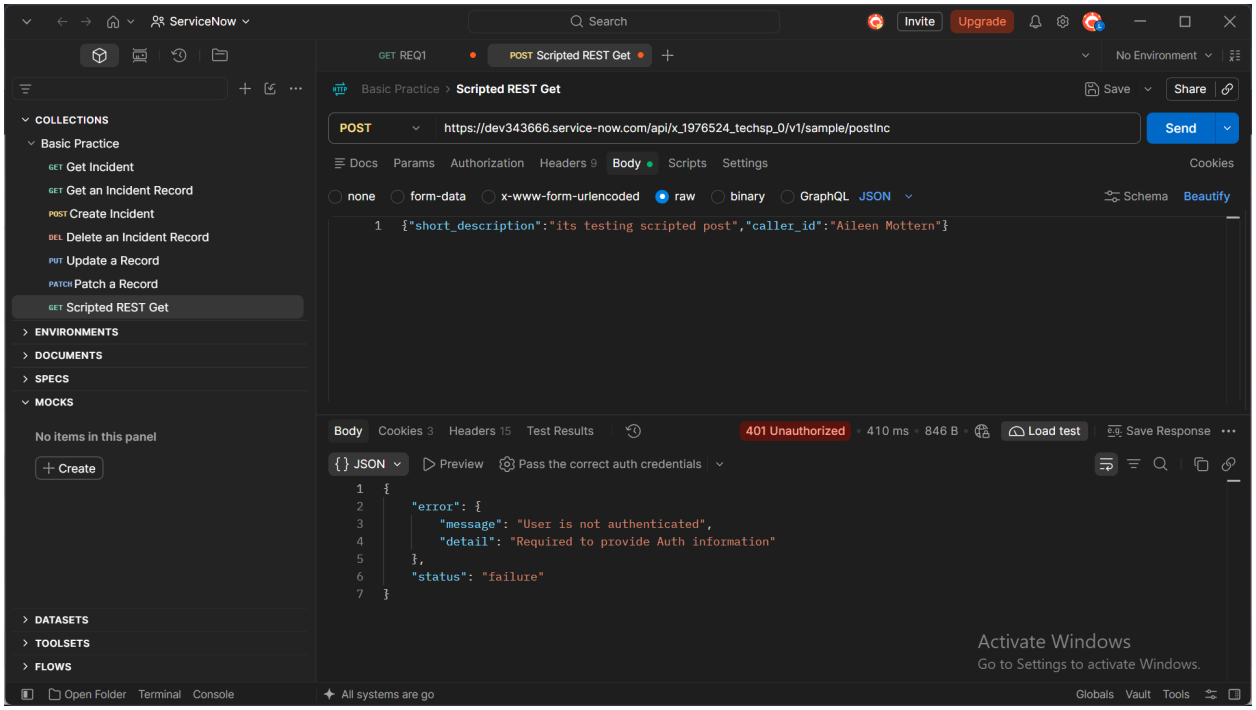

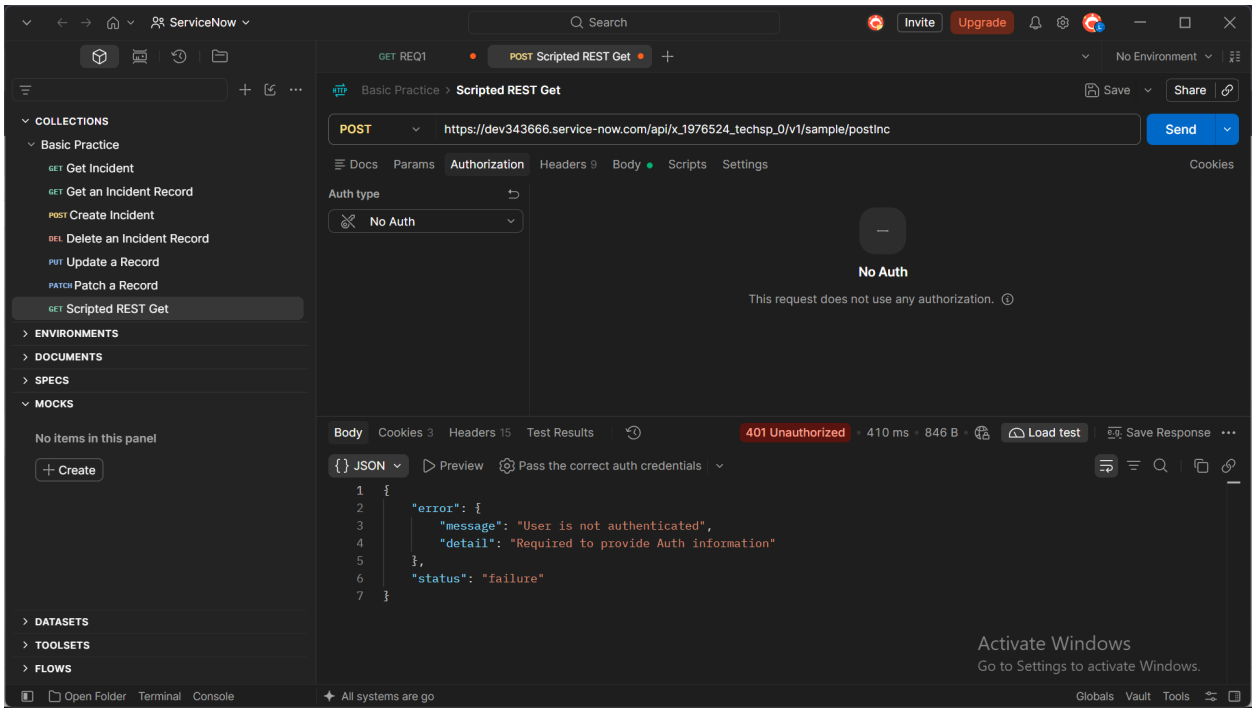

but maine to no auth kar rkha hai to isne kyu manga?

ANSWER :

Aapne Postman me **"No Auth"** choose kiya hai, lekin ServiceNow me Scripted REST API Resource Level par default setting Requires authentication = checked rehti hai.


ServiceNow security mechanism ke hisab se:

1. **ServiceNow Check:** Direct public request allow nahi karta, jab tak aap ServiceNow Scripted REST Resource me jaakar Security tab se Requires authentication checkbox ko **uncheck (False)** na kar do.
2.
3. **Result:** Agar ServiceNow side par check status active hai aur Postman se koi Auth Token/Credentials nahi aate, toh ServiceNow request ko wahi reject karke 401 Unauthorized error de deta hai.
4.


Solution Options:

- **Option 1 (Recommended):** Postman me **Authorization** tab par jaao -> **Basic Auth** choose karo -> ServiceNow instance ka **Username & Password** enter karke request bhej do.
-
- **Option 2 (Public Endpoint):** ServiceNow me apne **Scripted REST Resource** record ko kholo -> **Security** tab me jaao -> **Requires authentication** checkbox ko **Uncheck** karke **Save/Update** kar do. Uske baad bina auth ke request hit hone lagegi.


SO UNCHECK THIS :

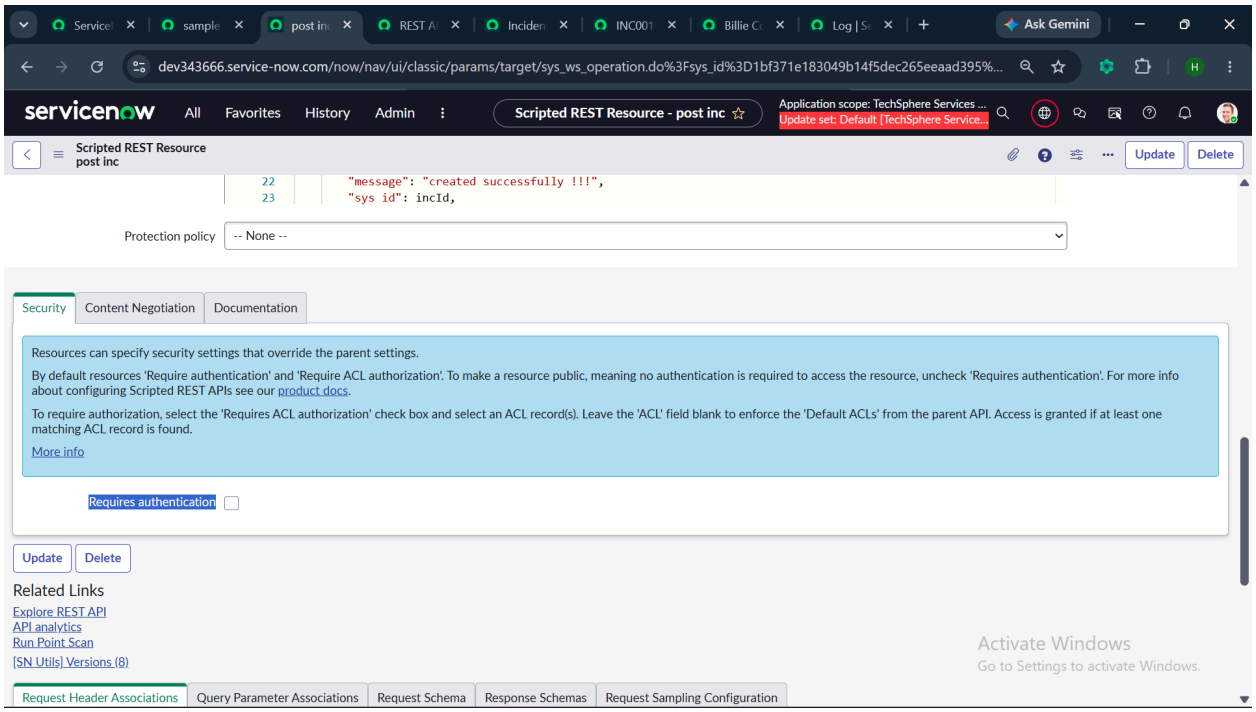


Then it will create in no auth :

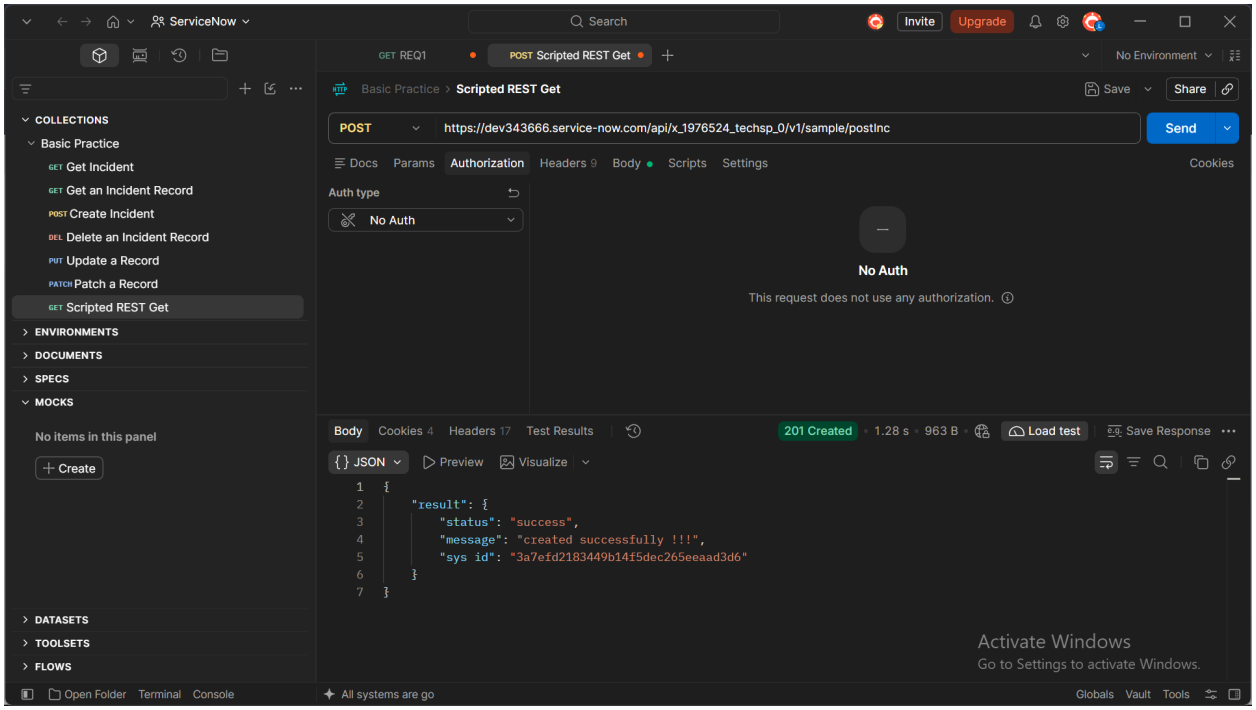



Even abb agar basic auth bhi karoge tab bhi ye create kar rha hai :

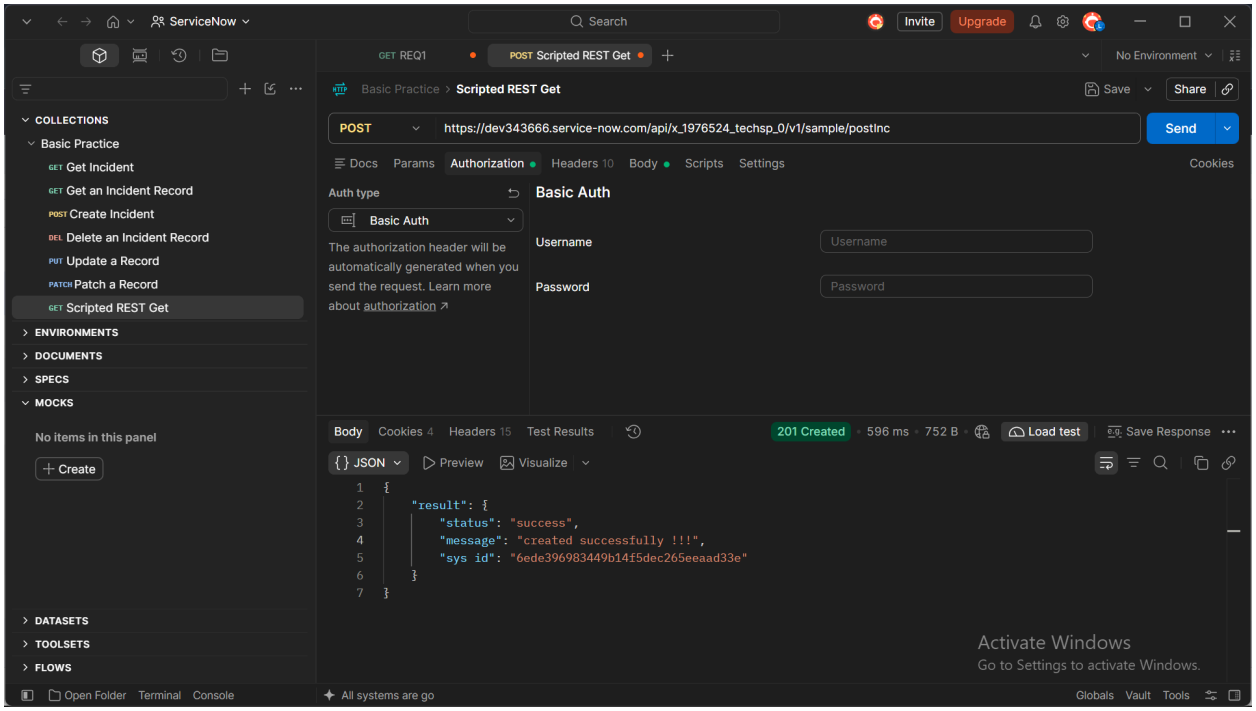


1. POST OPERATION BY HEADER TOKEN :

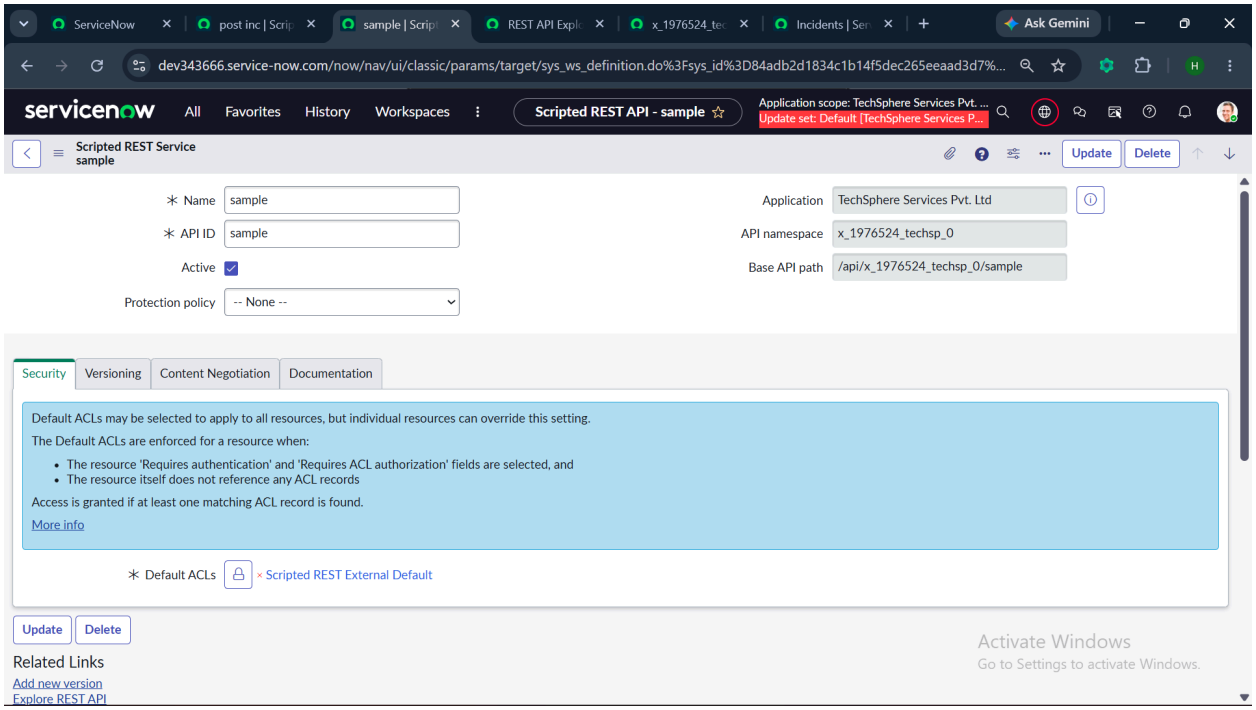
ServiceNow
post inc | Scrip
sample | Scrip
REST API Expl
x_1976524_tec
Incidents | Ser
Ask Gemini
dev343666.service-now.com/now/nav/ui/classic/params/target/sys_ws_definition.do%3Fsys_id%3D84adb2d1834c1b14f5dec265eeaad3d7%...
servicenow
All
Favorites
History
Workspaces
Scripted REST API - sample
Application scope: TechSphere Services Pvt. ...
Update set: Default [TechSphere Services P...
Scripted REST Service
sample
Update
Delete
* Name
sample
* API ID
sample
Active
Protection policy
-- None --
Application
TechSphere Services Pvt. Ltd
API namespace
x_1976524_techsp_0
Base API path
/api/x_1976524_techsp_0/sample
Security
Versioning
Content Negotiation
Documentation
Default ACLs may be selected to apply to all resources, but individual resources can override this setting.
The Default ACLs are enforced for a resource when:
The resource 'Requires authentication' and 'Requires ACL authorization' fields are selected, and
The resource itself does not reference any ACL records
Access is granted if at least one matching ACL record is found.
More info
* Default ACLs
Scripted REST External Default
Update
Delete
Related Links
Add new version
Explore REST API
Activate Windows
Go to Settings to activate Windows.

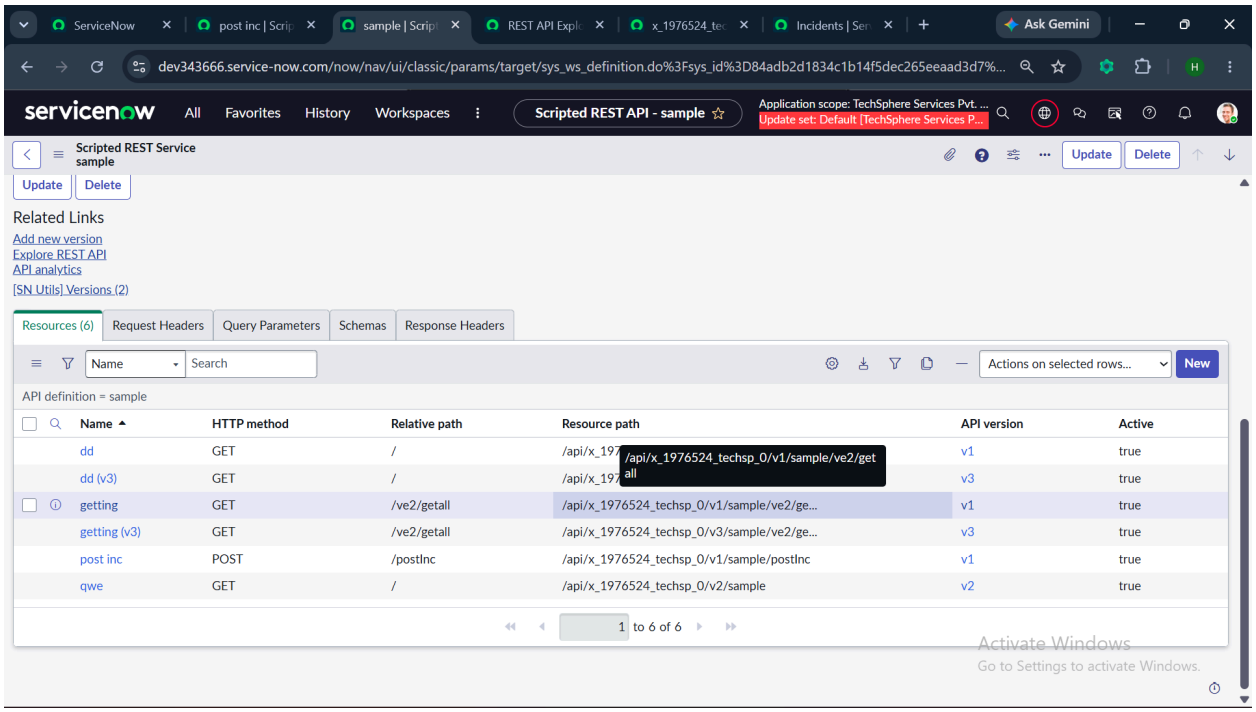
ServiceNow
post inc | Scrip
sample | Scrip
REST API Expl
x_1976524_tec
Incidents | Ser
Ask Gemini
dev343666.service-now.com/now/nav/ui/classic/params/target/sys_ws_definition.do%3Fsys_id%3D84adb2d1834c1b14f5dec265eeaad3d7%...
servicenow
All
Favorites
History
Workspaces
Scripted REST API - sample
Application scope: TechSphere Services Pvt. ...
Update set: Default [TechSphere Services P...
Scripted REST Service
sample
Update
Delete
Update
Delete
Related Links
Add new version
Explore REST API
API analytics
[SN Utils] Versions (2)
Resources (6)
Request Headers
Query Parameters
Schemas
Response Headers
Name
Search
Actions on selected rows...
New
API definition = sample
Name
HTTP method
Relative path
Resource path
API version
Active
dd
GET
/
/api/x_197
/api/x_1976524_techsp_0/v1/sample/ve2/getall
v1
true
dd (v3)
GET
/
/api/x_197
v3
true
getting
GET
/ve2/getall
/api/x_1976524_techsp_0/v1/sample/ve2/ge...
v1
true
getting (v3)
GET
/ve2/getall
/api/x_1976524_techsp_0/v3/sample/ve2/ge...
v3
true
post inc
POST
/postInc
/api/x_1976524_techsp_0/v1/sample/postInc
v1
true
qwe
GET
/
/api/x_1976524_techsp_0/v2/sample
v2
true
1
to 6 of 6
Activate Windows
Go to Settings to activate Windows.

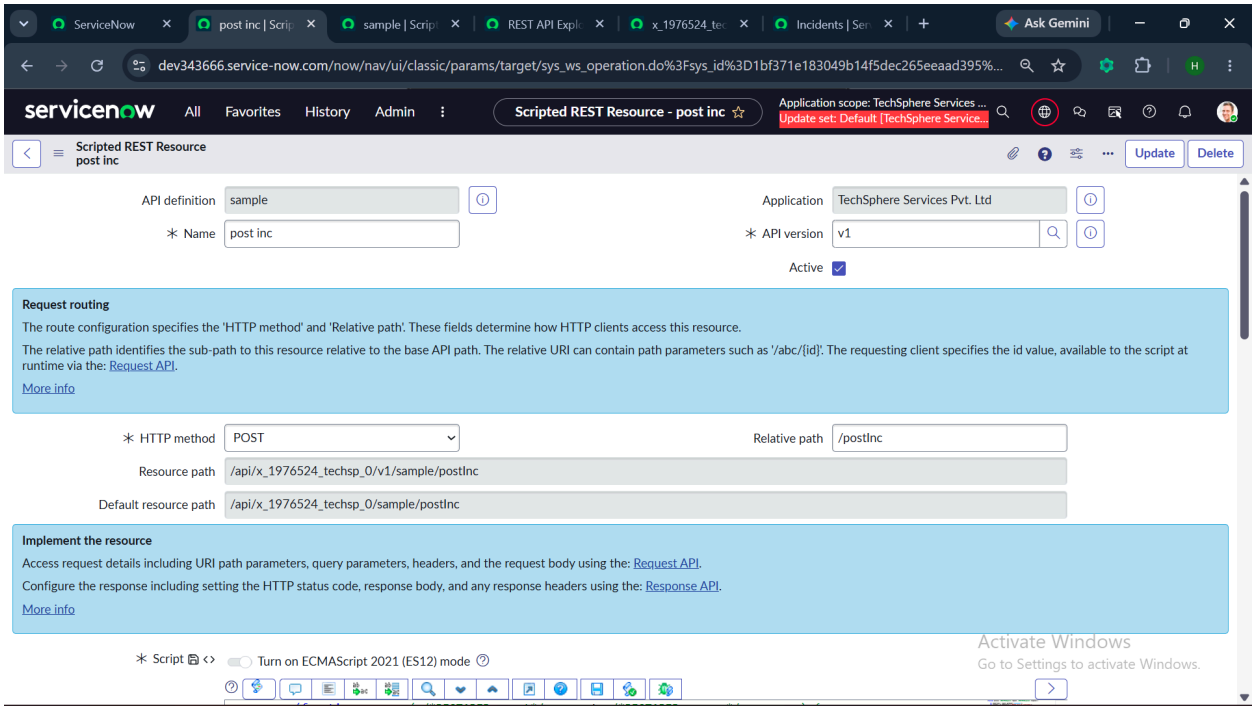

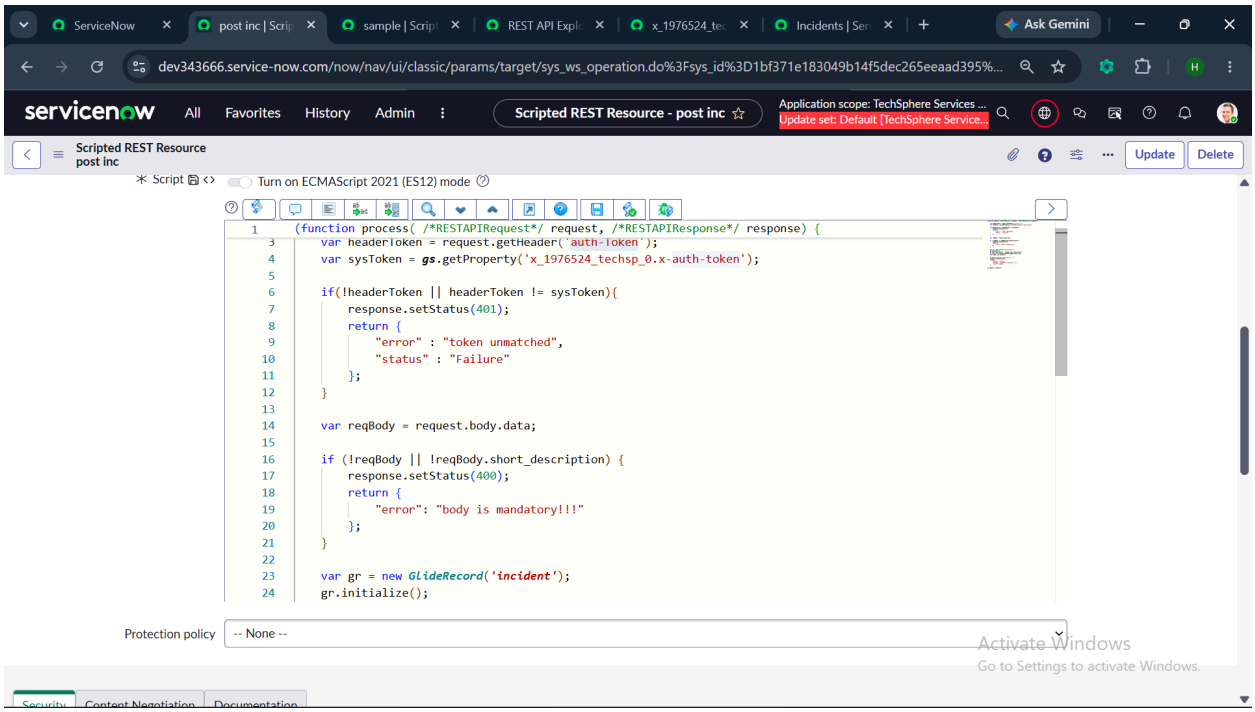

Code :

```
(function process( /*RESTAPIRequest*/ request, /*RESTAPIResponse*/
response) {

    var headerToken = request.getHeader('auth-Token');
    var sysToken =
gs.getProperty('x_1976524_techsp_0.x-auth-token');
```

```
    if(!headerToken || headerToken != sysToken){
        response.setStatus(401);
        return {
            "error" : "token unmatched",
            "status" : "Failure"
        };
    }

    var reqBody = request.body.data;


    if (!reqBody || !reqBody.short_description) {
        response.setStatus(400);
        return {
            "error": "body is mandatory!!!"
        };
    }

    var gr = new GlideRecord('incident');
    gr.initialize();
    gr.short_description = reqBody.short_description;
    gr.caller_id.setDisplayValue(reqBody.caller_id);
    var incId = gr.insert();


    gs.info('inserted successfully!!!!');
    response.setStatus(201);
    return {
        "status": "success",
        "message": "created successfully !!!",
        "sys id": incId,
    };


})(request, response);
```

SYSTEM PROPERTIES FOR HEADER TOKEN :

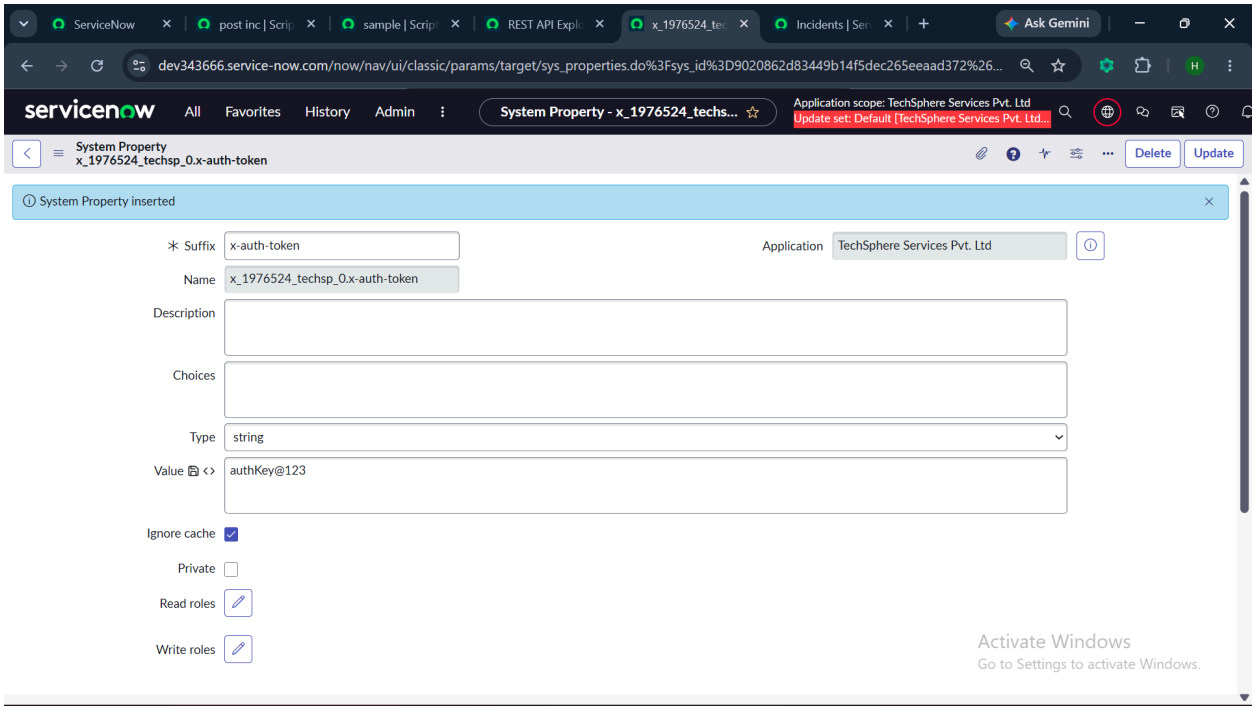

ServiceNow
post inc | Scrip
sample | Scrip
REST API Expl
x_1976524_tec
Incidents | Ser
Ask Gemini
dev343666.service-now.com/now/nav/ui/classic/params/target/sys_properties.do%3Fsys_id%3D9020862d83449b14f5dec265eeaad372%26...
servicenow
All
Favorites
History
Admin
System Property - x_1976524_techs...
Application scope: TechSphere Services Pvt. Ltd
Update set: Default [TechSphere Services Pvt. Ltd...
System Property
x_1976524_techsp_0.x-auth-token
Delete
Update
System Property inserted
Suffix
x-auth-token
Application
TechSphere Services Pvt. Ltd
Name
x_1976524_techsp_0.x-auth-token
Description
Choices
Type
string
Value
authKey@123
Ignore cache
Private
Read roles
Write roles
Activate Windows
Go to Settings to activate Windows.

POSTMAN :

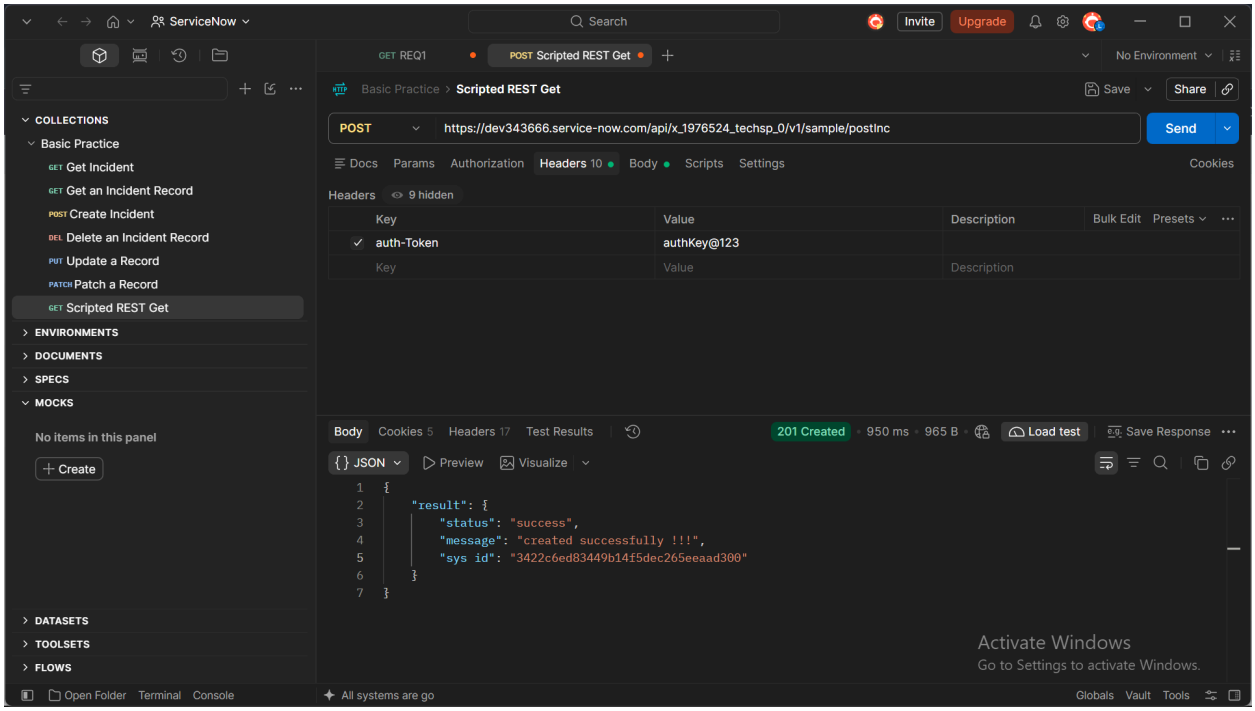
ServiceNow
Search
Invite
Upgrade
GET REQ1
POST Scripted REST Get
No Environment
Basic Practice
Scripted REST Get
Save
Share
COLLECTIONS
Basic Practice
GET Get Incident
GET Get an Incident Record
POST Create Incident
DEL Delete an Incident Record
PUT Update a Record
PATCH Patch a Record
GET Scripted REST Get
ENVIRONMENTS
DOCUMENTS
SPECS
MOCKS
No items in this panel
Create
DATASETS
TOOLSETS
FLOWS
POST
https://dev343666.service-now.com/api/x_1976524_techsp_0/v1/sample/postInc
Send
Docs
Params
Authorization
Headers 10
Body
Scripts
Settings
Cookies
Headers
9 hidden
Key
Value
Description
Bulk Edit
Presets
auth-Token
authKey@123
Body
Cookies 5
Headers 17
Test Results
201 Created
950 ms
965 B
Load test
Save Response
{ } JSON
Preview
Visualize
{
"result": {
"status": "success",
"message": "created successfully !!!",
"sys id": "3422c6ed83449b14f5dec265eeaad300"
}
}
Activate Windows
Go to Settings to activate Windows.
Open Folder
Terminal
Console
All systems are go
Globals
Vault
Tools

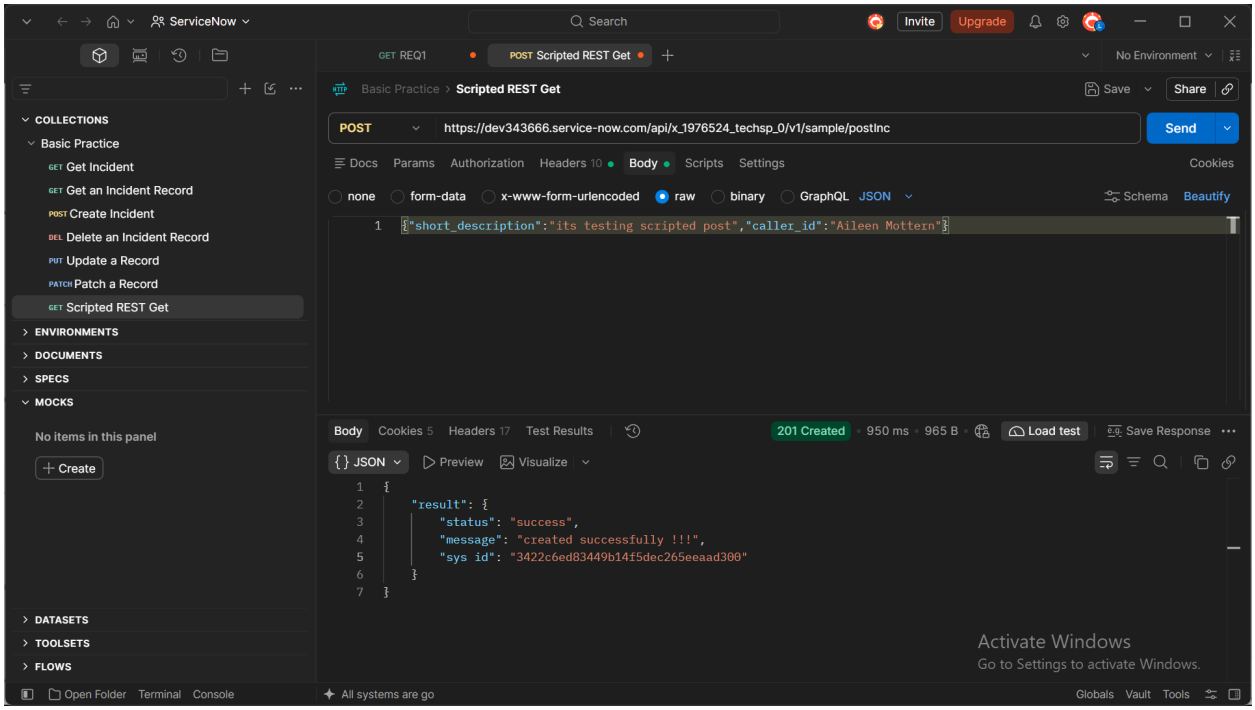

OUTPUT :

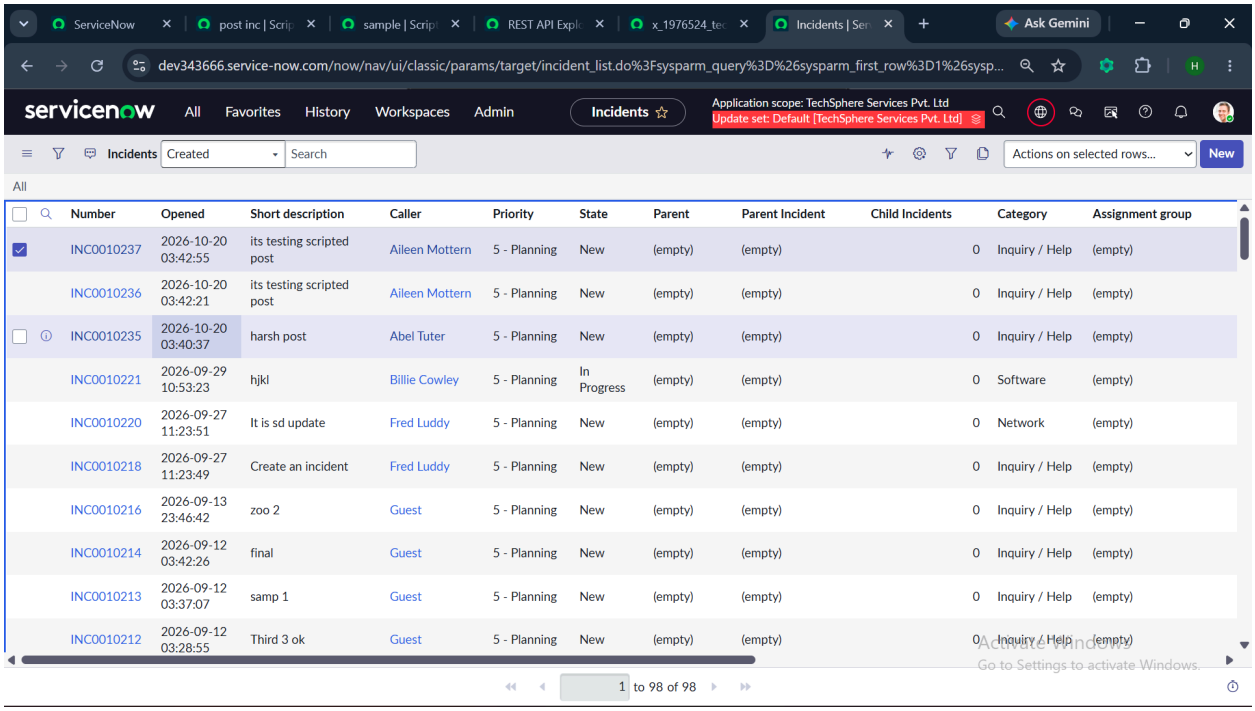

NOTE :

response.setStatus(201);

return {

"status": "success",

"message": "Created successfully !!!",

"sys_id": incId
};, why didn't you use response.setBody here ? and what is the difference if i use that ? in very short

ANSWER :

Scripted REST API mein `return` directly use karne par ServiceNow backend mein **`response.setBody()` ko automatically invoke** kar deta hai. Isliye alag se `response.setBody()` likhne ki zaroorat nahi padti.

Main Differences:


Method	Behavior	Use Case
return { ... };	Script execution ko **wahi stop/exit** kar deta hai aur Object ko response body mein convert karke bhej deta hai.	Single/Final response return karne ke liye (Shorter & Cleaner code).
response.setBody({ ... });	Body set kar deta hai, par script **aage execute hoti rehti hai** (jab tak return statement na aaye).	Jab body set karne ke baad bhi aage koi code/logging execute karna ho.

IMPORTANT :

```
    while (gr.next()) {
        incList.push({
            "number": gr.getValue('number'),
            "short_description": gr.getValue('short_description'),
            "caller": gr.getDisplayValue('caller_id'),
            "state": gr.getDisplayValue('state')
        });
    }
```

YHA YE getValue hi use krna agar gr.number kroge to nhi chalega.

2. GET OPERATION (GET ALL INCIDENT, AND USE QUERY PARAMETERS TOO):

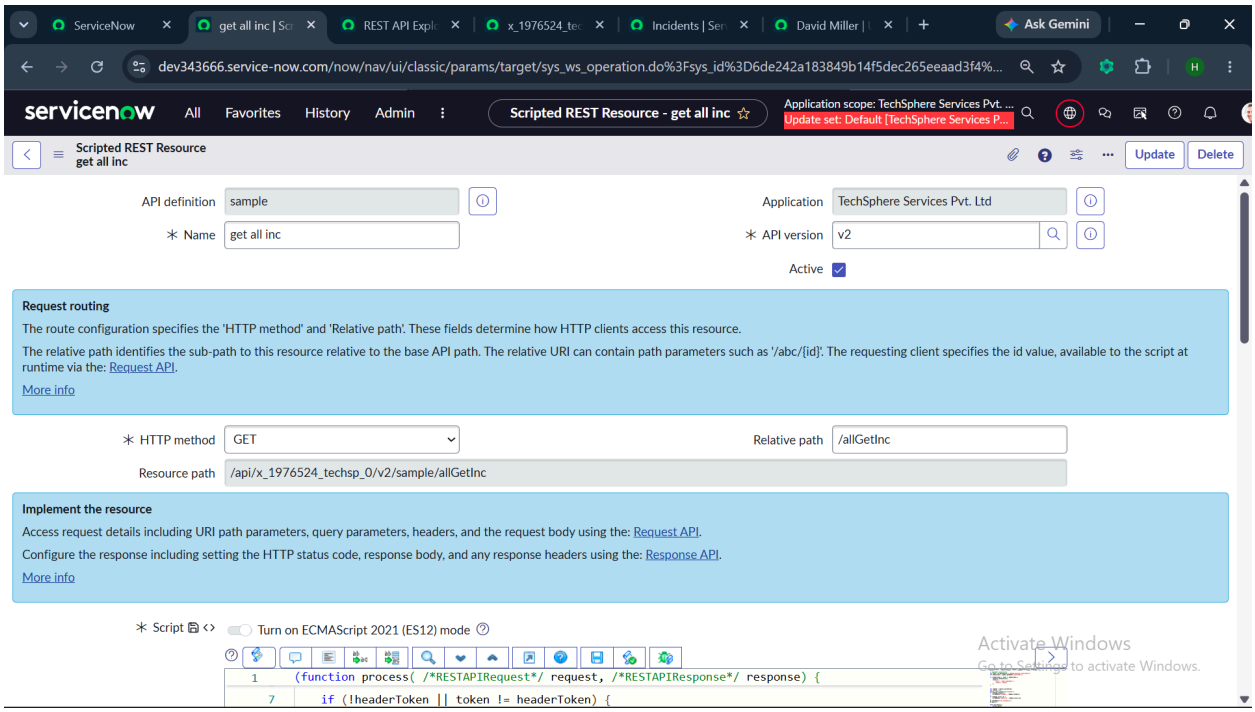

Code:

```
(function process( /*RESTAPIRequest*/ request, /*RESTAPIResponse*/
response) {

    // implement resource here
    var token = gs.getProperty('x_1976524_techsp_0.x-auth-token');
    var headerToken = request.getHeader('auth-token');

    if (!headerToken || token != headerToken) {
        response.setStatus(401);
        return {
            "error": "Token unmatched!!!",
            "status": "failed"
        };
    }



    var reqBody = request.queryParams;
    var incList = [];
```

```
    var gr = new GlideRecord('incident');
    if (reqBody.category) {
        gr.addQuery('category', reqBody.category);
    }
    if (reqBody.caller_id) {
        gr.addQuery('caller_id', reqBody.caller_id);
    }
    gr.orderByDesc('sys_created_on');
    gr.query();


    while (gr.next()) {
        incList.push({
            "number": gr.getValue('number'),
            "short_description": gr.getValue('short_description'),
            "caller": gr.getDisplayValue('caller_id'),
            "state": gr.getDisplayValue('state'),
            "category" : gr.getValue('category')
        });
    }

    response.setHeader('x-inc-count', incList.length.toString());
    response.setStatus(200);
    return {
        "status": "success",
        "message": "Get all the incidents",
        "data": incList
    };


})(request, response);
```

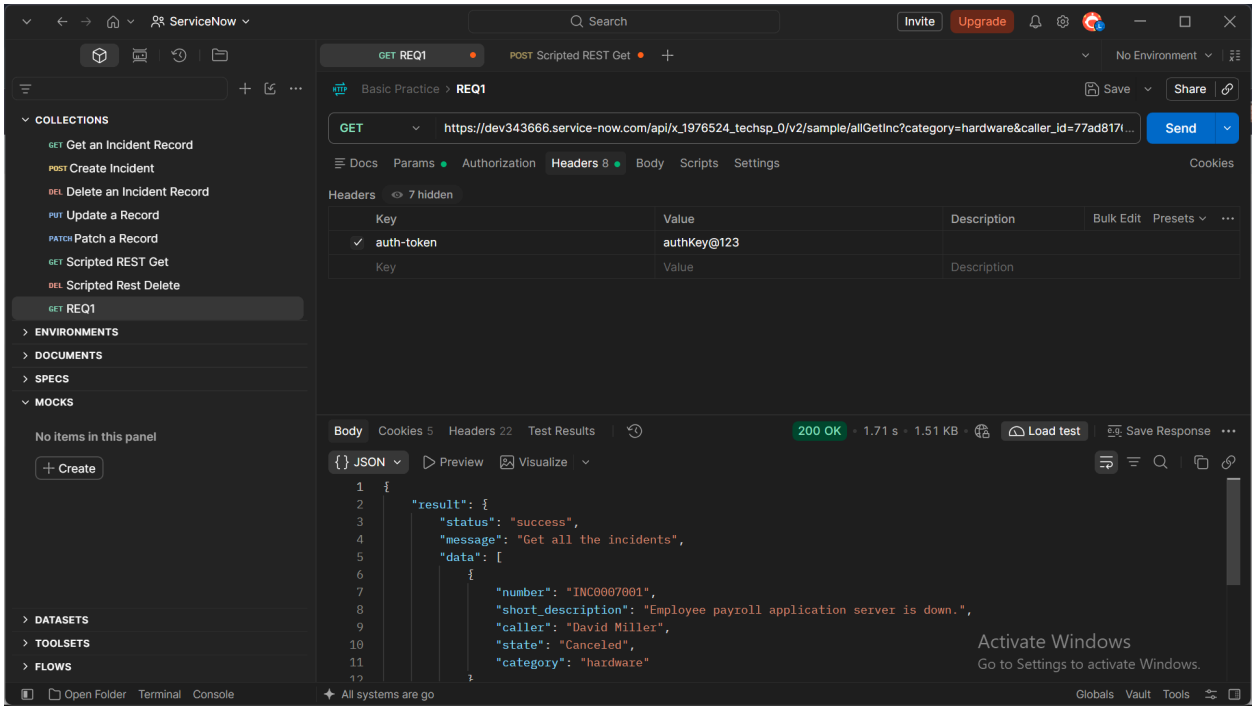

3. Get dynamic sys id :

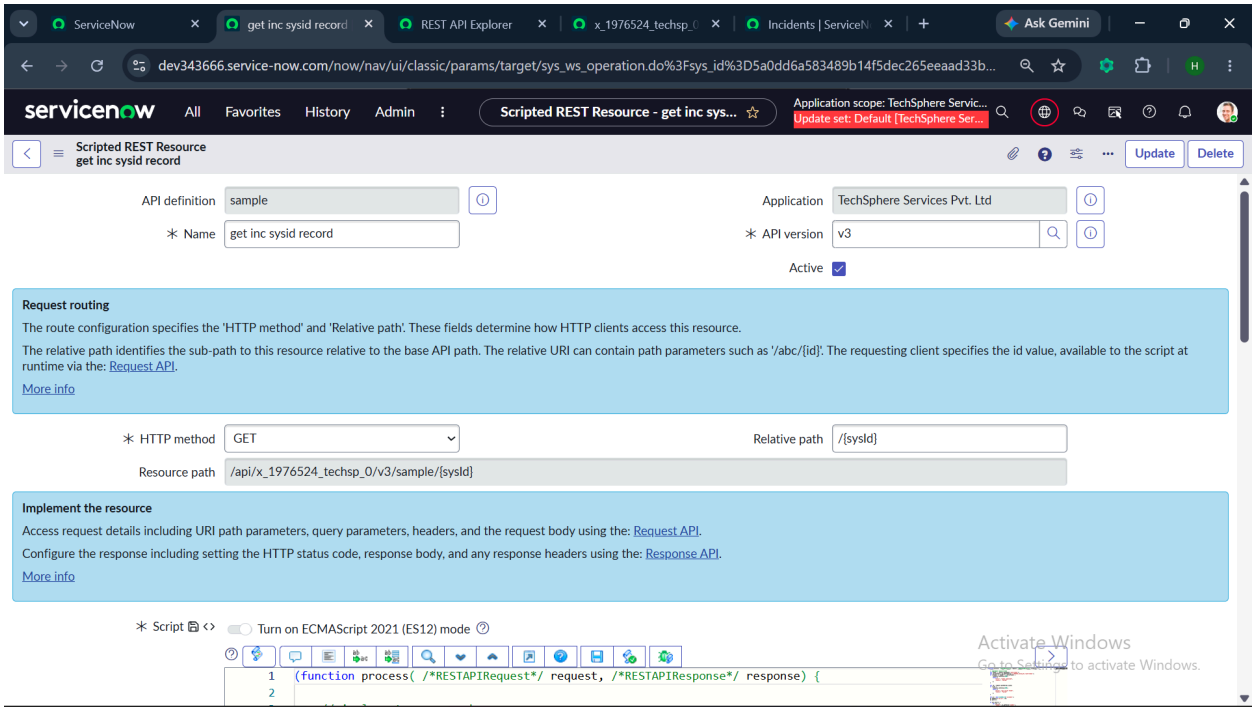


```
(function process( /*RESTAPIRequest*/ request, /*RESTAPIResponse*/ response) {

    // implement resource here
```

```
    var header = request.getHeader('auth-token');
    var secretToken =
gs.getProperty('x_1976524_techsp_0.x-auth-token');
    if (!header || header != secretToken) {
        response.setStatus(400);
        return {
            "error": "token unmatched",
            "status": "failed"
        };
    }

    var id = request.pathParams.sysId;
    if (!id) {
        response.setStatus(400);
        return {
            "error": "sys id not found",
            "status": "failed"
        };
    }

    var gr = new GlideRecord('incident');
    gr.addQuery('sys_id', id);
    gr.query();

    if (gr.next()) {
        var inc = {
            "number": gr.getValue('number'),
            "caller id": gr.getDisplayName('caller_id'),
            "short description": gr.getValue('short_description'),
            "category": gr.getValue('category'),
            "state": gr.getDisplayValue('state')
        };


        response.setStatus(200);
        return {
            "status": "success",
            "message": "incident found",
            "data": inc
        };
    } else {
```

```
        response.setStatus(404);
        return {
            "error": "Inc not found",
            "status": "failed"
        };
    }

})(request, response);
```

NOTE:
For Multiple Path Parameters (`/api/.../v3/sample/{tableName}/{sysId}`)
var table = request.pathParams.tableName; // e.g., 'incident' ya 'problem'
var sysId = request.pathParams.sysId; // e.g., '9d385017c611228701d2844e69674f11'

3. Update operations (using query param, only update those which matchd to the query paramas)

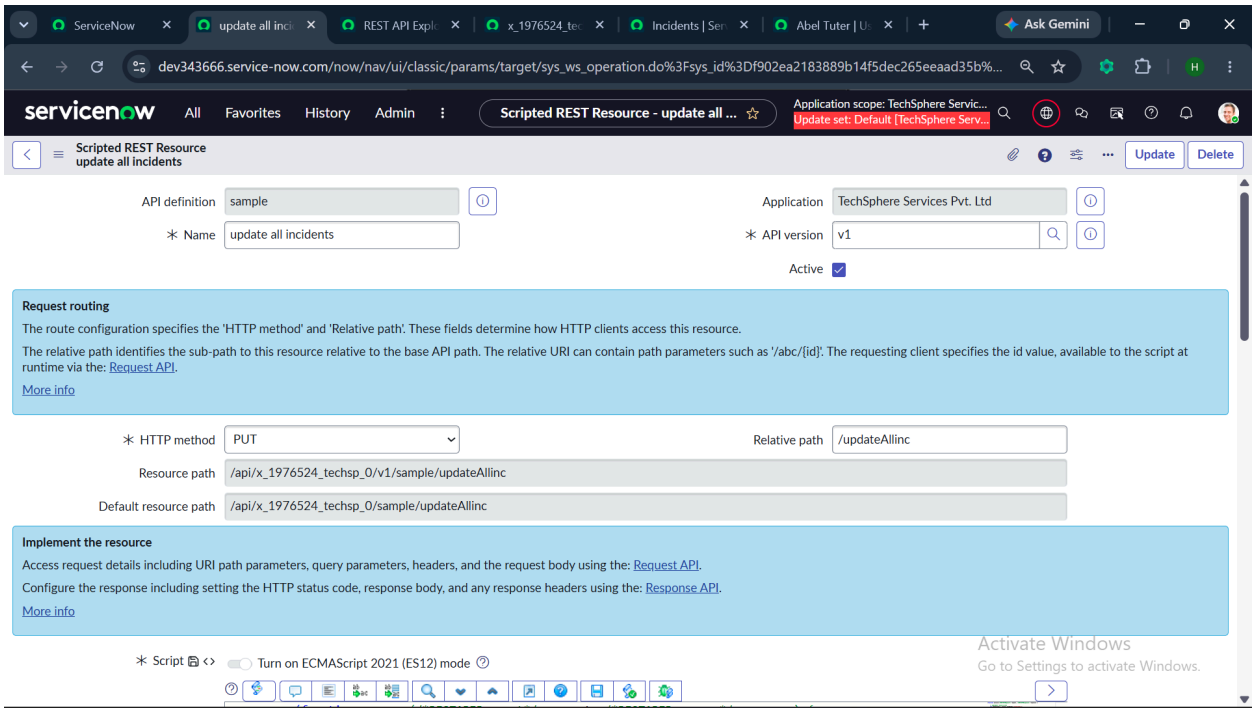

CODE:

```
(function process(/*RESTAPIRequest*/ request, /*RESTAPIResponse*/
response) {
```

```
    // implement resource here
    var headerToken = request.getHeader('auth-token');
    var secretToken =
gs.getProperty('x_1976524_techsp_0.x-auth-token');

    if(!headerToken || headerToken != secretToken){
        response.setStatus(400);
        return {
            'status' : 'failed',
            'error' : 'token unmatched'
        };
    }


    var reqQuery = request.queryParams;
    var gr = new GlideRecord('incident');
    if(reqQuery.category){
        gr.addQuery('category', reqQuery.category);
    }
    if(reqQuery.caller_id){
        gr.addQuery('caller_id', reqQuery.caller_id);
    }
    gr.orderByDesc('sys_created_on');
    gr.query();

    var reqBody = request.body.data;


    var totalInc = gr.getRowCount();
    if(totalInc == 0){
        response.setStatus(404);
        return {
            "error" : "no incident records found",
            "status" : "failed"
        };
    }


    var updatedInc = 0
    while(gr.next()){
        gr.setValue('short_description', reqBody.short_desc);
        gr.caller_id.setDisplayValue(reqBody.caller_id);
```


```
        if(gr.update()){
            updatedInc++;
        }
    }

    response.setStatus(200);
    return {
        'status' : 'success',
        'message' : 'successfully update all the matched incident',
        'total matched count' : totalInc,
        'total updated count' : updatedInc
    };


})(request, response);
```

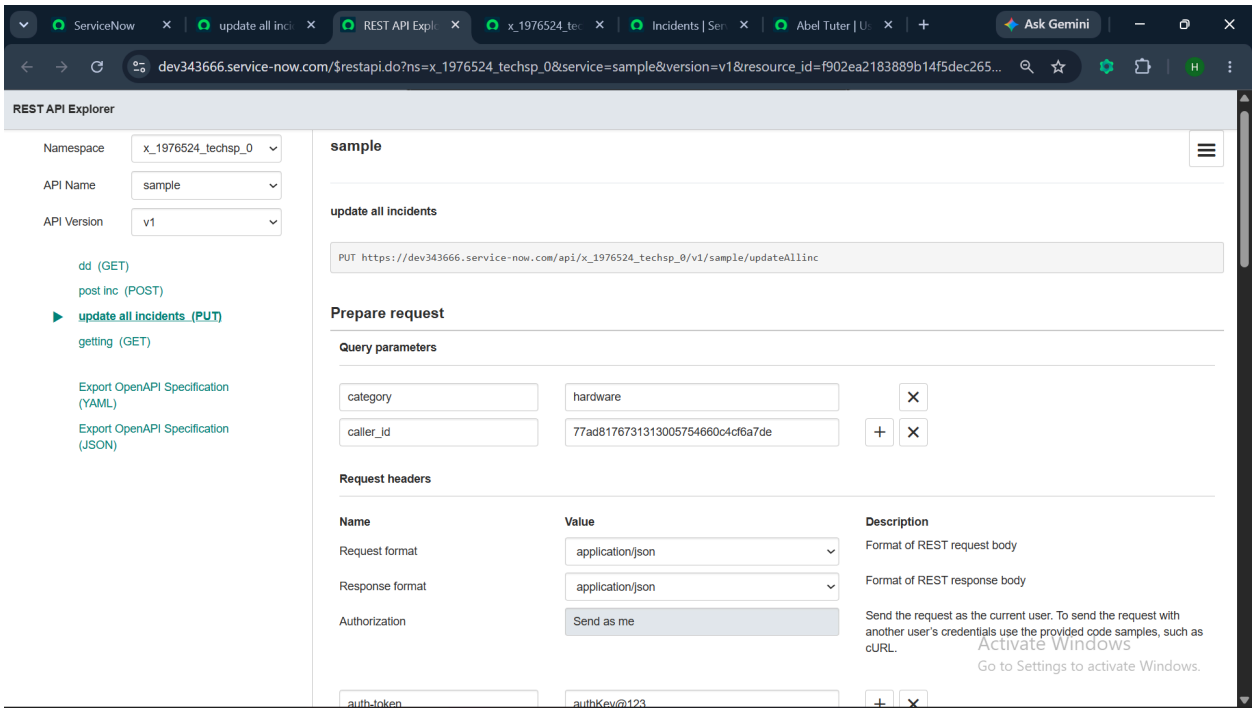

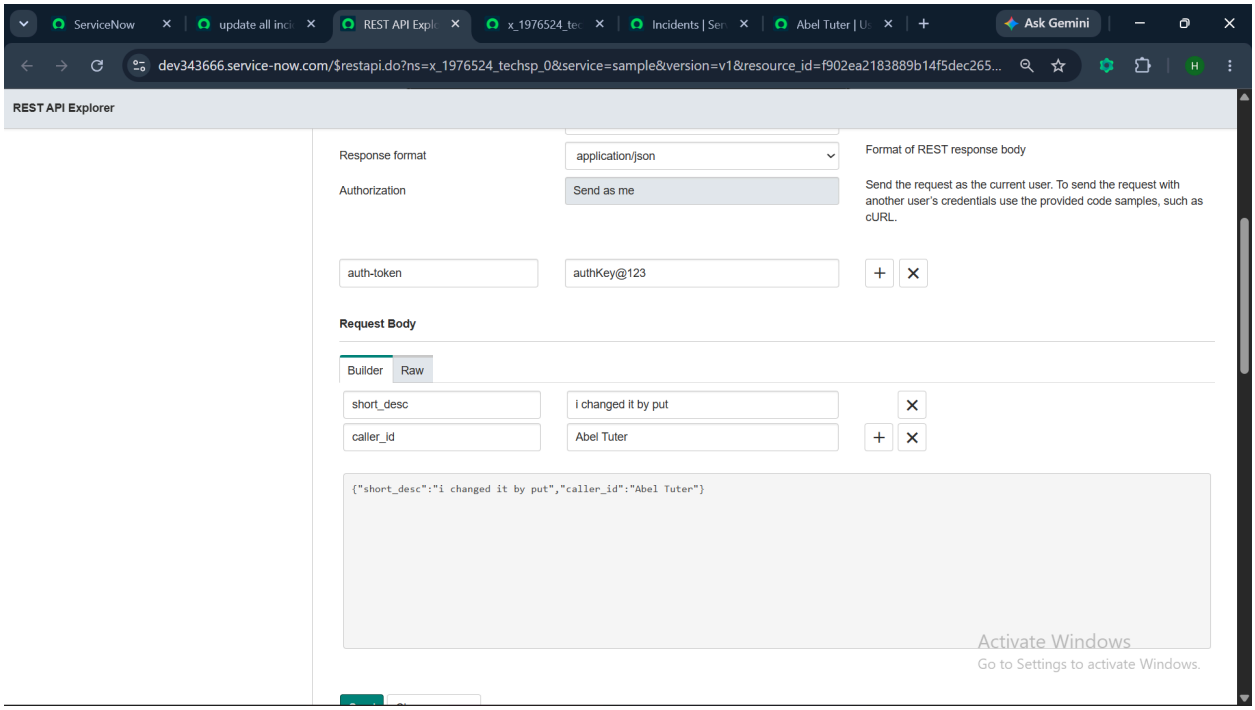

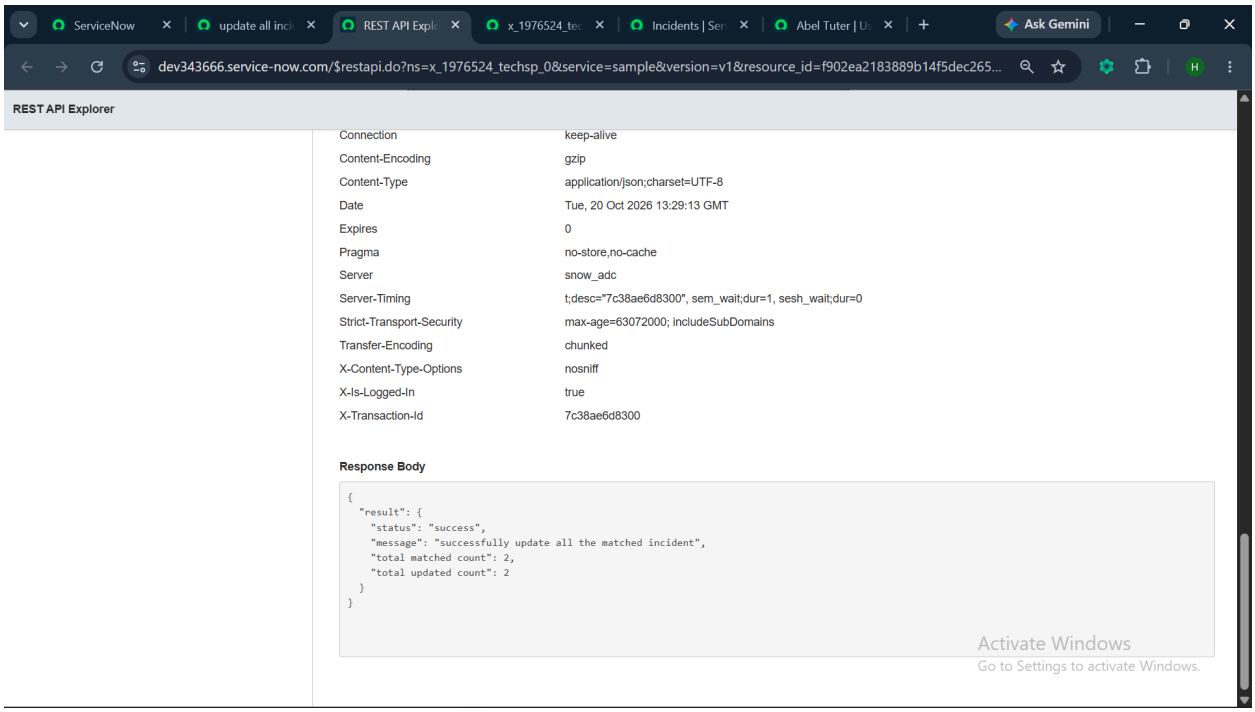

4. Update by sys id:

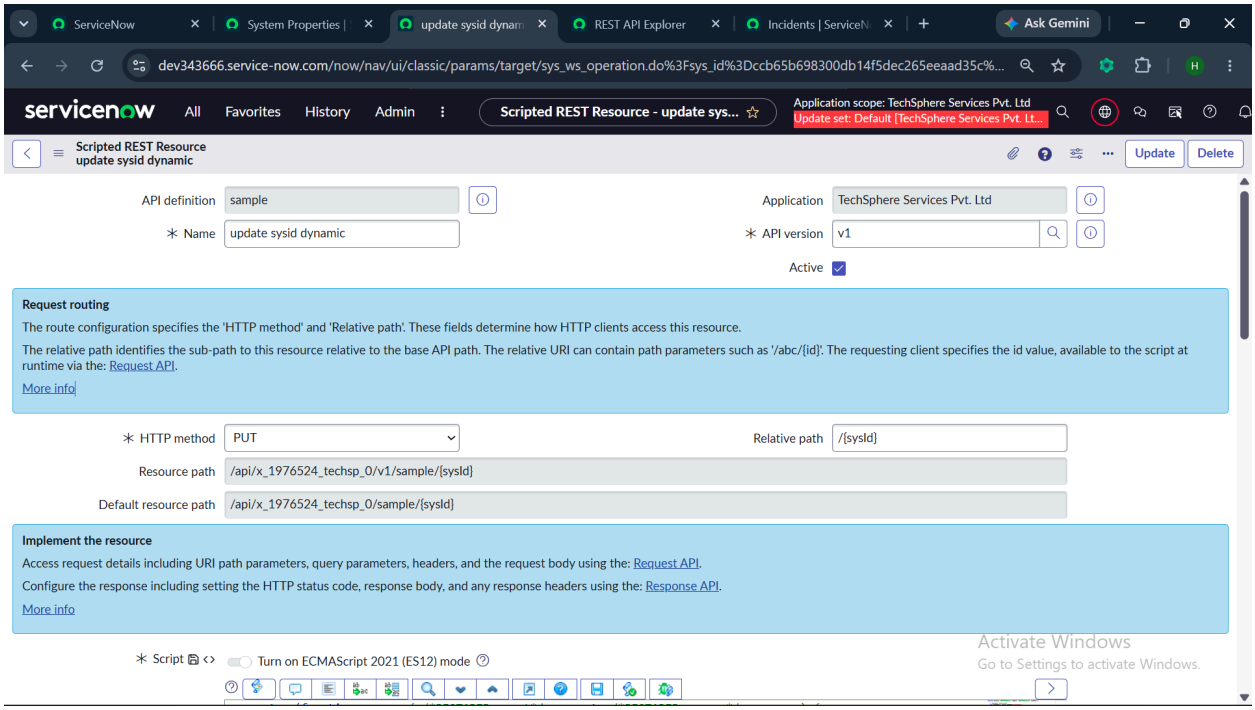

Code :


```
(function process( /*RESTAPIRequest*/ request, /*RESTAPIResponse*/ response) {

    // implement resource here
    var tokenHeader = request.getHeader('auth-token');
    var secretToken = gs.getProperty('x_1976524_techsp_0.x-auth-token');
    if (!tokenHeader || tokenHeader != secretToken) {
        response.setStatus(400);
        return {
            "error": "not matched token",
            "status": "failed"
        };
    }
    var id = request.pathParams.sysId;
    var gr = new GlideRecord('incident');
    gr.addQuery('sys_id', id);
    gr.query();


    var reqBody = request.body.data;
    if (gr.next()) {
```

```
            gr.setValue('short_description', reqBody.desc);
            gr.caller_id.setDisplayValue(reqBody.caller);
            gr.update();
            response.setStatus(200);
            return {
                "message": 'updated successfully'
            }
        } else {
            response.setStatus(404);
            return {
                "error": "Not found incident",
                "status": "failed"
            };
        }


})(request, response);
```

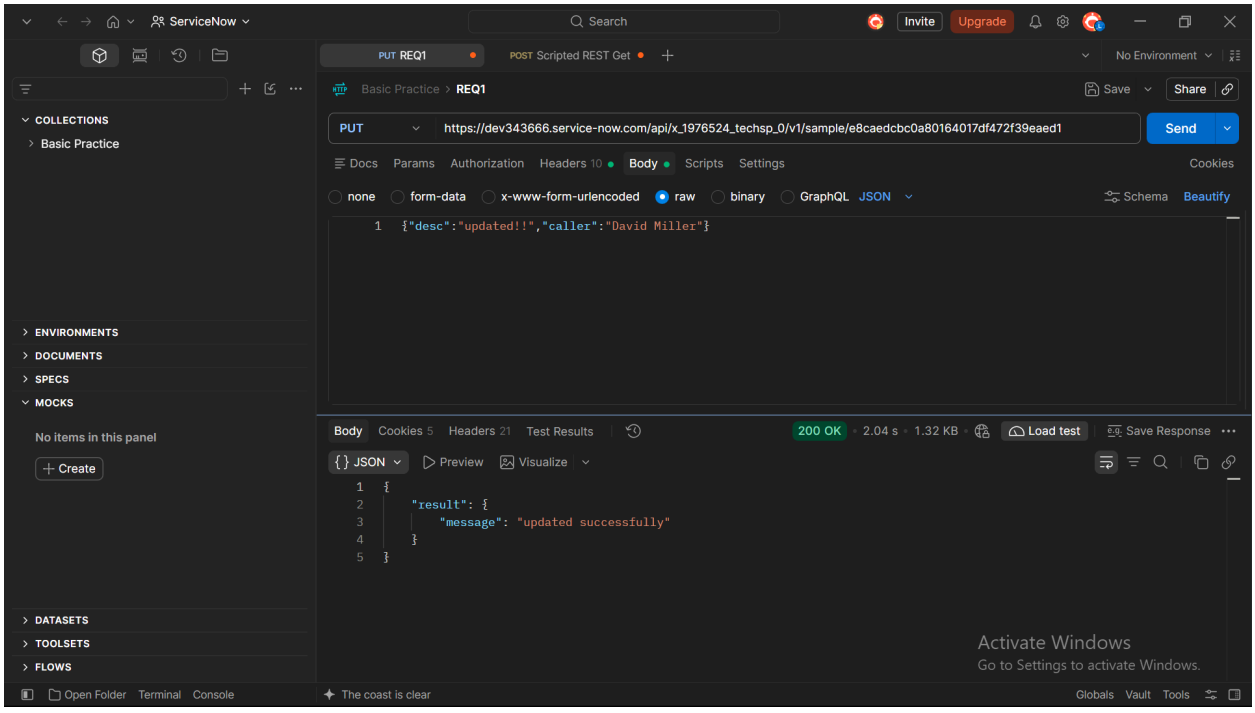

5. Delete by query params:

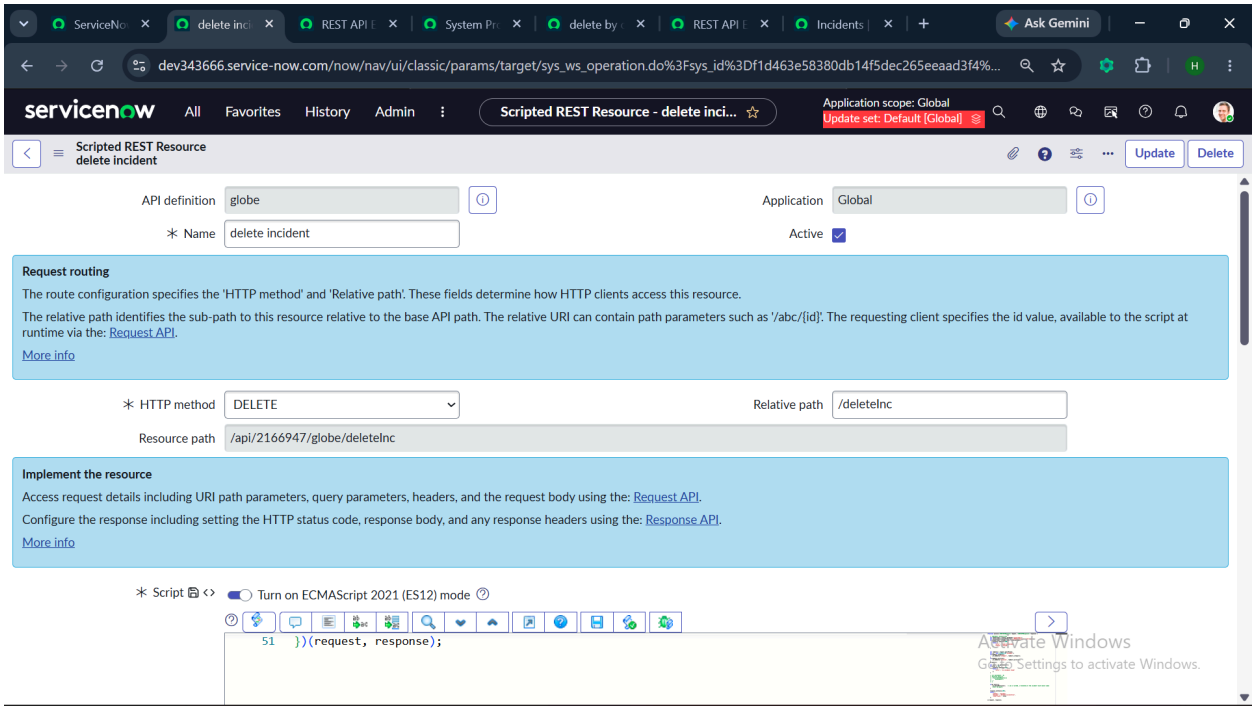


```
(function process(/*RESTAPIRequest*/ request, /*RESTAPIResponse*/
response) {

    // implement resource here
    var headerToken = request.getHeader('auth-token');
    var secretToken =
gs.getProperty('x_1976524_techsp_0.x-auth-token');
    if(!headerToken || headerToken != secretToken){
        response.setStatus(400);
        return {
            "error" : "token mismatched",
            "status" : "failed"
        };
    }


    var reqQuery = request.queryParams;
    var gr = new GlideRecord('incident');
    if(reqQuery.category){
        gr.addQuery('category', reqQuery.category);
    }
    if(reqQuery.priority){
```

```
        gr.addQuery('priority', reqQuery.priority);
    }
    gr.query();


    var total = gr.getRowCount();
    if(total == 0){
        response.setStatus(400);
        return {
            "error" : "no incidents found"
        };
    }


    // var deletedCnt = 0;
    // while(gr.next()){
    //  if(gr.deleteRecord()){
    //      deletedCnt++;
    //  }
    // }


    if(gr.next()){
        gr.deleteMultiple();   // yes it worked, it deleted all the
incident record which comes after the query
    }

    response.setStatus(200);
    return {
        "status" : "success",
        "message" : "deleted successfully",
        "total count" : total
    };


})(request, response);
```

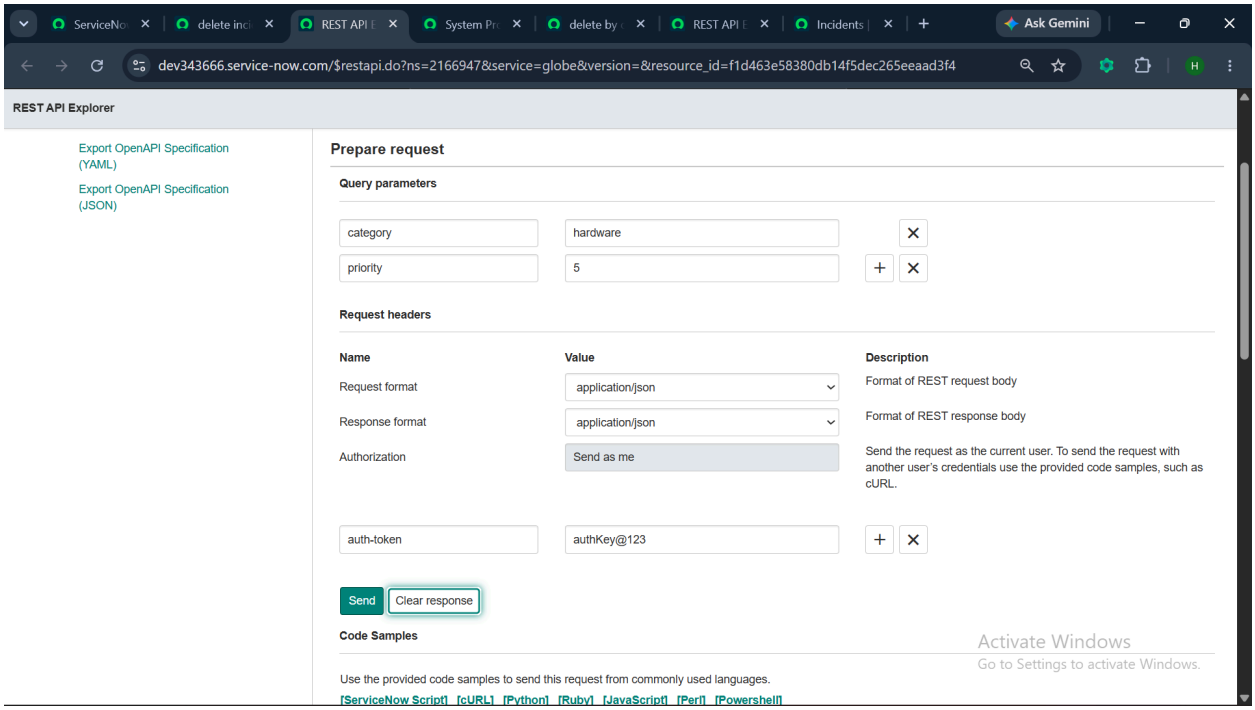
REST API Explorer
Export OpenAPI Specification (YAML)
Export OpenAPI Specification (JSON)
Prepare request
Query parameters
category
hardware
priority
5
Request headers
Name
Value
Description
Request format
application/json
Format of REST request body
Response format
application/json
Format of REST response body
Authorization
Send as me
Send the request as the current user. To send the request with another user's credentials use the provided code samples, such as cURL.
auth-token
authKey@123
Send
Clear response
Code Samples
Use the provided code samples to send this request from commonly used languages.
[ServiceNow Script] [cURL] [Python] [Ruby] [JavaScript] [Perl] [Powershell]
Activate Windows
Go to Settings to activate Windows.

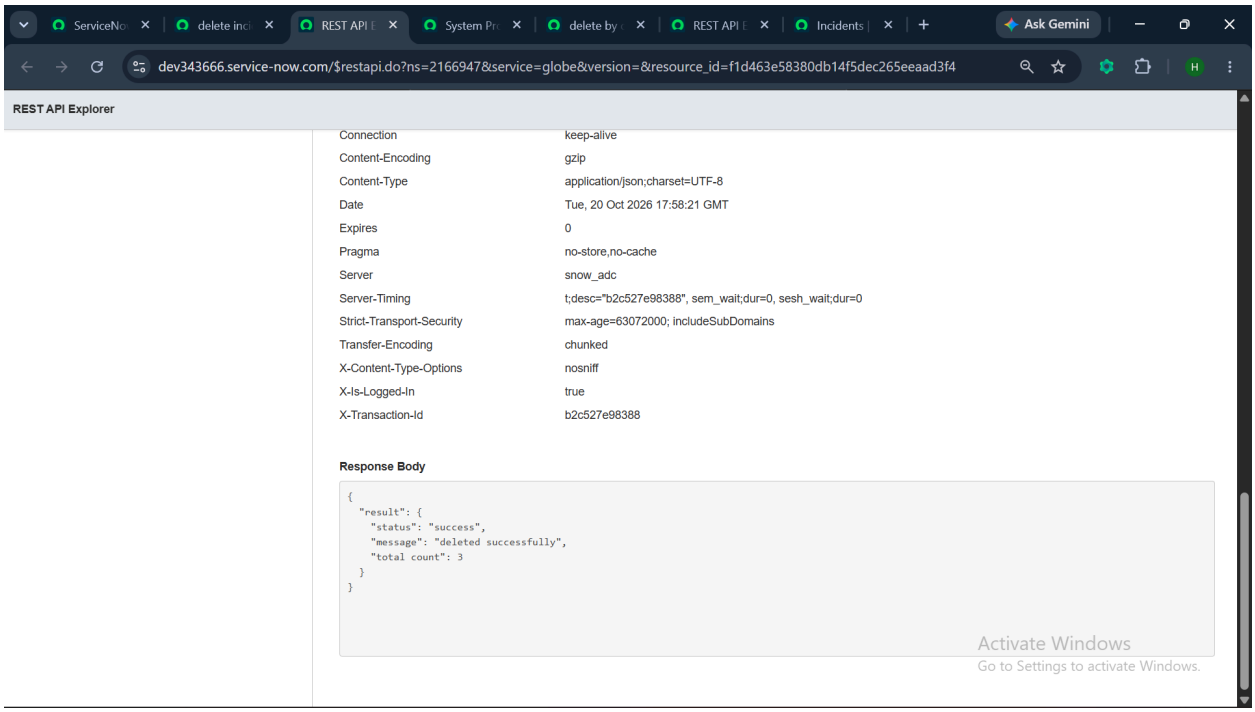
REST API Explorer
Connection
keep-alive
Content-Encoding
gzip
Content-Type
application/json;charset=UTF-8
Date
Tue, 20 Oct 2026 17:58:21 GMT
Expires
0
Pragma
no-store,no-cache
Server
snow_adc
Server-Timing
t;desc="b2c527e98388", sem_wait;dur=0, sesh_wait;dur=0
Strict-Transport-Security
max-age=63072000; includeSubDomains
Transfer-Encoding
chunked
X-Content-Type-Options
nosniff
X-Is-Logged-In
true
X-Transaction-Id
b2c527e98388
Response Body
{
"result": {
"status": "success",
"message": "deleted successfully",
"total count": 3
}
}
Activate Windows
Go to Settings to activate Windows.

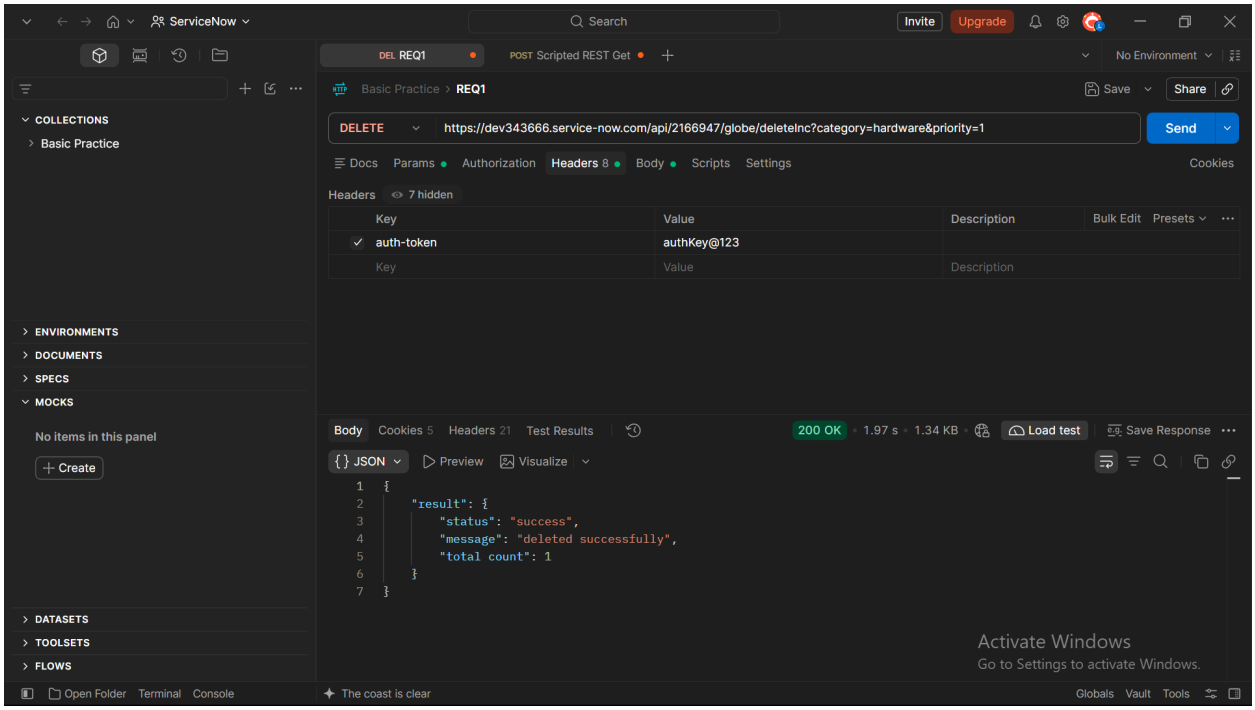

6. Delete by sys id:

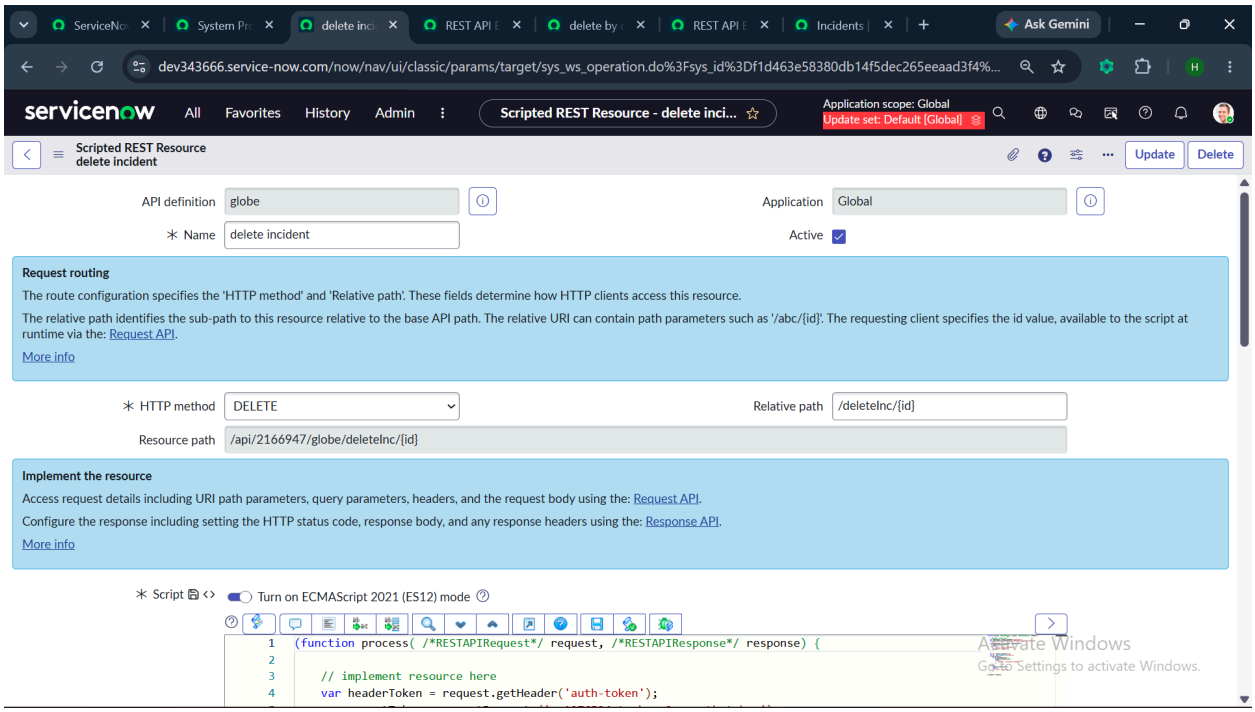


```
(function process( /*RESTAPIRequest*/ request, /*RESTAPIResponse*/ response) {


    // implement resource here
```

```
    var headerToken = request.getHeader('auth-token');
    var secretToken =
gs.getProperty('x_1976524_techsp_0.x-auth-token');

    if (!headerToken || secretToken != headerToken) {
        response.setStatus(401);
        return {
            "error": 'token mismatched',
            "status": 'failed'
        };
    }


    var id = request.pathParams.id;
    var gr = new GlideRecord('incident');
    if (gr.get(id)) {
        if (gr.deleteRecord()) {
            response.setStatus(200);
            return {
                "message": "successfully deleted"
            };
        }
    } else {
        response.setStatus(404);
        return {
            "error": "not found"
        };
    }


})(request, response);
```

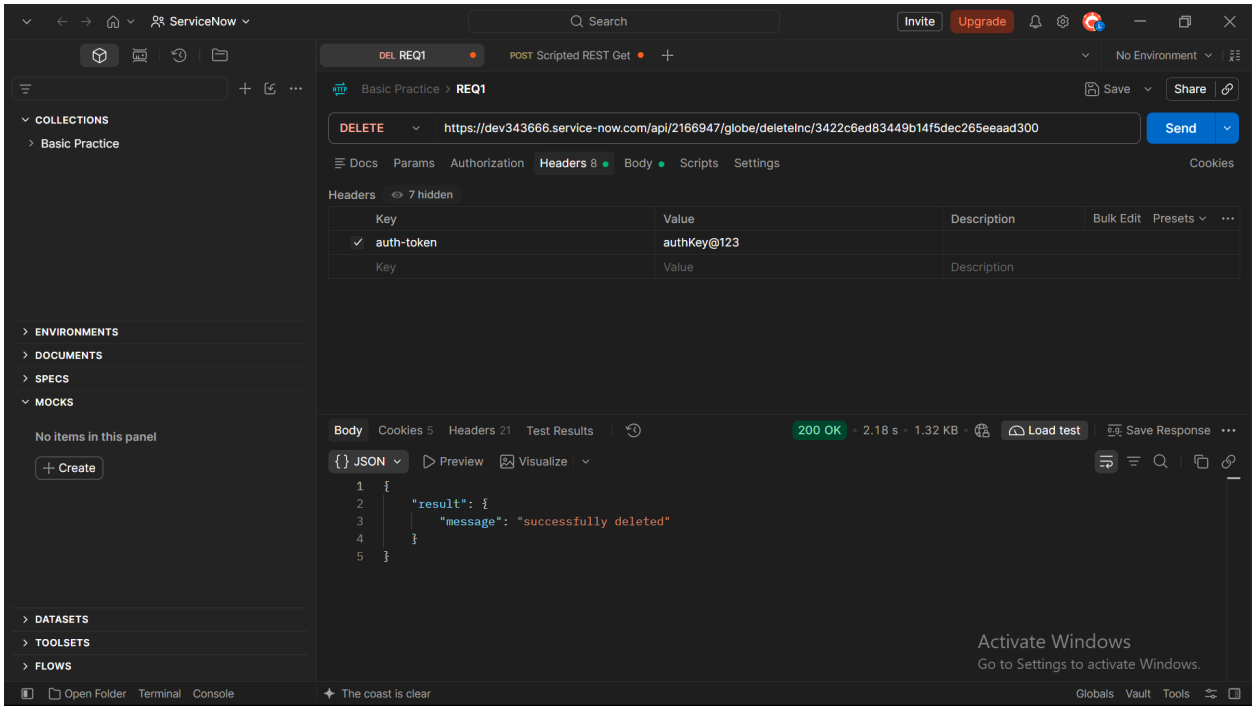

DAP 13TH OCTOBER PAPER 1ST REQUIREMENT :
QUESTION :
a. The platform must expose a single integration surface that external partners (claim clearinghouses, member portals, provider directory services) can call to read claim, member, and provider data and submit claims back. Partners authenticate using an API key supplied in a custom header X-API-Key. b. The surface must support three resources — claims (read by id, create), members (read by id, eligibility check returning {eligible, plan_code, effective_date, termination_date}). c. Resources must be addressable as /api/x_meridian/v1/... so a future incompatible revision can be released as v2 without breaking existing consumers. d. All responses use a consistent envelope: {status: "ok"|"error", data: {...}, errors: [...]}. Validation failures return HTTP 400, missing records HTTP 404, missing or invalid key HTTP 401. The API key value lives in a centrally managed configuration store — never hardcoded — so credential rotation is a configuration change, not a code change.

ANSWER :

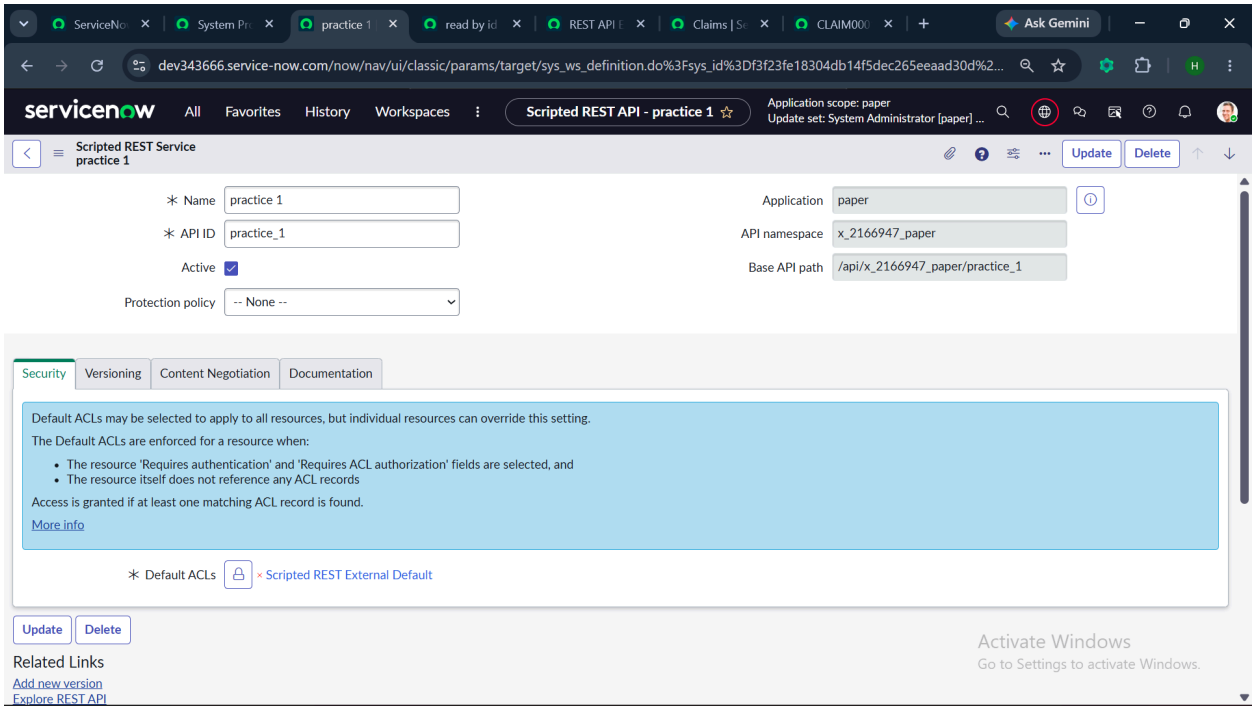

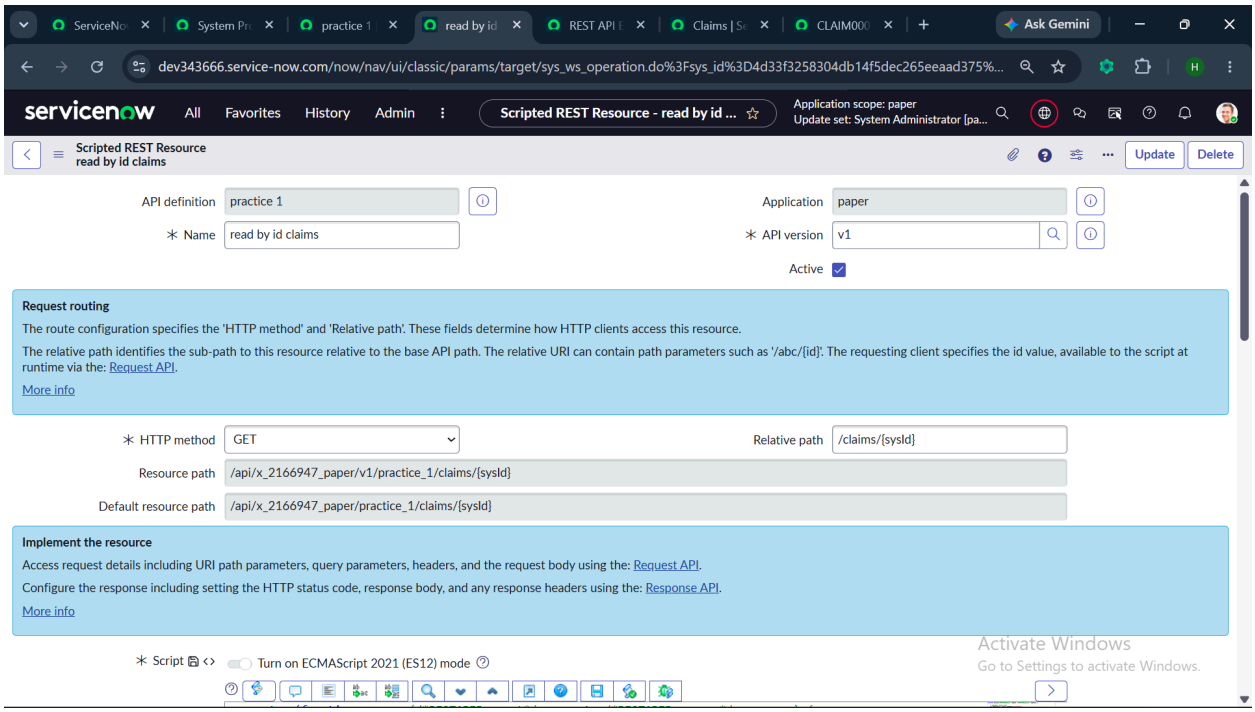

Get by id of claim table code :


```
(function process(/*RESTAPIRequest*/ request, /*RESTAPIResponse*/
response) {

    // implement resource here
    var headerToken = request.getHeader('auth-token');
    var secretToken = gs.getProperty('x_2166947.api.key');
```


```
if(!headerToken || headerToken != secretToken){
    response.setStatus(401);
    return {
        "status" : "error",
        "message" : "Token Mismatched"
    };
}

var id = request.pathParams.sysId;
if(!id){
    response.setStatus(400);
    return {
        "status" : "failed",
        "message" : "id not found"
    };
}
var gr = new GlideRecord('x_2166947_paper_claim');
if(gr.get(id)){
    var data = {
        "number" : gr.getValue('number'),
        "allowed_amount" : gr.getValue('allowed_amount'),
        "claim type" : gr.getValue('claim_type'),
        "Member" : gr.member.getDisplayValue(),
        "service date" : gr.getValue('service_date')
    };
    response.setStatus(200);
    return {
        "status" : "ok",
        "data" : data
    };
}
else{
    response.setStatus(404);
    return {
        "status" : "failed",
        "message" : "Record not found"
    };
}
```


```
})(request, response);
```

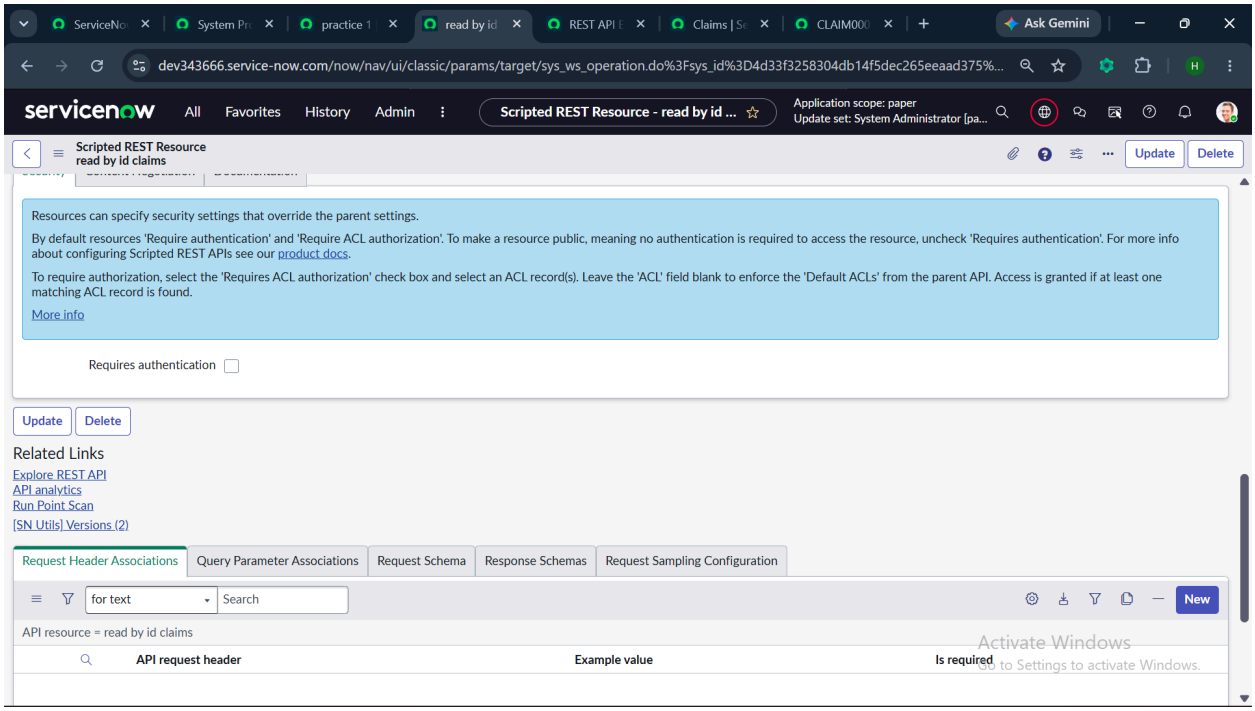

Requires auth must be unchecked for postman testing (if you checked it then you have to give admin pass and name)

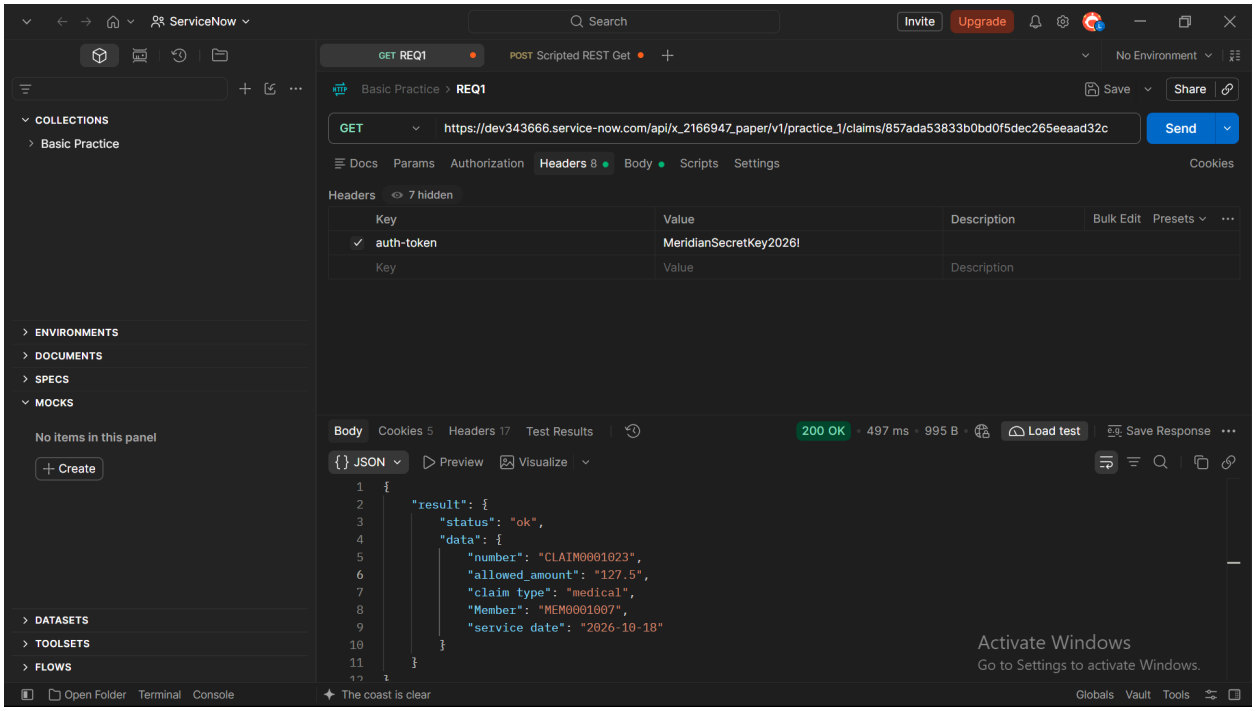

Create claim vala 2nd api :

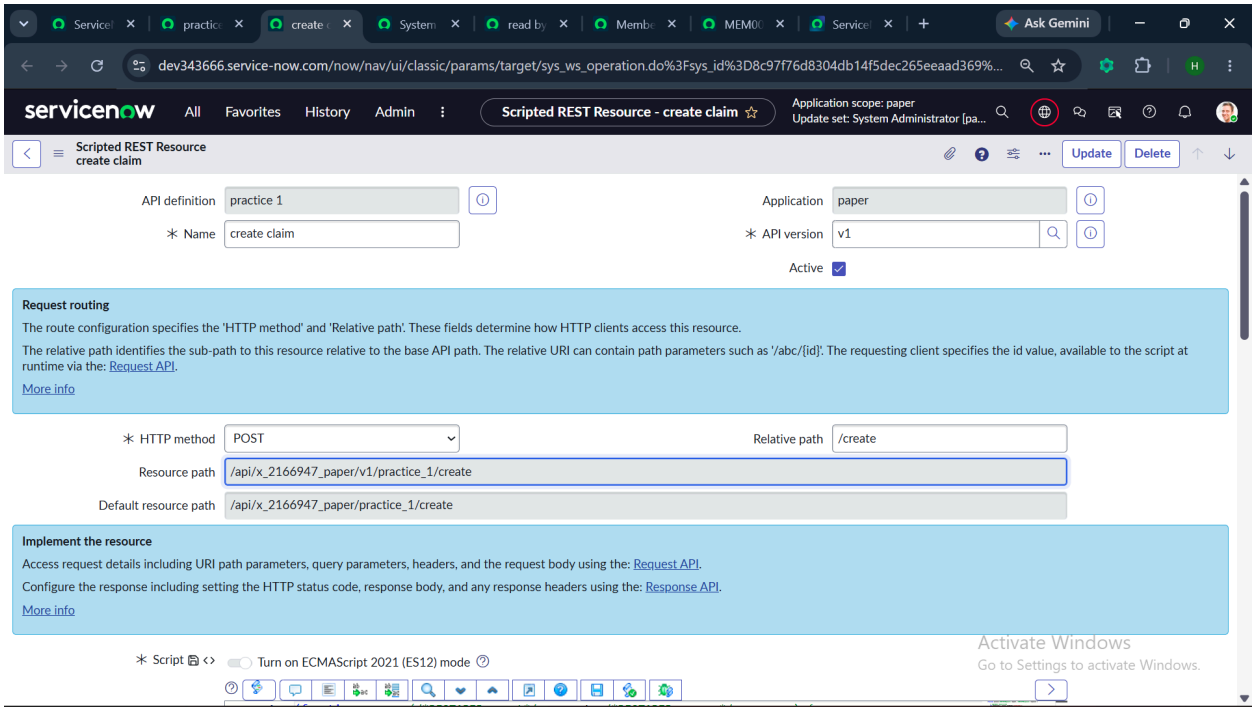

Code :

```
(function process(/*RESTAPIRequest*/ request, /*RESTAPIResponse*/ response) {

    // implement resource here
    var headerToken = request.getHeader('auth-token');
    var secretToken = gs.getProperty('x_2166947.api.key');
    if(!headerToken || headerToken != secretToken){
        response.setStatus(401);
        return {
            "status" : "error",
            "message" : "token mismatched"
        };
    }

    var reqBody = request.body.data;
    if(!reqBody || !reqBody.allowed_amount || !reqBody.claim_type || !reqBody.adjudication_pending || !reqBody.member){
        response.setStatus(400);
        return {
            "status" : "error",
            "message" : "Request body does not have mandatory data"
```


```
        };
    }

    var gr = new GlideRecord('x_2166947_paper_claim');
    gr.initialize();
    gr.setValue('allowed_amount', reqBody.allowed_amount);
    gr.setValue('claim_type', reqBody.claim_type);
    gr.setValue('adjudication_pending',
reqBody.adjudication_pending);
    gr.member.setDisplayValue(reqBody.member);
    var id = gr.insert();

    response.setStatus(201);
    return {
        "status" : "ok",
        "message" : "claim created successfully",
        "sys id" : id
    };

})(request, response);
```

MEMBER api read by id :

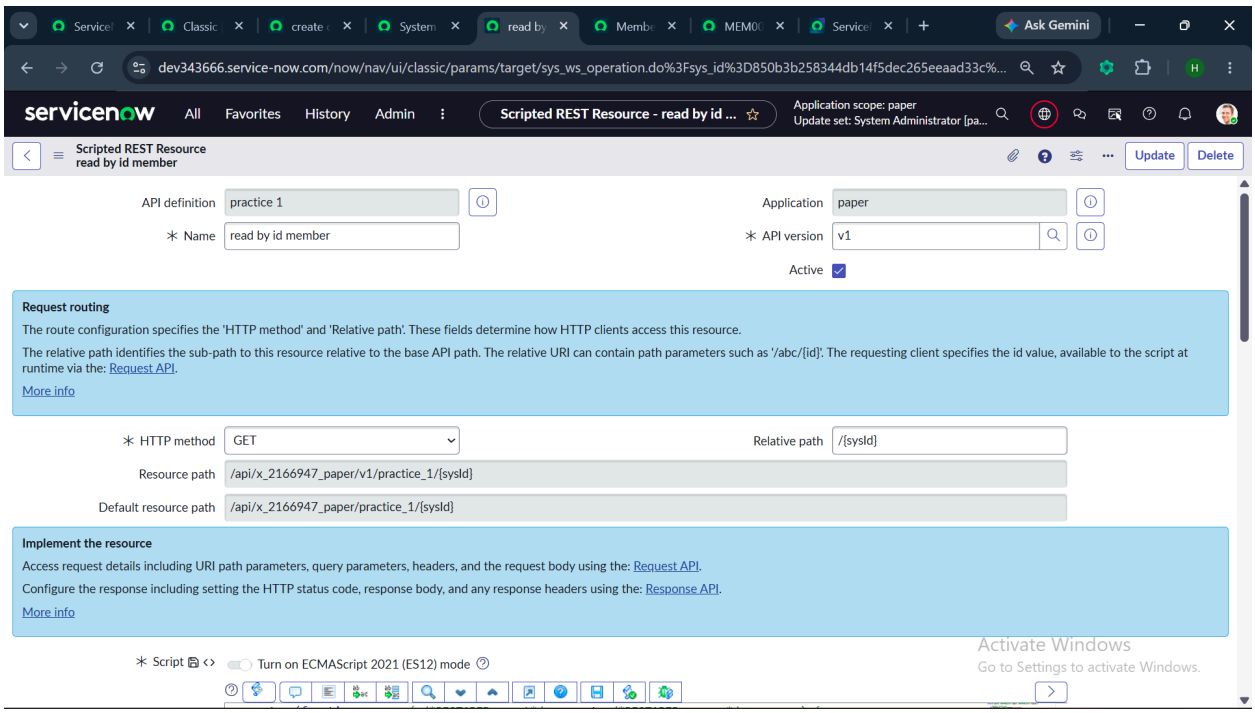

Code :

```
(function process( /*RESTAPIRequest*/ request, /*RESTAPIResponse*/ response) {

    // implement resource here
    var headerToken = request.getHeader('auth-token');
    var secretToken = gs.getProperty('x_2166947.api.key');
    if (!headerToken || headerToken != secretToken) {
        response.setStatus(401);
        return {
            "status": "error",
            "message": "Token mismatched"
        };
    }

    var id = request.pathParams.sysId;
    if (!id) {
        response.setStatus(400);
        return {
            "status": "error",
            "message": "id is not found"
        };
    }


    var gr = new GlideRecord('x_2166947_paper_member');
    if (gr.get(id)) {
        var data = {
            "number": gr.getValue("number"),
            "dob": gr.getValue("date_of_birth"),
            "first name": gr.getValue('first_name'),
            "plan": gr.plan.getDisplayValue(),
            "related_user": gr.related_user.getDisplayValue()
        };


        response.setStatus(200);
        // response.setHeader("hello-ji", 20); // yha ye 20 integer me nhi string me hi dena hoga, ye only string accept krega
        // response.setHeader('X-Total Count', '50'); // yha koi bhi space nhi dena hota . varna nhi chlega
        response.setHeader("hello-ji", "20");
```

```
        response.setHeader('X-Total-Count', '50');
        return {
            "status": "ok",
            "message": "successfully get the record",
            "data": data
        };
    } else {
        response.setStatus(404);
        return {
            "status": "error",
            "message": "member record is not found"
        };
    }

})(request, response);
```


MOST IMPORTANT SCREEN SHOT :

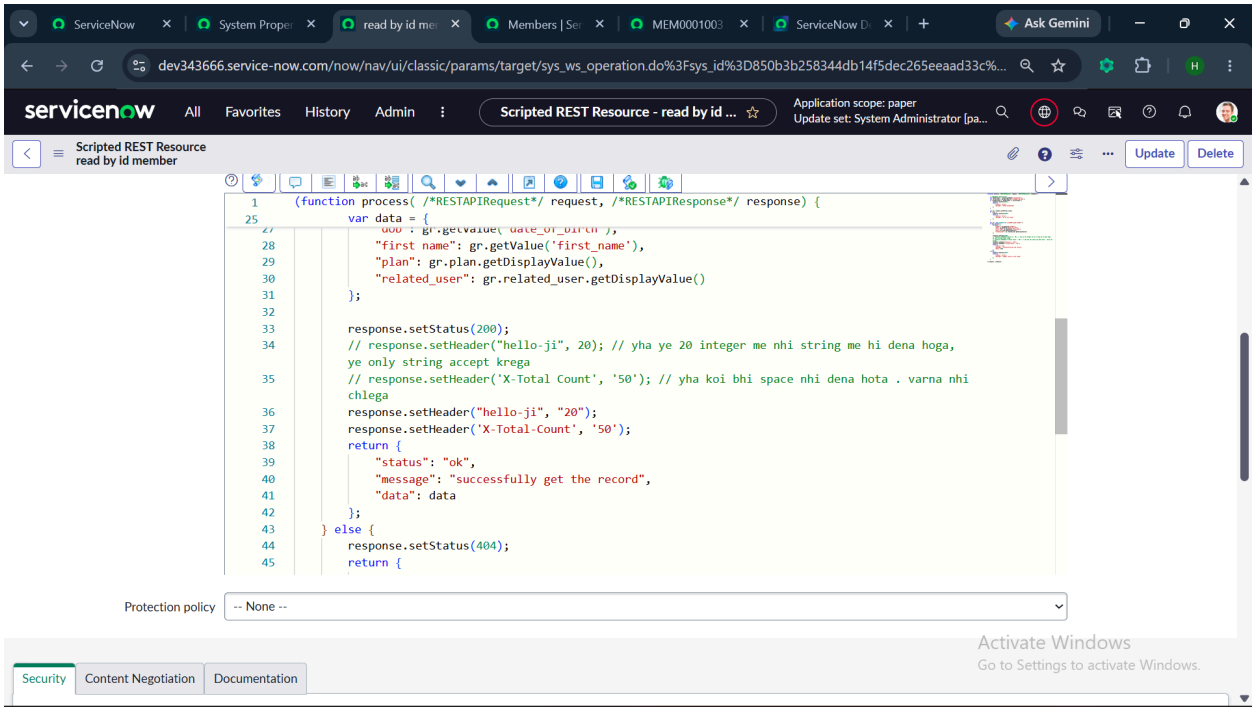

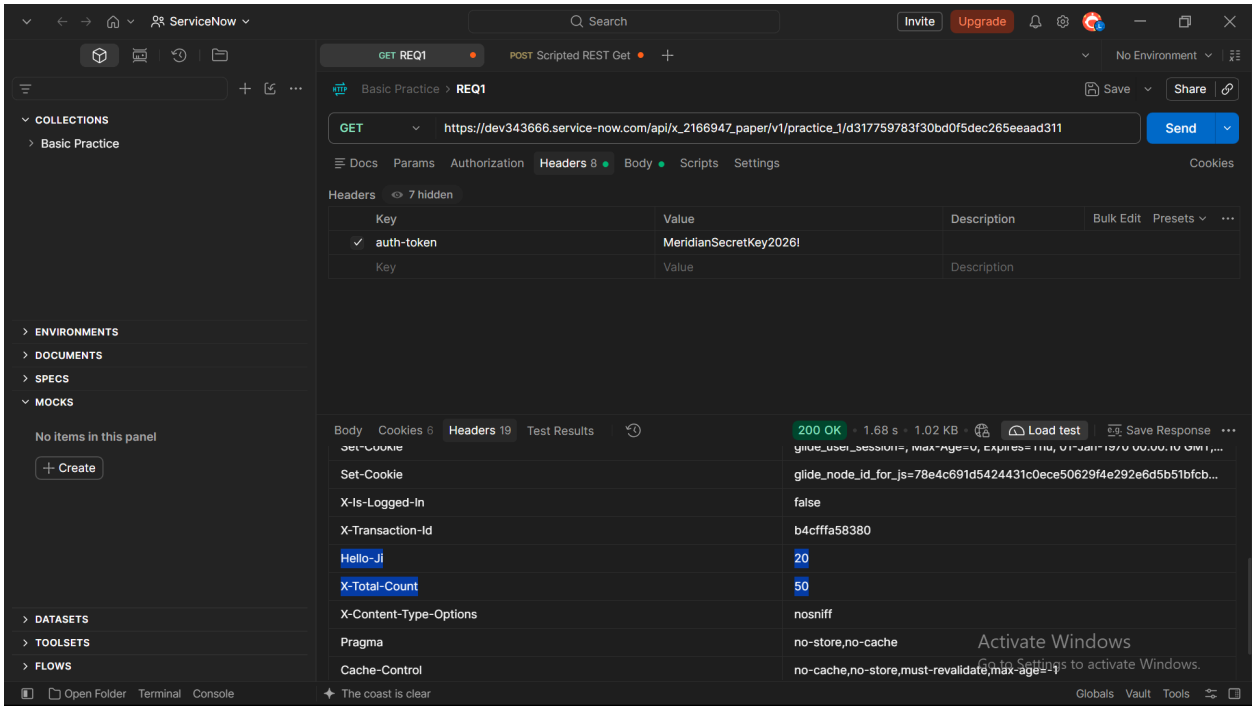


```
    // response.setHeader("hello-ji", 20); // yha ye 20 integer me nhi string me hi dena hoga, ye only string accept krega
        // response.setHeader('X-Total Count', '50'); // yha koi bhi space nhi dena hota . varna nhi chlega
        response.setHeader("hello-ji", "20");
        response.setHeader('X-Total-Count', '50');
```

MEMBER ki 2nd api for eligibility check get:

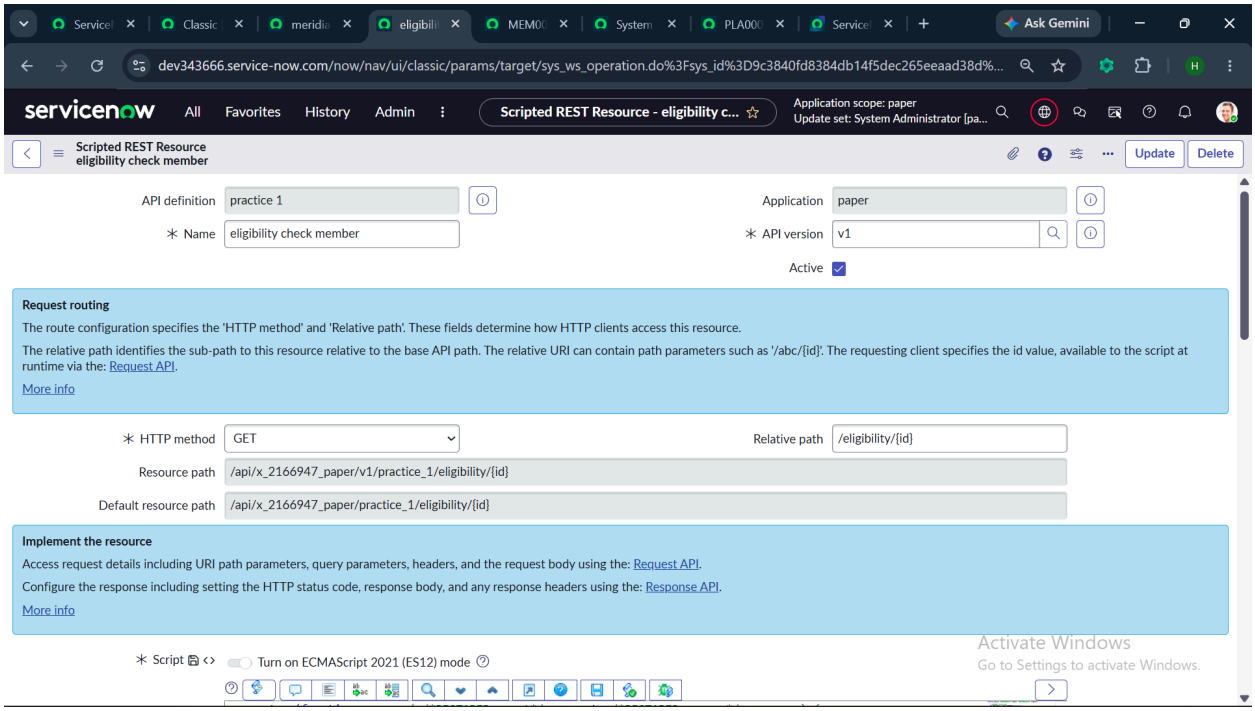

CODE :

```
(function process( /*RESTAPIRequest*/ request, /*RESTAPIResponse*/ response) {

    // implement resource here
    var headerToken = request.getHeader('X-API-Key');
    var secretToken = gs.getProperty('x_2166947.api.key');

    if (!headerToken || headerToken != secretToken) {
        response.setStatus(401);
        return {
            "status": "error",
            "message": "token mismatched"
        };
    }



    var id = request.pathParams.id;
    if (!id) {
        response.setStatus(400);
        return {
            "status": "error",
```

```
            "message": "id not found"
        };
    }

    var gr = new GlideRecord('x_2166947_paper_member');
    if (gr.get(id)) {
        var isEligible = false;
        var today = new GlideDate().getValue();
        var eff = gr.getValue('effective_date');
        var term = gr.getValue('termination_date');
        if(eff && term && today >= eff && today <= term){
            isEligible = true;
        }
        var data = {
            "Eligible" : isEligible,
            "Plan Code" : gr.plan.getDisplayValue(),
            "Effective Date" : gr.getValue('effective_date'),
            "Termination Date" : gr.getValue('termination_date')
        };

        response.setStatus(200);
        return {
            "status" : "ok",
            "data" : data
        };
    } else {
        response.setStatus(404);
        return {
            "status": "error",
            "message": "record not found"
        };
    }


})(request, response);
```

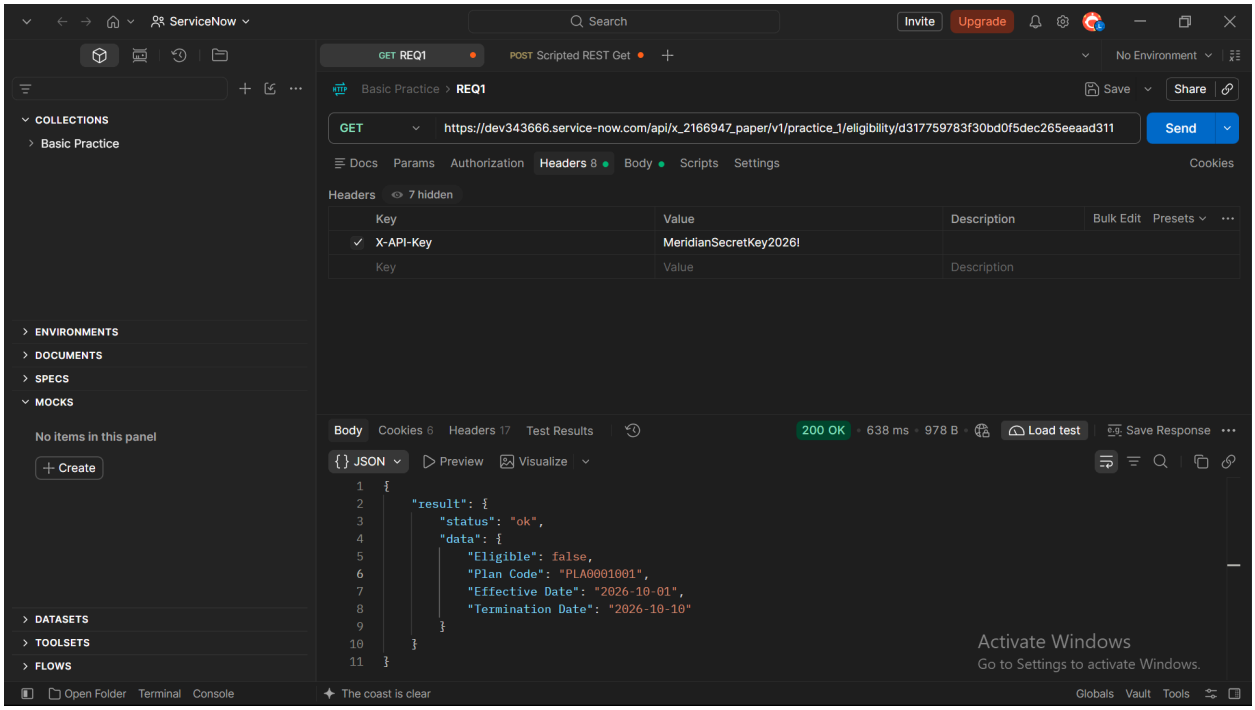

NOTE :

```
var isEligible = false;
var today = new GlideDate().getValue(); // YE IMP HAI
var eff = gr.getValue('effective_date');
var term = gr.getValue('termination_date');
if(eff && term && today >= eff && today <= term){
    isEligible = true;
}
```

EXTRA : ABB MAI ISSI ELIGIBILITY CHECK SE SABHI RECORDS KO RETURN KARAUNGA JO ELEIGIBLE HAI YA NHI UNKE SATH

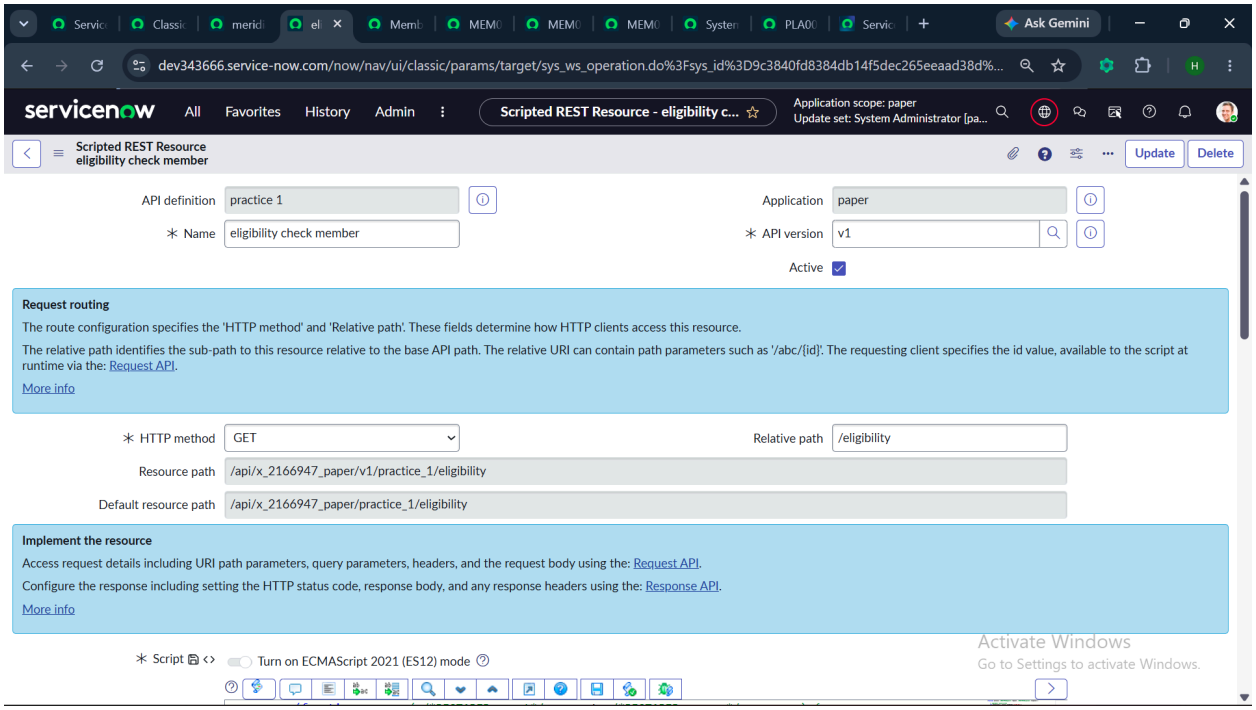

Code :

```
(function process( /*RESTAPIRequest*/ request, /*RESTAPIResponse*/ response) {

    // implement resource here
    var headerToken = request.getHeader('X-API-Key');
    var secretToken = gs.getProperty('x_2166947.api.key');

    if (!headerToken || headerToken != secretToken) {
        response.setStatus(401);
        return {
            "status": "error",
            "message": "token mismatched"
        };
    }

    var totalTrue = 0;
    var totalFalse = 0;
    var gr = new GlideRecord('x_2166947_paper_member');
    gr.query();
    var data = [];
    while (gr.next()) {
        var today = new GlideDate().getValue();
```

```
    var eff = gr.getValue('effective_date');
    var term = gr.getValue('termination_date');
    var isEligible = false;
    if (eff <= today && today <= term) {
        isEligible = true;
        ++totalTrue;
    } else {
        ++totalFalse;
    }

    var dataRecord = {
        "member number": gr.getValue('number'),
        "eligible": isEligible,
        "plan code": gr.plan.getDisplayValue(),
        "effective date": gr.getValue('effective_date'),
        "termination date": gr.getValue('termination_date')
    };

    data.push(dataRecord);
}


if (data.length == 0) {
    response.setStatus(404);
    return {
        "status": "failed",
        "message": "No record found"
    };
}


var jsonData = {
    "total count": gr.getRowCount(),
    "total true": totalTrue,
    "total false": totalFalse
};
response.setStatus(200);
response.setHeader('total-records', gr.getRowCount());
response.setHeader('total-true', totalTrue);
response.setHeader('total_false', totalFalse);
// ❌ Galat (Object direct pass kiya):
// response.setHeader('complete-jsonData', jsonData);
```

```
    // ✅ Sahi (JSON stringify kiya):
    response.setHeader('complete-jsonData', JSON.stringify(jsonData));

    return {
        "status": "success",
        "message": "successfully get data",
        "data": data
    };

})(request, response);
```

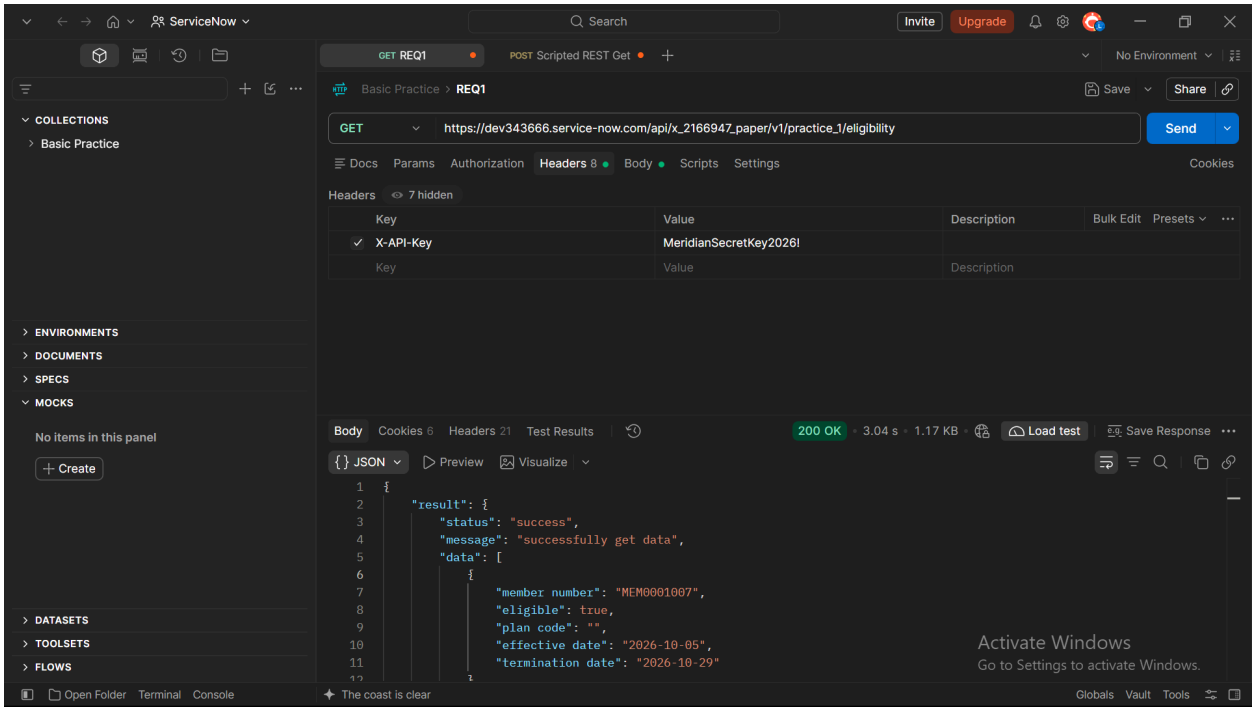


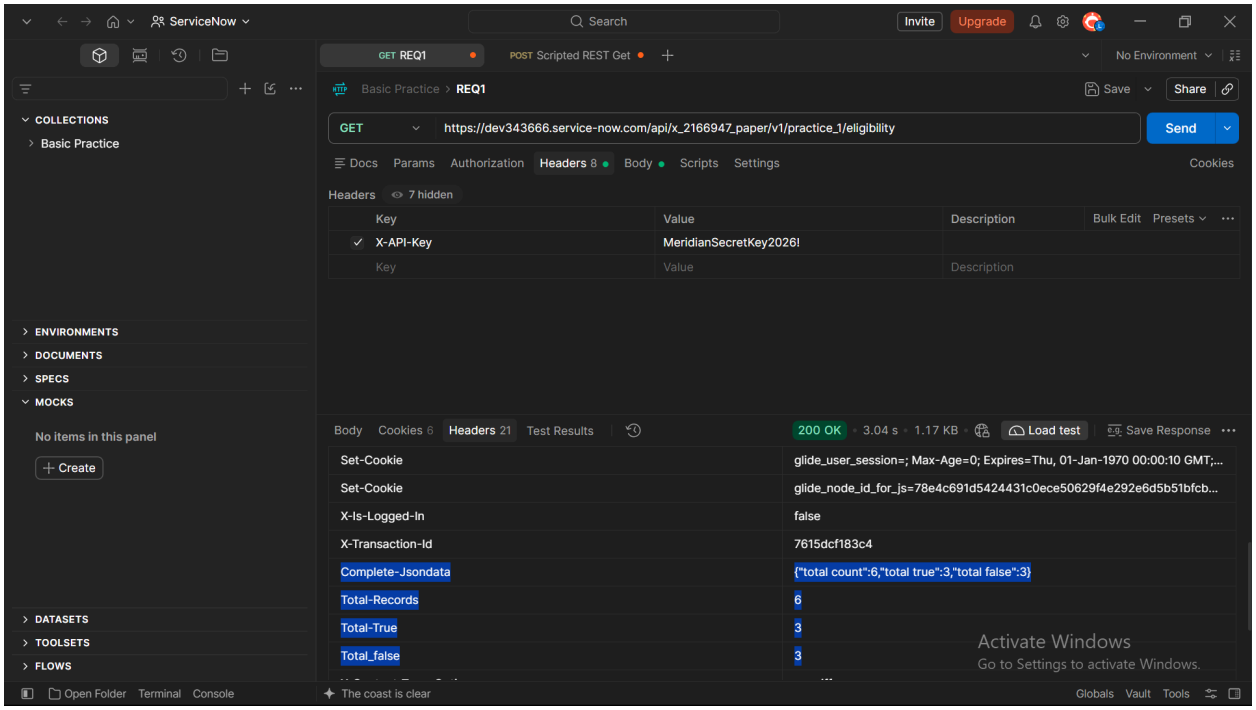

MOST IMPORTANT :

```
    // ❌ Galat (Object direct pass kiya):
    // response.setHeader('complete-jsonData', jsonData); ISS SE YE
[OBJECT object] DEGA

    // ✅ Sahi (JSON stringify kiya):
    response.setHeader('complete-jsonData', JSON.stringify(jsonData));
```

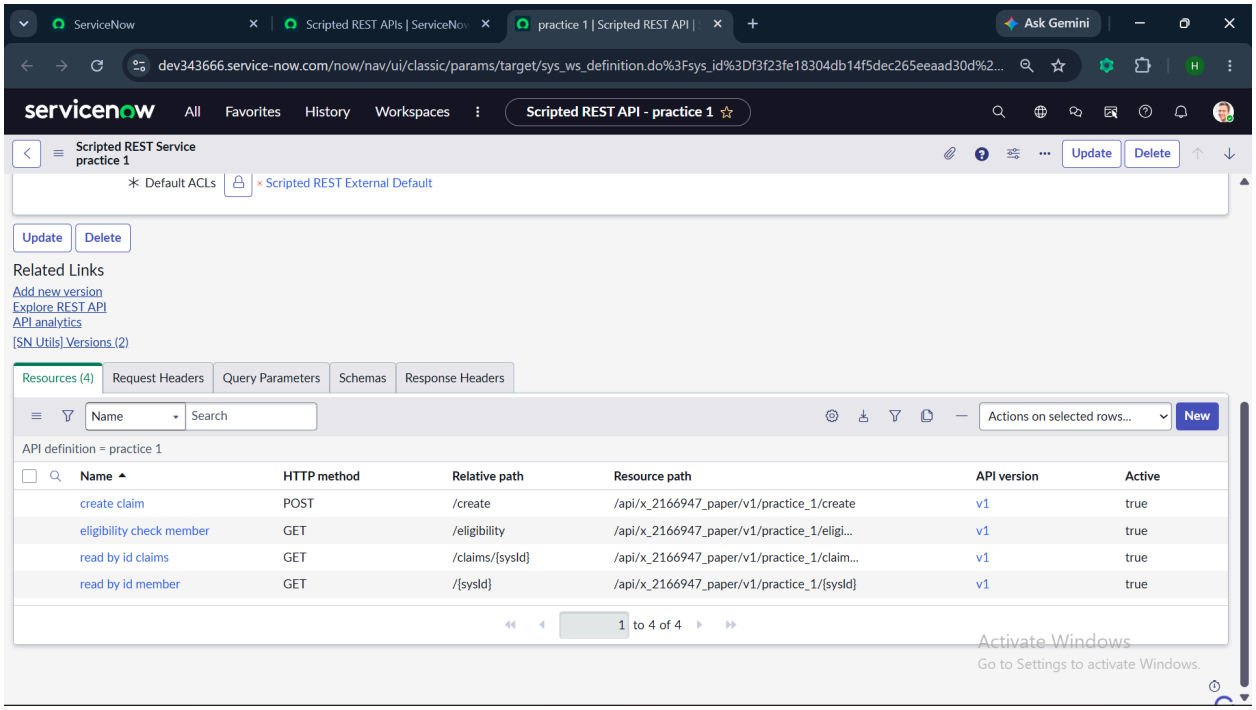

Response Object :

```
// Status code set karna
response.setStatus(200); // OK
response.setStatus(201); // Created
response.setStatus(204); // No Content
response.setStatus(400); // Bad Request
response.setStatus(404); // Not Found
response.setStatus(500); // Server Error

// Custom header set karna
response.setHeader('X-Custom-Header', 'value');

// Content type set karna (usually auto-handled)
response.setContentType('application/json');
```

ALL DONE FOR INBOUND INTEGRATION.