Outbound Integration start karte hain!

ServiceNow Outbound Integration ka matlab hai jab **ServiceNow kisi external system (Postman, Jira, Salesforce, 3rd Party APIs)** ko REST/SOAP requests bhejta hai.

Iske major components hote hain:

1. **REST Message / Outbound REST** (Static configuration using UI)
2.
3. sn_ws.RESTMessageV2 **API** (Dynamic execution via Scripts / Business Rules)
4.

Step 1: Create Outbound REST Message (UI)

1. Filter Navigator mein search karein REST Message -> Open **System Web Services > Outbound > REST Message**.
2.
3. Click **New**:
4.
    - **Name:** Jira Integration (ya koi bhi name)
    -
    - **Endpoint:** https://api.github.com (ya aapki target API ka Base URL)
    -
5. **Save (Insert)** karein.
6.

Step 2: Define HTTP Method (e.g., GET / POST)

1. **HTTP Methods** Related List mein jaakar **New** click karein:
2.
    - **HTTP Method:** GET / POST
    -
    - **Name:** Get User Details
    -
    - **Endpoint:** https://api.github.com/users/(*https://api.github.com/users/*)${user_id} *(Dynamic path variables ke liye* ${var_name} *use hota hai)*
    -
3. **HTTP Headers** tab mein required headers dalein:
4.
    - **Name:** Content-Type | **Value:** application/json
    -
    - **Name:** Accept | **Value:** application/json
    -

Step 3: Scripted Execution (`RESTMessageV2` API)

Aap Business Rule, Script Include, ya Background Script se is Outbound API ko call kar sakte hain:

JavaScript

```
try {
    // 1. Initialize REST Message (Message Name, Method Name)
    var r = new sn_ws.RESTMessageV2('Jira Integration', 'Get User Details');

    // 2. Dynamic Path/String Parameters set karna
    r.setStringParameterNoEscape('user_id', 'octocat');

    // 3. Timeout & Headers (Optional)
    r.setHttpTimeout(10000); // 10 seconds

    // 4. Execute Request
    var response = r.execute();

    // 5. Read Response Details
    var responseBody = response.getBody();
    var statusCode = response.getStatusCode();


    gs.info('Outbound Response Status: ' + statusCode);
    gs.info('Outbound Response Body: ' + responseBody);


    // 6. Parse JSON Response
    if (statusCode == 200) {
        var parsedData = JSON.parse(responseBody);
        gs.info('GitHub User Bio: ' + parsedData.bio);
    }


} catch (ex) {
    var message = ex.message;
    gs.info('Outbound Integration Error: ' + message);
}
```

Kaunse specific flow se start karein?

1. **Background Script** se mock API / GitHub API hit karke dekhein?
2.
3. **Business Rule** lagayein (jaise Incident create hote hi external system par ticket ban jaye)?

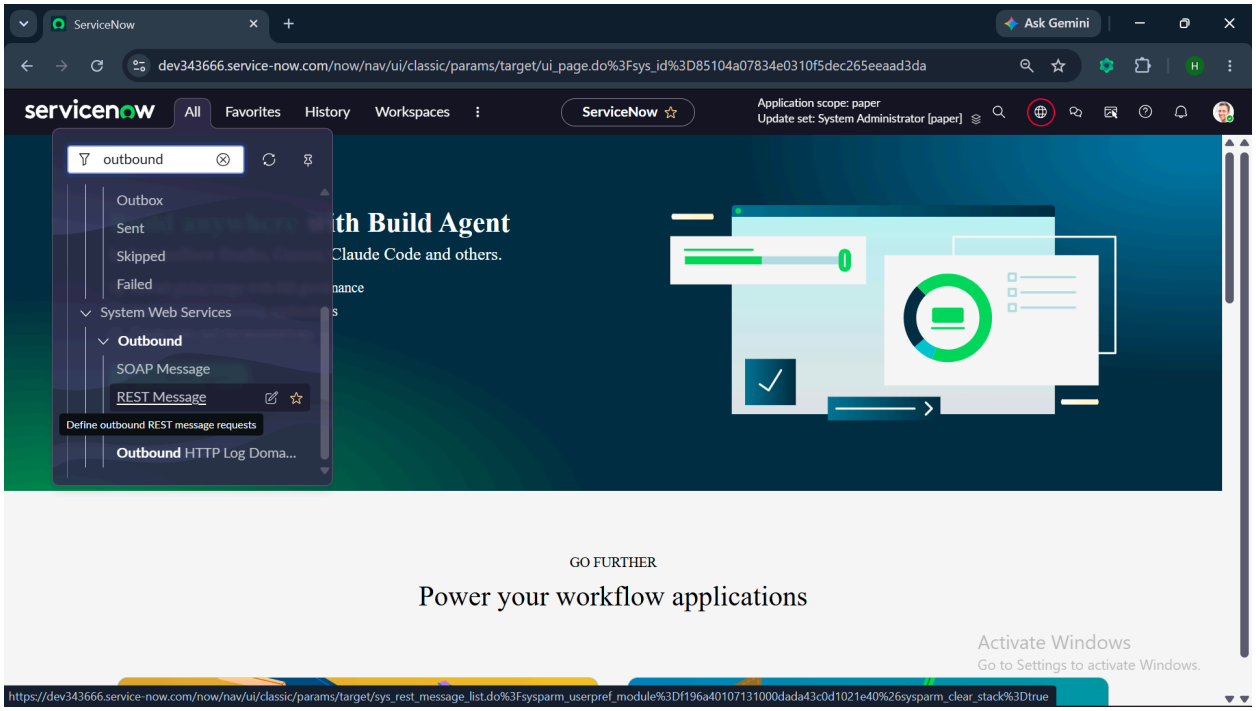
ServiceNow
Ask Gemini
dev343666.service-now.com/now/nav/ui/classic/params/target/ui_page.do%3Fsys_id%3D85104a07834e0310f5dec265eeaad3da
servicenow
All
Favorites
History
Workspaces
ServiceNow
Application scope: paper
Update set: System Administrator [paper]
outbound
Outbox
Sent
Skipped
Failed
System Web Services
Outbound
SOAP Message
REST Message
Define outbound REST message requests
Outbound HTTP Log Doma...
th Build Agent
Claude Code and others.
GO FURTHER
Power your workflow applications
Activate Windows
Go to Settings to activate Windows.
https://dev343666.service-now.com/now/nav/ui/classic/params/target/sys_rest_message_list.do%3Fsysparm_userpref_module%3Df196a40107131000dada43c0d1021e40%26sysparm_clear_stack%3Dtrue

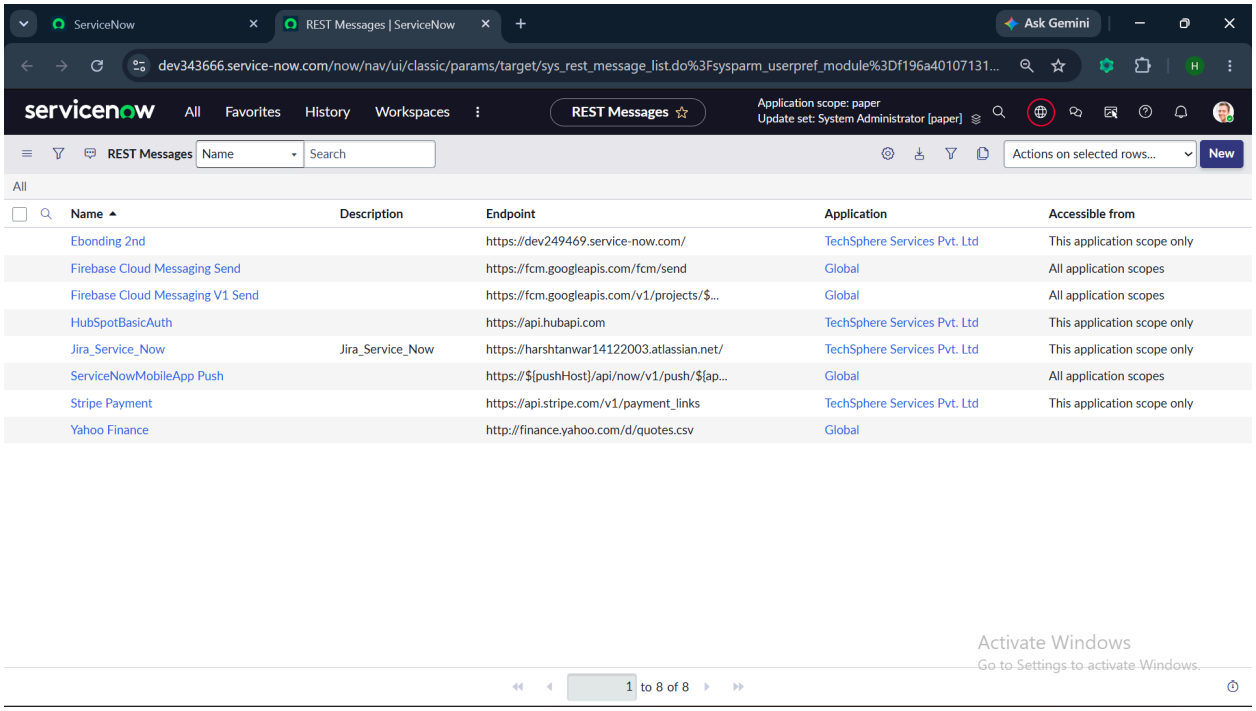
ServiceNow
REST Messages | ServiceNow
Ask Gemini
dev343666.service-now.com/now/nav/ui/classic/params/target/sys_rest_message_list.do%3Fsysparm_userpref_module%3Df196a40107131...
servicenow
All
Favorites
History
Workspaces
REST Messages
Application scope: paper
Update set: System Administrator [paper]
REST Messages
Name
Search
Actions on selected rows...
New
All
Name
Description
Endpoint
Application
Accessible from
Ebonding 2nd
https://dev249469.service-now.com/
TechSphere Services Pvt. Ltd
This application scope only
Firebase Cloud Messaging Send
https://fcm.googleapis.com/fcm/send
Global
All application scopes
Firebase Cloud Messaging V1 Send
https://fcm.googleapis.com/v1/projects/$...
Global
All application scopes
HubSpotBasicAuth
https://api.hubapi.com
TechSphere Services Pvt. Ltd
This application scope only
Jira_Service_Now
Jira_Service_Now
https://harshtanwar14122003.atlassian.net/
TechSphere Services Pvt. Ltd
This application scope only
ServiceNowMobileApp Push
https://${pushHost}/api/now/v1/push/${ap...
Global
All application scopes
Stripe Payment
https://api.stripe.com/v1/payment_links
TechSphere Services Pvt. Ltd
This application scope only
Yahoo Finance
http://finance.yahoo.com/d/quotes.csv
Global
Activate Windows
Go to Settings to activate Windows.
1 to 8 of 8

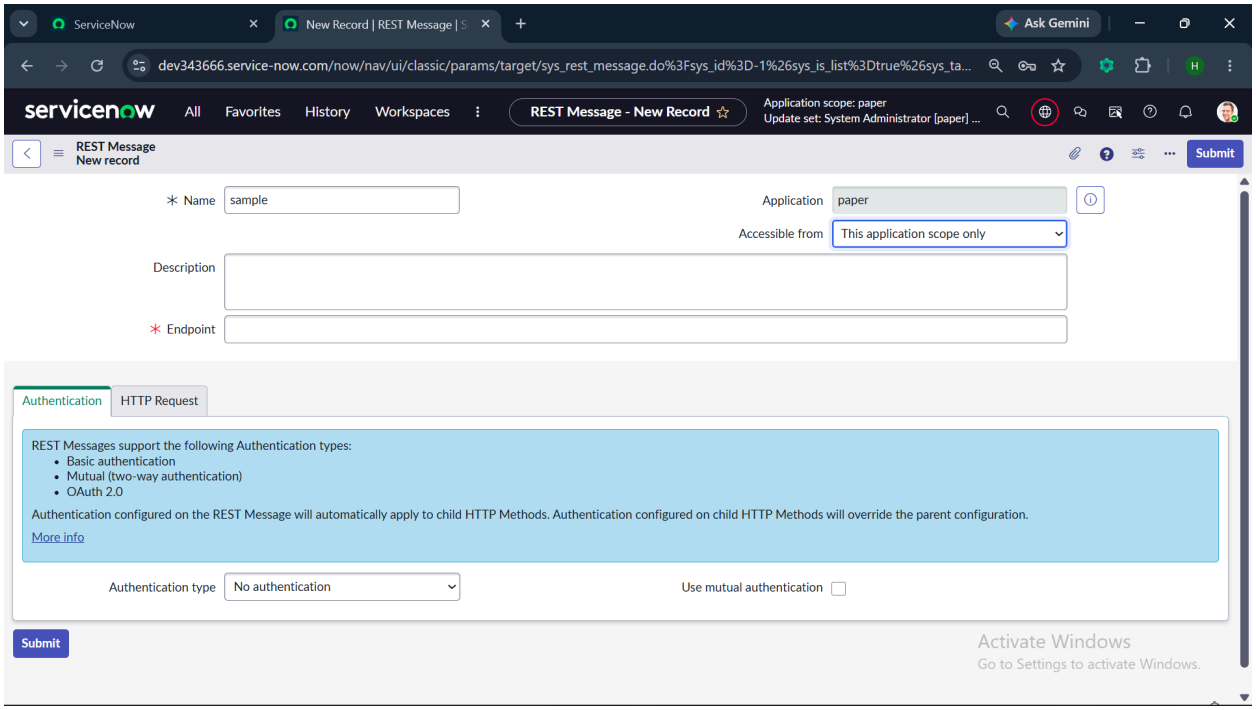

ServiceNow Outbound REST Message form ke fields ka brief breakdown:

- **Name:** REST Message ka unique identity name (e.g., Jira Integration ya sample). Iska use script mein sn_ws.RESTMessageV2('Name', ...) call karte waqt hota hai.
-
- **Application:** Woh application scope jisme yeh record save ho raha hai (e.g., paper).
-
- **Accessible from:** Cross-scope security configuration.
-
    - **This application scope only:** Sirf is scope (paper) ke scripts is REST message ko call kar sakte hain.
    -
    - **All application scopes:** Kisi bhi custom ya global scope ki script is REST message ko call kar sakti hai.
    -
- **Description:** Optional details ya documentation text ki yeh API kis purpose ke liye use ho rahi hai.
-
- **Endpoint:** Target external system ka base URL (e.g., https://api.github.com ya https://reqres.in).
-
- **Authentication type:** External API mein authenticate karne ka mechanism (Basic Auth, OAuth 2.0, ya No authentication).
-

- **Use mutual authentication:** SSL/TLS certificate-based two-way security enable karne ke liye checkbox.

Mutual Authentication (Two-Way TLS/SSL) ka matlab hai ki **dono systems** (ServiceNow aur External Server) ek-doosre ko verify karte hain.

- **Standard (One-Way) SSL:** Sirf aapka browser/ServiceNow target server ka SSL certificate verify karta hai.
-
- **Mutual Authentication:** Target server bhi ServiceNow ka digital certificate check karta hai pehle hi connection establish karne ke liye. Agar ServiceNow sahi SSL/mTLS Certificate nahi bhejta, toh server request immediate drop kar deta hai.
-


Example Scenario:

Maan lo **ServiceNow** ko kisi highly secure **Bank API** (e.g., HDFC Bank) se data sync karna hai:

1. **ServiceNow Request Bhejta hai:** Bank ke server ko call lagata hai.
2.
3. **Bank Server Certificate Mangta hai:** Bank ServiceNow se kehta hai— *"Apna identity certificate dikhao."*
4.
5. **ServiceNow Certificate Bhejta hai:** ServiceNow apna uploaded Digital Certificate (PEM/JKS format) bhejta hai.
6.
7. **Handshake Complete:** Bank Server certificate verify karke confirm karta hai ki request genuine ServiceNow instance se aayi hai, tabhi API response bhejta hai.
8.


Key Takeaway:

Jab API Username/Password ya API Key se bhi ziada high security demanded ho (Healthcare, Banking, Financial Systems), tab **Mutual Authentication** checkbox enable karke digital certificate attach kiya jata hai.

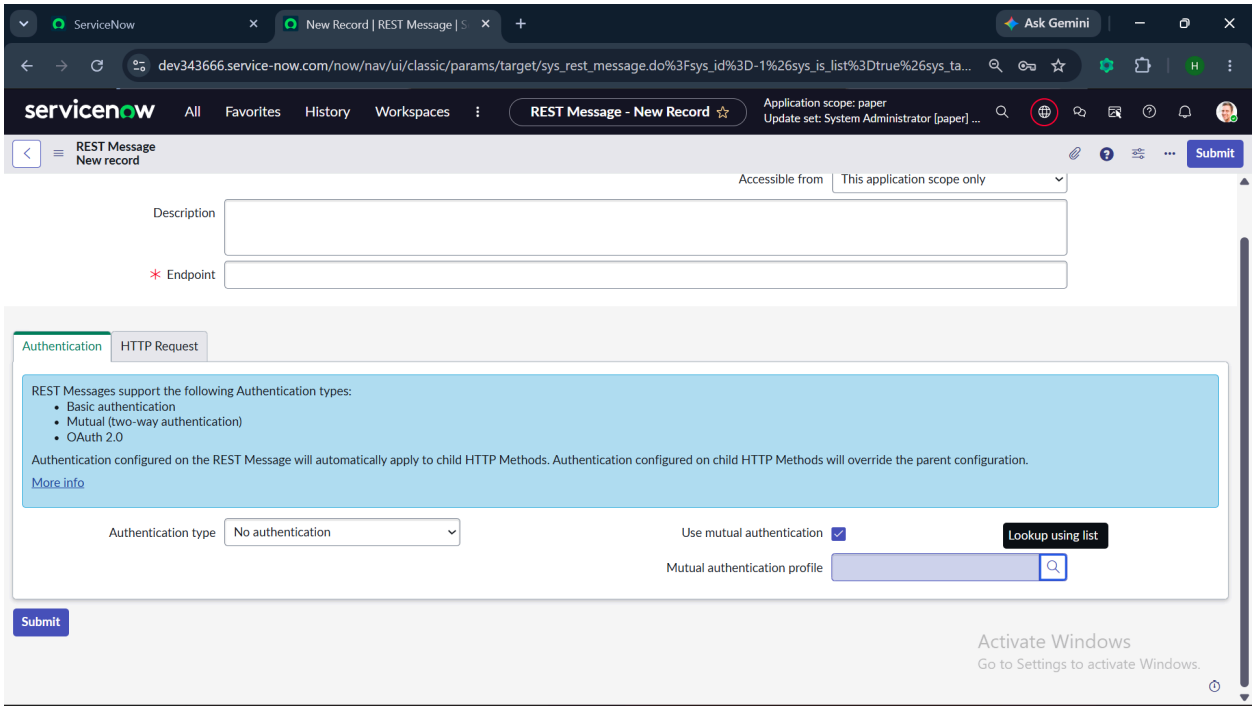

Mutual authentication profile woh record reference hota hai jisme ServiceNow ka **Client Digital Certificate** saved hota hai.

Jab aap "Use mutual authentication" check karte ho, tab target server ko authenticity prove karne ke liye kaunsa SSL Certificate bhejnah hai, woh isi profile field se select kiya jata hai.

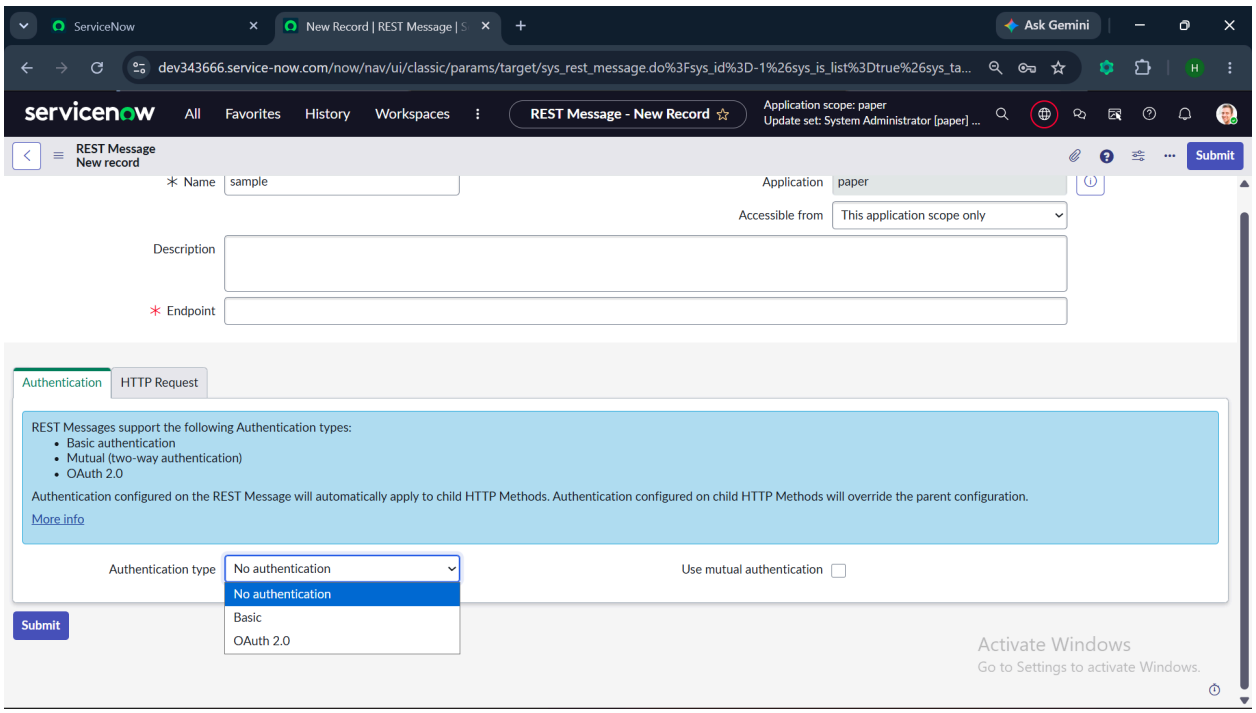

1. Basic Authentication

Mechanism:

- Client (ServiceNow) target server ko har request mein **Username** aur **Password** bhejta hai.
- Yeh credentials username:password format mein combine karke **Base64** encode kiye jaate hain.
- Is encoded string ko HTTP Request ke **Authorization** header mein bhejha jata hai:

    - $Authorization: BasicBase64EncodedString$

Mechanism Flow:

1. ServiceNow credentials ko encode karta hai (e.g., admin:secret123 → YWRtaW46c2VjcmV0MTIz).
2. Request ke header mein Authorization: Basic YWRtaW46c2VjcmV0MTIz attach karke API call karta hai.
3. Server string ko decode karta hai, credentials verify karta hai, aur access grant karta hai.

Example:

Jira Cloud instance ko call karna jahan aapka Jira User Email aur API Token use hota hai:

- **ServiceNow Configuration: Basic Auth Profile** create karke usme admin@company.com aur Jira_API_Token Save kar diya jata hai.

2. OAuth 2.0

Mechanism:

- Direct Password share karne ke bajaye **Token-based Architecture** par kaam karta hai.
- ServiceNow external system se **Access Token** maangta hai (Client ID aur Client Secret ka use karke).
- External Authorization Server Token verify karke ek short-lived Access Token issue karta hai.
- ServiceNow aage ki saari API calls mein usi Access Token ko use karta hai.


Mechanism Flow:


1. **Token Request:** ServiceNow Auth Server ko Request bhejta hai → Client ID + Client Secret + Grant Type.
2. **Token Response:** Auth Server verify karke Access Token return karta hai (e.g., ya29.a0AfH6SM...).
3. **API Call:** ServiceNow original API call karta hai → Header: Authorization: Bearer <Access_Token>.


Example:


Salesforce, Microsoft Graph API, ya Google Cloud APIs connect karna:

- **ServiceNow Configuration:** ServiceNow Application Registry mein **OAuth Entity** create ki jaati hai (jisme Client ID, Client Secret, aur Authorization/Token URL configure hota hai).

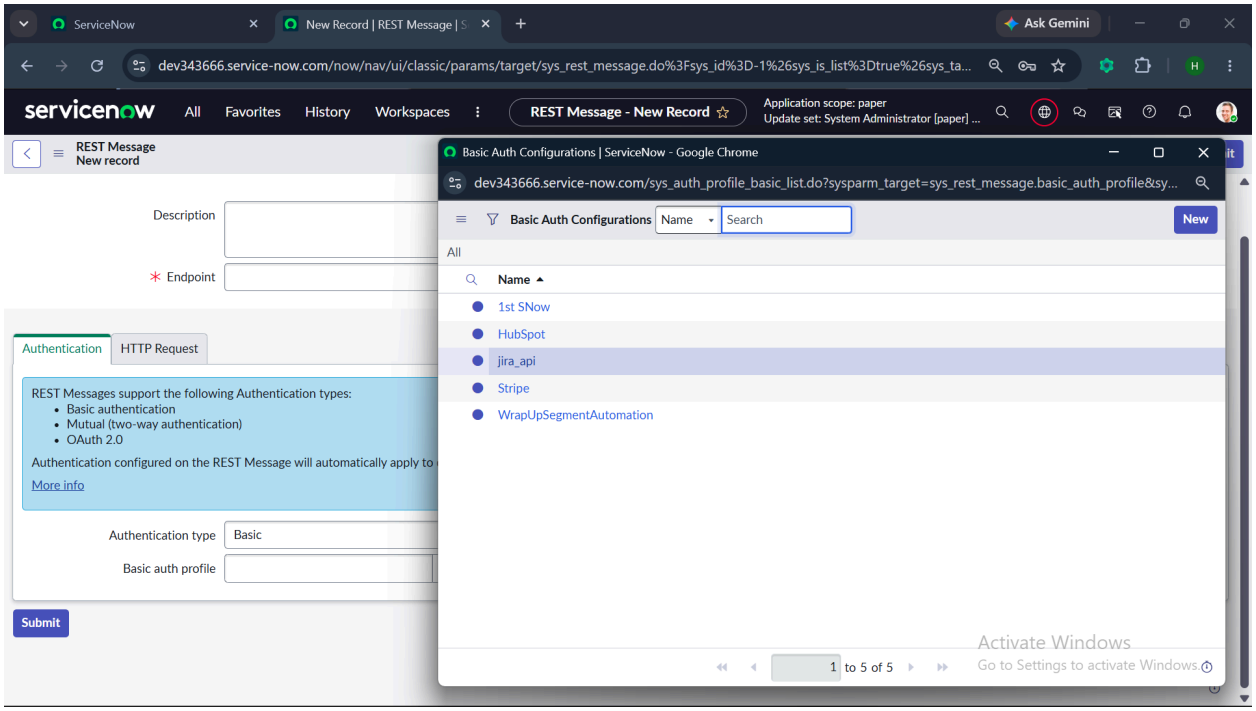

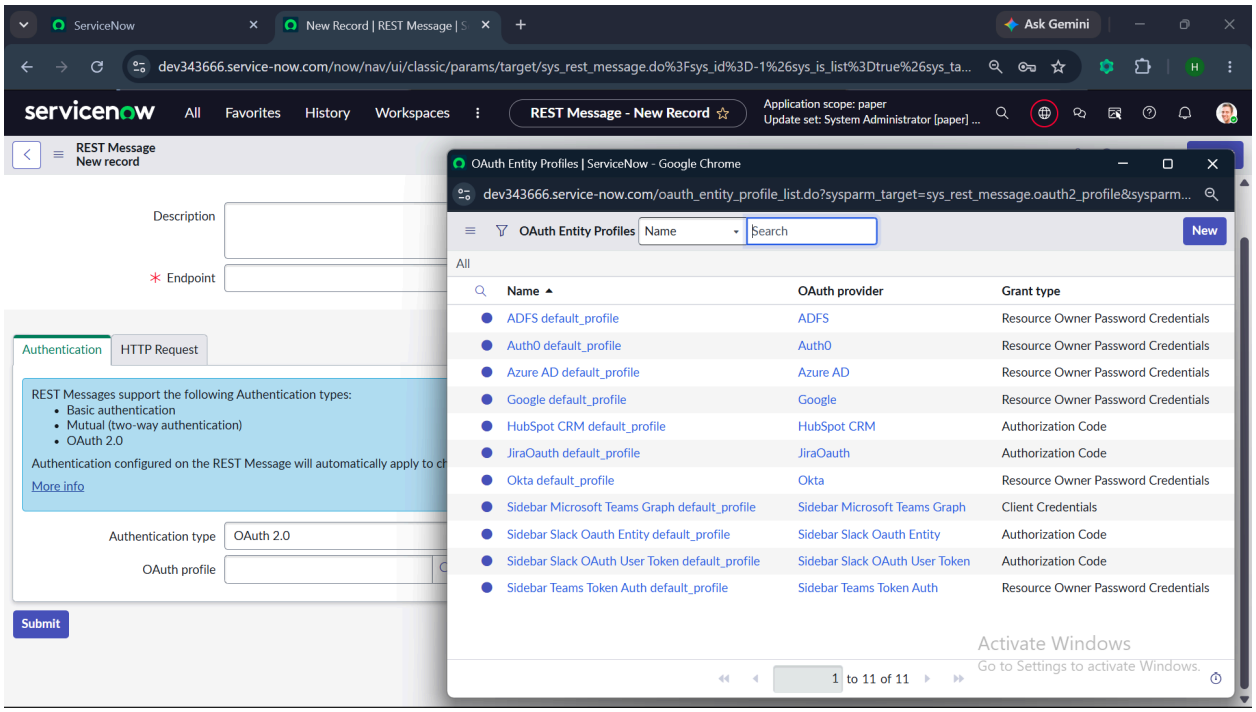

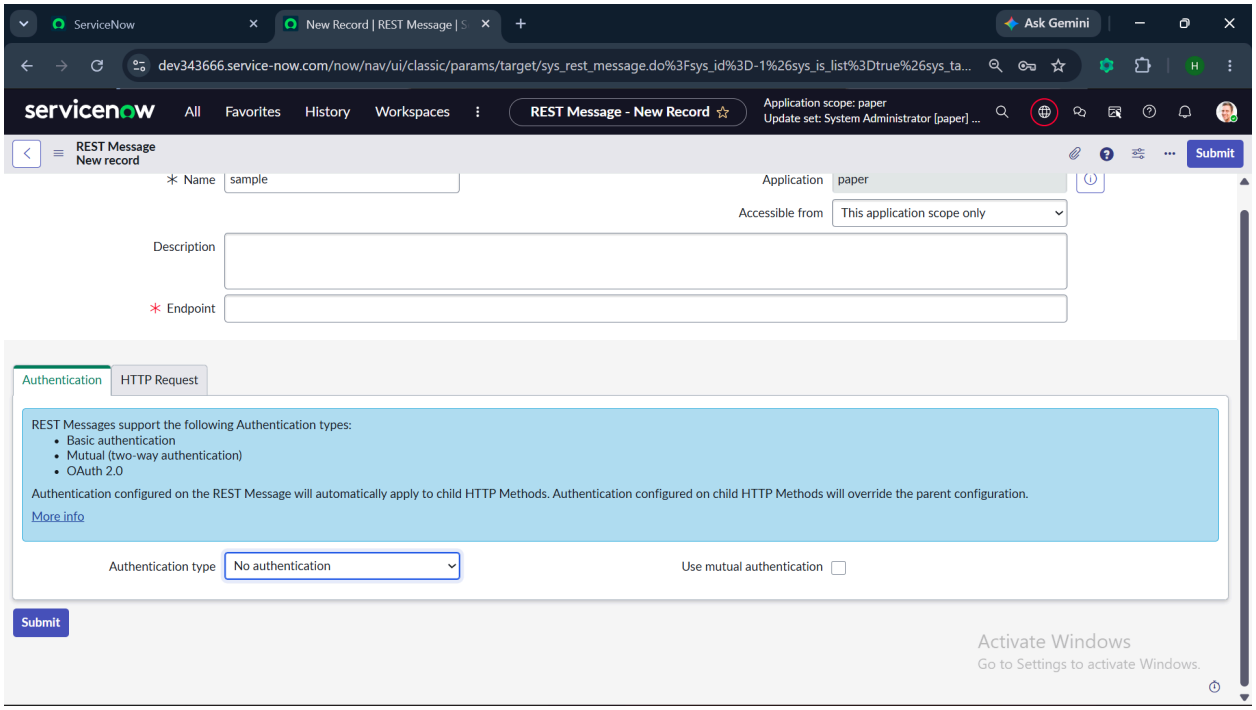

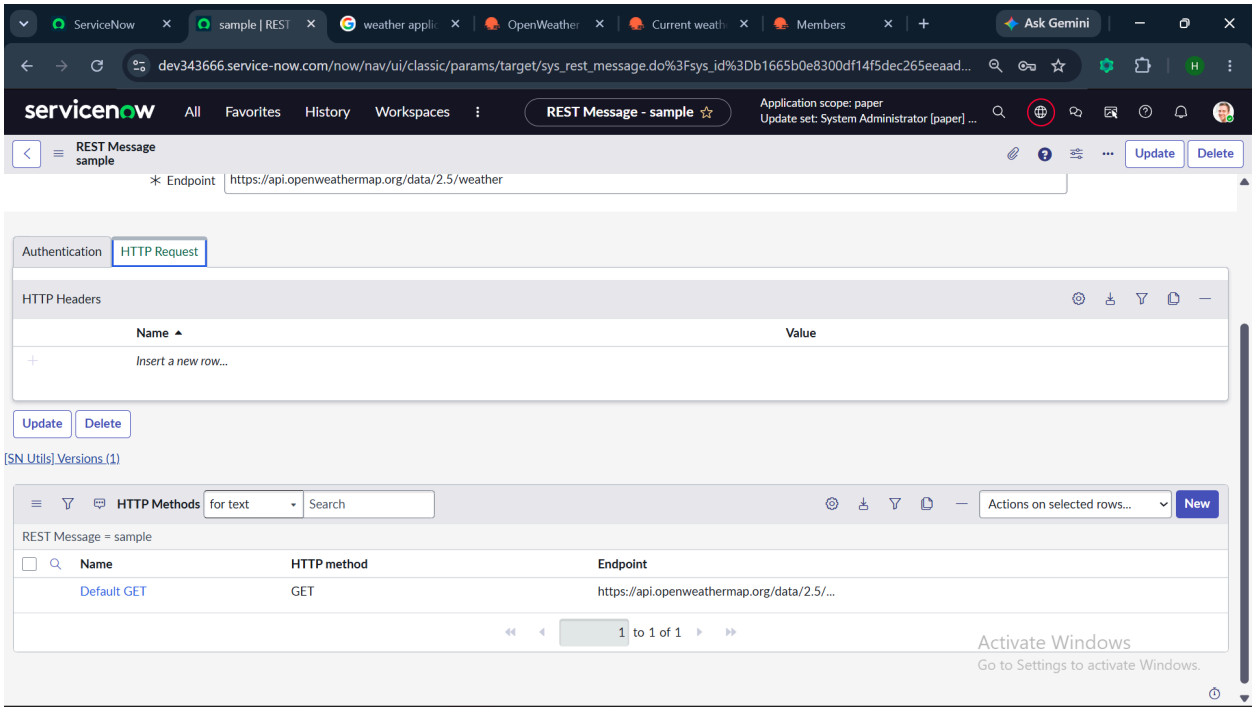



Is tab mein **HTTP Headers** daale jaate hain.

Use:

Target API server ko request ke saath metadata bhejna, jaise:

`Content-Type`: Request body ka format batane ke liye (e.g., `application/json`, `application/xml`).
`Accept`: Server se kis format mein response chahiye (e.g., `application/json`).
`Authorization`: Auth tokens ya credentials bhejne ke liye (e.g., `Bearer <token>` ya `Basic <base64>`).
Custom Headers / API Keys: Target API ki requirement ke according custom headers bhejne ke liye (e.g., `X-API-Key`, `auth-token`).

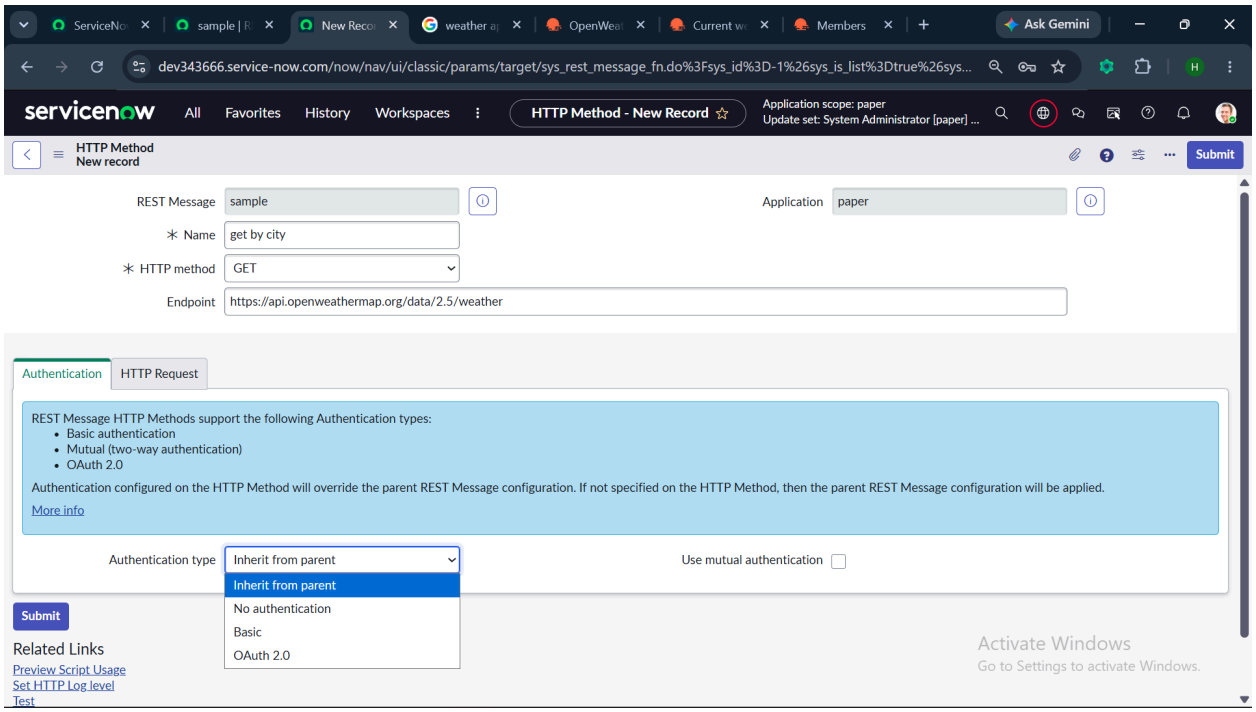

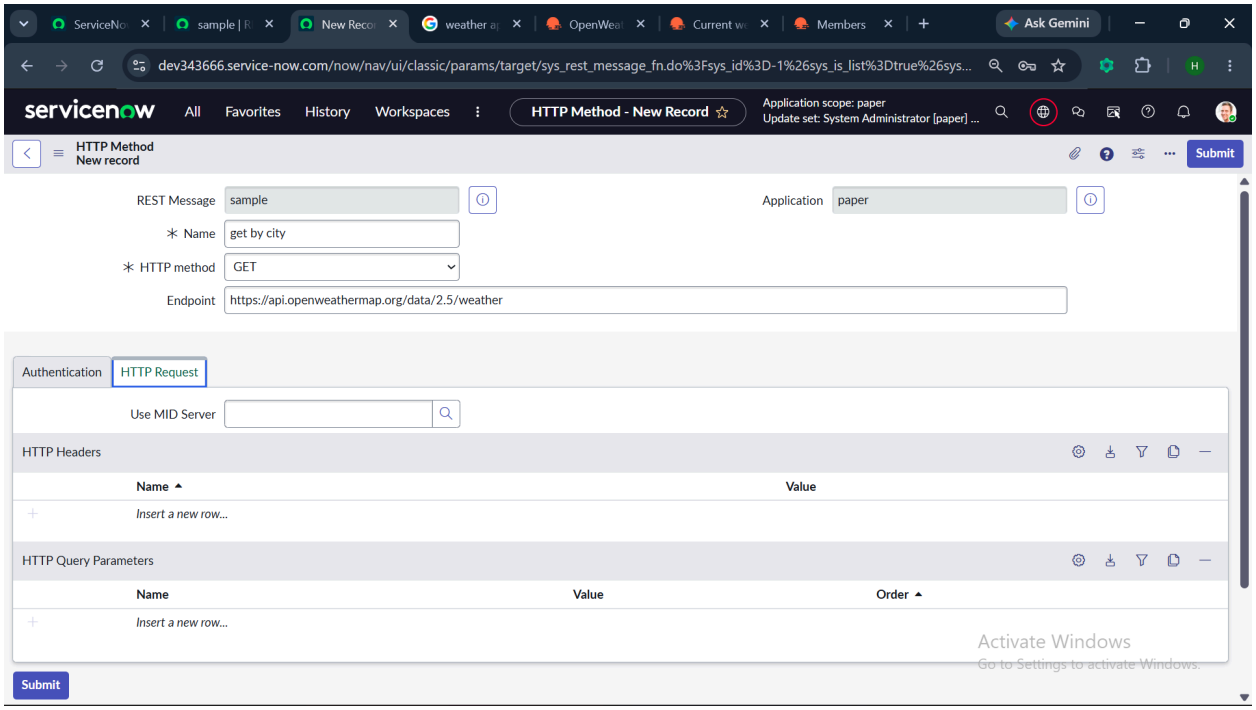

QUESTION : ye auth type kya hia? and ye http query paamter etc yha daalu kya ? and ye mid server ka kya scene hai ? in short

ANSWER :
Aapke teeno questions ke quick answers:

1. Inherit from parent (Auth Type)

Iska matlab hai ki yeh HTTP Method parent REST Message (sample) ki hi authentication settings follow karega. Kyunki parent par "No authentication" set hai, isko Inherit from parent hi rehne do.

2. HTTP Query Parameters yahan daalna hai?


Haan, bilkul! HTTP Request tab mein neeche **HTTP Query Parameters** section hai, wahan yeh 3 rows add karo:

- q : ${city}
-
- appid : 4451f979ed8ff61cd687537e83ba8ac7
-
- units : metric
-

3. MID Server ka scene kya hai?

- **MID Server** (Management, Instrumentation, and Discovery) ek local server app hoti hai jo company ke internal/private network (behind firewall) mein install hoti hai.
-

- **Use:** Jab ServiceNow cloud ko kisi aisi API se connect karna ho jo public internet par accessible nahi hai (jaise company ka local internal server), tab MID Server mediator banta hai.
-
- **OpenWeather ke liye:** Yeh public API hai, toh **Use MID Server ko blank chhod do**.

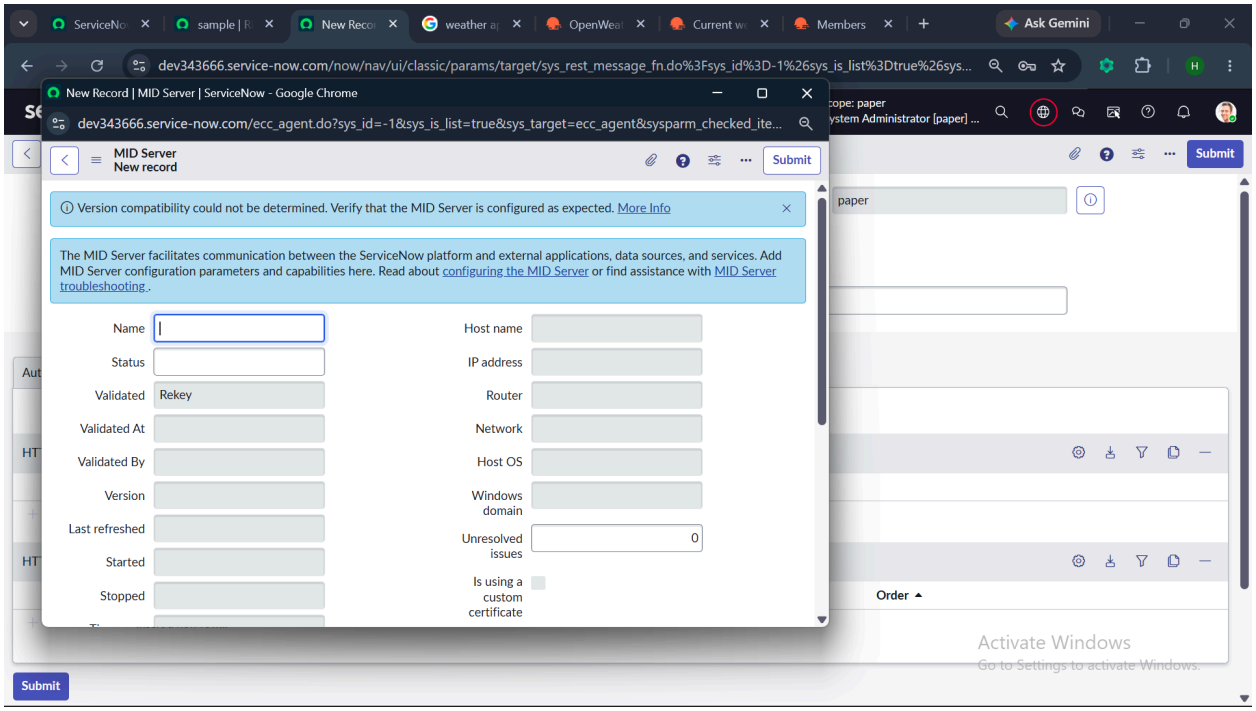

QUESTION : YHA KYA MAI APNA MID SERVER BNATA HU ? YA FIR JUST JO COMPANY KA MID SERVER HAI USKI CONFIGURATION DAALTA HU? in very short

ANSWER : Yahan aap manual form fill karke MID Server **nahi banate** ho.

- **Kaise banta hai:** Real environment mein MID Server installer software ko local machine/server par install karke configure kiya jata hai.
-
- **Automatic creation:** Jaise hi aapka local MID Server software ServiceNow instance se connect hota hai, yeh record (`ecc_agent`) yahan **automatically create aur auto-populate** ho jata hai.
-
- **Select in REST:** Direct REST Message field mein bas bane hue active MID Server ka name select kiya jata hai.


QUESTION : ye mid server ko servicenow se connect kaise krte hai ? issi record se ?


ANSWER:
Nahi, iss record se connect nahi hota.


Connect karne ke liye MID Server software install karna padta hai. Poora process short me:


1. **ZIP Download Karo:** ServiceNow me **MID Server > Downloads** me jaakar installer (Windows/Linux) download karo.
2.
3. `config.xml` **Edit Karo:** Downloaded folder me `config.xml` file khol kar 3 main details daalo:
4.
    - ServiceNow Instance URL (https://yourinstance.service-now.com)
    -
    - MID Server User Credentials (username/password)
    -
    - MID Server Name
    -
5. **Service Start Karo:** Folder ke inside `start.bat` (Windows) ya `start-mid.sh` (Linux) chala kar service start karo.
6.
7. **Auto-Register & Validate:** Service start hote hi yeh record ServiceNow me apne aap ban jata hai. Bas ServiceNow me aakar us record ko open karke **Validate** link par click karna padta hai.


OPEN WEATHER INTEGRATION:

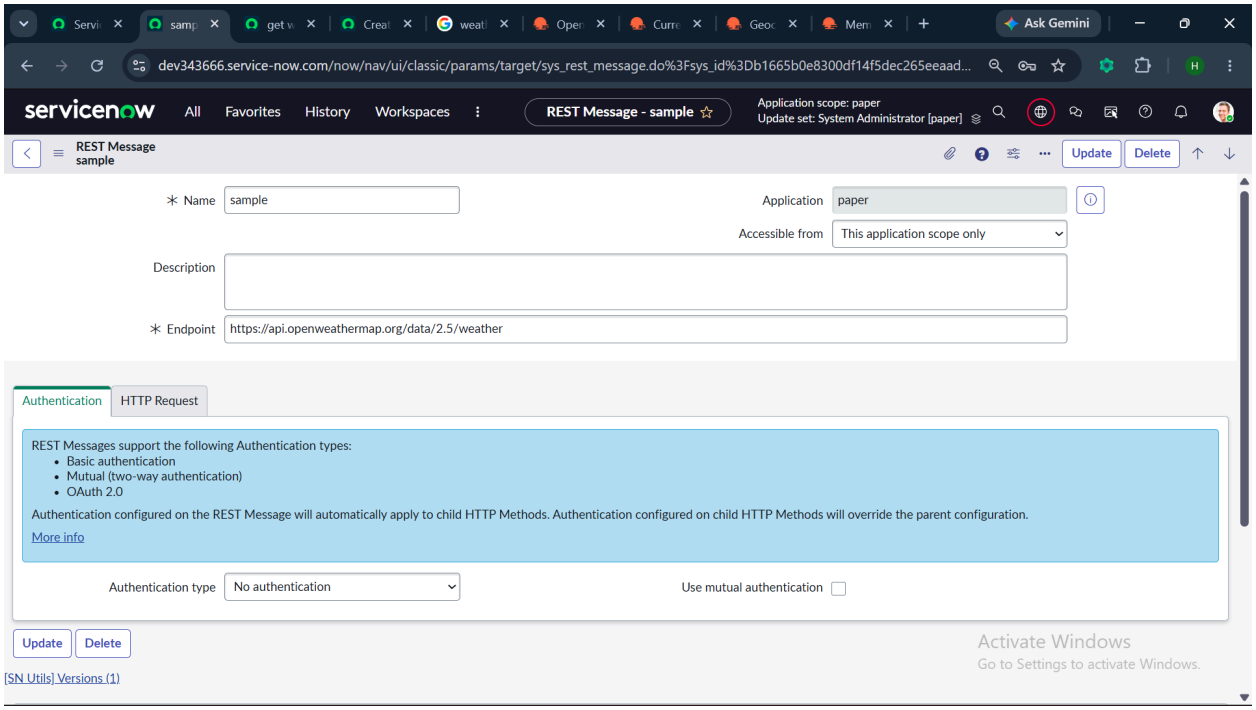

Ask Gemini
dev343666.service-now.com/now/nav/ui/classic/params/target/sys_rest_message.do%3Fsys_id%3Db1665b0e8300df14f5dec265eeaad...
servicenow
All
Favorites
History
Workspaces
REST Message - sample
Application scope: paper
Update set: System Administrator [paper]
REST Message
sample
Update
Delete
* Name
sample
Application
paper
Accessible from
This application scope only
Description
* Endpoint
https://api.openweathermap.org/data/2.5/weather
Authentication
HTTP Request
REST Messages support the following Authentication types:
Basic authentication
Mutual (two-way authentication)
OAuth 2.0
Authentication configured on the REST Message will automatically apply to child HTTP Methods. Authentication configured on child HTTP Methods will override the parent configuration.
More info
Authentication type
No authentication
Use mutual authentication
Update
Delete
[SN Utils] Versions (1)
Activate Windows
Go to Settings to activate Windows.

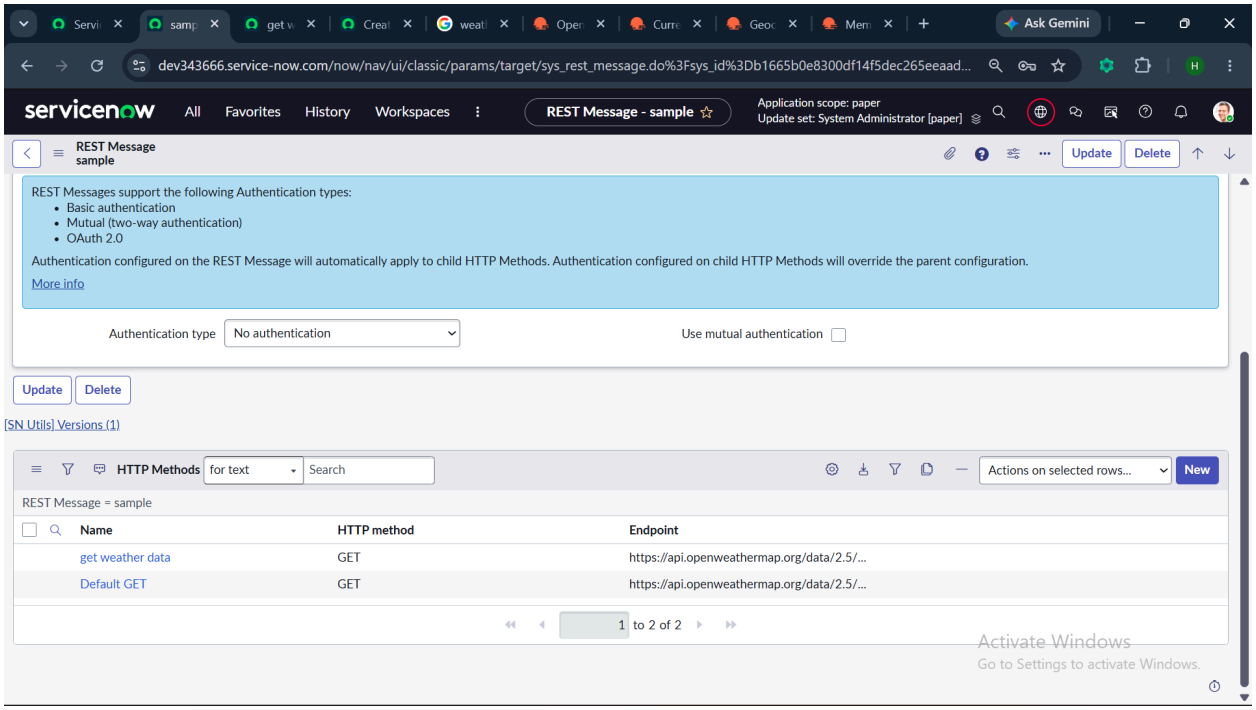
servicenow
All
Favorites
History
Workspaces
REST Message - sample
Application scope: paper
Update set: System Administrator [paper]
REST Message
sample
Update
Delete
REST Messages support the following Authentication types:
Basic authentication
Mutual (two-way authentication)
OAuth 2.0
Authentication configured on the REST Message will automatically apply to child HTTP Methods. Authentication configured on child HTTP Methods will override the parent configuration.
More info
Authentication type
No authentication
Use mutual authentication
Update
Delete
[SN Utils] Versions (1)
HTTP Methods
for text
Search
Actions on selected rows...
New
REST Message = sample
Name
HTTP method
Endpoint
get weather data
GET
https://api.openweathermap.org/data/2.5/...
Default GET
GET
https://api.openweathermap.org/data/2.5/...
1 to 2 of 2
Activate Windows
Go to Settings to activate Windows.

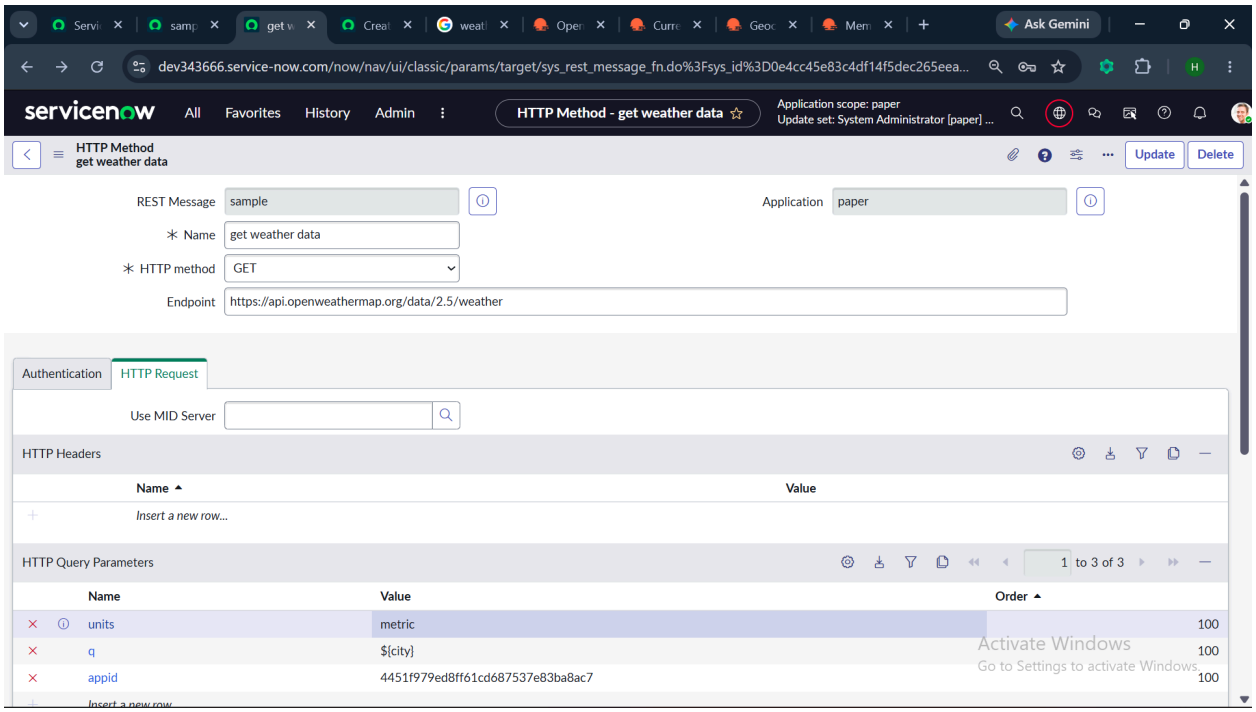
servicenow
All
Favorites
History
Admin
HTTP Method - get weather data
Application scope: paper
Update set: System Administrator [paper] ...
HTTP Method
get weather data
Update
Delete
REST Message
sample
Application
paper
Name
get weather data
HTTP method
GET
Endpoint
https://api.openweathermap.org/data/2.5/weather
Authentication
HTTP Request
Use MID Server
HTTP Headers
Name
Value
Insert a new row...
HTTP Query Parameters
1 to 3 of 3
Name
Value
Order
units
metric
100
q
${city}
100
appid
4451f979ed8ff61cd687537e83ba8ac7
100
Activate Windows
Go to Settings to activate Windows.

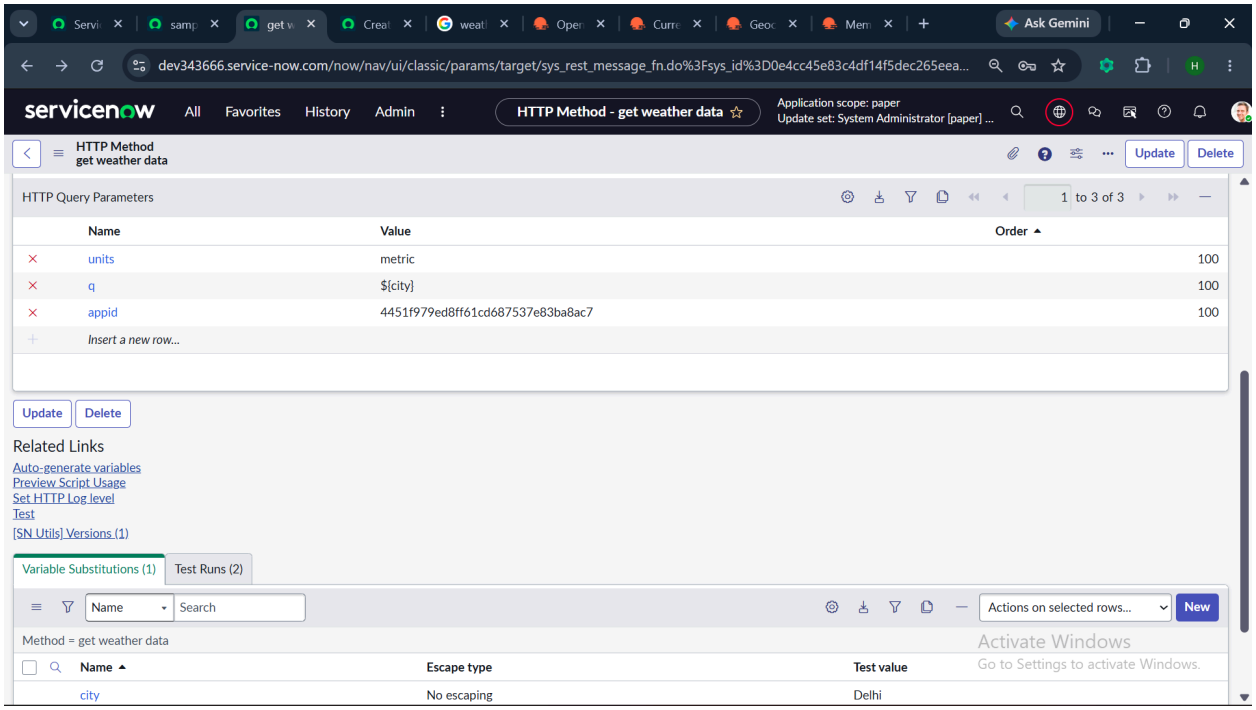
Ask Gemini
dev343666.service-now.com/now/nav/ui/classic/params/target/sys_rest_message_fn.do%3Fsys_id%3D0e4cc45e83c4df14f5dec265eea...
servicenow
All
Favorites
History
Admin
HTTP Method - get weather data
Application scope: paper
Update set: System Administrator [paper] ...
HTTP Method
get weather data
Update
Delete
HTTP Query Parameters
1 to 3 of 3
Name
Value
Order
units
metric
100
q
${city}
100
appid
4451f979ed8ff61cd687537e83ba8ac7
100
Insert a new row...
Update
Delete
Related Links
Auto-generate variables
Preview Script Usage
Set HTTP Log level
Test
[SN Utils] Versions (1)
Variable Substitutions (1)
Test Runs (2)
Name
Search
Actions on selected rows...
New
Method = get weather data
Activate Windows
Go to Settings to activate Windows.
Name
Escape type
Test value
city
No escaping
Delhi

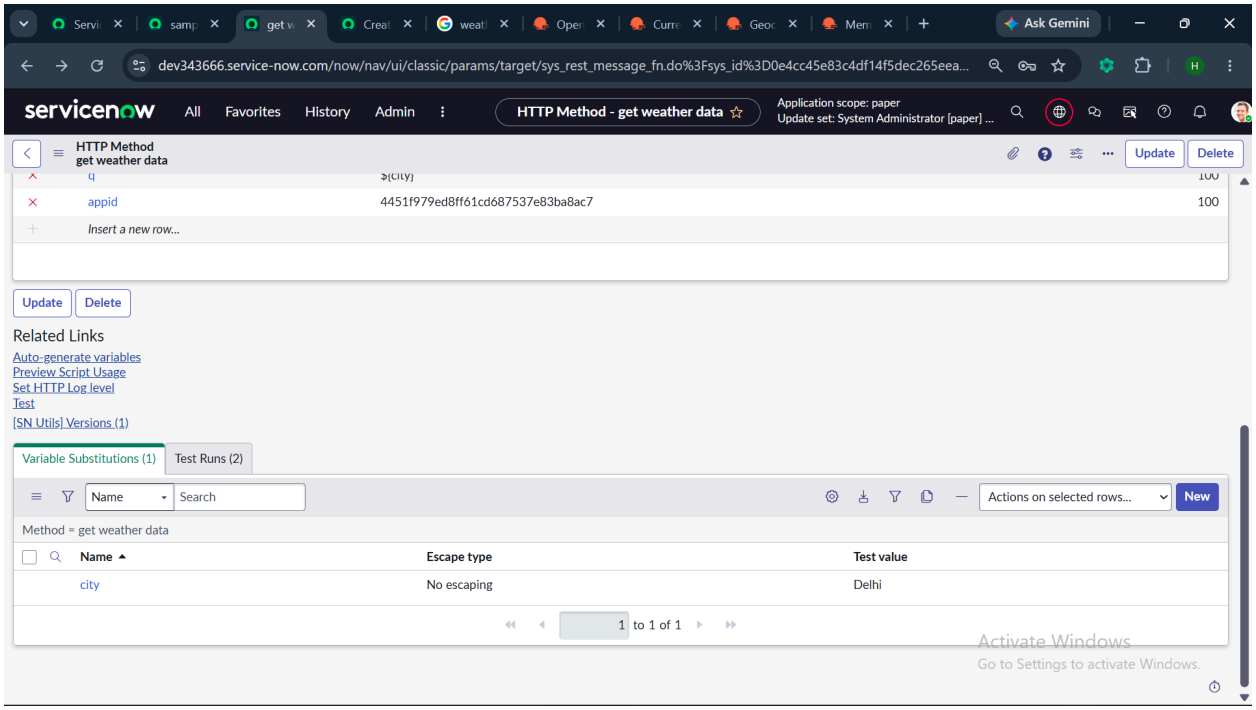

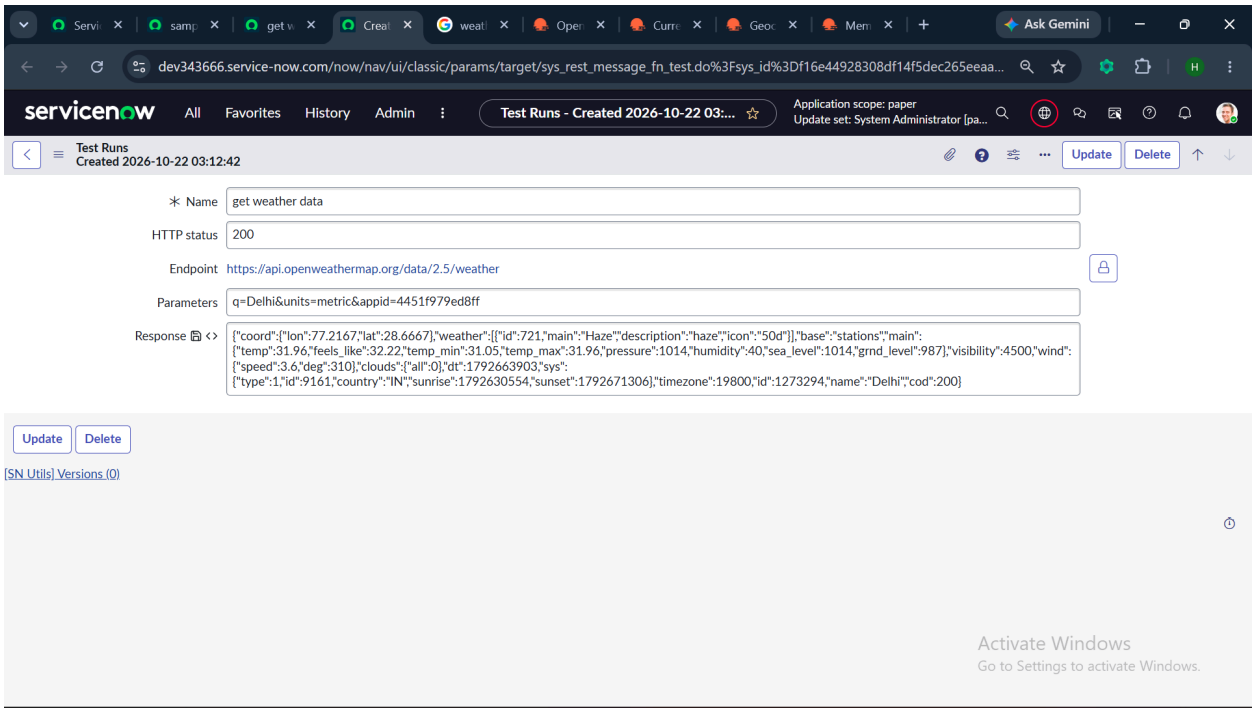

QUESTION: kaise pta lge ki koi 3rd party application basic auth, oath 2.0 ya no auth me se konsa follow krti hai or konsa nhi ?

ANSWER:
Yeh pata karne ka ek hi standard tarika hai: Target Application ki Official API Documentation dekhna.

Har 3rd party application (jaise ServiceNow, Jira, Salesforce, OpenWeather, GitHub) apni documentation ke Authentication / Authorization section mein clear mention karti hai ki unka server kaun sa mechanism support karta hai.


Key Indicators & Differences


1. **No Authentication:**
2.
    - **Documentation Indicator: "Public API", "No auth required", ya "API Key via Query Parameter / Header".**
    -
    - **Kaise Pata Lagta Hai: API endpoint ko bina kisi credentials ke browser ya Postman se hit karne par direct `200 OK` response mil jata hai.**
    -
    - **Example: OpenWeather (`appid` query param), Public news APIs.**
    -
3. **Basic Authentication:**
4.
    - **Documentation Indicator: "Basic Auth", "HTTP Basic", ya "Username / Password / API Token in Header".**
    -
    - **Kaise Pata Lagta Hai: Request bhejte waqt header mein `Authorization: Basic <Base64_Encoded_String>` bhejna hota hai.**
    -
    - **Example: Jira REST API (Email + API Token), ServiceNow Inbound REST (Username + Password).**
    -
5. **OAuth 2.0:**
6.
    - **Documentation Indicator: "OAuth 2.0", "Bearer Token", "Access Token", "Client Credentials / Authorization Code Grant".**
    -
    - **Kaise Pata Lagta Hai: Direct API hit karne se pehle ek Token Endpoint par request bhej kar `access_token` generate karna padta hai, aur fir request header mein `Authorization: Bearer <token>` bheja jata hai.**
    -
    - **Example: Salesforce, Google APIs, GitHub APIs, Microsoft Graph.**
    -

Real World Testing (Postman / ServiceNow)


Agar documentation na mil rahi ho, toh aap Postman ya ServiceNow REST Message se test kar sakte ho:


- **Bina kisi auth ke request hit karo:**
-
    - **Agar 200 OK aaye → No Auth**
    -
    - **Agar 401 Unauthorized aaye aur response header mein WWW-Authenticate: Basic dikhe → Basic Auth**
    -
    - **Agar 401 Unauthorized / 403 Forbidden aaye aur response mein Invalid Token ya OAuth mention ho → OAuth 2.0 / Bearer Token**

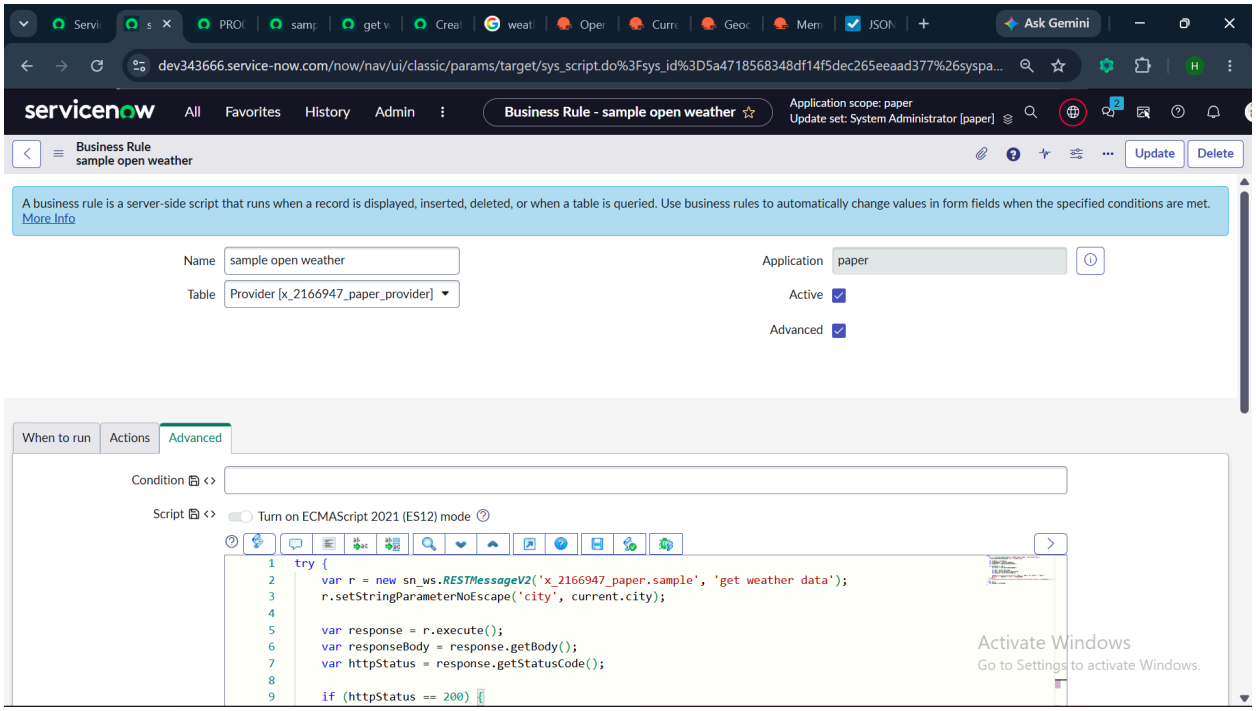


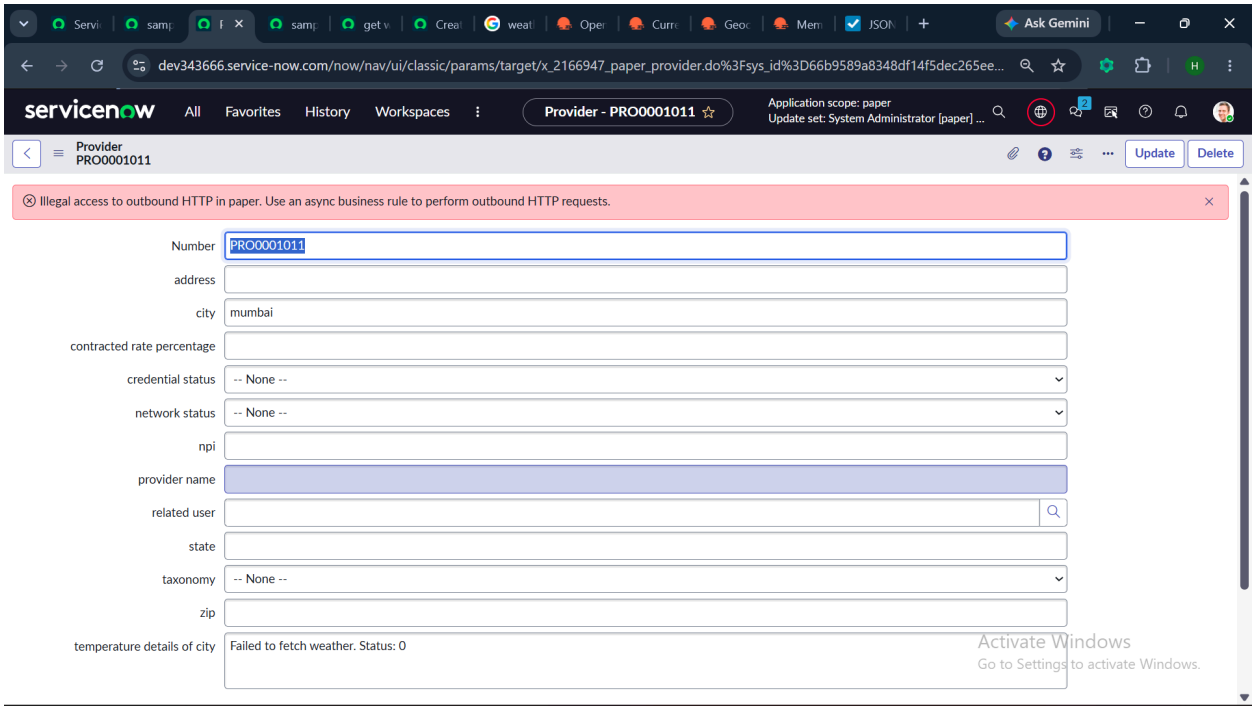

MOST IMPORTANT:

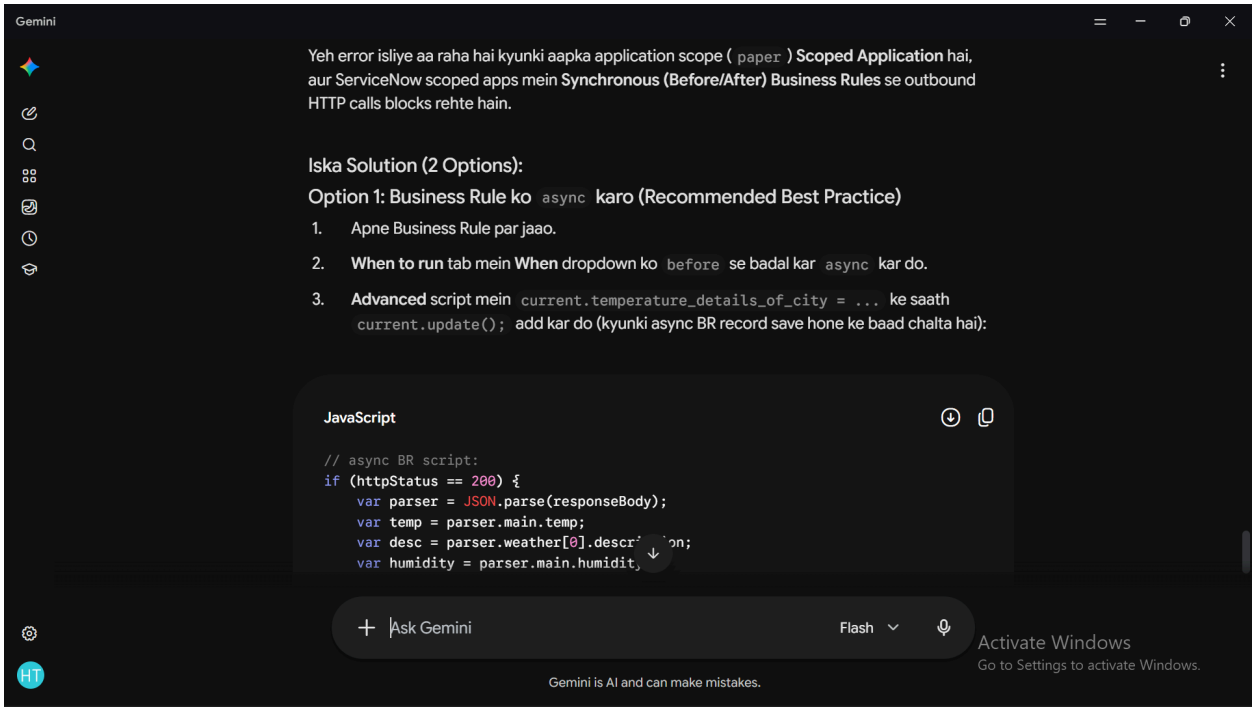

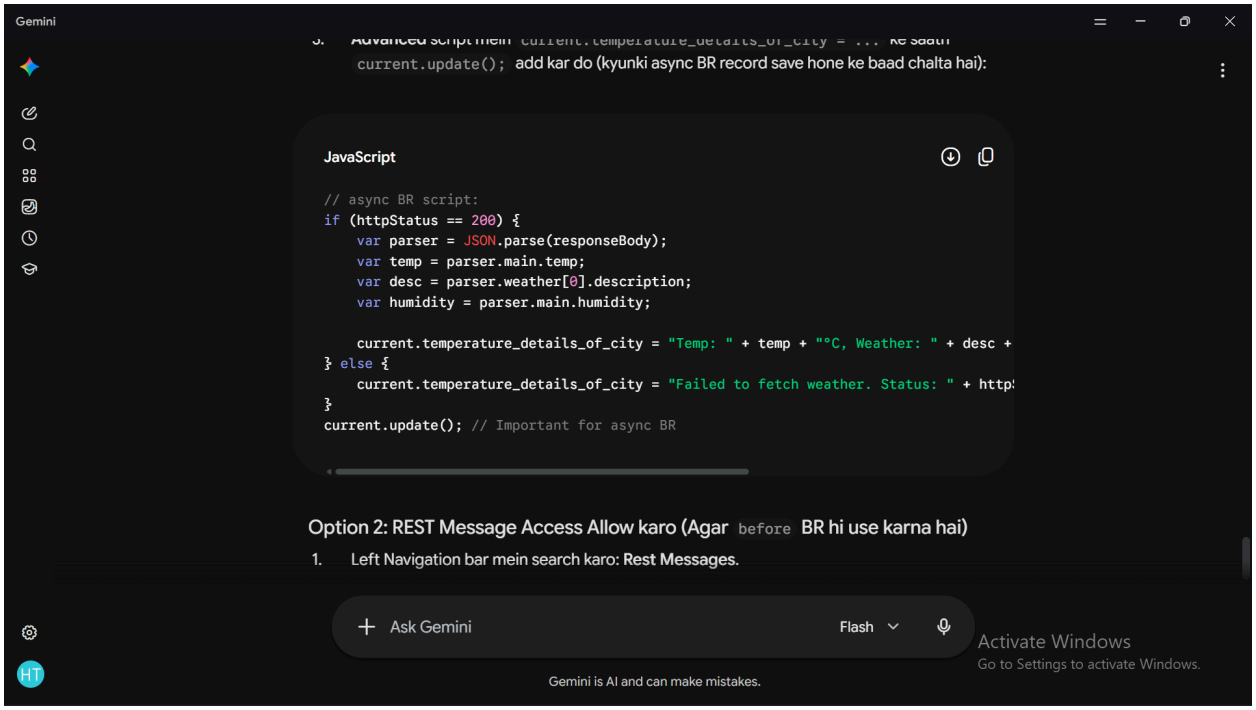

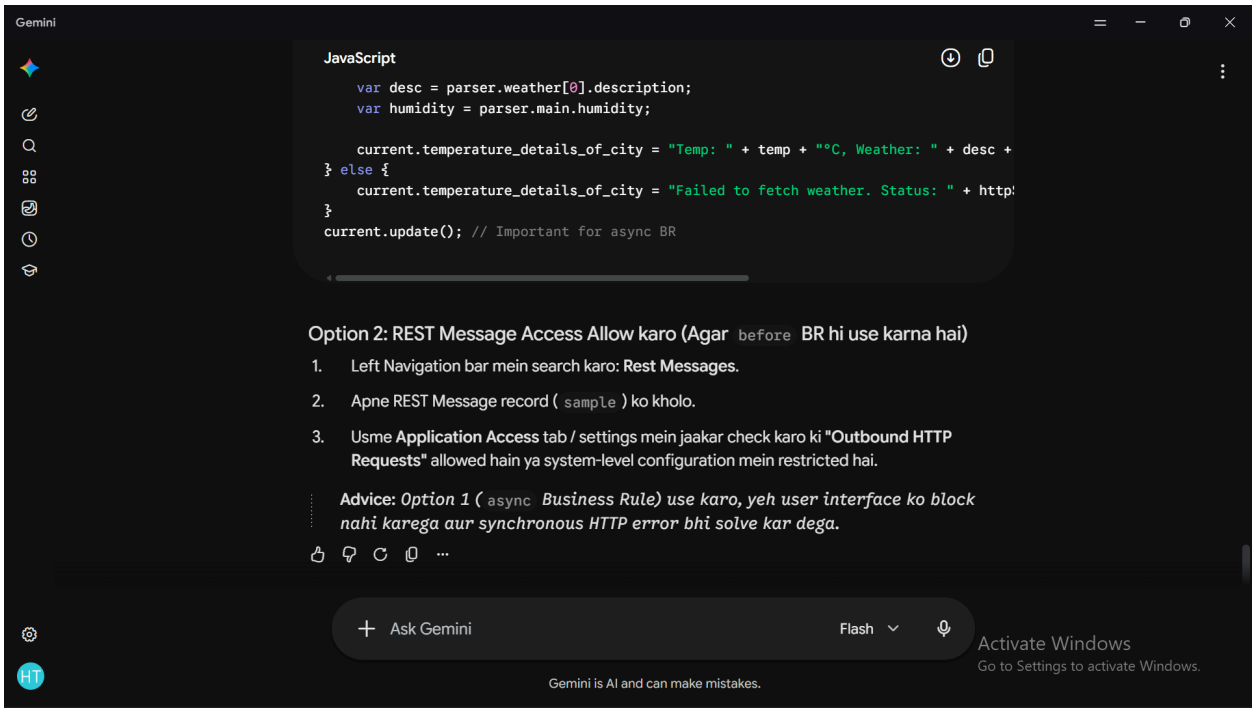

HOW TO DO BASIC OAUTH ?
ServiceNow me HTTP Basic Authentication (jise common language me "Basic Auth" ya Username/Password authentication bolte hain) ke zariye outbound integration karna kaafi simple aur straightforward hai.

ServiceNow me iske liye Basic Auth Credentials record create karke REST Message me attach karna hota hai.

Step 1: Basic Auth Credential Create Karein

1. **Filter Navigator me Integration Commons > Credentials ya System OAuth > Application Registry ke bajaye directly Credentials search karein.**
2.
    - **Path: Discovery > Credentials ya Integration Hub > Credentials (agar active ho).**
    -
    - **Alternately, aap direct REST Message banate waqt bhi new credential create kar sakte hain.**
    -
3. **New button par click karein aur Basic Auth Credentials select karein.**
4.
5. **Form fill karein:**
6.
    - **Name: Credential ka naam (e.g., `ThirdParty_BasicAuth_Cred`).**
    -
    - **User name: 3rd party system ka username / API Key identifier.**
    -
    - **Password: 3rd party system ka password / API secret key.**
    -
7. **Record ko Submit / Save karein.**
8.

Step 2: Outbound REST Message Configure Karein

1. **System Web Services > Outbound > REST Message par jayein.**
2.
3. **New par click karein.**
4.
5. **Configuration fields fill karein:**
6.
    - **Name:** `External_BasicAuth_API`
    -
    - **Endpoint: 3rd party ka Base URL (e.g., https://api.example.com/api/v1)**
    -
    - **Authentication type: Dropdown se `Basic` select karein.**
    -

- **Basic auth profile: Step 1 me jo Basic Auth Credential banaya tha use search karke select karein.**
-

7. **Record ko Save karein.**
8.

(Note: ServiceNow automatically request head me `Authorization: Basic <base64_encoded_credentials>` ***add kar dega).***

Step 3: REST Methods Define Karein (Operations)

REST Message ke andar HTTP Methods (GET, POST, PUT, DELETE) define karein:

1. **HTTP Method Create Karein: Related list me New par click karein.**
2.
3. **HTTP Method Type:** `POST` **(Data create karne ke liye) ya** `GET` **(Data fetch karne ke liye).**
4.
5. **Endpoint: Specific resource URL (e.g.,** `[https://api.example.com/api/v1/tickets](https://api.example.com/api/v1/tickets)`**).**
6.
7. **HTTP Headers: Related list me** `Content-Type: application/json` **aur** `Accept: application/json` **add karein.**
8.
9. **HTTP Request Body (POST/PUT ke liye):**
10.

JSON

```
"short_description"  "${short_desc}"
"priority"  "${priority_val}"
```

12.

13.

Step 4: Script se Integration Execute Karein

Business Rule, Scheduled Script Execution, ya Script Include me `sn_ws.RESTMessageV2` **ka code likh kar 3rd party API call karein.**

Script Example:

JavaScript

```
try {
    // REST Message Name aur Method Name pass karein
    var r = new sn_ws.RESTMessageV2('External_BasicAuth_API', 'POST_CreateTicket');

    // Dynamic Variables Set Karein
    r.setStringParameterNoEscape('short_desc', 'Issue reported from ServiceNow');
```

```
    r.setStringParameterNoEscape('priority_val', '1');

    // Basic Auth Profile explicitly script se bhi bind kar sakte hain (Optional, agar GUI me set kiya hai)
    // r.setAuthenticationProfile('basic', 'ThirdParty_BasicAuth_Cred');

    // Response Execute Karein
    var response = r.execute();
    var responseBody = response.getBody();
    var httpStatus = response.getStatusCode();

    gs.info("HTTP Status Code: " + httpStatus);
    gs.info("Response Body: " + responseBody);

    if (httpStatus == 200 || httpStatus == 201) {
        var parsed = JSON.parse(responseBody);
        gs.info("Operation Successful. Created Ticket ID: " + parsed.id);
    } else {
        gs.error("API Call Failed with Status: " + httpStatus);
    }
} catch (ex) {
    var message = ex.getMessage();
    gs.error("Error Message: " + message);
}
```

Key Points to Remember


1. **Automatic Header: Manual** Authorization **header add karne ki zaroorat nahi hoti; ServiceNow background me Base64 encode karke handle kar leta hai.**
2.
3. **Security: Basic auth credentials database me encrypted store hote hain, isliye script me plaintext password likhne ke bajaye ServiceNow Credentials feature ka use karna hamesha best practice hai.**

STEP BY STEP WAY TO DO BASIC OAUTH OUTBOUND INTEGRATION :


1. Sbse phle ye jaan lo ki karna kya kya hai, orr kaise sb hoga. Iske liye just google pe jake ye likho : hubspot ka endpoint do for servicenow outbound integration with hubspot.


Ye karne se tumko bhut si chije pta chalegi like basic auth ki need hai ya nhi, http method create krne ke baad authorization bearer token dena hai ya nhi, content type kya rkhna hai etc ek briefing type miljayegi jiss se tumko idea hoga kya kya krna hai.

2. Abb hme 5 chijo pe focus karna hai :

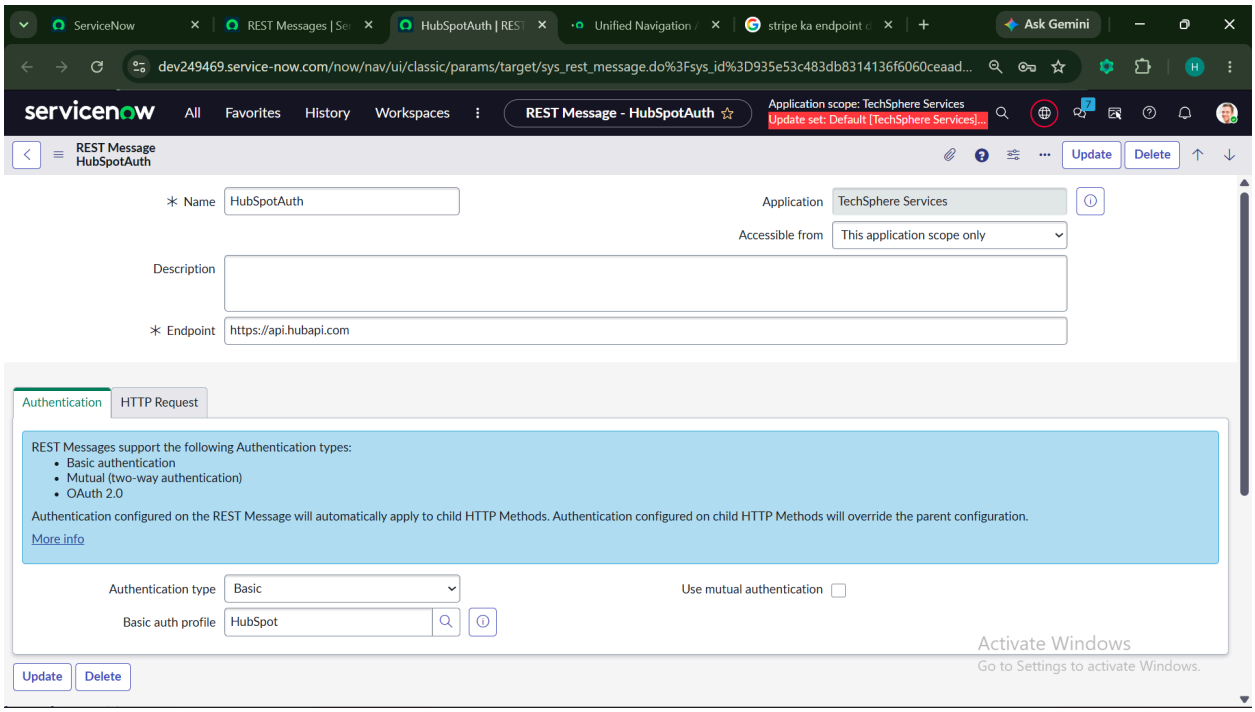

Iss page pe to 2 chije hme findout krni hai : endpoint(base url), authorization me agar basic auth hai to uske username and password(like ye username me kya daalna hai ? gmail ya stripe ke jaise koi secret key? Orr password me kya aayega ? koi api key ya kuch orr) ye dono chije google pe search krna ya ai mode se puchna.

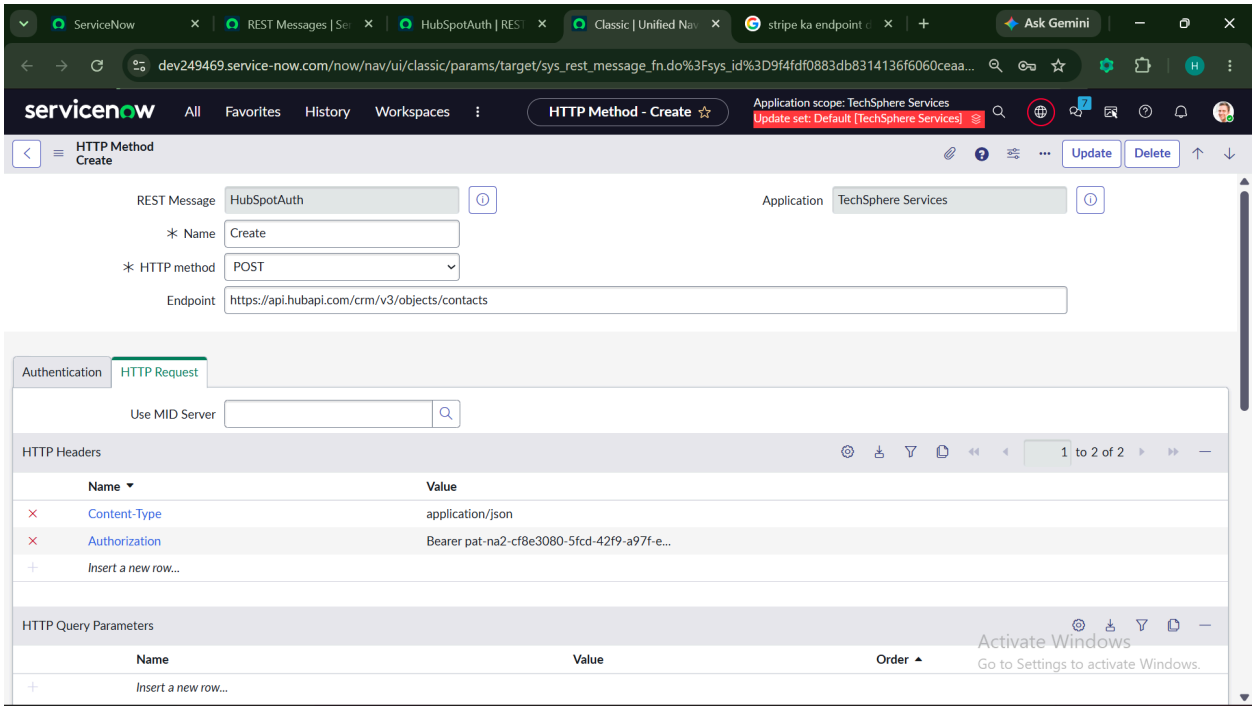


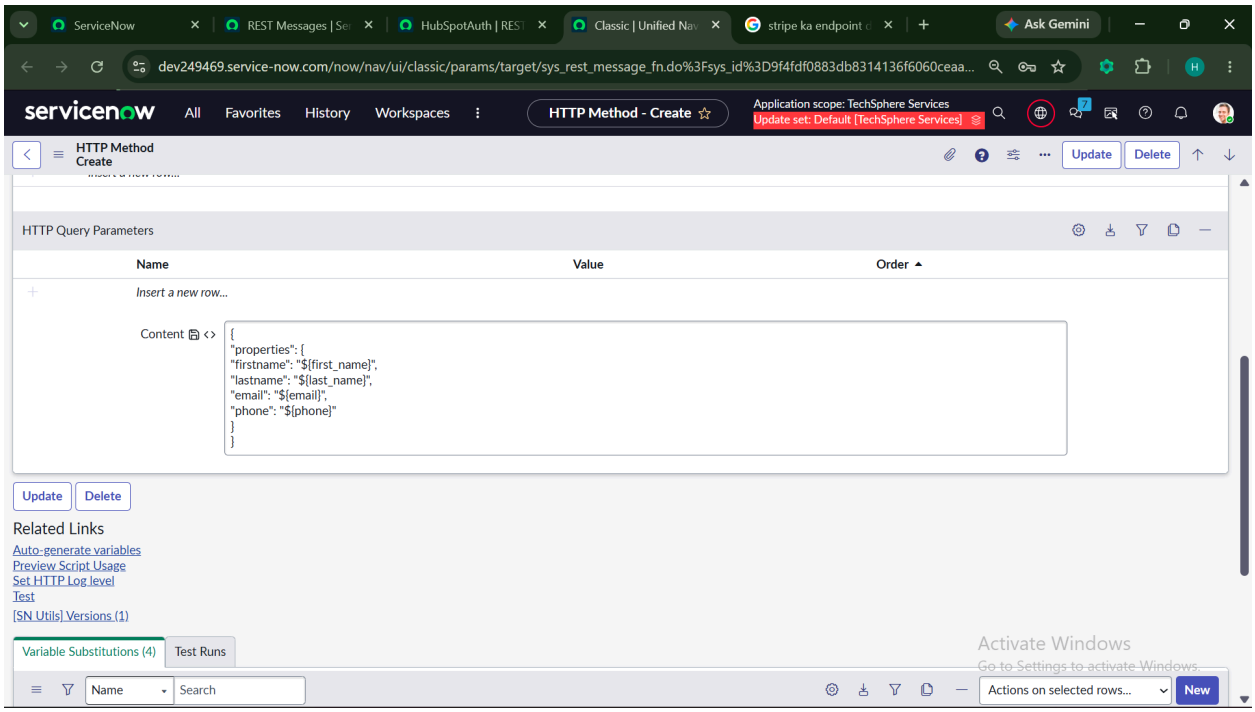



Then inside http method 3 chije findout karni hai : particular crud operation ka endpoint, header me authorization (like bearer token etc me se kya use horha hai ? agar basic auth dediya hai and usme hi token diya hai to yha bearer token ki need nhi hoti, baki ye ai mode se confirm krlena), post ya update operation ho to content body ka format lelena ki body bhejni kaise hai.


Ye 5 chije findout krne ke baad just testing kro and baki ke steps follow kro like BR bnana and trigger karna outbound ko.


GEMINI INTEGRATION :

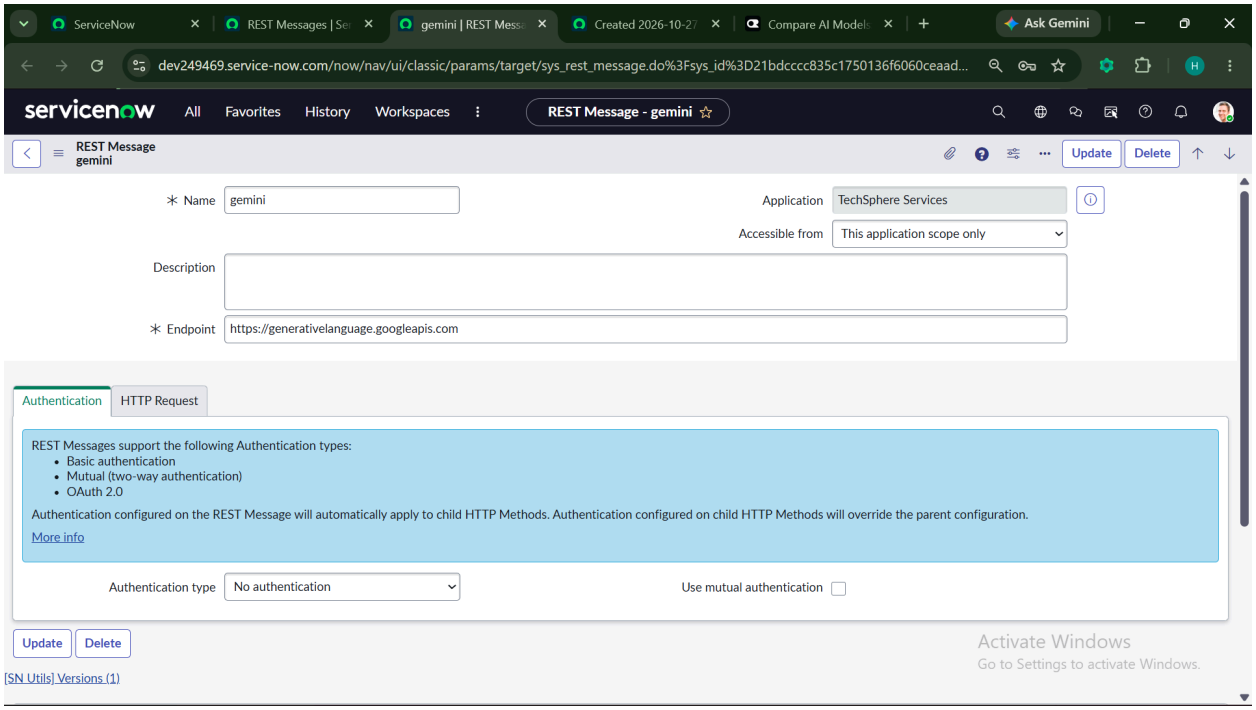
ServiceNow
REST Messages | Se
gemini | REST Mess
Created 2026-10-27
Compare AI Models
Ask Gemini
dev249469.service-now.com/now/nav/ui/classic/params/target/sys_rest_message.do%3Fsys_id%3D21bdcccc835c1750136f6060ceaad...
servicenow
All
Favorites
History
Workspaces
REST Message - gemini
REST Message
gemini
Update
Delete
* Name
gemini
Application
TechSphere Services
Accessible from
This application scope only
Description
* Endpoint
https://generativelanguage.googleapis.com
Authentication
HTTP Request
REST Messages support the following Authentication types:
Basic authentication
Mutual (two-way authentication)
OAuth 2.0
Authentication configured on the REST Message will automatically apply to child HTTP Methods. Authentication configured on child HTTP Methods will override the parent configuration.
More info
Authentication type
No authentication
Use mutual authentication
Update
Delete
[SN Utils] Versions (1)
Activate Windows
Go to Settings to activate Windows.

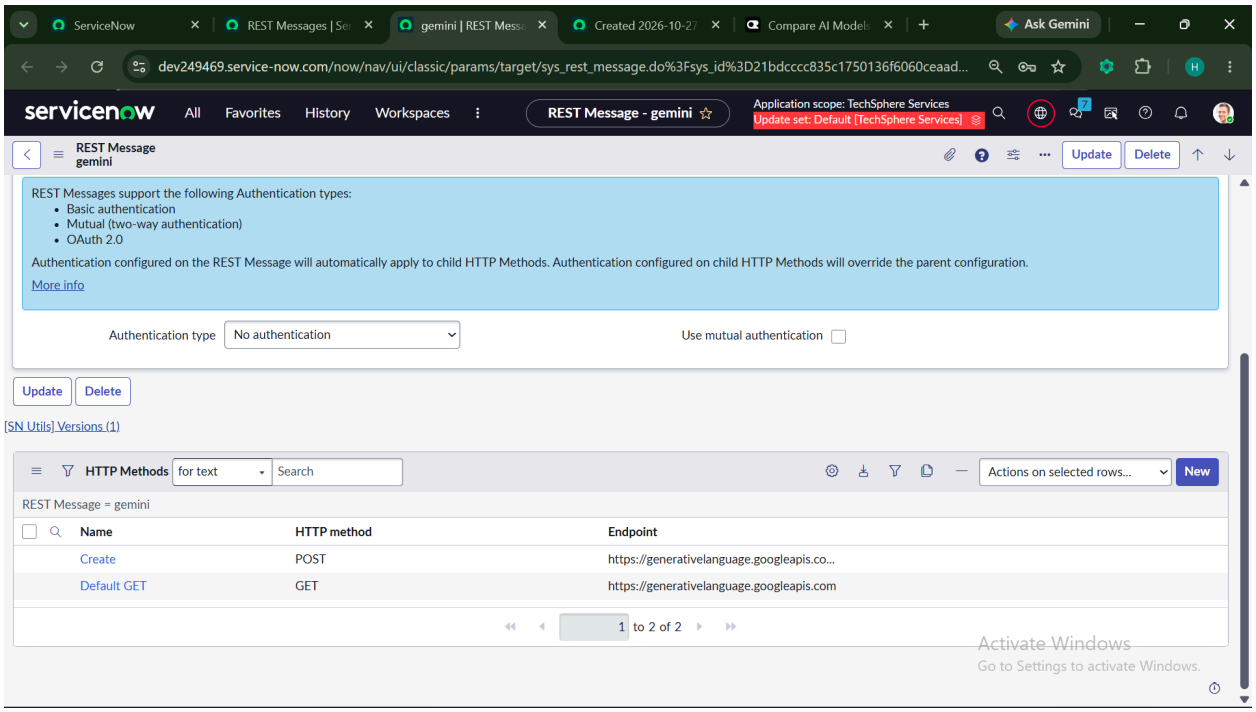
ServiceNow
REST Messages | Se
gemini | REST Mess
Created 2026-10-27
Compare AI Models
Ask Gemini
dev249469.service-now.com/now/nav/ui/classic/params/target/sys_rest_message.do%3Fsys_id%3D21bdcccc835c1750136f6060ceaad...
servicenow
All
Favorites
History
Workspaces
REST Message - gemini
Application scope: TechSphere Services
Update set: Default [TechSphere Services]
REST Message
gemini
Update
Delete
REST Messages support the following Authentication types:
Basic authentication
Mutual (two-way authentication)
OAuth 2.0
Authentication configured on the REST Message will automatically apply to child HTTP Methods. Authentication configured on child HTTP Methods will override the parent configuration.
More info
Authentication type
No authentication
Use mutual authentication
Update
Delete
[SN Utils] Versions (1)
HTTP Methods
for text
Search
Actions on selected rows...
New
REST Message = gemini
Name
HTTP method
Endpoint
Create
POST
https://generativelanguage.googleapis.co...
Default GET
GET
https://generativelanguage.googleapis.com
1 to 2 of 2
Activate Windows
Go to Settings to activate Windows.

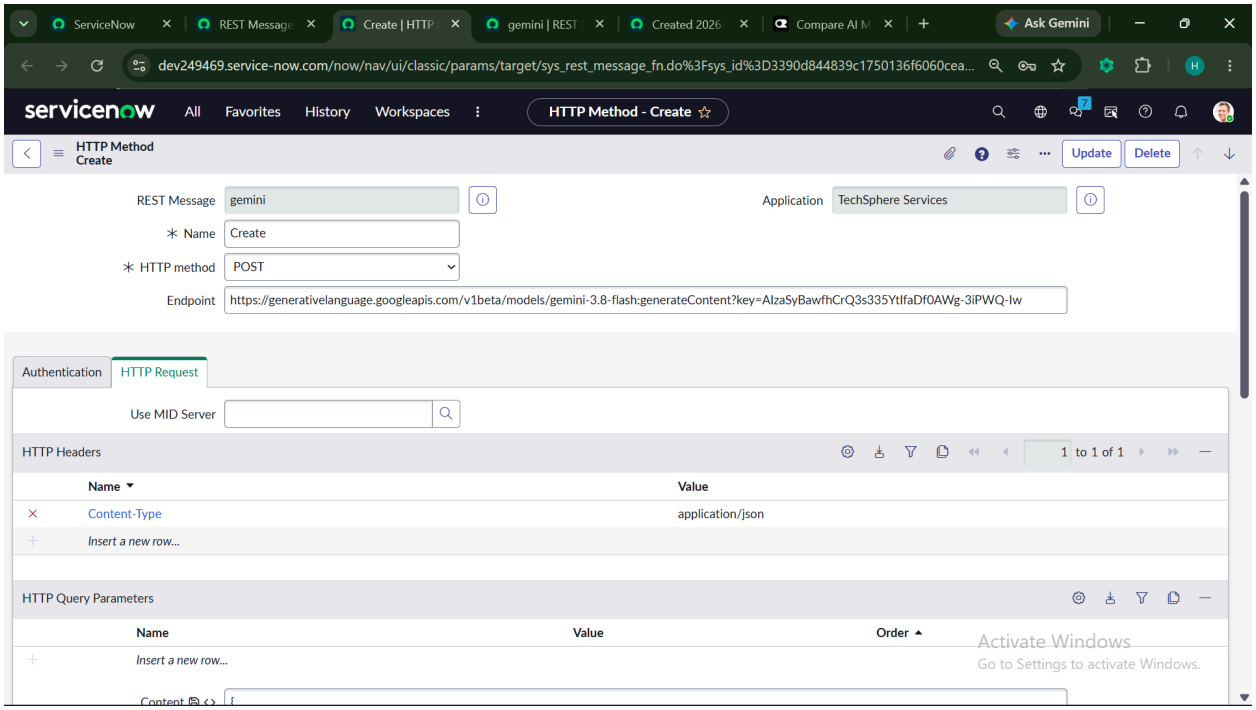
ServiceNow
REST Message
Create | HTTP
gemini | REST
Created 2026
Compare AI M
Ask Gemini
dev249469.service-now.com/now/nav/ui/classic/params/target/sys_rest_message_fn.do%3Fsys_id%3D3390d844839c1750136f6060cea...
servicenow
All
Favorites
History
Workspaces
HTTP Method - Create
HTTP Method
Create
Update
Delete
REST Message
gemini
Application
TechSphere Services
Name
Create
HTTP method
POST
Endpoint
https://generativelanguage.googleapis.com/v1beta/models/gemini-3.8-flash:generateContent?key=AIzaSyBawfhCrQ3s335YtIfaDf0AWg-3iPWQ-Iw
Authentication
HTTP Request
Use MID Server
HTTP Headers
1 to 1 of 1
Name
Value
Content-Type
application/json
Insert a new row...
HTTP Query Parameters
Name
Value
Order
Insert a new row...
Activate Windows
Go to Settings to activate Windows.
Content

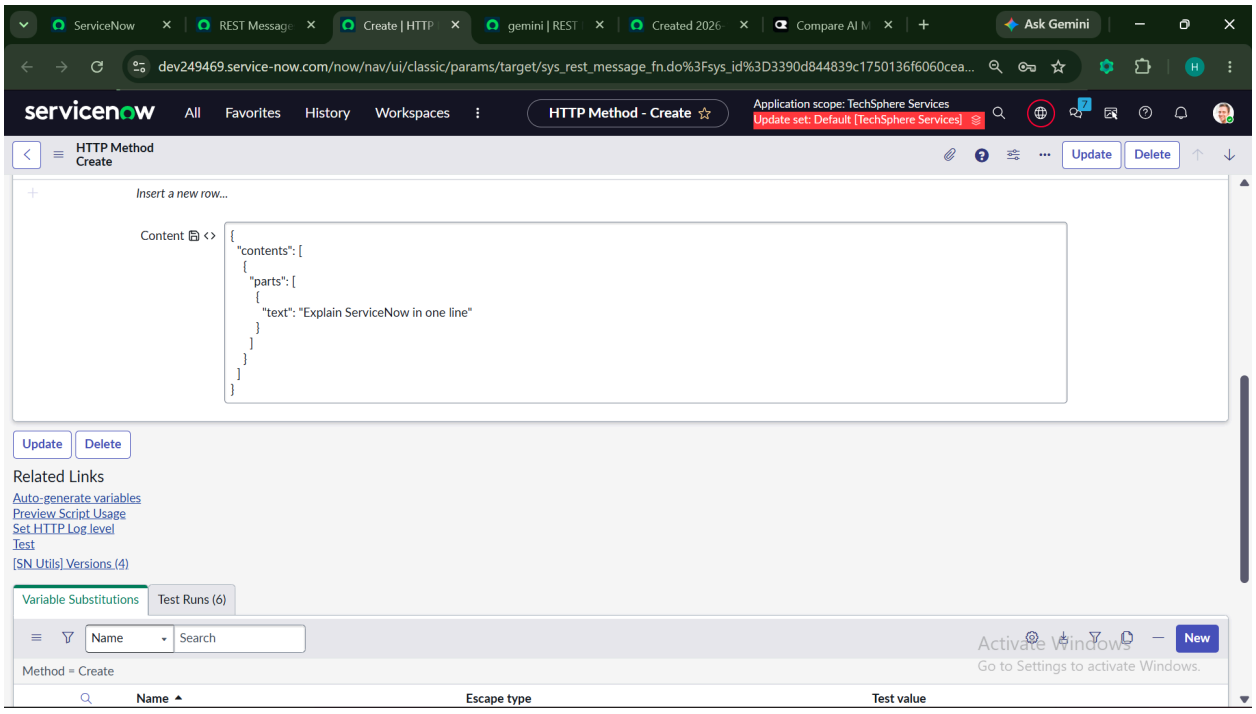
ServiceNow
REST Message
Create | HTTP
gemini | REST
Created 2026
Compare AI M
Ask Gemini
dev249469.service-now.com/now/nav/ui/classic/params/target/sys_rest_message_fn.do%3Fsys_id%3D3390d844839c1750136f6060cea...
servicenow
All
Favorites
History
Workspaces
HTTP Method - Create
Application scope: TechSphere Services
Update set: Default [TechSphere Services]
HTTP Method
Create
Update
Delete
Insert a new row...
Content
{
"contents": [
{
"parts": [
{
"text": "Explain ServiceNow in one line"
}
]
}
]
}
Update
Delete
Related Links
Auto-generate variables
Preview Script Usage
Set HTTP Log level
Test
[SN Utils] Versions (4)
Variable Substitutions
Test Runs (6)
Name
Search
New
Method = Create
Activate Windows
Go to Settings to activate Windows.
Name
Escape type
Test value

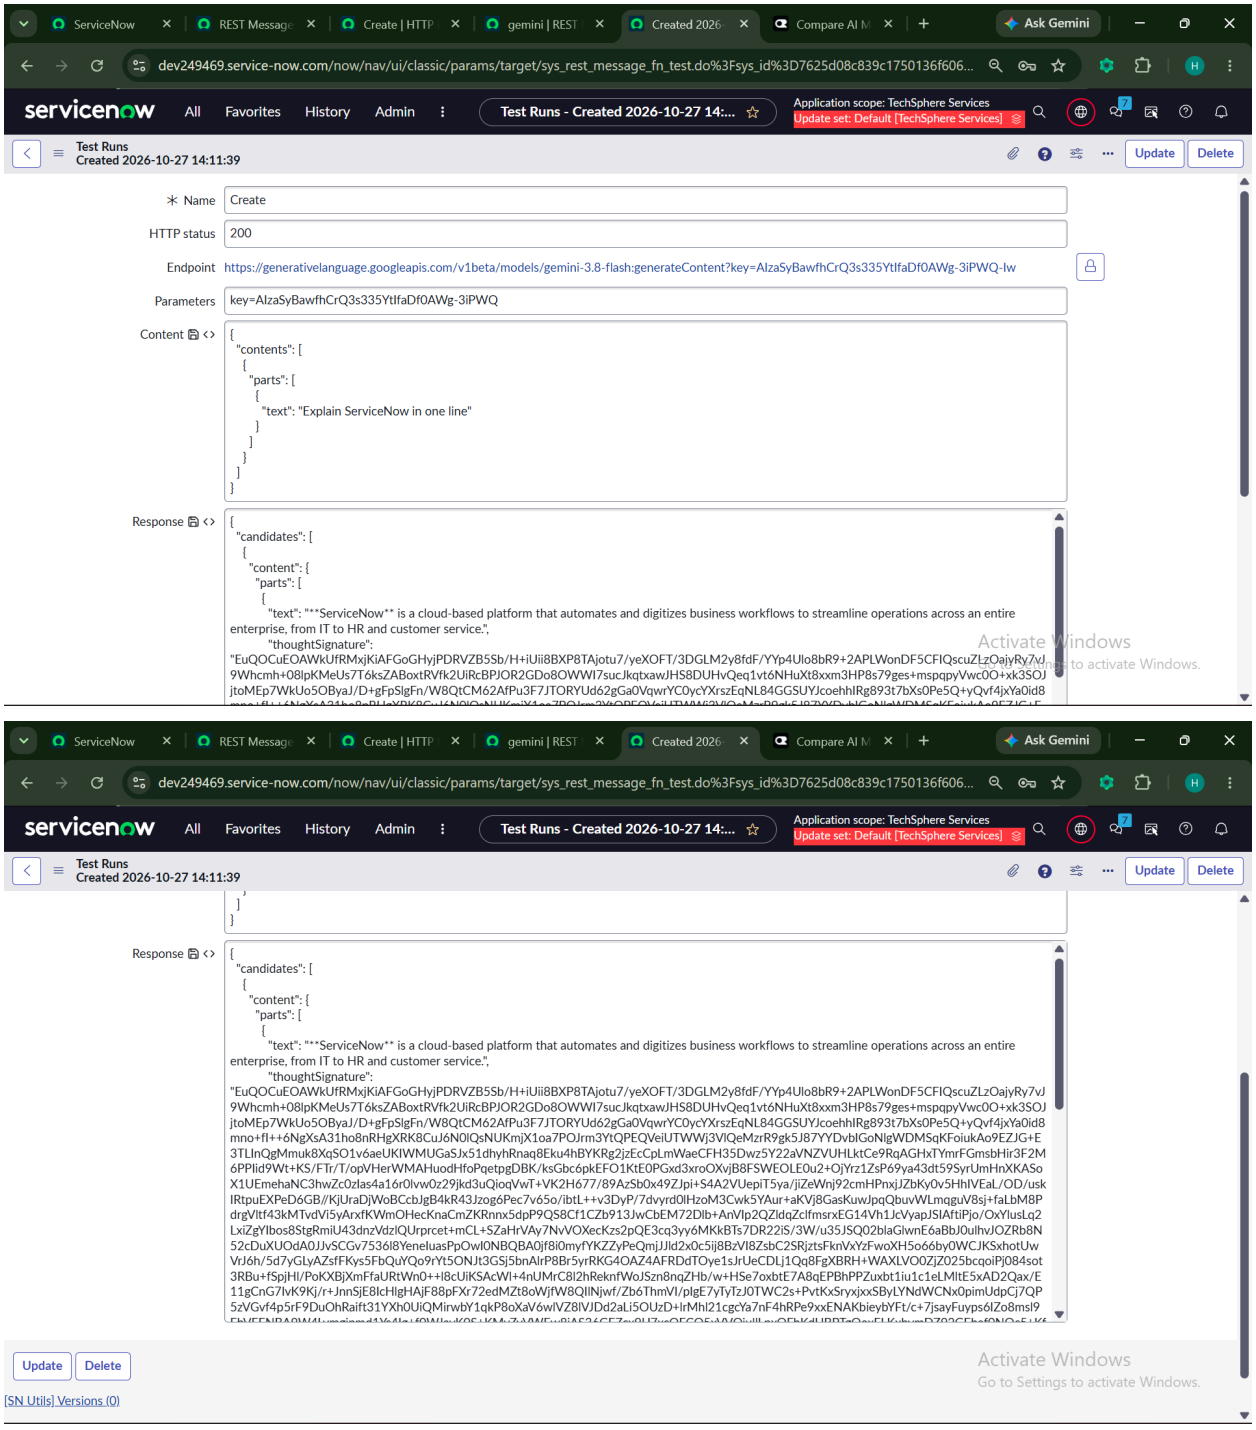

Question : agar maine ek outbound integration ke liye rest message kisi scoped app me banaya to kya mai usse dusre scoped app or global me bhi call kr paunga ya sirf ussi app scope me kar paunga call ? in very short ?

Answer :

Haan, aap doosre app scope aur Global scope se bhi use call kar sakte hain.


Bas aapko REST Message record me **Accessible from field ko **`All application scopes`** set karna hoga. Agar wo *"This application scope only"* par set raha, toh wo sirf ussi scoped app tak limited rahega.**


IMPORTANT NOTE :
Nahi, vo chalega (block nahi hoga).


Reason: Firewall normally domain-based block karte hain (chatgpt.com**,** gemini.google.com**,** claude.ai**).**

Aapki request openrouter.ai **IP/Endpoint par jaa rahi hai, kisi chat AI platform par nahi. Aur sabse badi baat—request aapke browser se nahi, balki ServiceNow ke cloud server se direct OpenRouter ko jaa rahi hai, isliye local office firewall isko detect hi nahi kar paayega.**


OPEN ROUTER AI MODEL INTEGRATION :

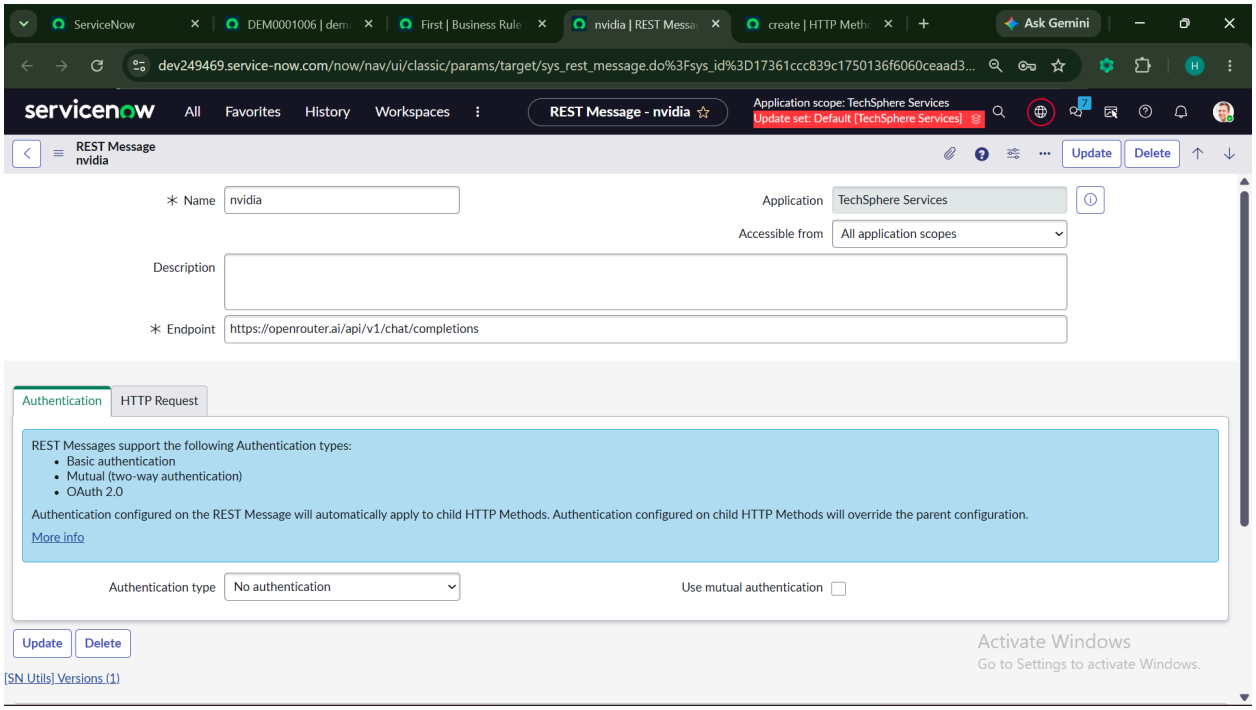

ServiceNow
DEM0001006 | dem
First | Business Rule
nvidia | REST Messa
create | HTTP Meth
Ask Gemini
dev249469.service-now.com/now/nav/ui/classic/params/target/sys_rest_message.do%3Fsys_id%3D17361ccc839c1750136f6060ceaad3...
servicenow
All
Favorites
History
Workspaces
REST Message - nvidia
Application scope: TechSphere Services
Update set: Default [TechSphere Services]
REST Message
nvidia
Update
Delete
* Name
nvidia
Application
TechSphere Services
Accessible from
All application scopes
Description
* Endpoint
https://openrouter.ai/api/v1/chat/completions
Authentication
HTTP Request
REST Messages support the following Authentication types:
Basic authentication
Mutual (two-way authentication)
OAuth 2.0
Authentication configured on the REST Message will automatically apply to child HTTP Methods. Authentication configured on child HTTP Methods will override the parent configuration.
More info
Authentication type
No authentication
Use mutual authentication
Update
Delete
[SN Utils] Versions (1)
Activate Windows
Go to Settings to activate Windows.

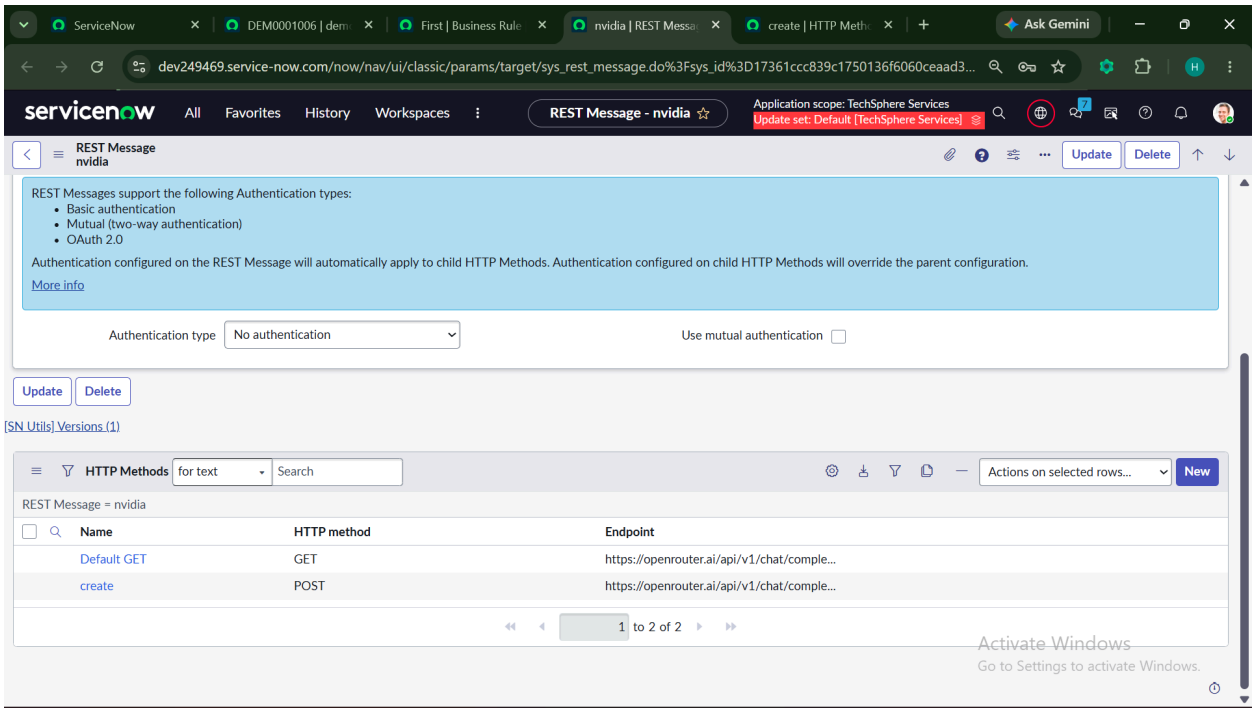

ServiceNow
DEM0001006 | dem
First | Business Rule
nvidia | REST Messa
create | HTTP Meth
Ask Gemini
dev249469.service-now.com/now/nav/ui/classic/params/target/sys_rest_message.do%3Fsys_id%3D17361ccc839c1750136f6060ceaad3...
servicenow
All
Favorites
History
Workspaces
REST Message - nvidia
Application scope: TechSphere Services
Update set: Default [TechSphere Services]
REST Message
nvidia
Update
Delete
REST Messages support the following Authentication types:
Basic authentication
Mutual (two-way authentication)
OAuth 2.0
Authentication configured on the REST Message will automatically apply to child HTTP Methods. Authentication configured on child HTTP Methods will override the parent configuration.
More info
Authentication type
No authentication
Use mutual authentication
Update
Delete
[SN Utils] Versions (1)
HTTP Methods
for text
Search
Actions on selected rows...
New
REST Message = nvidia
Name
HTTP method
Endpoint
Default GET
GET
https://openrouter.ai/api/v1/chat/comple...
create
POST
https://openrouter.ai/api/v1/chat/comple...
1 to 2 of 2
Activate Windows
Go to Settings to activate Windows.

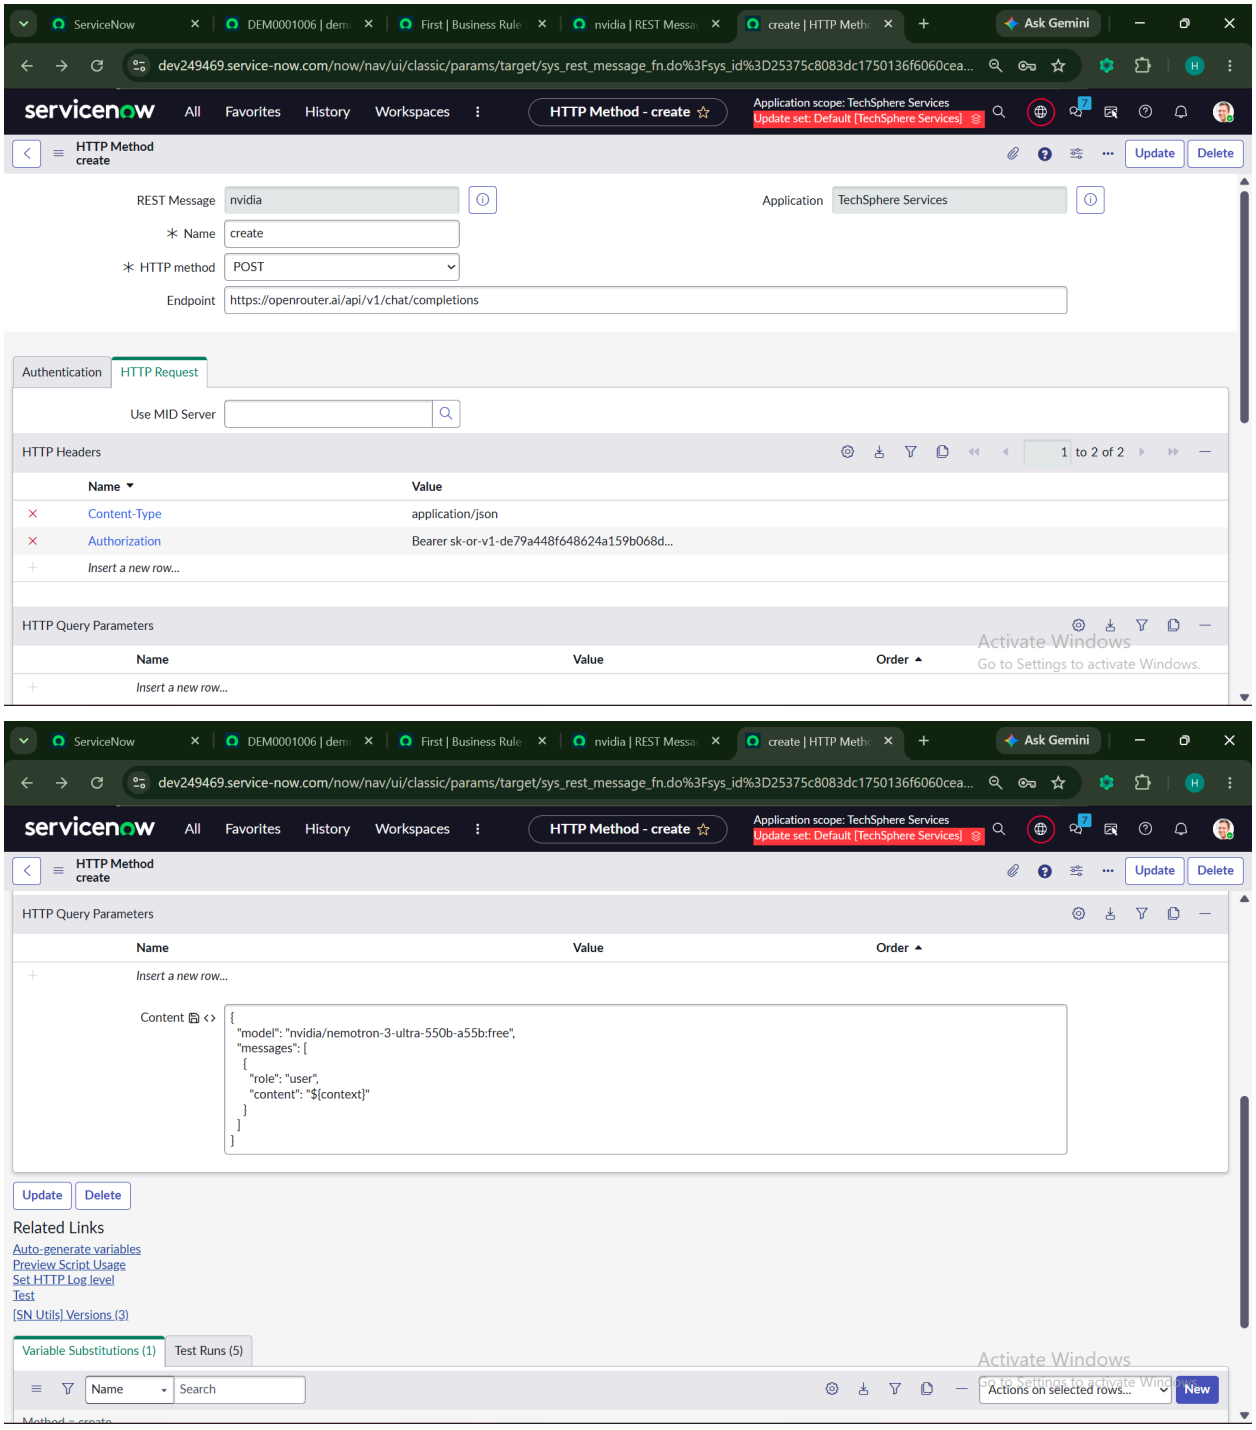

Note : to change the model just replace the new model name here in this model value

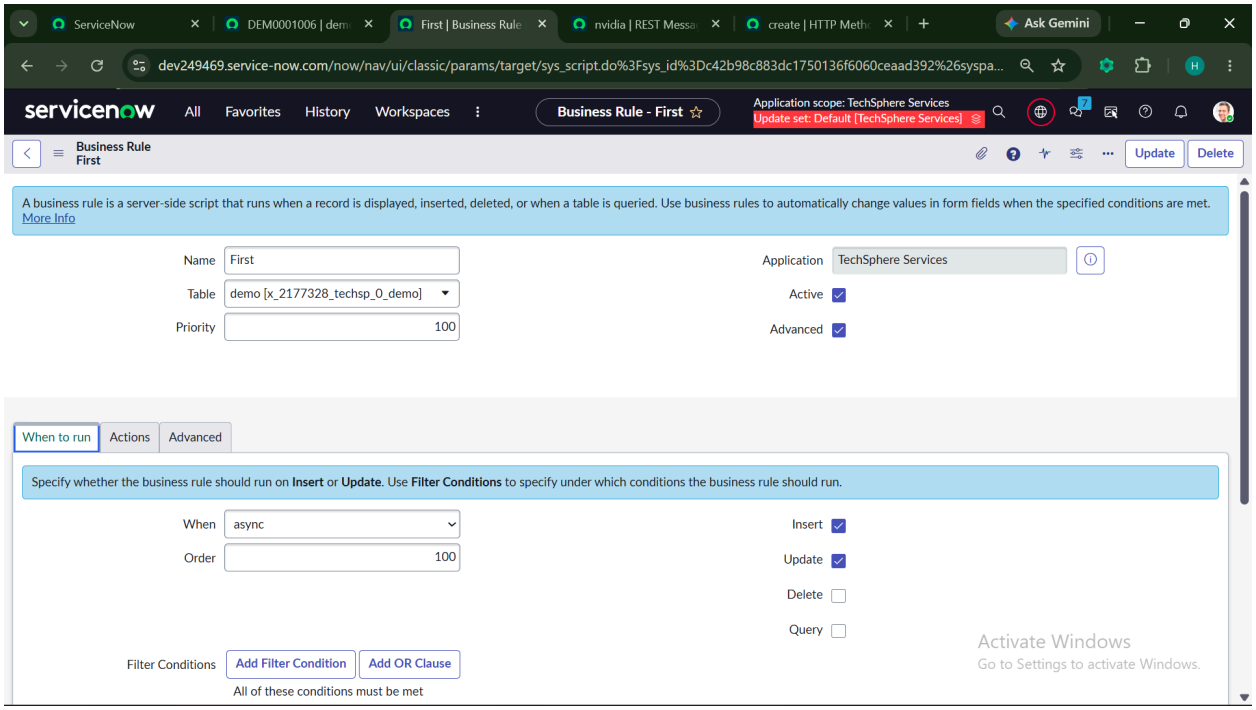
ServiceNow
DEM0001006 | dem
First | Business Rule
nvidia | REST Messa
create | HTTP Meth
Ask Gemini
dev249469.service-now.com/now/nav/ui/classic/params/target/sys_script.do%3Fsys_id%3Dc42b98c883dc1750136f6060ceaad392%26syspa...
servicenow
All
Favorites
History
Workspaces
Business Rule - First
Application scope: TechSphere Services
Update set: Default [TechSphere Services]
Business Rule
First
Update
Delete
A business rule is a server-side script that runs when a record is displayed, inserted, deleted, or when a table is queried. Use business rules to automatically change values in form fields when the specified conditions are met.
More Info
Name
First
Table
demo [x_2177328_techsp_0_demo]
Priority
100
Application
TechSphere Services
Active
Advanced
When to run
Actions
Advanced
Specify whether the business rule should run on Insert or Update. Use Filter Conditions to specify under which conditions the business rule should run.
When
async
Order
100
Insert
Update
Delete
Query
Filter Conditions
Add Filter Condition
Add OR Clause
All of these conditions must be met
Activate Windows
Go to Settings to activate Windows.

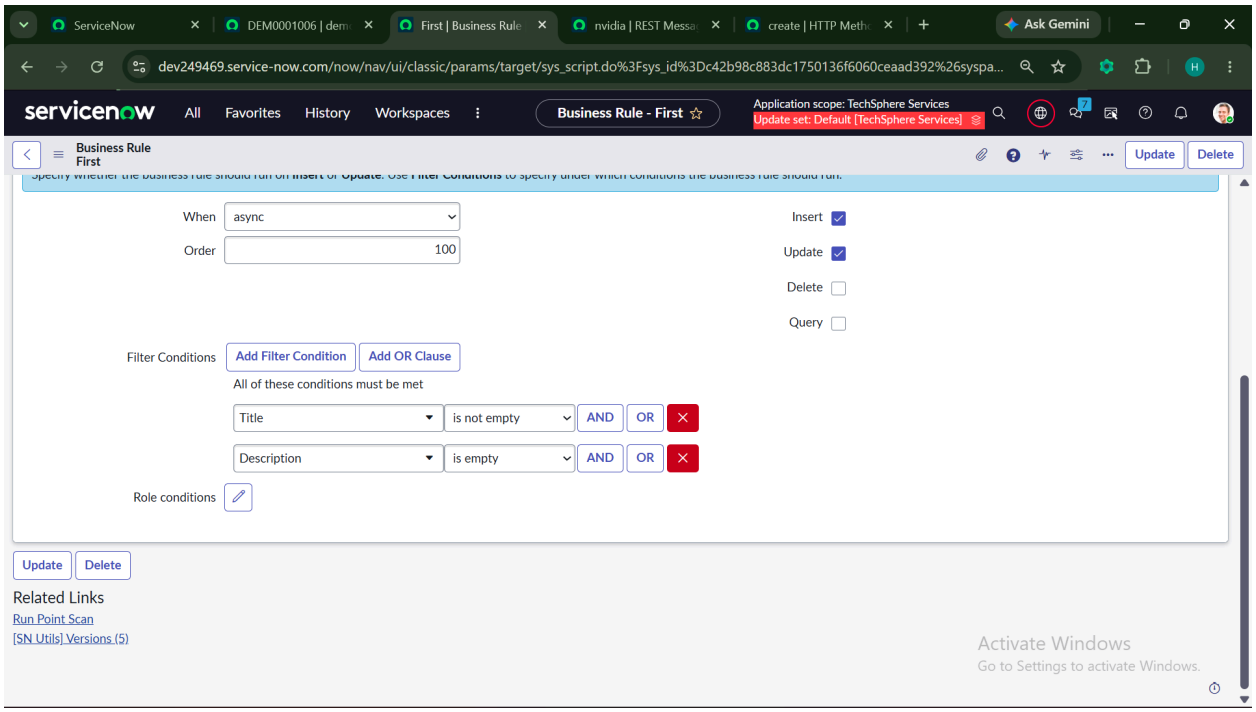
ServiceNow
DEM0001006 | dem
First | Business Rule
nvidia | REST Messa
create | HTTP Meth
Ask Gemini
dev249469.service-now.com/now/nav/ui/classic/params/target/sys_script.do%3Fsys_id%3Dc42b98c883dc1750136f6060ceaad392%26syspa...
servicenow
All
Favorites
History
Workspaces
Business Rule - First
Application scope: TechSphere Services
Update set: Default [TechSphere Services]
Business Rule
First
Update
Delete
When
async
Order
100
Insert
Update
Delete
Query
Filter Conditions
Add Filter Condition
Add OR Clause
All of these conditions must be met
Title
is not empty
AND
OR
Description
is empty
AND
OR
Role conditions
Update
Delete
Related Links
Run Point Scan
[SN Utils] Versions (5)
Activate Windows
Go to Settings to activate Windows.

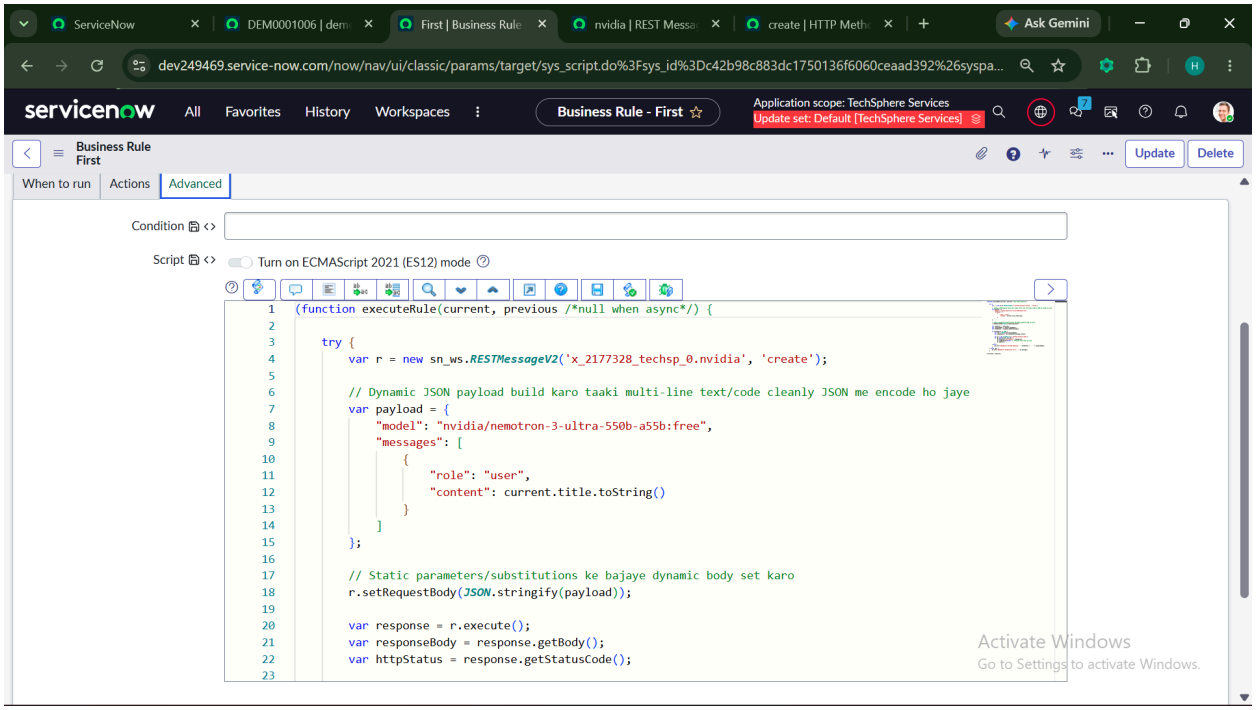

Code :

```
(function executeRule(current, previous /*null when async*/) {

    try {
        var r = new sn_ws.RESTMessageV2('x_2177328_techsp_0.nvidia', 'create');

        // Dynamic JSON payload build karo taaki multi-line text/code cleanly JSON me encode ho jaye
        var payload = {
            "model": "nvidia/nemotron-3-ultra-550b-a55b:free",
            "messages": [
                {
                    "role": "user",
                    "content": current.title.toString()
                }
            ]
        };

        // Static parameters/substitutions ke bajaye dynamic body set karo
        r.setRequestBody(JSON.stringify(payload));


        var response = r.execute();
```

```
        var responseBody = response.getBody();
        var httpStatus = response.getStatusCode();

        if (httpStatus == 200) {
            var res = JSON.parse(responseBody);
            var aiResponse = res.choices[0].message.content;

            var gr = new GlideRecord('x_2177328_techsp_0_demo');
            if (gr.get(current.sys_id)) {
                gr.setValue('description', aiResponse);
                gr.setWorkflow(false); // Infinite loop rokne ke liye
                gr.update();
            }
        } else {
            gs.info('OpenRouter Non-200 Response: ' + httpStatus + ' - ' +
responseBody);
        }
    } catch (ex) {
        gs.info('OpenRouter Integration Error: ' + ex.message);
    }

})(current, previous);
```

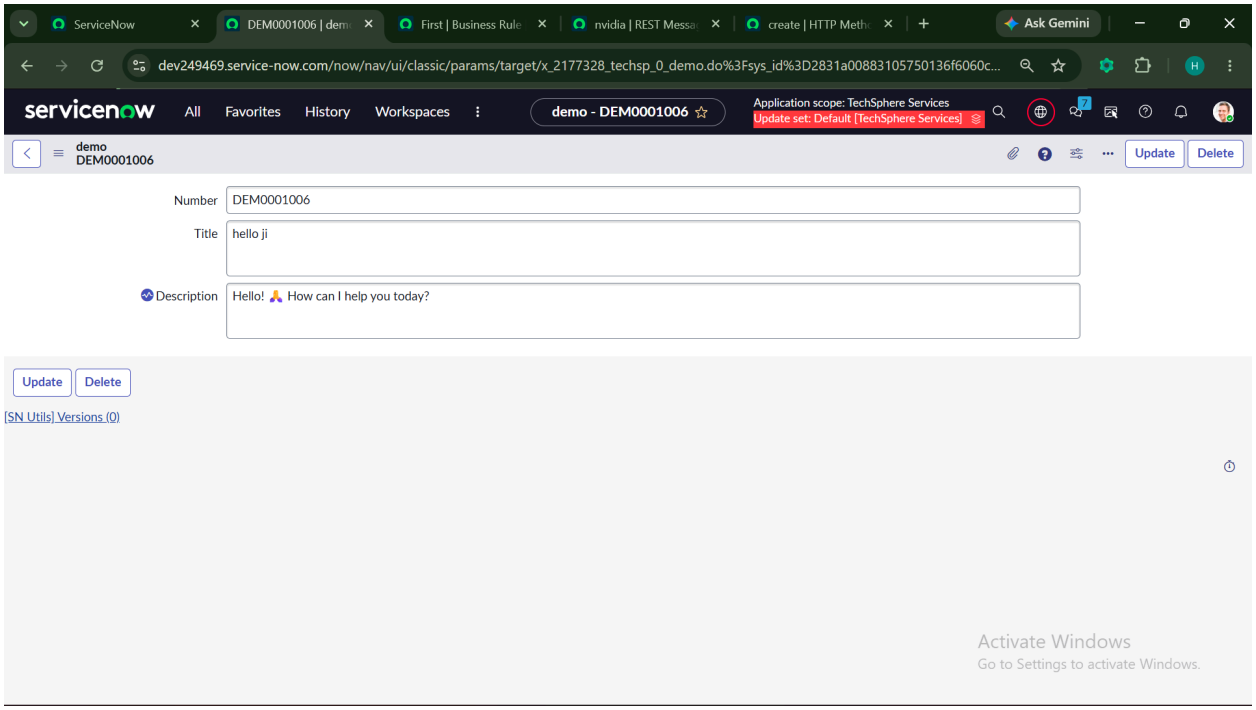
ServiceNow
DEM0001006 | dem
First | Business Rule
nvidia | REST Messa
create | HTTP Meth
Ask Gemini
dev249469.service-now.com/now/nav/ui/classic/params/target/x_2177328_techsp_0_demo.do%3Fsys_id%3D2831a00883105750136f6060c...
servicenow
All
Favorites
History
Workspaces
demo - DEM0001006
Application scope: TechSphere Services
Update set: Default [TechSphere Services]
demo
DEM0001006
Update
Delete
Number
DEM0001006
Title
hello ji
Description
Hello! How can I help you today?
Update
Delete
[SN Utils] Versions (0)
Activate Windows
Go to Settings to activate Windows.