


TWO TYPES OF APPLETS

PROGRAM OUTPUT SCREENSHOT

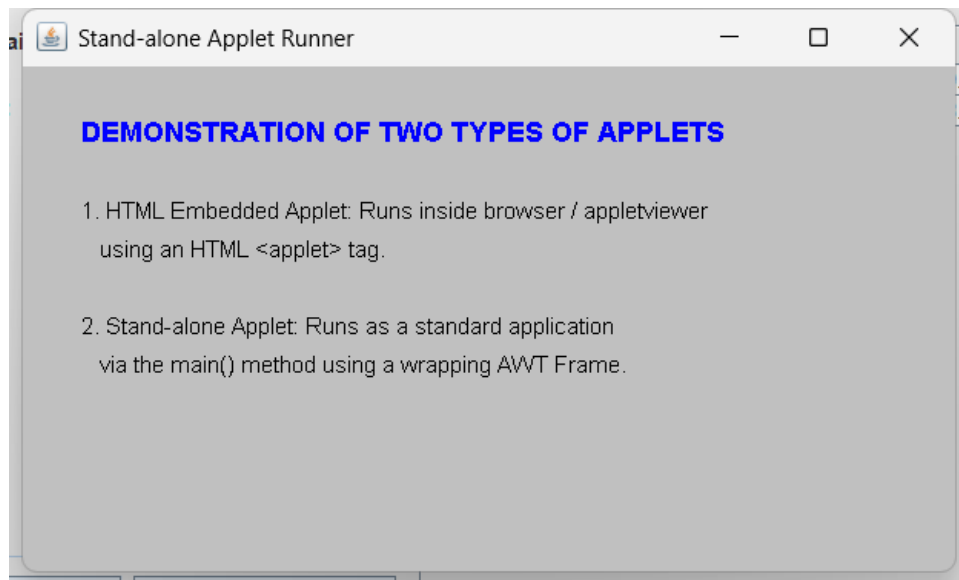

SOURCE CODE

```
import java.applet.Applet;
import java.awt.Color;
import java.awt.Font;
import java.awt.Graphics;
import java.awt.Frame;
import java.awt.event.WindowAdapter;
import java.awt.event.WindowEvent;

public class TwoTypesApplet extends Applet {

    @Override
    public void init() {
        setBackground(Color.LIGHT_GRAY);
    }

    @Override
    public void paint(Graphics g) {
        g.setFont(new Font("Arial", Font.BOLD, 14));
        g.setColor(Color.BLUE);
        g.drawString("DEMONSTRATION OF TWO TYPES OF APPLETs", 30, 40);

        g.setFont(new Font("Arial", Font.PLAIN, 12));
        g.setColor(Color.BLACK);
        g.drawString("1. HTML Embedded Applet: Runs inside browser / appletviewer", 30,
80);
        g.drawString("    using an HTML <applet> tag.", 30, 100);

        g.drawString("2. Stand-alone Applet: Runs as a standard application", 30, 140);
        g.drawString("    via the main() method using a wrapping AWT Frame.", 30, 160);
    }

    public static void main(String[] args) {
        Frame frame = new Frame("Stand-alone Applet Runner");
        TwoTypesApplet applet = new TwoTypesApplet();

        applet.init();
        applet.start();

        frame.add(applet);
        frame.setSize(500, 300);
        frame.setLocationRelativeTo(null);

        frame.addWindowListener(new WindowAdapter() {
            @Override
            public void windowClosing(WindowEvent e) {
                applet.stop();
                applet.destroy();
                System.exit(0);
            }
        });

        frame.setVisible(true);
    }
}
```