


Session 10: Create a read-only database user in RDS using Workbench-SKILL

Create Read-Only User in RDS (Using Workbench)

1. Aim

To create a **read-only user** in a MySQL database hosted on **Amazon Web Services RDS** using **MySQL Workbench**.

A read-only user in RDS is created using CREATE USER and GRANT SELECT commands, allowing only data retrieval without modification.

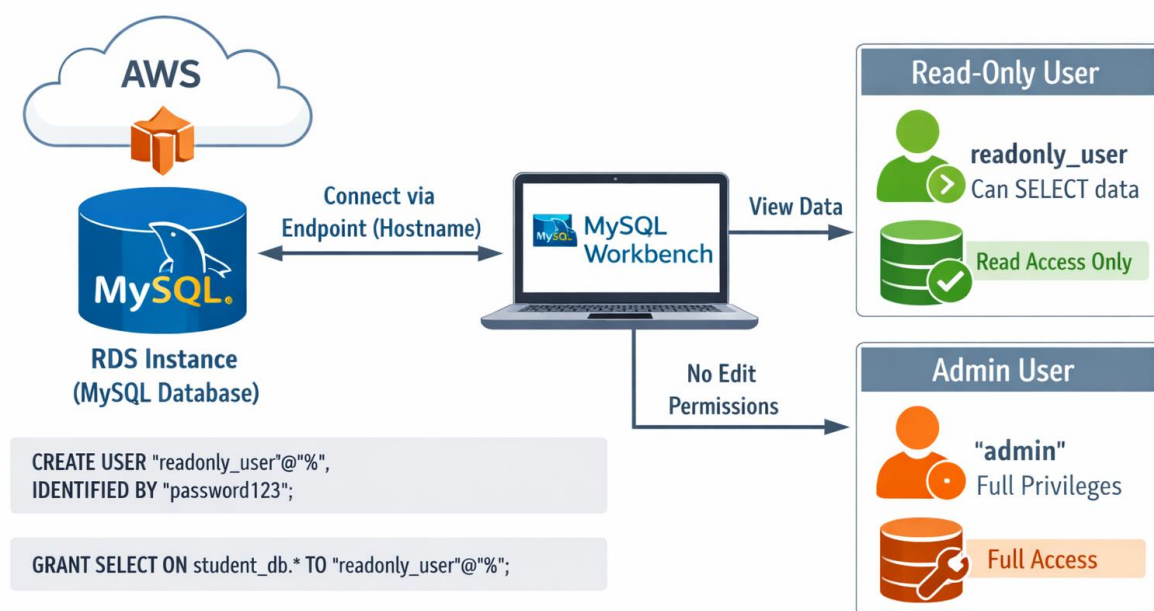

2. Procedure

Step 1: Connect to RDS using Workbench

- Open **MySQL Workbench**
- Connect using:
 - Endpoint (RDS hostname)
 - Username: admin
 - Password

Step 2: Select Database

```
USE student_db;
```

Step 3: Create New User

```
CREATE USER 'readonly_user'@'%' IDENTIFIED BY 'password123';
```

☞ % means the user can connect from any host

☞ You can restrict it to a specific IP for better security

Step 4: Grant Read-Only Permissions

```
GRANT SELECT ON student_db.* TO 'readonly_user'@'%';
```

Step 5: Apply Changes

```
FLUSH PRIVILEGES;
```

Step 6: Verify User Permissions

```
SHOW GRANTS FOR 'readonly_user'@'%';
```

3. Testing the Read-Only User

Step 1: Create New Connection

- Open **MySQL Workbench**
- Add new connection:
 - Username: readonly_user
 - Password: password123

Step 2: Test Queries

Allowed (Read)

```
SELECT * FROM student_db.students;
```

Not Allowed (Write)

```
INSERT INTO student_db.students VALUES (3, 'Test', 20, 'BCA');
```

✗ This will give **permission denied error**

4. Output

- Read-only user successfully created
- User can **view data** but cannot **insert, update, or delete**

5. Result

Successfully created a **read-only database user** in **Amazon Web Services RDS** using **MySQL Workbench**.