

Evaluation Doc

AWS Deployment:

Started AWS lab

Copied the credentials and downloaded the labsuser.pem file

`aws configure`

Configured the aws instance

`aws ec2 run-instances --image-id ami-0d73480446600f555 --instance`



Created t2.micro instance

In the AWS console created new Inbound rules to allow custom tcp

SSHed into my console to pull the git repo

`ssh -i labsuser.pem ubuntu@ec2-54-159-33-11.compute-1.amazonaws`

Git pulled my repo into the instance and started testing

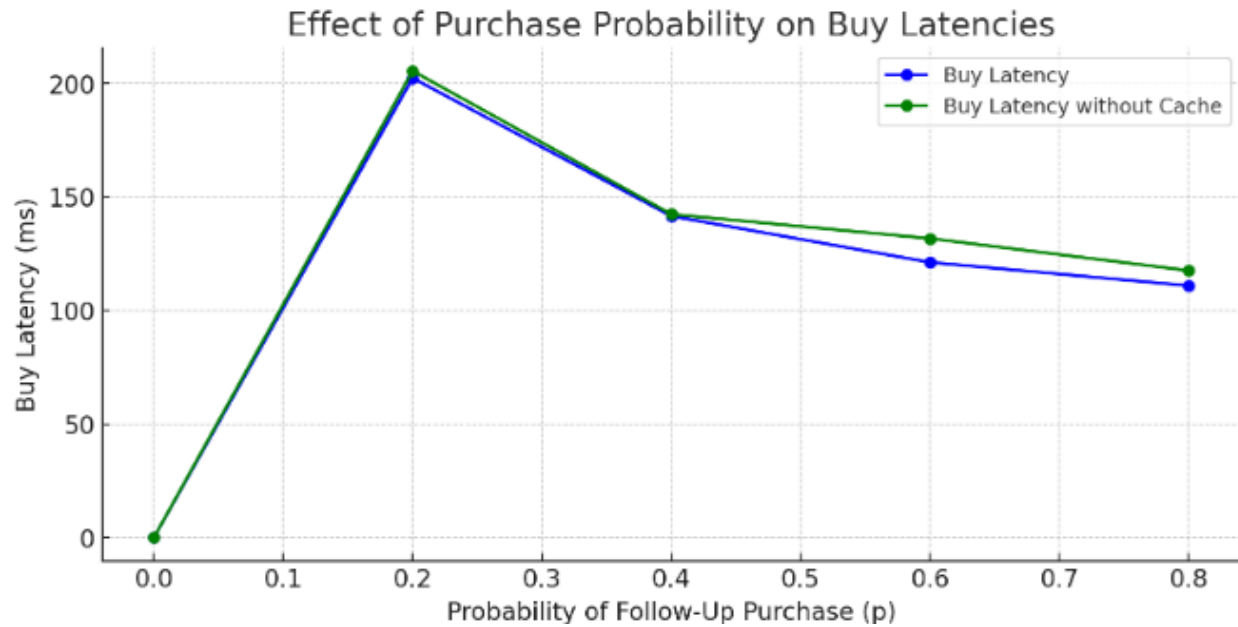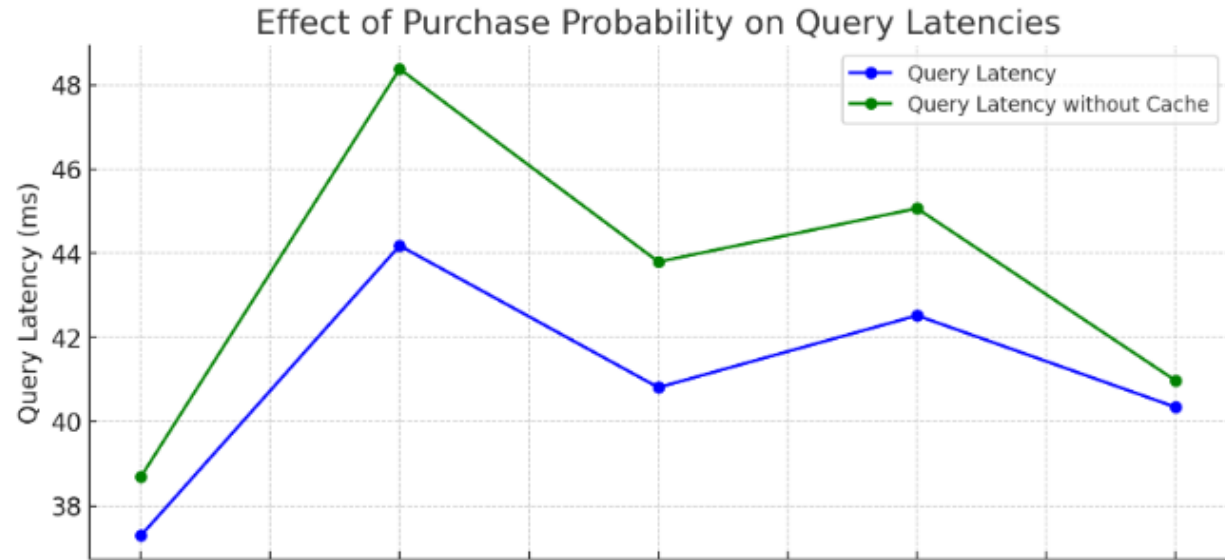

There is no significant benefit in using cache at frontend service. The clients are transparent to order service failures and all order services end up with same database file.