


→ Display

→ Position

→ Units

(Lecture 12)

Telegram

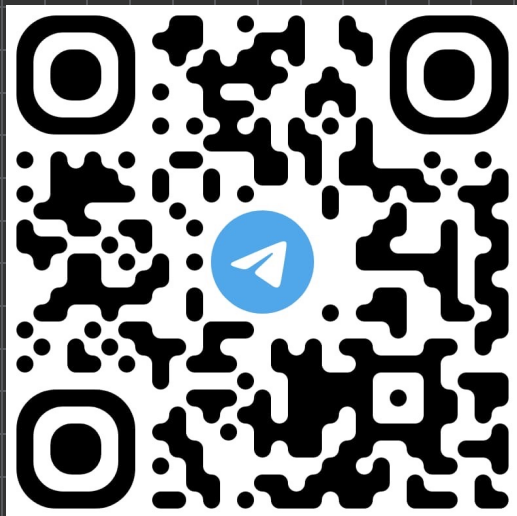

Discord



Display

display property batati hai ek element page pe kaise behave karega - kitni jagah lega, doosron ke saath kaise interact karega

→ Block | Inline

div, p, ol, li, ol, section, article

Hi Dost

Display

↳

Block

inline

inline-Block

width x
height x

padding +
margin x

display: block

Block element पूरी available width leta hai - chahe content kitna bhi chhota ho width, height, margin, padding - sab properly kaam karte hain

display: inline

Inline element sirf content jitni jagah leta hai - zyada nahi width aur height kaam nahi karte inline elements pe Top/bottom margin aur padding properly kaam nahi karte (left/right karte hain)

display: inline-block

Inline ka problem - width/height kaam nahi karti. Block ka problem - har cheez nayi line pe aati hai. inline-block dono ka solution hai.

inline-block = inline ki tarah same line pe rehta hai, block ki tarah width/height/padding/margin properly kaam karte hain

Display : none





element → delete


visibility : hidden

element → hidden

Positions

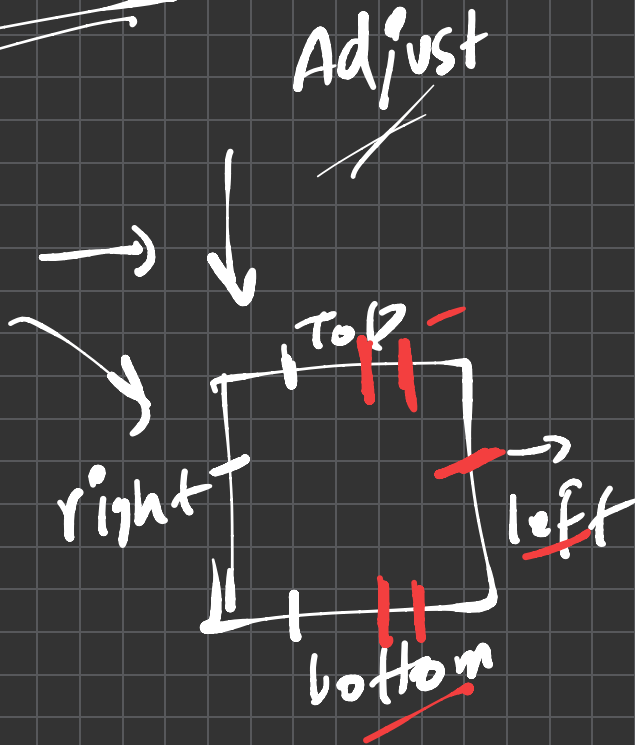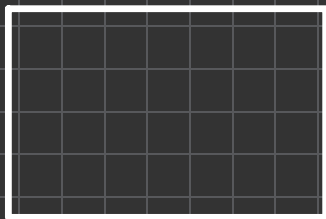

top left

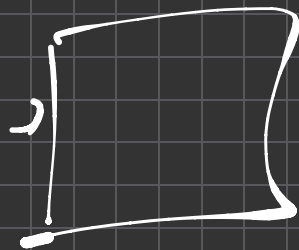

Positions in CSS

→ Static (By default)

→ Relative

→ Absolute

→ fixed

→ sticky

normal flow

Static: Static is the default position of an element. It does not accept properties like top, left, right, or bottom.

Relative: Relative positioning places an element relative to its normal position. You can move it using top, left, right, or bottom.

Absolute: Absolute positioning removes the element from the document flow and places it relative to the nearest ancestor with a positioning context (relative, absolute, or fixed).


Fixed: Fixed positioning removes the element from the flow and positions it relative to the viewport. It remains in place even when the page scrolls.

Sticky: Sticky positioning switches between relative and fixed based on the scroll position.

Position Relative

Element $\rightarrow$ normal flow

Absolute position

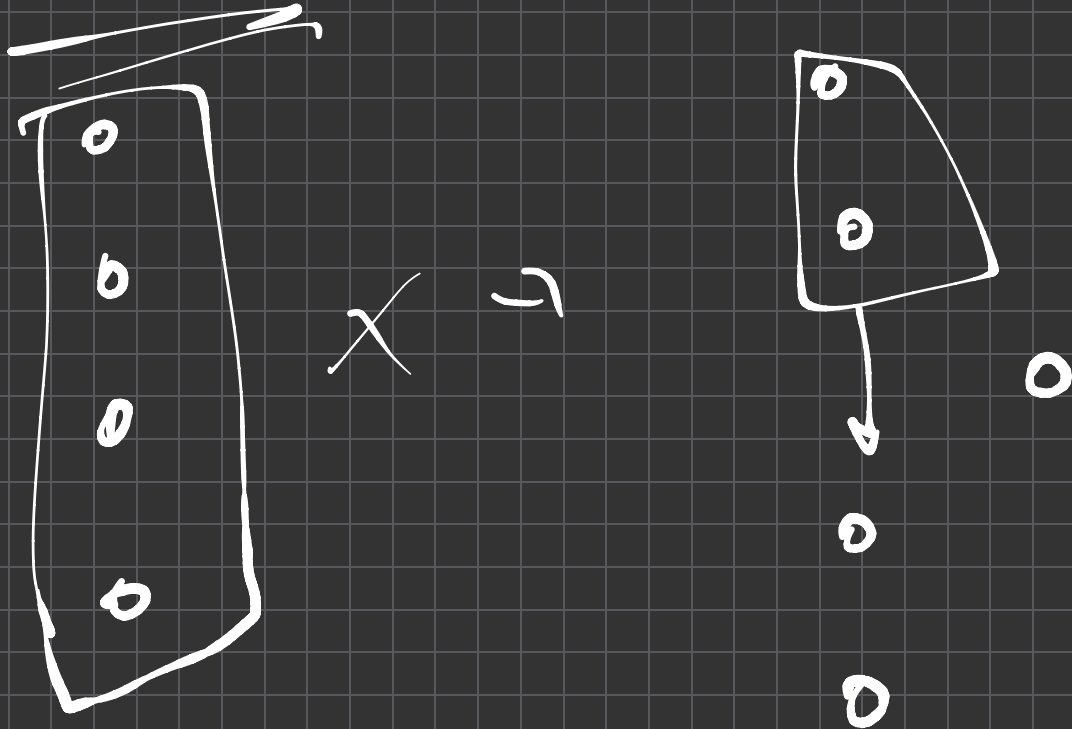


Absolute.

↓
relative, sticky, fixed

body
↓
div
↑
1

cart




P-R


~~P-R~~

absolute
Top: 0

fixed



viewport

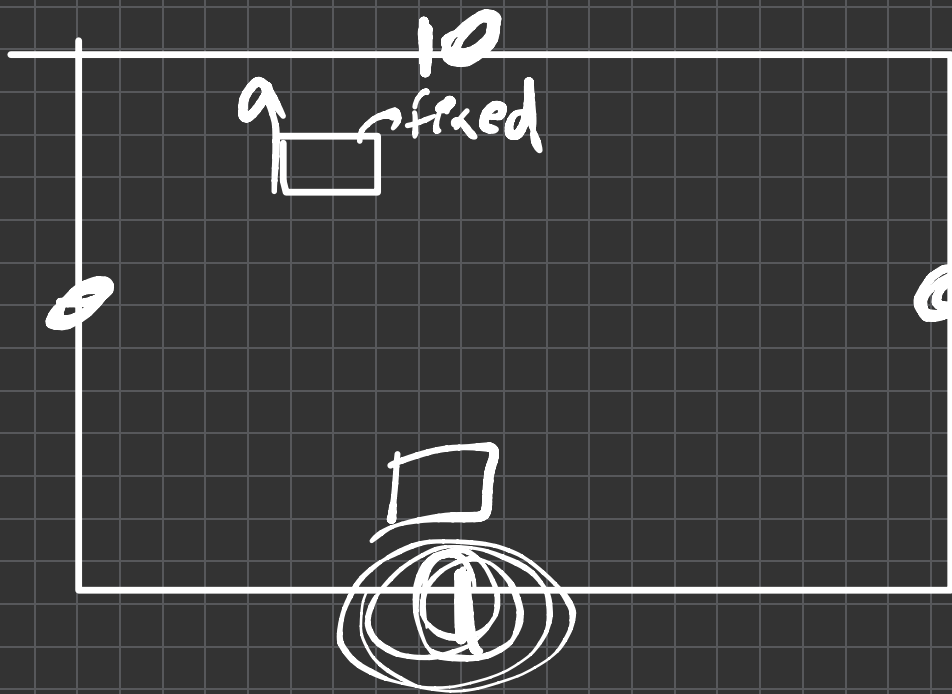

Top
Bottom : 30
left
right

sticky

z-index → 0

fixed

sticky

Absolute

Relative



The diagram illustrates the relationship between z-index and position types. A curved arrow labeled 'z-index' points from the 'fixed' position type towards a circle containing the number '0'. Below this, two overlapping rectangles are shown, each with an arrow pointing upwards and to the right, representing elements with different z-index values.

Units

Px, %, vh, vw

Unit	Sub-Type	Dynamic Scaling?	Standard Use Case
px	Absolute	No	Precise borders, thin dividers, static sizes
rem	Relative	Yes (via Root Font)	Accessible typography, structural padding, margins
em	Relative	Yes (via Parent Font)	Content-specific spacing tied directly to local text size
%	Relative	Yes (via Parent Box)	Fluid grid widths and flexible layout columns
vw / vh	Relative	Yes (via Browser Window)	Full-screen hero sections, landing split layouts


Absolute

→ PK →
cm
mm
m
μ

Relative

$\%$
VH
VW
em
rem

Responsive Design ✓




Absolute Unit


fixed

Pt
cm

Relative

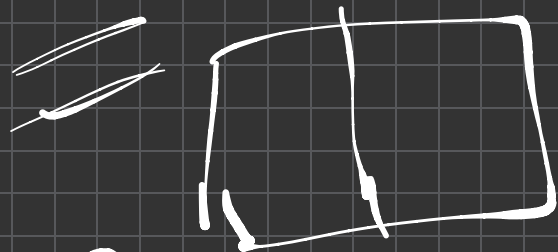


Sakshi

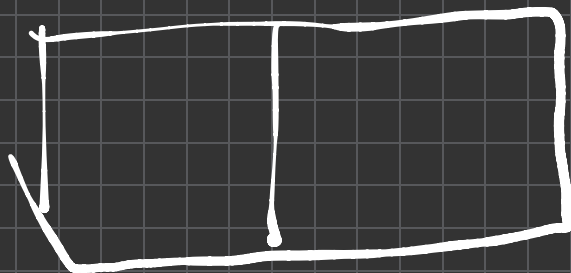


20 X 40

Adarsh



(% →

→ Parent ke
Relative
50%

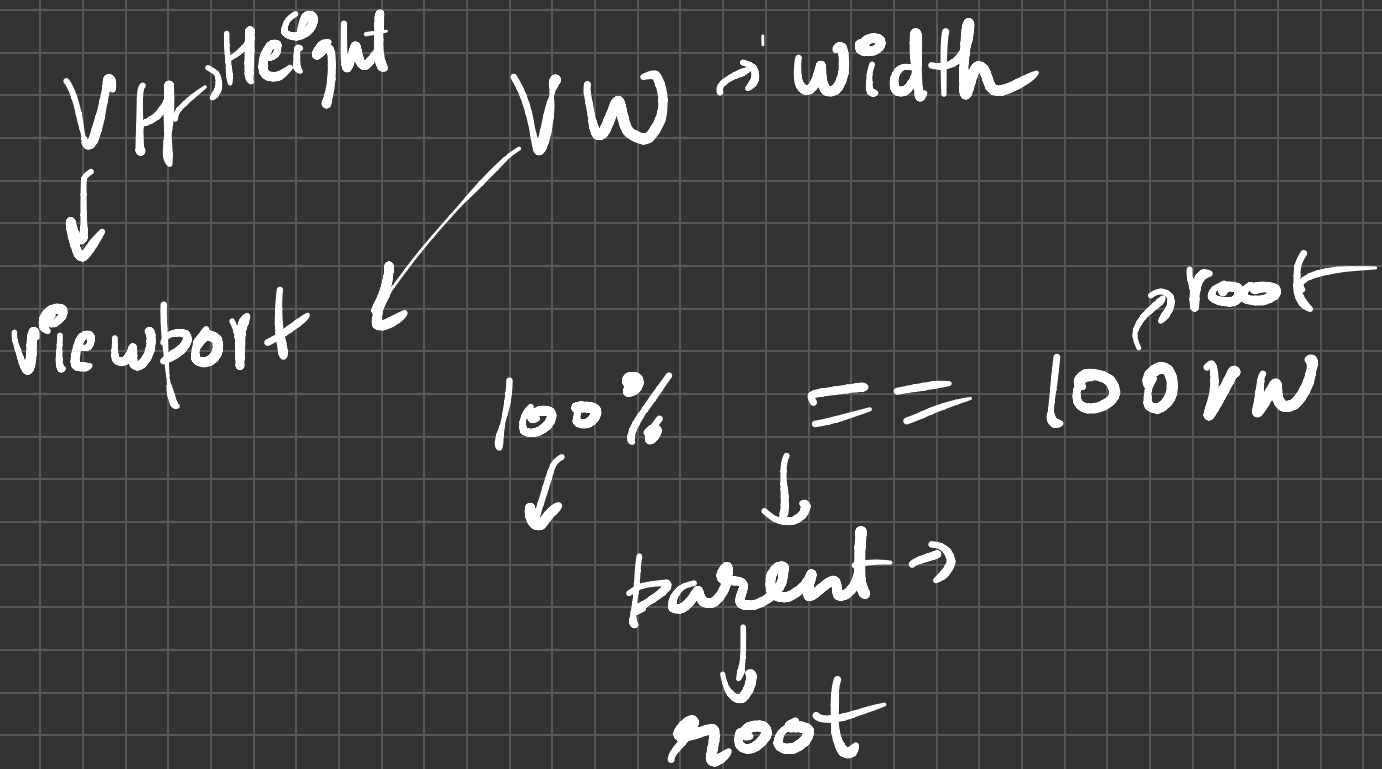

em → font size

new

default text-size




16px

→ 20

em →

1 → 16px

16x2 ⇒ 32

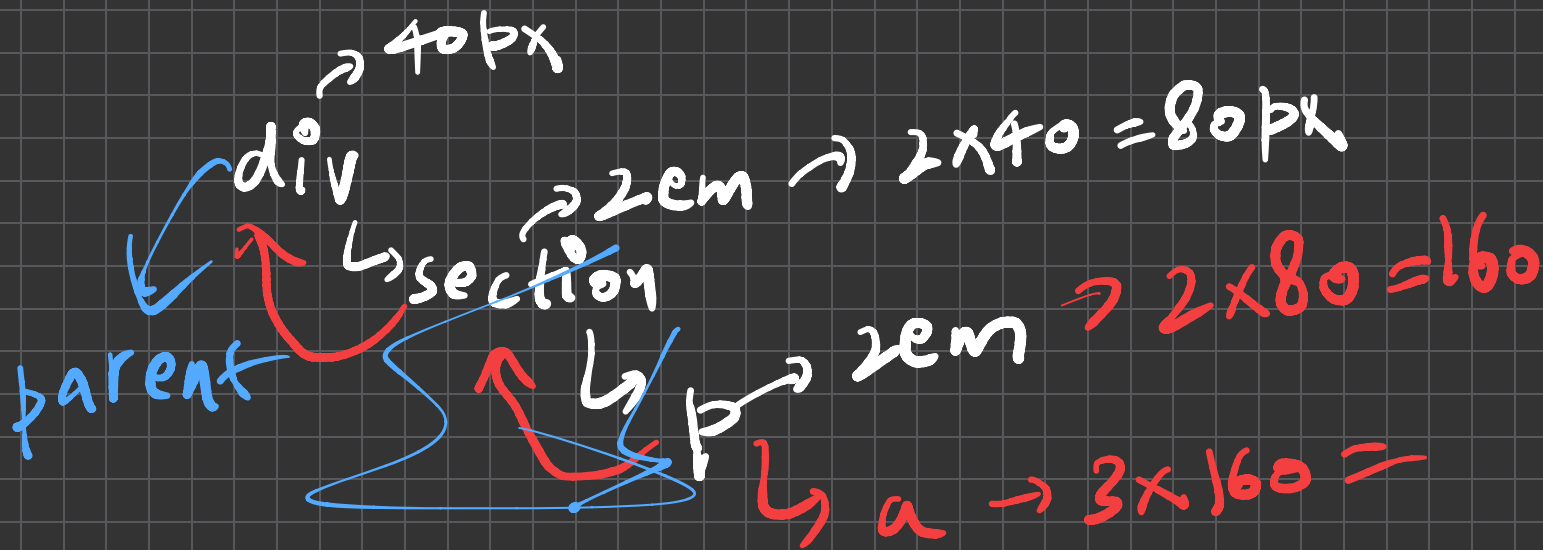

Rem $\rightarrow$

=

$\hookrightarrow$ root