

for pool =
 { }
 { }

Built in ✓ Math.

Array → ordered collection
 sequence data

object

let arr = ["1", "2", "3"] → object
 0 1 2

arr { }
 ↑
 Index

.length

Telegram



Discord



Objects

- collection related properties or method
- collection of keys & values

product
↳ name
↳ price
↳ discount
↳ stock
↳ sizes
↳ description

[- , - , - , -]

```
let products = [{"tshirt", 566}, {"lower", 543}, {"cap", 53}, {"shoes", 673}]  
  
// let firstProduct = products[0]  
// console.log(firstProduct[0]);  
  
console.log(products[0][0]); // order depend
```

order depend
readability khtm

object →

↓
represent

↓
real world
object

phone, mic, car
student

related data

↓
keys/values

represent key
store hai

product
└─ prize
└─ name

object syntax

product = {}

```
product = {  
  name: "phone",  
  prize: 59999,  
}
```

[] → parameters

[] → array

{ } → object

property

key
string

```
let product2 = {  
  price: 57633,  
  avgRating: 4.5,  
  totalReviews: 75,  
  discount: 10,  
  name: "iphone",  
}
```

value

Number, string, object,
array, boolean, function,
null

Dot notation

product.name
 ↓
 key

Bracket notation (array)

product["^{key in string}22"]

method → function

pr sir jo dot se excess ho jata hai jaise product.name
krte hai pr sir product[name] excess ni ho rh

product["name"]

let name = "name"

product[name]

this ?
current object
ko batata hai

objed.key(n)
object

objed.values()
values

returns ~~array~~ of key/values

- ✓ for of loop ✓ array
- ✓ for in loop = object → keys | array → index
- ✓ for each method = array

✓
`for(value of product1){
 console.log(value);
}`

array
↳ direct value

56835
4.5
75
10
iphone

X
`for(let i = 0 ; i < product1.length; i++){
 console.log(product1[i]);
}`

→ shortcut
for of loop

^{method}
[].forEach(

[] ↓
product1.

callback function

callback function


```
product1.forEach(function(value, index){  
  console.log(value, index);  
})
```

forEach(^{arg})
 ↓
 function (^{parameter})

is also a function

Jab aap kisi
funⁱ ko
as an argument
pass krte
ho toh usko
callback function

destructuring of object & array

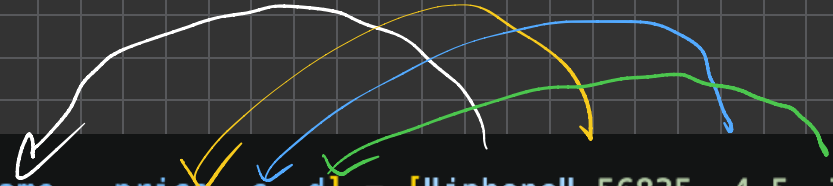

The diagram illustrates the destructuring process. Five colored arrows originate from the array `["iphone", 56835, 4.5, 75, 10]` and point to the variables `name`, `price`, `c`, `d`, and an unnamed variable respectively. A white arrow points to the `const` keyword. The unnamed variable is represented by a white arrow pointing to a space before the closing bracket of the array.

```
const [name , price , c , d] = ["iphone", 56835, 4.5, 75, 10]  
console.log(price);
```

scope

rest operator & spread operator

```
let arr = [53, 15, 626, 7, 43, 57, 23, 54, 752, 43]
```



spread → unboxing
unpack



rest → pack
↓
back combine → array
bachi hui
o items

```
const [n, p, ...hello] = ["iphone", 56835, 4.5, 75, 10]
```

```
console.log(hello);
```