


Day 11 Assignment

REST API Mini Project : Employee Management System

1. Configuring json server

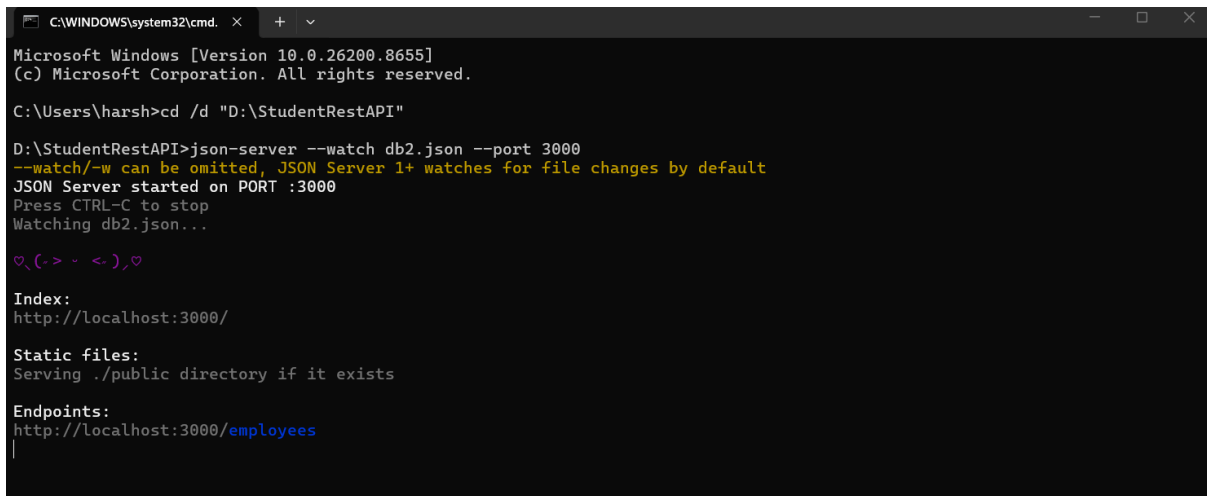

```
C:\WINDOWS\system32\cmd. x + v
Microsoft Windows [Version 10.0.26200.8655]
(c) Microsoft Corporation. All rights reserved.

C:\Users\harsh>cd /d "D:\StudentRestAPI"

D:\StudentRestAPI>json-server --watch db2.json --port 3000
--watch/-w can be omitted, JSON Server 1+ watches for file changes by default
JSON Server started on PORT :3000
Press CTRL-C to stop
Watching db2.json...


♥ (> <), ♥

Index:
http://localhost:3000/

Static files:
Serving ./public directory if it exists

Endpoints:
http://localhost:3000/employees
|
```

This is what we observe in the browser when we open the end point url (the initial data in the db2.json file)

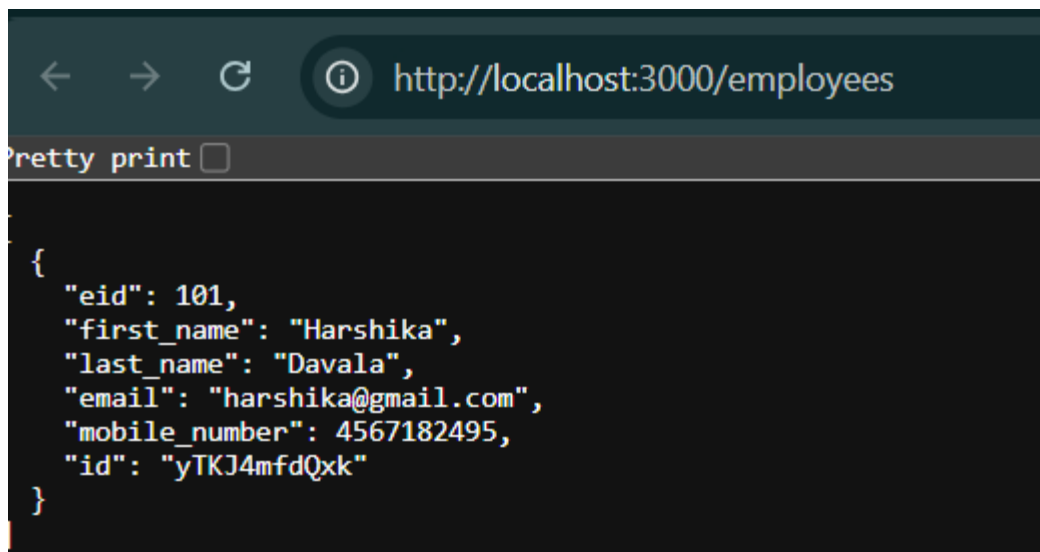


```
← → ↻ ⓘ http://localhost:3000/employees


Pretty print ☐

{
  "eid": 101,
  "first_name": "Harshika",
  "last_name": "Davala",
  "email": "harshika@gmail.com",
  "mobile_number": 4567182495,
  "id": "yTKJ4mfdQxk"
}
```

In postman api, copy the same endpoint url, select **GET** method and click on send

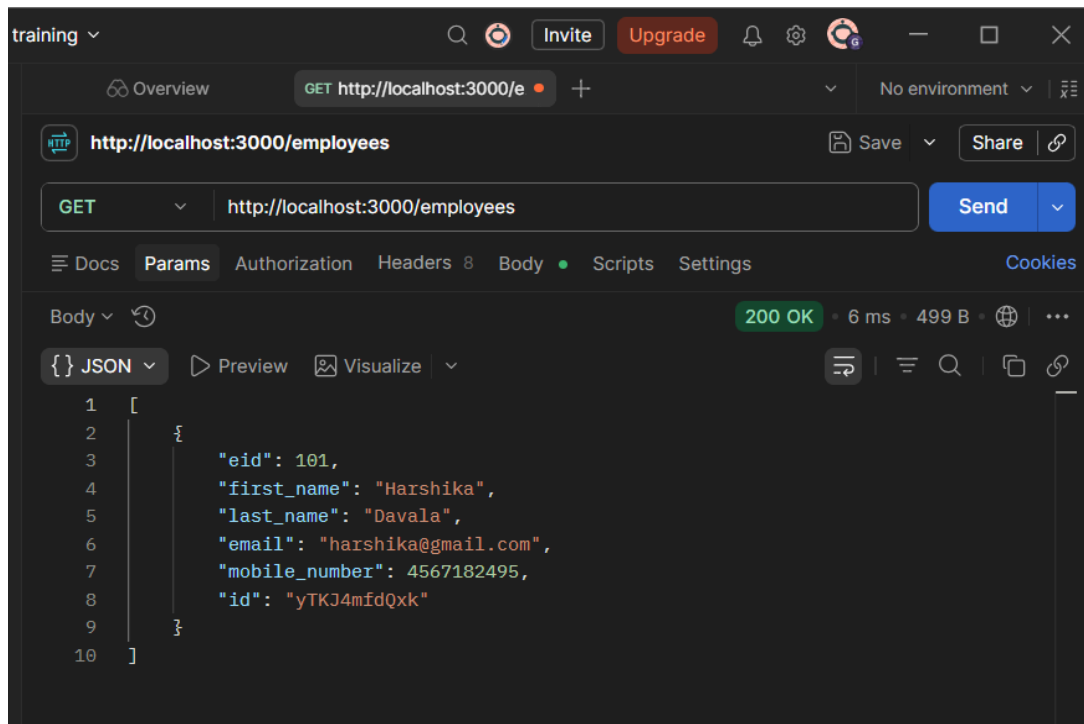

2. Adding new employee data - using **POST** method.

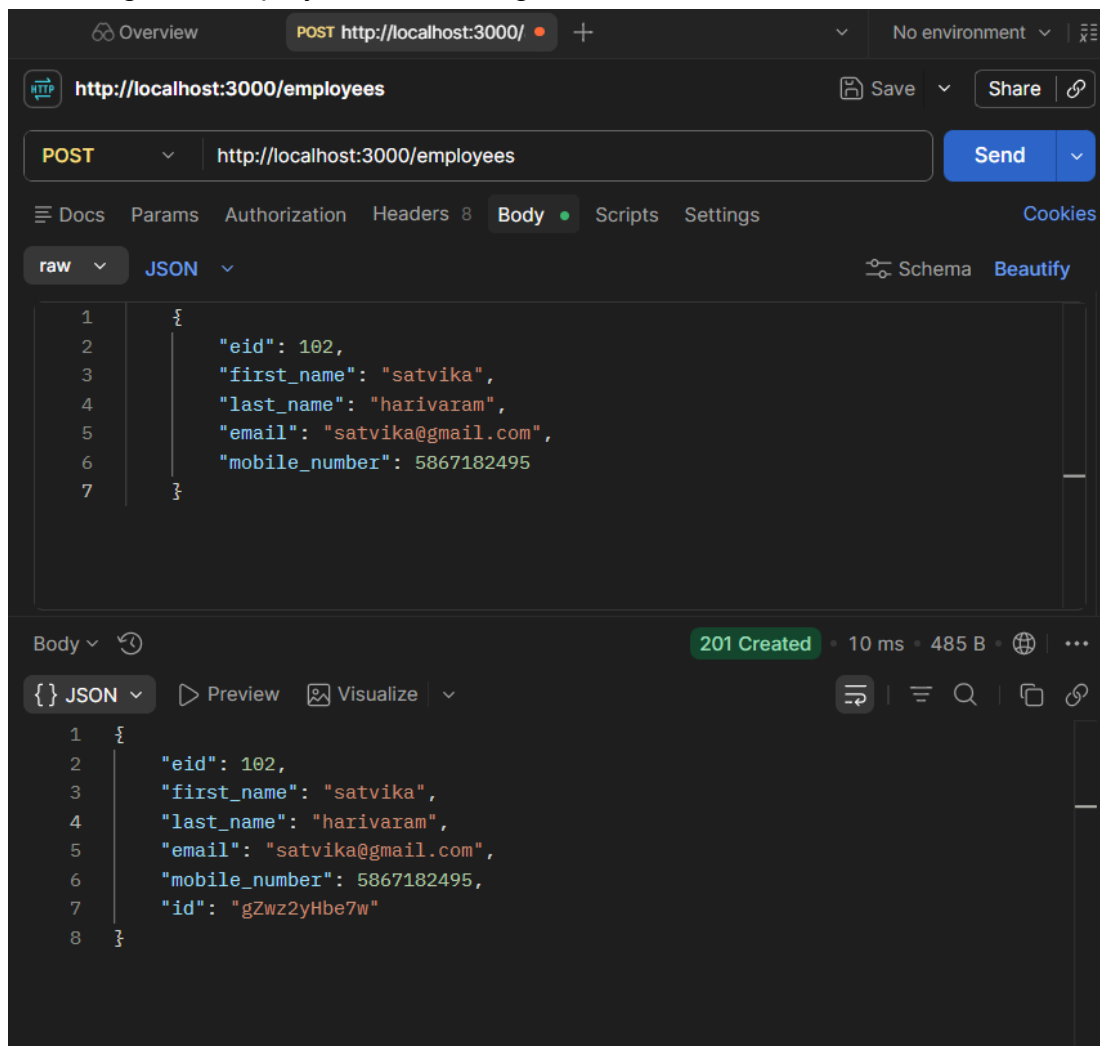


3 . Viewing all employee data using **GET** method.

The screenshot shows a REST client interface with the following details:

- URL:** `http://localhost:3000/employees`
- Method:** `GET`
- Status:** `200 OK`
- Time:** `9 ms`
- Size:** `1011 B`
- Response Type:** `JSON`
- Response Body:** A JSON array of 4 employee objects.

```
{
  "eid": 101,
  "first_name": "Harshika",
  "last_name": "Davala",
  "email": "harshika@gmail.com",
  "mobile_number": 4567182495,
  "id": "yTKJ4mfdQxk"
},
{
  "eid": 102,
  "first_name": "satvika",
  "last_name": "harivaram",
  "email": "satvika@gmail.com",
  "mobile_number": 5867182495,
  "id": "gZwz2yHbe7w"
},
{
  "eid": 103,
  "first_name": "neha",
  "last_name": "pakala",
  "email": "neha@gmail.com",
  "mobile_number": 2547182495,
  "id": "ik2LG0QZrXo"
},
{
  "eid": 104,
  "first_name": "aniketh",
  "last_name": "reddy",
  "email": "aniketh@gmail.com",
  "mobile_number": 4712182495,
  "id": "TTmBn-1fCS8"
}
```

4 . Searching employee by id using **GET** method

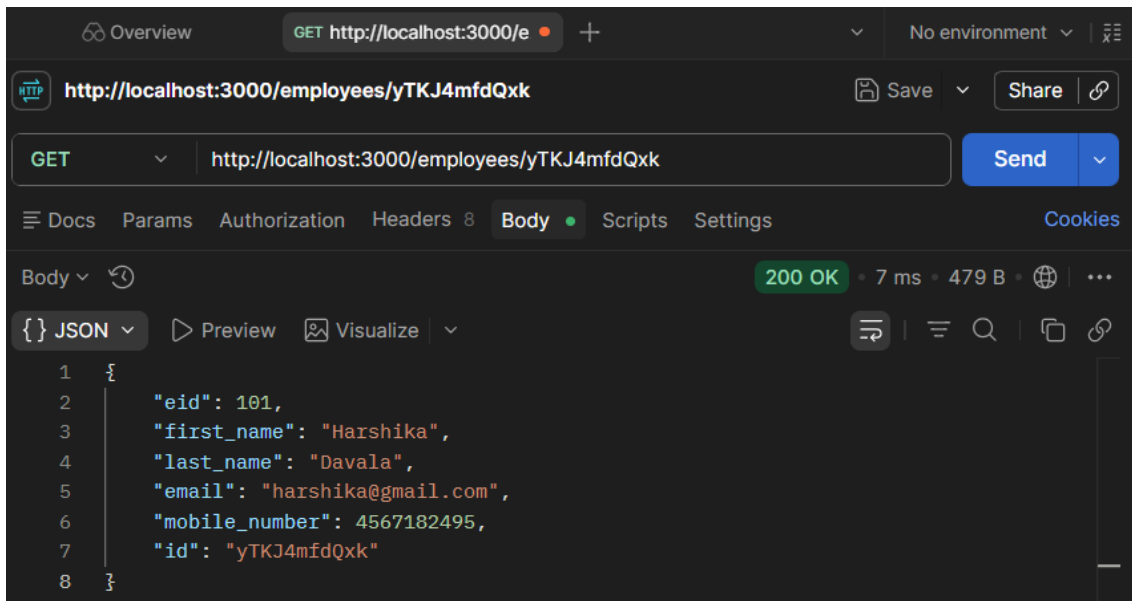

Overview GET http://localhost:3000/e + No environment

http://localhost:3000/employees/yTKJ4mfdQxk Save Share

GET http://localhost:3000/employees/yTKJ4mfdQxk Send


Docs Params Authorization Headers 8 Body Scripts Settings Cookies

Body 200 OK • 7 ms • 479 B

JSON Preview Visualize

```
1 {
2   "eid": 101,
3   "first_name": "Harshika",
4   "last_name": "Davalala",
5   "email": "harshika@gmail.com",
6   "mobile_number": 4567182495,
7   "id": "yTKJ4mfdQxk"
8 }
```

5 . Updating employee using **PUT** method.

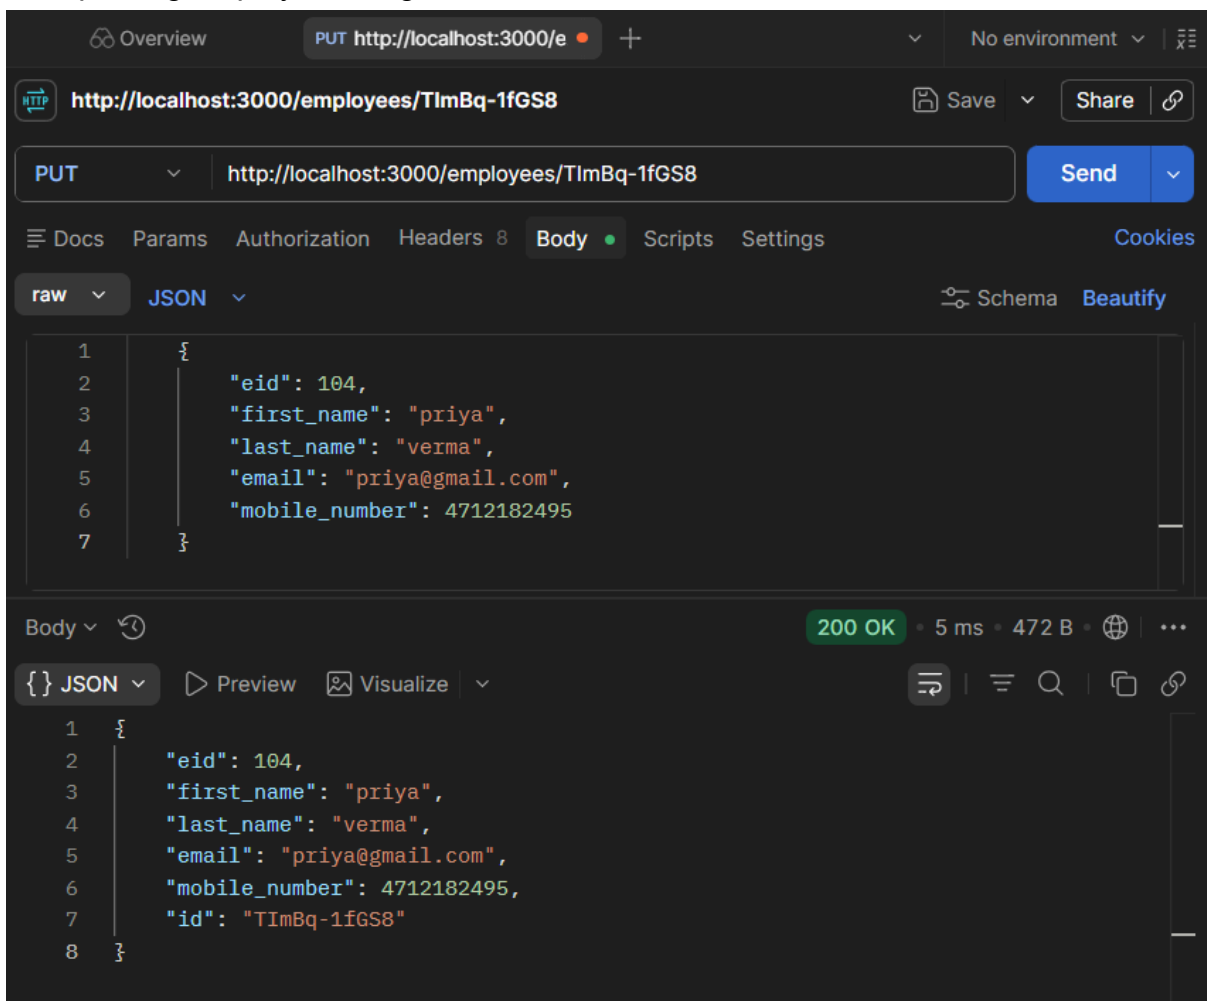

Overview PUT http://localhost:3000/e + No environment

http://localhost:3000/employees/TImBq-1fGS8 Save Share

PUT http://localhost:3000/employees/TImBq-1fGS8 Send

Docs Params Authorization Headers 8 Body Scripts Settings Cookies

raw JSON Schema Beautify

```
1 {
2   "eid": 104,
3   "first_name": "priya",
4   "last_name": "verma",
5   "email": "priya@gmail.com",
6   "mobile_number": 4712182495
7 }
```

Body 200 OK • 5 ms • 472 B

JSON Preview Visualize

```
1 {
2   "eid": 104,
3   "first_name": "priya",
4   "last_name": "verma",
5   "email": "priya@gmail.com",
6   "mobile_number": 4712182495,
7   "id": "TImBq-1fGS8"
8 }
```

6 . Updating using **PATCH** method

The screenshot shows a REST client interface with the following details:

- Method:** PATCH
- URL:** `http://localhost:3000/employees/yTKJ4mfdQxk`
- Body (JSON):**

```
{
  "first_name": "Harshika Dayal"
}
```
- Response:** 200 OK, 5 ms, 485 B. The response body is a JSON object:

```
{
  "eid": 101,
  "first_name": "Harshika Dayal",
  "last_name": "Daval",
  "email": "harshika@gmail.com",
  "mobile_number": 4567182495,
  "id": "yTKJ4mfdQxk"
}
```


7. Deleting using **DELETE** method

The screenshot shows a REST client interface with the following details:

- Method:** DELETE
- URL:** `http://localhost:3000/employees/TImBq-1fGS8`
- Response:** 200 OK, 9 ms, 472 B. The response body is a JSON object:

```
{
  "eid": 104,
  "first_name": "priya",
  "last_name": "verma",
  "email": "priya@gmail.com",
  "mobile_number": 4712182495,
  "id": "TImBq-1fGS8"
}
```

We can verify by searching for that id. It will show an error.

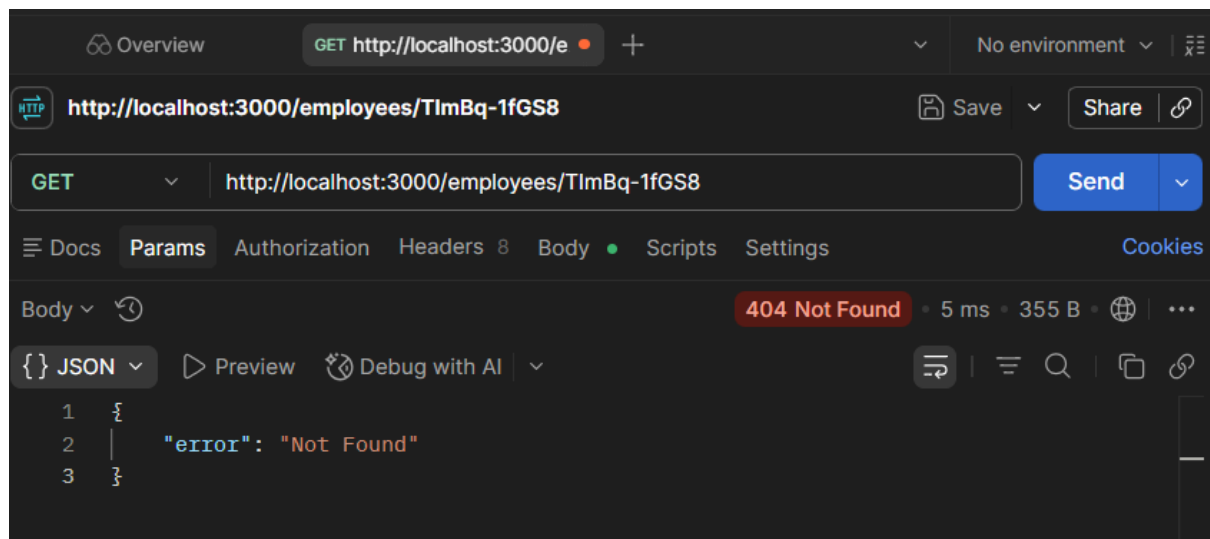

8 . Viewing all the data after CRUD operations.

