

```
In [1]: def install_reqs():
#This defines a function named install_reqs.

!pip install pandas
#Installs the pandas library, used for reading and manipulating tabular data (li

!pip install "matplotlib>=3.4"
#Installs matplotlib version 3.4 or higher, used for plotting graphs and visuali

!pip install numpy
#Installs numpy, a fundamental package for numerical computations and arrays.

!pip install statsmodels
#Installs statsmodels, a library used for statistical tests (e.g., t-tests, Wilc

!pip install scipy
#Installs scipy, which contains scientific computing tools, including statistica

install_reqs()
# to install all the above dependencies uncomment the above line.
```

Defaulting to user installation because normal site-packages is not writeable  
Requirement already satisfied: pandas in c:\programdata\anaconda3\lib\site-packag  
es (2.3.0)

Requirement already satisfied: numpy>=1.22.4 in c:\users\hp\appdata\roaming\pytho  
n\python310\site-packages (from pandas) (1.26.4)

Requirement already satisfied: python-dateutil>=2.8.2 in c:\programdata\anaconda3  
\lib\site-packages (from pandas) (2.9.0.post0)

Requirement already satisfied: pytz>=2020.1 in c:\programdata\anaconda3\lib\site-  
packages (from pandas) (2025.2)

Requirement already satisfied: tzdata>=2022.7 in c:\programdata\anaconda3\lib\sit  
e-packages (from pandas) (2025.2)

Requirement already satisfied: six>=1.5 in c:\programdata\anaconda3\lib\site-pack  
ages (from python-dateutil>=2.8.2->pandas) (1.17.0)

WARNING: Ignoring invalid distribution -atplotlib (c:\programdata\anaconda3\lib\s  
ite-packages)

WARNING: Ignoring invalid distribution -orch (c:\programdata\anaconda3\lib\site-p  
ackages)

WARNING: Ignoring invalid distribution -atplotlib (c:\programdata\anaconda3\lib\s  
ite-packages)

WARNING: Ignoring invalid distribution -orch (c:\programdata\anaconda3\lib\site-p  
ackages)

Defaulting to user installation because normal site-packages is not writeable  
Requirement already satisfied: matplotlib>=3.4 in c:\programdata\anaconda3\lib\site-packages (3.10.0)  
Requirement already satisfied: contourpy>=1.0.1 in c:\programdata\anaconda3\lib\site-packages (from matplotlib>=3.4) (1.3.1)  
Requirement already satisfied: cycler>=0.10 in c:\programdata\anaconda3\lib\site-packages (from matplotlib>=3.4) (0.11.0)  
Requirement already satisfied: fonttools>=4.22.0 in c:\programdata\anaconda3\lib\site-packages (from matplotlib>=3.4) (4.55.3)  
Requirement already satisfied: kiwisolver>=1.3.1 in c:\programdata\anaconda3\lib\site-packages (from matplotlib>=3.4) (1.4.8)  
Requirement already satisfied: numpy>=1.23 in c:\users\hp\appdata\roaming\python\python310\site-packages (from matplotlib>=3.4) (1.26.4)  
Requirement already satisfied: packaging>=20.0 in c:\programdata\anaconda3\lib\site-packages (from matplotlib>=3.4) (25.0)  
Requirement already satisfied: pillow>=8 in c:\programdata\anaconda3\lib\site-packages (from matplotlib>=3.4) (11.1.0)  
Requirement already satisfied: pyparsing>=2.3.1 in c:\programdata\anaconda3\lib\site-packages (from matplotlib>=3.4) (3.2.0)  
Requirement already satisfied: python-dateutil>=2.7 in c:\programdata\anaconda3\lib\site-packages (from matplotlib>=3.4) (2.9.0.post0)  
Requirement already satisfied: six>=1.5 in c:\programdata\anaconda3\lib\site-packages (from python-dateutil>=2.7->matplotlib>=3.4) (1.17.0)

WARNING: Ignoring invalid distribution -atplotlib (c:\programdata\anaconda3\lib\site-packages)  
WARNING: Ignoring invalid distribution -orch (c:\programdata\anaconda3\lib\site-packages)  
WARNING: Ignoring invalid distribution -atplotlib (c:\programdata\anaconda3\lib\site-packages)  
WARNING: Ignoring invalid distribution -orch (c:\programdata\anaconda3\lib\site-packages)

Defaulting to user installation because normal site-packages is not writeable  
Requirement already satisfied: numpy in c:\users\hp\appdata\roaming\python\python310\site-packages (1.26.4)

WARNING: Ignoring invalid distribution -atplotlib (c:\programdata\anaconda3\lib\site-packages)  
WARNING: Ignoring invalid distribution -orch (c:\programdata\anaconda3\lib\site-packages)  
WARNING: Ignoring invalid distribution -atplotlib (c:\programdata\anaconda3\lib\site-packages)  
WARNING: Ignoring invalid distribution -orch (c:\programdata\anaconda3\lib\site-packages)

Defaulting to user installation because normal site-packages is not writeable  
 Requirement already satisfied: statsmodels in c:\programdata\anaconda3\lib\site-packages (0.14.4)  
 Requirement already satisfied: numpy<3,>=1.22.3 in c:\users\hp\appdata\roaming\python\python310\site-packages (from statsmodels) (1.26.4)  
 Requirement already satisfied: scipy!=1.9.2,>=1.8 in c:\programdata\anaconda3\lib\site-packages (from statsmodels) (1.15.3)  
 Requirement already satisfied: pandas!=2.1.0,>=1.4 in c:\programdata\anaconda3\lib\site-packages (from statsmodels) (2.3.0)  
 Requirement already satisfied: patsy>=0.5.6 in c:\programdata\anaconda3\lib\site-packages (from statsmodels) (1.0.1)  
 Requirement already satisfied: packaging>=21.3 in c:\programdata\anaconda3\lib\site-packages (from statsmodels) (25.0)  
 Requirement already satisfied: python-dateutil>=2.8.2 in c:\programdata\anaconda3\lib\site-packages (from pandas!=2.1.0,>=1.4->statsmodels) (2.9.0.post0)  
 Requirement already satisfied: pytz>=2020.1 in c:\programdata\anaconda3\lib\site-packages (from pandas!=2.1.0,>=1.4->statsmodels) (2025.2)  
 Requirement already satisfied: tzdata>=2022.7 in c:\programdata\anaconda3\lib\site-packages (from pandas!=2.1.0,>=1.4->statsmodels) (2025.2)  
 Requirement already satisfied: six>=1.5 in c:\programdata\anaconda3\lib\site-packages (from python-dateutil>=2.8.2->pandas!=2.1.0,>=1.4->statsmodels) (1.17.0)

WARNING: Ignoring invalid distribution -atplotlib (c:\programdata\anaconda3\lib\site-packages)  
 WARNING: Ignoring invalid distribution -orch (c:\programdata\anaconda3\lib\site-packages)  
 WARNING: Ignoring invalid distribution -atplotlib (c:\programdata\anaconda3\lib\site-packages)  
 WARNING: Ignoring invalid distribution -orch (c:\programdata\anaconda3\lib\site-packages)

Defaulting to user installation because normal site-packages is not writeable  
 Requirement already satisfied: scipy in c:\programdata\anaconda3\lib\site-packages (1.15.3)  
 Requirement already satisfied: numpy<2.5,>=1.23.5 in c:\users\hp\appdata\roaming\python\python310\site-packages (from scipy) (1.26.4)

WARNING: Ignoring invalid distribution -atplotlib (c:\programdata\anaconda3\lib\site-packages)  
 WARNING: Ignoring invalid distribution -orch (c:\programdata\anaconda3\lib\site-packages)  
 WARNING: Ignoring invalid distribution -atplotlib (c:\programdata\anaconda3\lib\site-packages)  
 WARNING: Ignoring invalid distribution -orch (c:\programdata\anaconda3\lib\site-packages)

```
In [2]: import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
```

```
In [3]: from compass_analysis import cohens_d, wilcoxon_test, get_reaction_consistencies
```

```
In [4]: from matplotlib import __version__ as matplotlibversion
if matplotlibversion < "3.4":
    print("Matplotlib versions older than 3.4 may not be able to generate figure
```

Matplotlib versions older than 3.4 may not be able to generate figure 2E, as they do not support alpha arrays

```
In [5]: import os
os.system("compass --data expression.tsv \
--model RECON2_mat --species mus_musculus --media default-media --lamb
```

```
--and-function mean --output-dir extdata/Th17 --penalty-diffusion knn
--isoform-summing legacy --num-processes 50")
```

Out[5]: 0

```
In [6]: import os
print(os.getcwd())
```

C:\Users\HP\Tcon vs Treg\extdata

```
In [7]: reaction_penalties = pd.read_csv("reactions.tsv", sep="\t", index_col=0)
```

```
In [8]: import pandas as pd

# Load reactions.tsv
reaction_penalties = pd.read_csv("reactions.tsv", sep="\t", index_col=0)

# Extract cell IDs from the columns
cell_ids = reaction_penalties.columns

# Infer cell type from prefix
def infer_cell_type(cell_id):
    if cell_id.startswith("Treg"):
        return "Treg"
    elif cell_id.startswith("Tcon"):
        return "Tcon"
    elif cell_id.startswith("exTreg"):
        return "exTreg"
    else:
        return "Unknown"

cell_types = [infer_cell_type(cell) for cell in cell_ids]

# Create metadata DataFrame
cell_metadata = pd.DataFrame({
    "cell_id": cell_ids,
    "cell_type": cell_types
}).set_index("cell_id")

# Save to CSV
cell_metadata.to_csv("cell_metadata.csv")

print("✅ Created cell_metadata.csv with the following cell types:")
print(cell_metadata["cell_type"].value_counts())
```

```
✅ Created cell_metadata.csv with the following cell types:
cell_type
exTreg    20
Tcon      20
Treg      16
Name: count, dtype: int64
```

```
In [9]: cell_metadata = pd.read_csv("cell_metadata.csv", sep=",")
cell_metadata.set_index("cell_id", inplace=True)
```

```
In [10]: print(cell_metadata.columns.tolist())
print(cell_metadata.head())
```

```
['cell_type']

cell_type
cell_id
exTreg_Lymph_exTreg2_L1    exTreg
Tcon_Lymph_Tcon9_L2        Tcon
exTreg_Spleen_exTreg8_L1   exTreg
Tcon_Spleen_Tcon5_L2       Tcon
Treg_Spleen_Treg5_L1       Treg
```

```
In [11]: Treg_cells = cell_metadata.index[cell_metadata["cell_type"] == "Treg"]
        Tcon_cells = cell_metadata.index[cell_metadata["cell_type"] == "Tcon"]
        exTreg_cells = cell_metadata.index[cell_metadata["cell_type"] == "exTreg"]
```

```
In [12]: print(cell_metadata.columns.tolist())

['cell_type']
```

```
In [13]: print(cell_metadata.head())
        print(cell_metadata.columns.tolist())
```

```
cell_type
cell_id
exTreg_Lymph_exTreg2_L1    exTreg
Tcon_Lymph_Tcon9_L2        Tcon
exTreg_Spleen_exTreg8_L1   exTreg
Tcon_Spleen_Tcon5_L2       Tcon
Treg_Spleen_Treg5_L1       Treg
['cell_type']
```

```
In [14]: cell_metadata = pd.read_csv("cell_metadata.csv", index_col=0)

        treg_ln_cells = cell_metadata[
            (cell_metadata['cell_type'] == 'Treg') &
            (cell_metadata.index.str.contains("Lymph"))
        ].index

        extreg_ln_cells = cell_metadata[
            (cell_metadata['cell_type'] == 'exTreg') &
            (cell_metadata.index.str.contains("Lymph"))
        ].index
```

```
In [15]: cell_metadata = pd.read_csv("cell_metadata.csv", index_col=0)

        treg_ln_cells = cell_metadata[
            (cell_metadata['cell_type'] == 'Treg') &
            (cell_metadata.index.str.contains("Lymph"))
        ].index

        extreg_ln_cells = cell_metadata[
            (cell_metadata['cell_type'] == 'exTreg') &
            (cell_metadata.index.str.contains("Lymph"))
        ].index
```

```
In [16]: reaction_metadata = pd.read_csv("reaction_metadata.csv", index_col = 0)
```

```
In [17]: reaction_metadata.loc[['r0281']]
```

Out[17]:

reaction_name	formula	associated_genes	subsystem	EC_num
reaction_no_direction				
		1.00 *		
		Water		
	Putrescine:oxygen	[e] +	Methionine	
<b>r0281</b>	oxidoreductase	1.00 *	and	1.4
	(deaminating)...	O2 [e] +	cysteine	
		1.00 *	metabolism	
		Putr...		

In [18]: *#This function is repeated here for clarity*

```
def get_reaction_consistencies(compass_reaction_penalties, min_range=1e-3):
    """
        Converts the raw penalties outputs of compass into scores per reactions
    """
    df = -np.log(compass_reaction_penalties + 1)
    df = df[df.max(axis=1) - df.min(axis=1) >= min_range]
    df = df - df.min().min()
    return df
```

In [19]: reaction\_consistencies = get\_reaction\_consistencies(reaction\_penalties)

```
In [20]: common_cells = list(set(reaction_consistencies.columns).intersection(set(cell_me
reaction_consistencies = reaction_consistencies[common_cells])
```

In [21]: print(reaction\_consistencies.columns.tolist()[:10])

```
['exTreg_Spleen_exTreg8_L1', 'exTreg_Lymph_exTreg3_L2', 'exTreg_Lymph_exTreg2_L
2', 'exTreg_Spleen_exTreg9_L1', 'exTreg_Spleen_exTreg6_L2', 'Tcon_Spleen_Tcon1_L
2', 'Tcon_Spleen_Tcon5_L1', 'Tcon_Spleen_Tcon3_L2', 'Tcon_Lymph_Tcon9_L2', 'exTre
g_Spleen_exTreg9_L2']
```

In [22]: print(exTreg\_cells[:10])

```
Index(['exTreg_Lymph_exTreg2_L1', 'exTreg_Spleen_exTreg8_L1',
      'exTreg_Spleen_exTreg7_L2', 'exTreg_Lymph_exTreg3_L2',
      'exTreg_Spleen_exTreg8_L2', 'exTreg_Lymph_exTreg2_L2',
      'exTreg_Lymph_exTreg3_L1', 'exTreg_Spleen_exTreg7_L1',
      'exTreg_Spleen_exTreg6_L2', 'exTreg_Lymph_exTreg4_L2'],
      dtype='object', name='cell_id')
```

```
In [23]: wilcox_results = wilcoxon_test(reaction_consistencies, treg_ln_cells, extreg_ln
wilcox_results['metadata_r_id'] = ""
```

```
for r in wilcox_results.index:
    if r in reaction_metadata.index:
        wilcox_results.loc[r, 'metadata_r_id'] = r
    elif r[:-4] in reaction_metadata.index:
        wilcox_results.loc[r, 'metadata_r_id'] = r[:-4]
    else:
        print(f"Should not occur → {r}")
```

```
In [24]: W = wilcox_results.merge(reaction_metadata, how='left',
                                left_on='metadata_r_id', right_index=True, validate='m:
W = W[W['confidence'].isin([0,4])]
```

```
W = W[~W['EC_number'].isna()]
W.loc[(W['formula'].map(lambda x: '[m]' not in x)) & (W['subsystem'] == "Citric
```

In [25]: `wilcox_results.loc[['r0281_pos']]`

```
Out[25]:
```

	wilcox_stat	wilcox_pval	cohens_d	adjusted_pval	metadata_r_id
<b>r0281_pos</b>	45.0	0.117882	0.903637	0.141679	r0281

In [26]: `reaction_metadata.loc['r0281']['formula']`

```
Out[26]: '1.00 * Water [e] + 1.00 * O2 [e] + 1.00 * Putrescine [e] --> 1.00 * Ammonium
[e] + 1.00 * Hydrogen peroxide [e] + 1.00 * 4-Aminobutanal [e]\nAOC1'
```

```
In [106... def plot_differential_scores(data, title, c):
    plt.figure(figsize=(10,10))
    axs = plt.gca()
    axs.scatter(data['cohens_d'], -np.log10(data['adjusted_pval']), c=c)
    axs.set_xlabel("Cohen's d", fontsize=16)
    axs.set_ylabel("-log10 (Wilcoxon-adjusted p)", fontsize=16)

    # Visual markers and title
    axs.set_xlim(-8, 8)
    axs.axvline(0, dashes=(3,3), c='black')
    axs.axhline(1, dashes=(3,3), c='black')
    axs.set_title(title, fontdict={'fontsize':20})

    # Arrows for sample identity
    axs.annotate('', xy=(0.5, -0.08), xycoords='axes fraction', xytext=(0, -0.08),
        arrowprops=dict(arrowstyle="<-", color='#348C73', linewidth=4))
    axs.annotate('treg_ln_cells', xy=(0.75, -0.12), xycoords='axes fraction', fc=
    axs.annotate('', xy=(0.5, -0.08), xycoords='axes fraction', xytext=(1, -0.08),
        arrowprops=dict(arrowstyle="<-", color='#E92E87', linewidth=4))
    axs.annotate('extreg_ln_cells', xy=(0.25, -0.12), xycoords='axes fraction',

    # Dynamic annotation loop with variable offsets and labels
    for i, r in enumerate(data.index):
        if r in labeled_reactions:
            x = data.loc[r, 'cohens_d']
            y = -np.log10(data.loc[r, 'adjusted_pval'])

            dx = 30 if x >= 0 else -120 # horizontal offset
            dy = (i % 6) * 12 - 30 # vertical offset varies to reduce stack


            axs.annotate(
                labeled_reactions[r],
                (x, y),
                xytext=(dx, dy),
                textcoords='offset pixels',
                arrowprops=dict(arrowstyle="-", shrinkA=6, shrinkB=4),
                fontsize=10,
                zorder=5, # make sure text is on top
                bbox=dict(boxstyle="round,pad=0.3", fc="white", ec="gray", alpha
```

```
In [108... filtered_data = pd.concat([W[W['subsystem'] == "Glycolysis/gluconeogenesis"],
    W[W['subsystem'] == "Citric acid cycle"],
```

```
W[W['subsystem'].isin(amino_acid_metab)],
W[W['subsystem'] == "Fatty acid oxidation"]])
```

In [110...


```
data = W[W['subsystem'] == "Glycolysis/gluconeogenesis"]
plot_differential_scores(data, title='Glycolysis', c="#695D73")
```

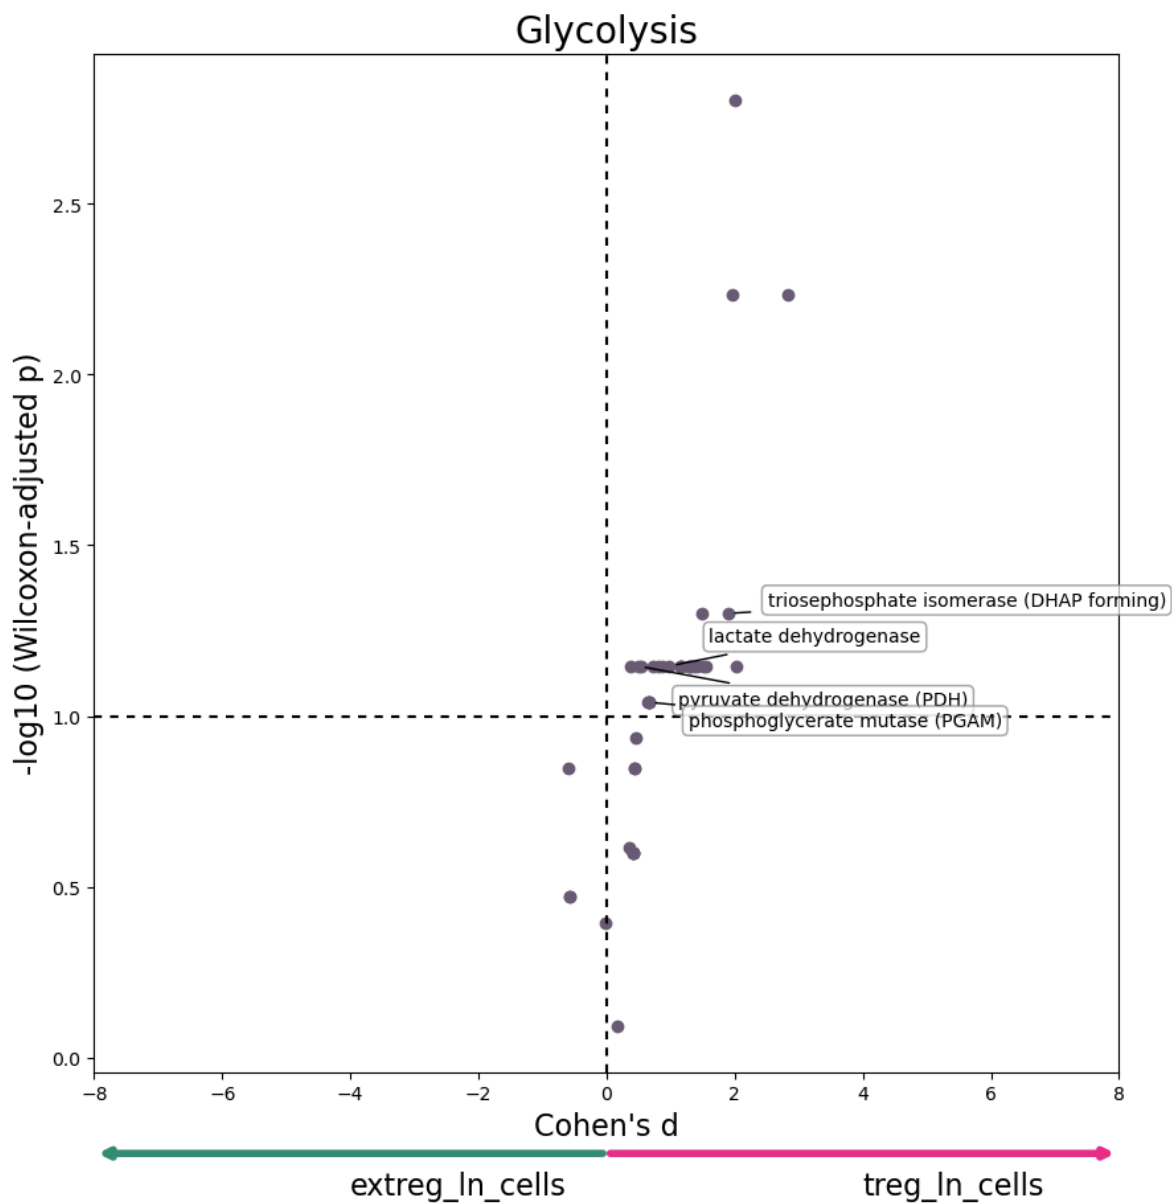

In [112...


```
data = W[W['subsystem'] == "Citric acid cycle"]
plot_differential_scores(data, title="TCA Cycle", c="#D3A991")
```



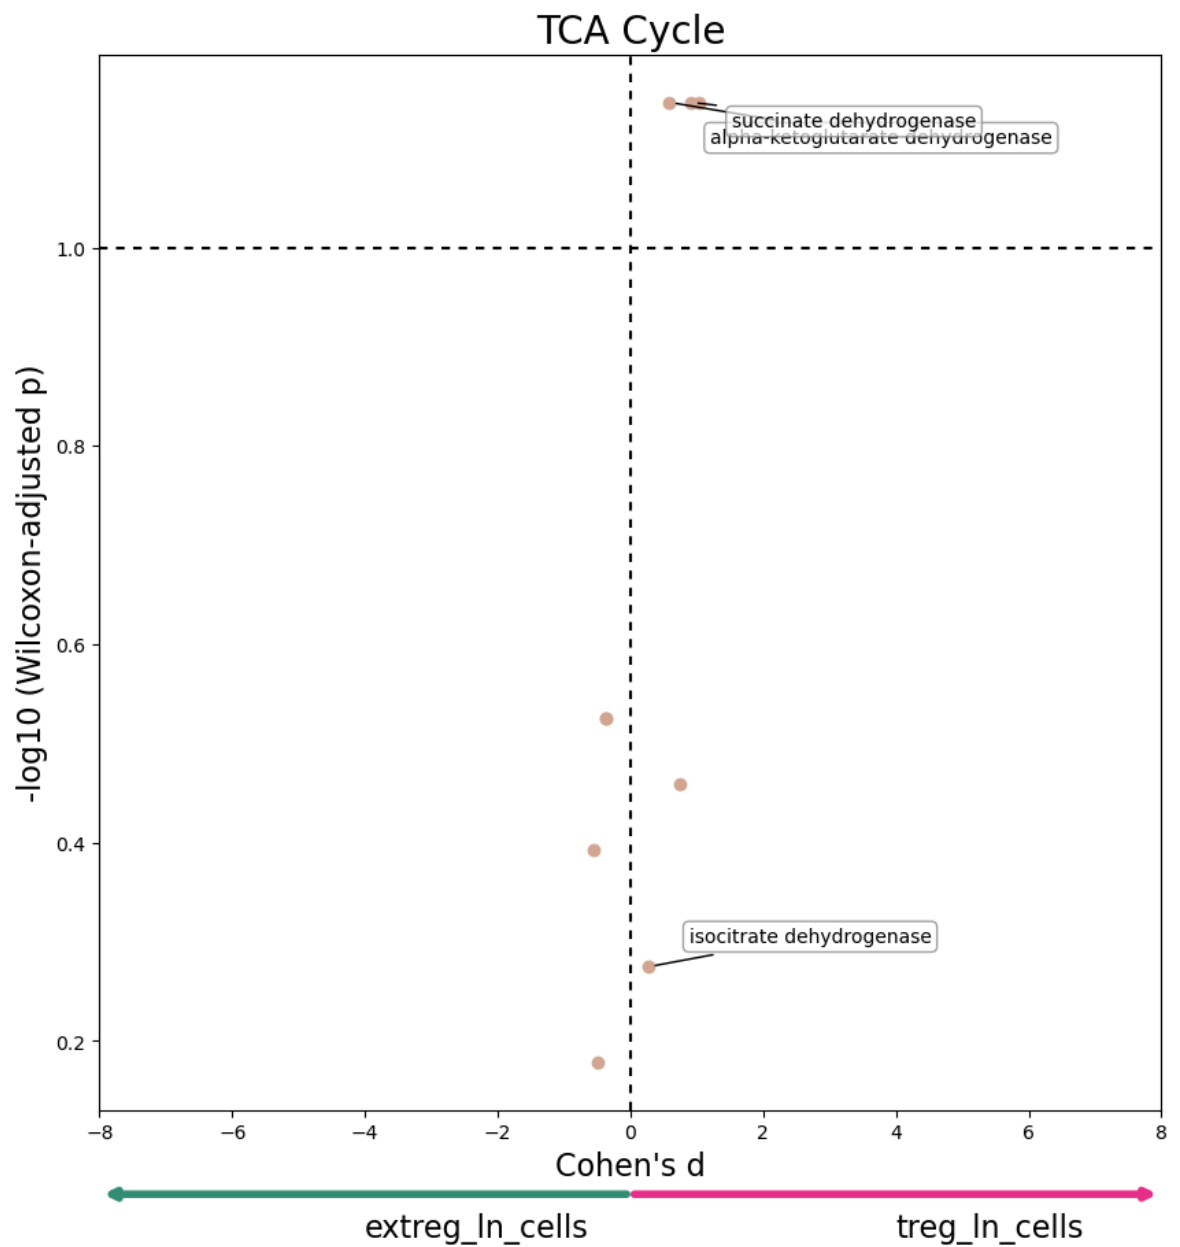


In [114...

```
data = W[W['subsystem'].isin(amino_acid_metab)].copy()
data['adjusted_pval'] = data['adjusted_pval'].clip(1e-12)
plot_differential_scores(data, "Amino Acid Metabolism", c="#BF1E2E")
```

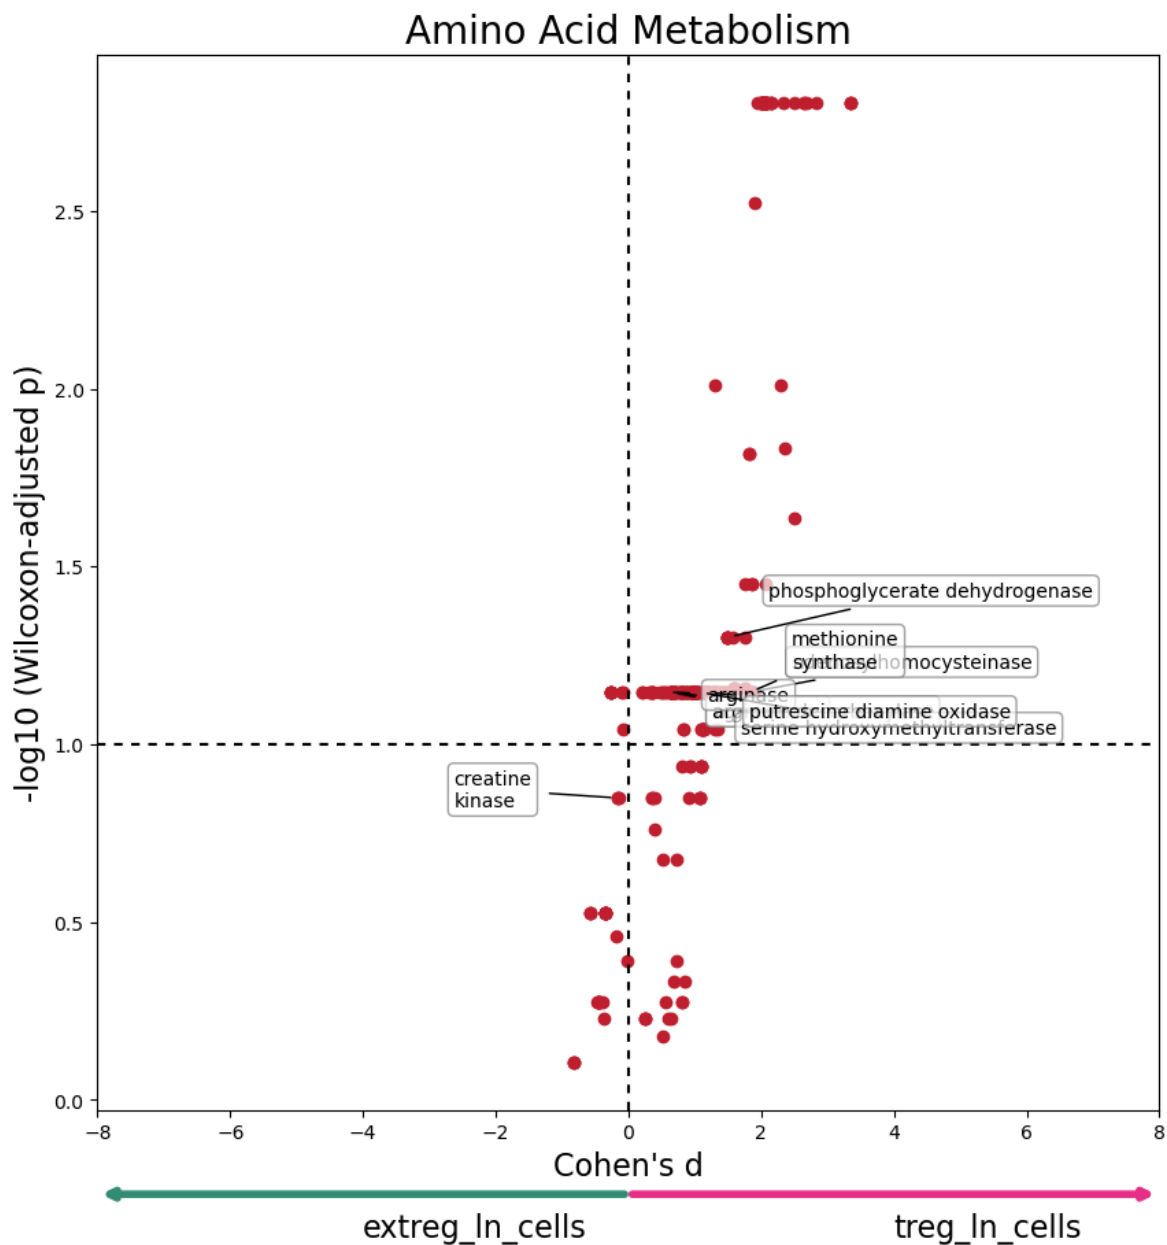

In [116...

```
data = W[W['subsystem'] == "Fatty acid oxidation"]
plot_differential_scores(data, "Fatty Acid Oxidation", c="#040772")
```

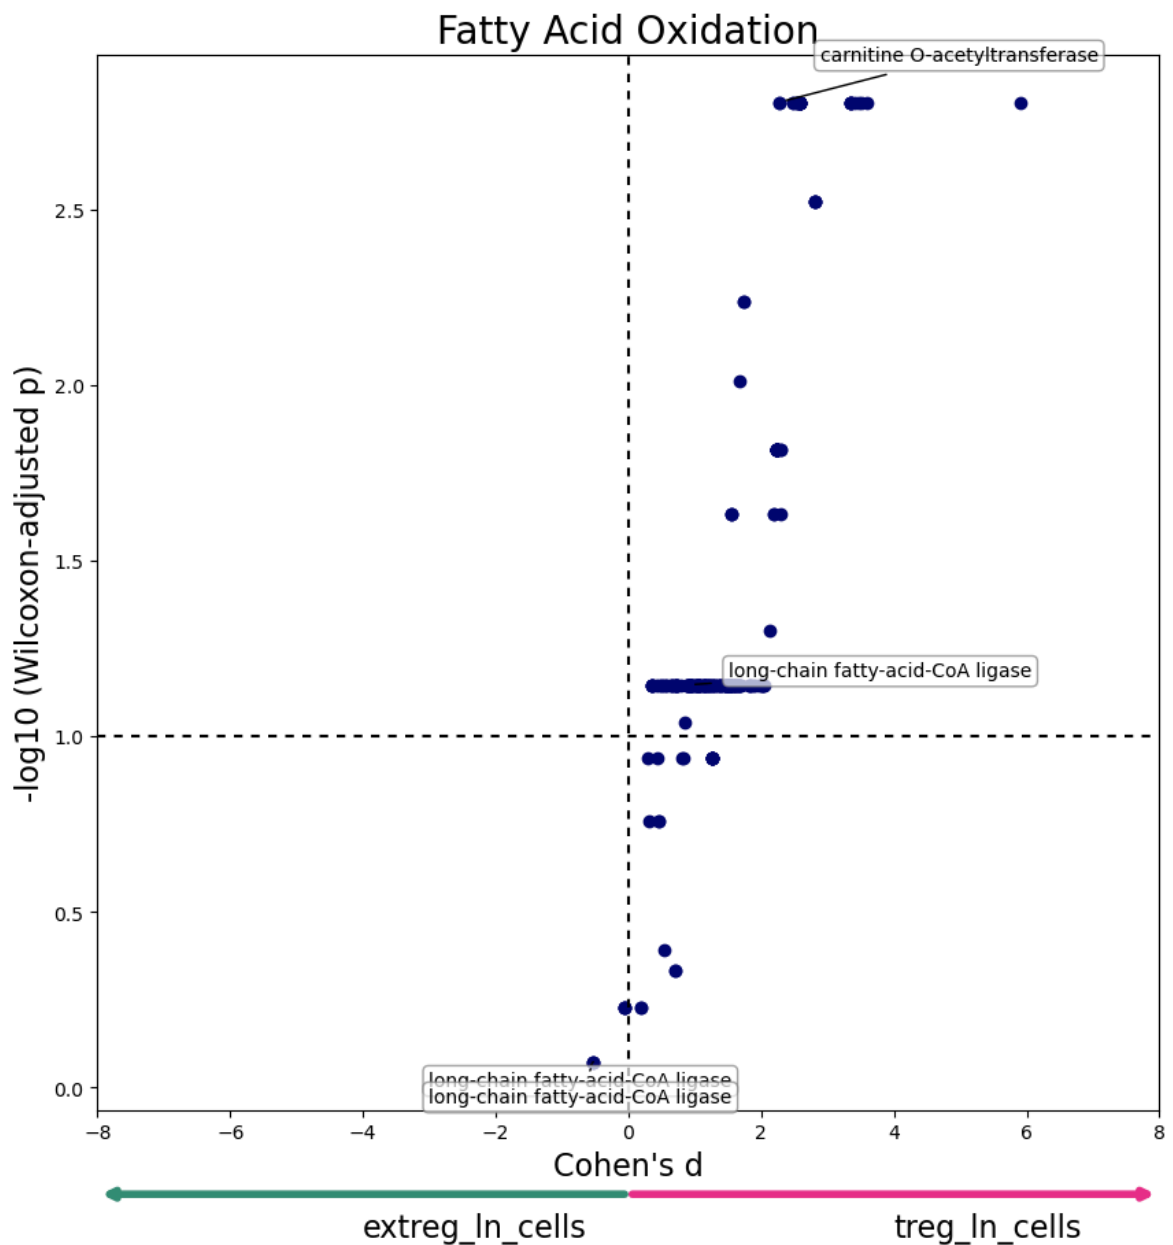

```
In [33]: data = W[~W['subsystem'].isin(["Miscellaneous", "Unassigned"])]
data = data[~data['subsystem'].map(lambda x: "Transport" in x or "Exchange" in x
items, counts = np.unique(data['subsystem'], return_counts=True)
items = [items[i] for i in range(len(items)) if counts[i] > 5] #filter(n() > 5)
data = data[data['subsystem'].isin(items)]
```

```
In [34]: import matplotlib.pyplot as plt

plt.figure(figsize=(12, 12))
axs = plt.gca()

d = data[data['adjusted_pval'] < 0.1].groupby('subsystem')['cohens_d'].median().
d_sorted = d.sort_values()

axs.scatter(d_sorted, d_sorted.index, alpha=0)

color = data['cohens_d'].map(lambda x: 'r' if x >= 0 else 'b')
alpha = data['adjusted_pval'].map(lambda x: 1.0 if x < 0.1 else 0.25)


axs.scatter(data['cohens_d'], data['subsystem'], c=color, alpha=alpha)
```

```

axs.set_xlabel("Cohen's d")
axs.set_ylabel("Pathway (subsystem)")
axs.set_title("Pathway-Level Differential Activity")

```

Out[34]: Text(0.5, 1.0, 'Pathway-Level Differential Activity')

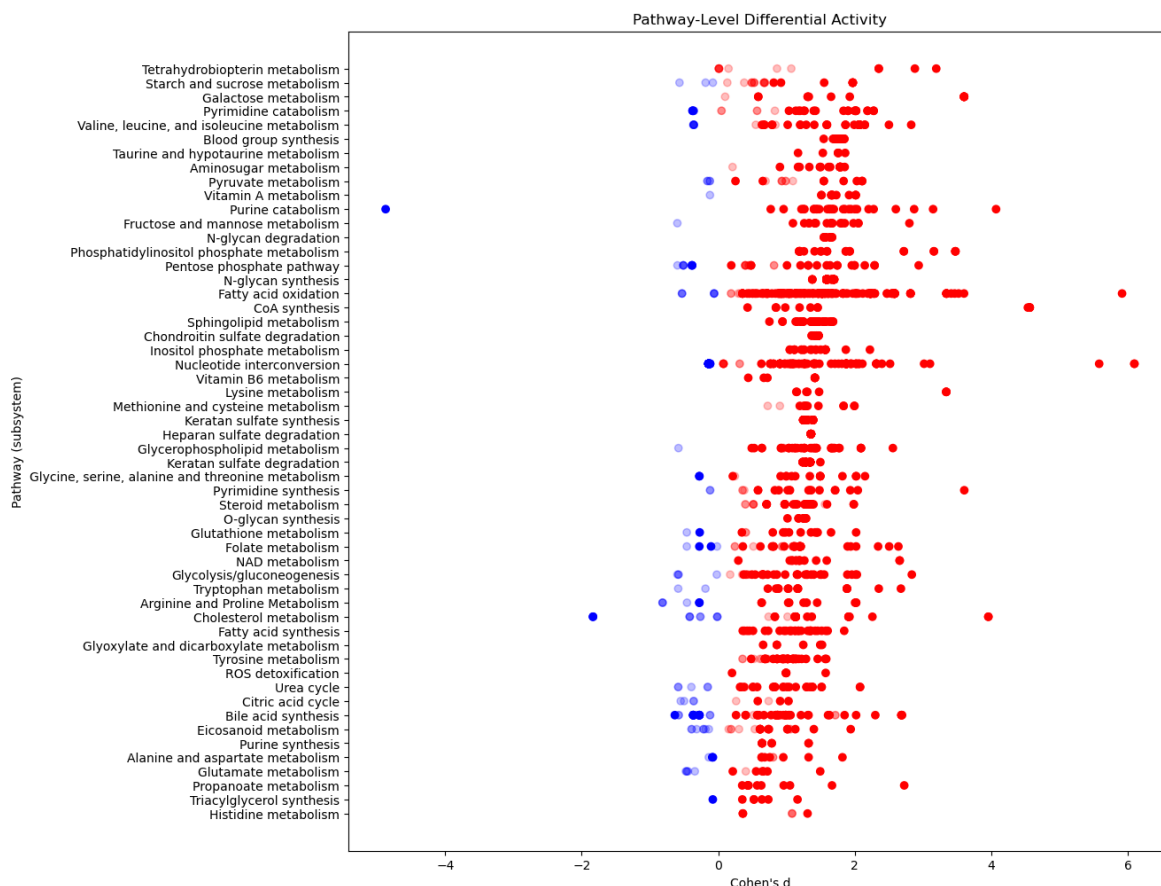

```

In [35]: reaction_penalties = pd.read_csv("reactions.tsv", sep="\t", index_col = 0)
reaction_penalties[reaction_penalties <= 1e-4] = 0
reaction_penalties = reaction_penalties[np.all(reaction_penalties != 0, axis=1)]

```

```

In [36]: reaction_penalties = reaction_penalties[reaction_penalties.max(axis=1) - reaction_penalties.min(axis=1) > 0]

```

```

In [37]: meta_rxns_map = get_metareactions(reaction_penalties)
meta_rxns = reaction_penalties.join(pd.DataFrame(meta_rxns_map, columns=["meta_rxn_id", "meta_rxn_name", "meta_rxn_type", "meta_rxn_subsystem"]))

```

```

In [38]: meta_rxn_consistencies = get_reaction_consistencies(meta_rxns)

```

```

In [39]: treg_cells = cell_metadata.index[cell_metadata["cell_type"] == "treg_ln_cells"]
tcon_cells = cell_metadata.index[cell_metadata["cell_type"] == "extreg_ln_cells"]

wilcox_meta_rxn_results = wilcoxon_test(meta_rxn_consistencies, treg_ln_cells, tcon_cells)

```

```

In [40]: wilcox_meta_rxn_results.iloc[0:1]

```

Out[40]:

	wilcox_stat	wilcox_pval	cohens_d	adjusted_pval
--	-------------	-------------	----------	---------------

meta_rxn_id	wilcox_stat	wilcox_pval	cohens_d	adjusted_pval
-------------	-------------	-------------	----------	---------------

1	48.0	0.055944	1.135176	0.078347
---	------	----------	----------	----------

```
In [41]: wilcox_meta_rxn_expanded = pd.DataFrame(index=reaction_penalties.index, columns=
for i in range(len(wilcox_meta_rxn_expanded.index)):
    if (meta_rxns_map[i] in wilcox_meta_rxn_results.index):
        wilcox_meta_rxn_expanded.loc[wilcox_meta_rxn_expanded.index[i]] = wilcox
wilcox_meta_rxn_expanded = wilcox_meta_rxn_expanded.dropna().astype('float64')
```

```
In [42]: wilcox_meta_rxn_expanded['metadata_r_id'] = ""
for r in wilcox_meta_rxn_expanded.index:
    if r in reaction_metadata.index:
        wilcox_meta_rxn_expanded.loc[r, 'metadata_r_id'] = r
    elif r[:-4] in reaction_metadata.index:
        wilcox_meta_rxn_expanded.loc[r, 'metadata_r_id'] = r[:-4]
    else:
        print("Should not occur")
```

```
In [43]: wilcox_meta_rxn_expanded.iloc[0:1]
```

```
Out[43]:
```

	wilcox_stat	wilcox_pval	cohens_d	adjusted_pval	metadata_r_id
<b>10FTHF5GLUtl_pos</b>	48.0	0.055944	1.198422	0.078347	10FTHF5GLUtl

```
In [44]: outputs = {
    "wilcox_results.csv": wilcox_results,
    "reaction_consistencies.csv": reaction_consistencies,
    "reaction_metadata.csv": reaction_metadata,
    "wilcox_meta_rxn_results.csv": wilcox_meta_rxn_results,
    "wilcox_meta_rxn_expanded.csv": wilcox_meta_rxn_expanded,
    "final_stats_with_metadata.csv": W,
}

for name, df in outputs.items():
    df.to_csv(name)
```

```
In [45]: import zipfile

with zipfile.ZipFile("Treg LN vs exTreg LN.zip", "w") as zipf:
    for filename in outputs:
        zipf.write(filename)
```

```
In [46]: from IPython.display import FileLink
FileLink("Treg LN vs exTreg LN.zip")
```

```
Out[46]: Treg LN vs exTreg LN.zip
```

```
In [ ]:
```