

In [3]:

```
import numpy as np
import pandas as pd

from sklearn import preprocessing
import matplotlib.pyplot as plt
import seaborn as sns
sns.set(style="white")
sns.set(style="whitegrid", color_codes=True)

import warnings
warnings.simplefilter(action='ignore')
```


In [4]:

```
train_df=pd.read_csv(r"C:\Users\91950\Downloads\train.gender_submission.csv")
train_df
```

Out[4]:

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fa
0	1	0	3Braund, Mr. Owen Harris	male	22.0	1	0	A/5 21171	7.25
1	2	1	1Cumings, Mrs. John Bradley (Florence Briggs Th...	female	38.0	1	0	PC 17599	71.28
2	3	1	3Heikkinen, Miss. Laina	female	26.0	0	0	STON/O2. 3101282	7.92
3	4	1	1Futrelle, Mrs. Jacques Heath (Lily May Peel)	female	35.0	1	0	113803	53.10
4	5	0	3Allen, Mr. William Henry	male	35.0	0	0	373450	8.05
...
886	887	0	2Montvila, Rev. Juozas	male	27.0	0	0	211536	13.00
887	888	1	1Graham, Miss. Margaret Edith	female	19.0	0	0	112053	30.00
888	889	0	3Johnston, Miss. Catherine Helen "Carrie"	female	NaN	1	2	W./C. 6607	23.45
889	890	1	1Behr, Mr. Karl Howell	male	26.0	0	0	111369	30.00
890	891	0	3Dooley, Mr. Patrick	male	32.0	0	0	370376	7.75

891 rows × 12 columns



In [5]:

```
test_df=pd.read_csv(r"C:\Users\91950\Downloads\test.gender_submission.csv")
test_df
```

Out[5]:

	PassengerId	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cal
0	892	3	Kelly, Mr. James	male	34.5	0	0	330911	7.8292	N
1	893	3	Wilkes, Mrs. James (Ellen Needs)	female	47.0	1	0	363272	7.0000	N
2	894	2	Myles, Mr. Thomas Francis	male	62.0	0	0	240276	9.6875	N
3	895	3	Wirz, Mr. Albert	male	27.0	0	0	315154	8.6625	N
4	896	3	Hirvonen, Mrs. Alexander (Helga E Lindqvist)	female	22.0	1	1	3101298	12.2875	N
...
413	1305	3	Spector, Mr. Woolf	male	NaN	0	0	A.5. 3236	8.0500	N
414	1306	1	Oliva y Ocana, Dona. Fermina	female	39.0	0	0	PC 17758	108.9000	C1
415	1307	3	Saether, Mr. Simon Sivertsen	male	38.5	0	0	SOTON/O.Q. 3101262	7.2500	N
416	1308	3	Ware, Mr. Frederick	male	NaN	0	0	359309	8.0500	N
417	1309	3	Peter, Master. Michael J	male	NaN	1	1	2668	22.3583	N

418 rows × 11 columns




In [6]:

```
train_df.head()
```

Out[6]:

	PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare
0	1	0	3	Braund, Mr. Owen Harris	male	22.0	1	0	A/5 21171	7.2500
1	2	1	1	Cumings, Mrs. John Bradley (Florence Briggs Th...	female	38.0	1	0	PC 17599	71.2833
2	3	1	3	Heikkinen, Miss. Laina	female	26.0	0	0	STON/O2. 3101282	7.9250
3	4	1	1	Futrelle, Mrs. Jacques Heath (Lily May Peel)	female	35.0	1	0	113803	53.1000
4	5	0	3	Allen, Mr. William Henry	male	35.0	0	0	373450	8.0500



In [7]:

```
train_df.shape
```

Out[7]:

```
(891, 12)
```

In [8]:

```
test_df.head()
```

Out[8]:

	PassengerId	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked
0	892	3	Kelly, Mr. James	male	34.5	0	0	330911	7.8292	NaN	
1	893	3	Wilkes, Mrs. James (Ellen Needs)	female	47.0	1	0	363272	7.0000	NaN	
2	894	2	Myles, Mr. Thomas Francis	male	62.0	0	0	240276	9.6875	NaN	
3	895	3	Wirz, Mr. Albert	male	27.0	0	0	315154	8.6625	NaN	
4	896	3	Hirvonen, Mrs. Alexander (Helga E Lindqvist)	female	22.0	1	1	3101298	12.2875	NaN	

In [9]:

```
test_df.shape
```

Out[9]:

(418, 11)

In [11]:

```
train_df.describe()
```

Out[11]:

	PassengerId	Survived	Pclass	Age	SibSp	Parch	Fare
count	891.000000	891.000000	891.000000	714.000000	891.000000	891.000000	891.000000
mean	446.000000	0.383838	2.308642	29.699118	0.523008	0.381594	32.204208
std	257.353842	0.486592	0.836071	14.526497	1.102743	0.806057	49.693429
min	1.000000	0.000000	1.000000	0.420000	0.000000	0.000000	0.000000
25%	223.500000	0.000000	2.000000	20.125000	0.000000	0.000000	7.910400
50%	446.000000	0.000000	3.000000	28.000000	0.000000	0.000000	14.454200
75%	668.500000	1.000000	3.000000	38.000000	1.000000	0.000000	31.000000
max	891.000000	1.000000	3.000000	80.000000	8.000000	6.000000	512.329200

In [12]:

```
test_df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 418 entries, 0 to 417
Data columns (total 11 columns):
#   Column          Non-Null Count  Dtype
---  -
0   PassengerId     418 non-null   int64
1   Pclass          418 non-null   int64
2   Name            418 non-null   object
3   Sex             418 non-null   object
4   Age             332 non-null   float64
5   SibSp           418 non-null   int64
6   Parch           418 non-null   int64
7   Ticket          418 non-null   object
8   Fare            417 non-null   float64
9   Cabin           91 non-null    object
10  Embarked        418 non-null   object
dtypes: float64(2), int64(4), object(5)
memory usage: 36.1+ KB
```

In [13]:


```
train_df.isnull().sum()
```

Out[13]:

```
PassengerId     0
Survived         0
Pclass           0
Name             0
Sex              0
Age             177
SibSp            0
Parch           0
Ticket           0
Fare             0
Cabin           687
Embarked         2
dtype: int64
```

In [20]:

```
ax=train_df["Age"].hist(bins=15,density=True,stacked=True,color='Cyan',alpha=0.6)
train_df["Age"].plot(kind='density',color='teal')
plt.xlim(-10,85)
plt.show()
```

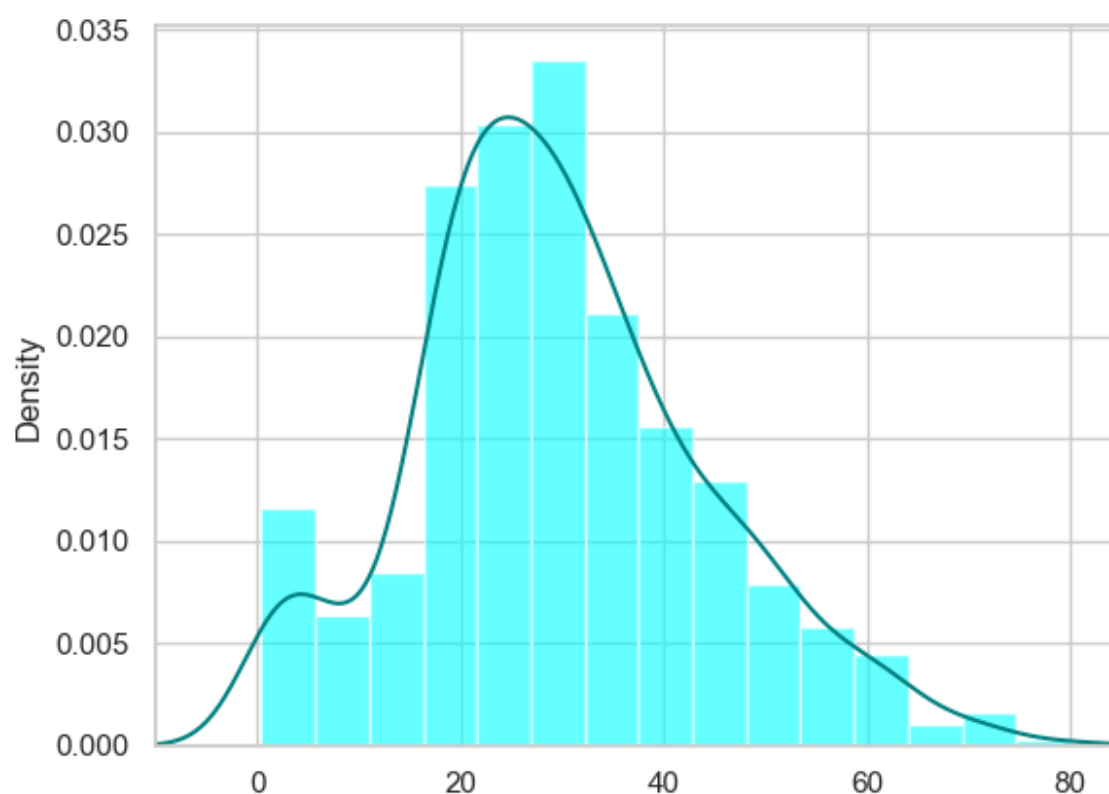

In [21]:

```
print(train_df["Age"].mean(skipna=True))
print(train_df["Age"].median(skipna=True))
```

```
29.69911764705882
28.0
```

In [26]:

```
print((train_df['Cabin'].isnull().sum()/train_df.shape[0])*100)
```

```
77.10437710437711
```

In [27]:

```
print((train_df['Embarked'].isnull().sum()/train_df.shape[0])*100)
```

```
0.22446689113355783
```

In [41]:

```
print('Boareded passengers grouped by port of embarkation(c=Cherbourg,q=Queenstown,s=Southampton):')
print(train_df['Embarked'].value_counts())
sns.countplot(x='Embarked',data=train_df,palette='Set2')
plt.show()
```

Boareded passengers grouped by port of embarkation(c=Cherbourg,q=Queenstown,s=Southampton):


Embarked

S 644

C 168

Q 77

Name: count, dtype: int64

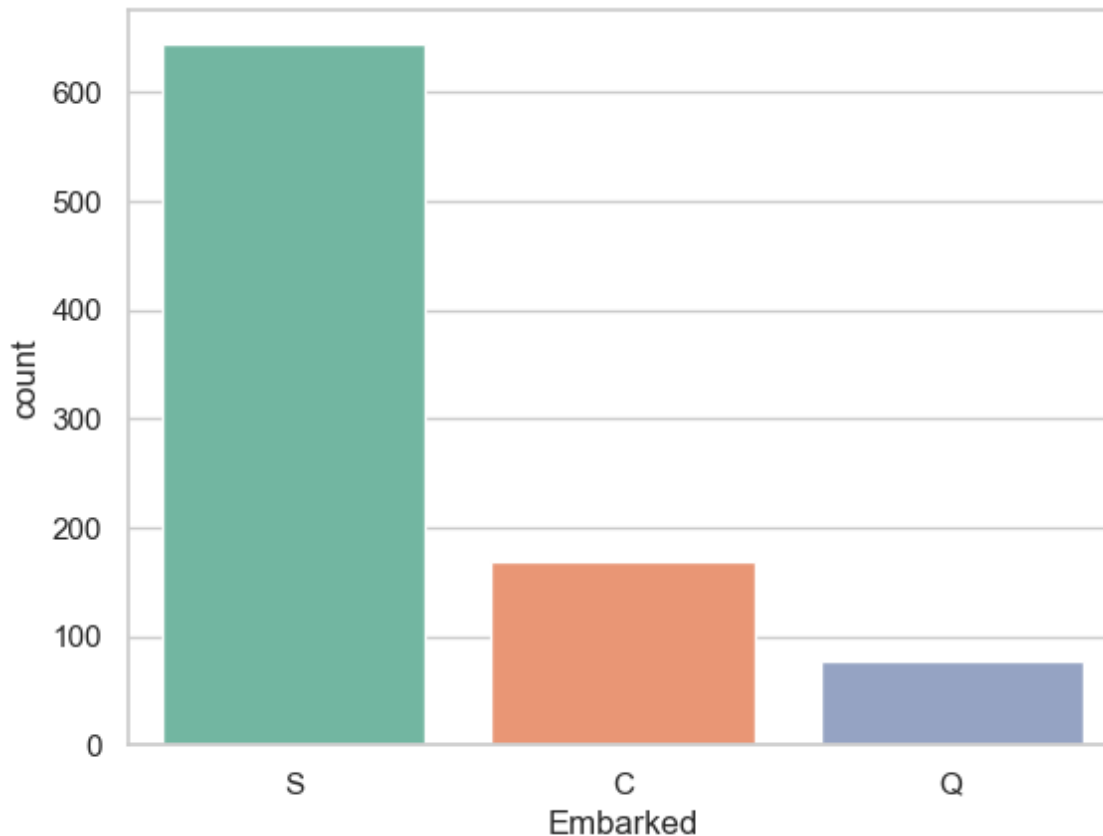

In [42]:

```
print(train_df['Embarked'].value_counts().idxmax())
```

S

In [50]:

```
train_data=train_df.copy()
train_data['Age'].fillna(train_df['Age'].median(skipna=True),inplace=True)
train_data["Embarked"].fillna(train_df['Embarked'].value_counts().idxmax(),inplace=True)
train_data.drop('Cabin',axis=1,inplace=True)
```


In [51]:

```
train_data.isnull().sum()
```

Out[51]:

PassengerId 0
Survived 0
Pclass 0
Name 0
Sex 0
Age 0
SibSp 0
Parch 0
Ticket 0
Fare 0
Embarked 0
dtype: int64

In [52]:


```
train_data.head()
```

Out[52]:

	PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare
0	1	0	3	Braund, Mr. Owen Harris	male	22.0	1	0	A/5 21171	7.2500
1	2	1	1	Cumings, Mrs. John Bradley (Florence Briggs Th...	female	38.0	1	0	PC 17599	71.2833
2	3	1	3	Heikkinen, Miss. Laina	female	26.0	0	0	STON/O2. 3101282	7.9250
3	4	1	1	Futrelle, Mrs. Jacques Heath (Lily May Peel)	female	35.0	1	0	113803	53.1000
4	5	0	3	Allen, Mr. William Henry	male	35.0	0	0	373450	8.0500

In [54]:

```
plt.figure(figsize=(15,8))
ax=train_df["Age"].hist(bins=15,density=True,stacked=True,color='Cyan',alpha=0.6)
train_df["Age"].plot(kind='density',color='teal')
ax=train_data["Age"].hist(bins=15,density=True,stacked=True,color='orange',alpha=0.5)
ax.set(xlabel='Age')
plt.xlim(-10,85)
plt.show()
```

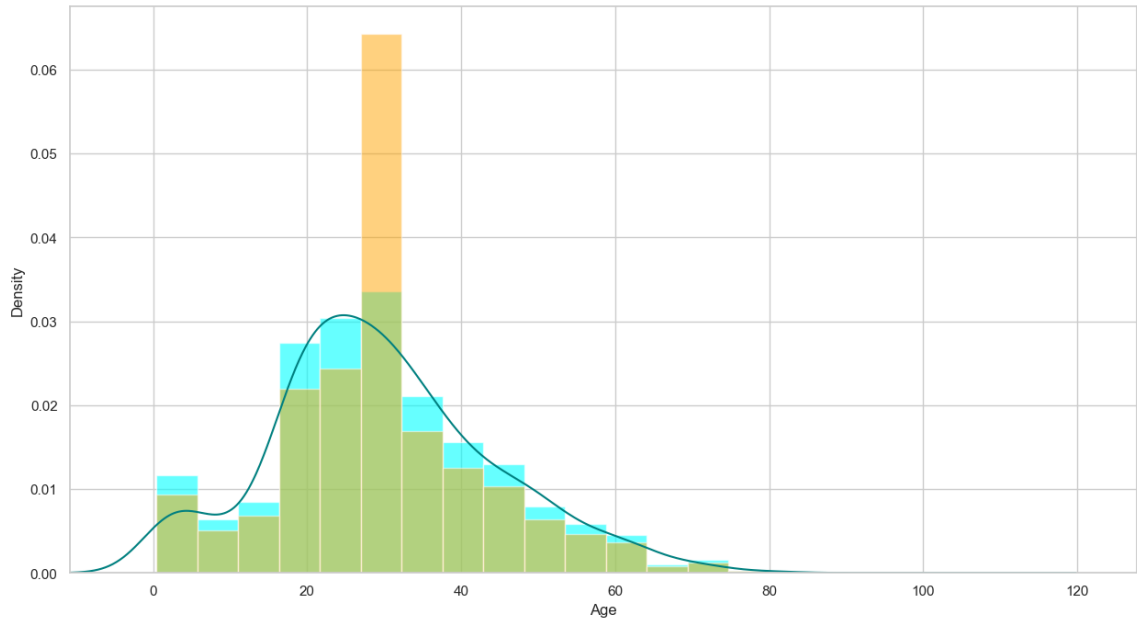

In [61]:

```
train_data['TravelAlone']=np.where((train_data["SibSp"]+train_data["Parch"])>0, 0, 1)
train_data.drop('SibSp', axis=1, inplace=True)
train_data.drop('Parch', axis=1, inplace=True)
```

In [64]:

```
training=pd.get_dummies(train_data, columns=["Pclass","Embarked","Sex"])
training.drop('Sex_female', axis=1, inplace=True)
training.drop('PassengerId', axis=1, inplace=True)
training.drop('Name', axis=1, inplace=True)
training.drop('Ticket', axis=1, inplace=True)

final_train = training
final_train.head()
```

Out[64]:

	Survived	Age	Fare	TravelAlone	Pclass_1	Pclass_2	Pclass_3	Embarked_C	Embark
0	0	22.0	7.2500	0	False	False	True	False	
1	1	38.0	71.2833	0	True	False	False	True	
2	1	26.0	7.9250	1	False	False	True	False	
3	1	35.0	53.1000	0	True	False	False	False	
4	0	35.0	8.0500	1	False	False	True	False	

In [65]:

```
test_df.isnull().sum()
```

Out[65]:

```
PassengerId    0
Pclass         0
Name           0
Sex            0
Age           86
SibSp          0
Parch          0
Ticket         0
Fare           1
Cabin        327
Embarked       0
dtype: int64
```

In [66]:

```
test_data = test_df.copy()
test_data["Age"].fillna(train_df["Age"].median(skipna=True), inplace=True)
test_data["Fare"].fillna(train_df["Fare"].median(skipna=True), inplace=True)
test_data.drop('Cabin', axis=1, inplace=True)

test_data['TravelAlone'] = np.where((test_data["SibSp"] + test_data["Parch"]) > 0, 0, 1)

test_data.drop('SibSp', axis=1, inplace=True)
test_data.drop('Parch', axis=1, inplace=True)

testing = pd.get_dummies(test_data, columns=["Pclass", "Embarked", "Sex"])
testing.drop('Sex_female', axis=1, inplace=True)
testing.drop('PassengerId', axis=1, inplace=True)
testing.drop('Name', axis=1, inplace=True)
testing.drop('Ticket', axis=1, inplace=True)
final_test = testing
final_test.head()
```

Out[66]:

	Age	Fare	TravelAlone	Pclass_1	Pclass_2	Pclass_3	Embarked_C	Embarked_Q	Em
0	34.5	7.8292	1	False	False	True	False	True	
1	47.0	7.0000	0	False	False	True	False	False	
2	62.0	9.6875	1	False	True	False	False	True	
3	27.0	8.6625	1	False	False	True	False	False	
4	22.0	12.2875	0	False	False	True	False	False	



EXPLORATORY DATA ANALYSIS

In [9]:

```
import seaborn as sns
plt.figure(figsize=(15,8))
ax = sns.kdeplot(final_train["Age"][final_train.Survived == 1], color="darkturquoise", shade=True)
sns.kdeplot(final_train["Age"][final_train.Survived == 0], color="lightcoral", shade=True)
plt.legend(['Survived', 'Died'])
plt.title('Density Plot of Age for Surviving Population and Deceased Population')
ax.set(xlabel='Age')
plt.xlim(-10,85)
plt.show()
```

-
NameError

Traceback (most recent call last)

t)

Cell In[9], line 3

```
1 import seaborn as sns
2 plt.figure(figsize=(15,8))
----> 3 ax = sns.kdeplot(final_train["Age"][final_train.Survived == 1], color="darkturquoise", shade=True)
4 sns.kdeplot(final_train["Age"][final_train.Survived == 0], color="lightcoral", shade=True)
5 plt.legend(['Survived', 'Died'])
```

NameError: name 'final_train' is not defined

<Figure size 1500x800 with 0 Axes>

In []: