




Sub-app: QP Initialization

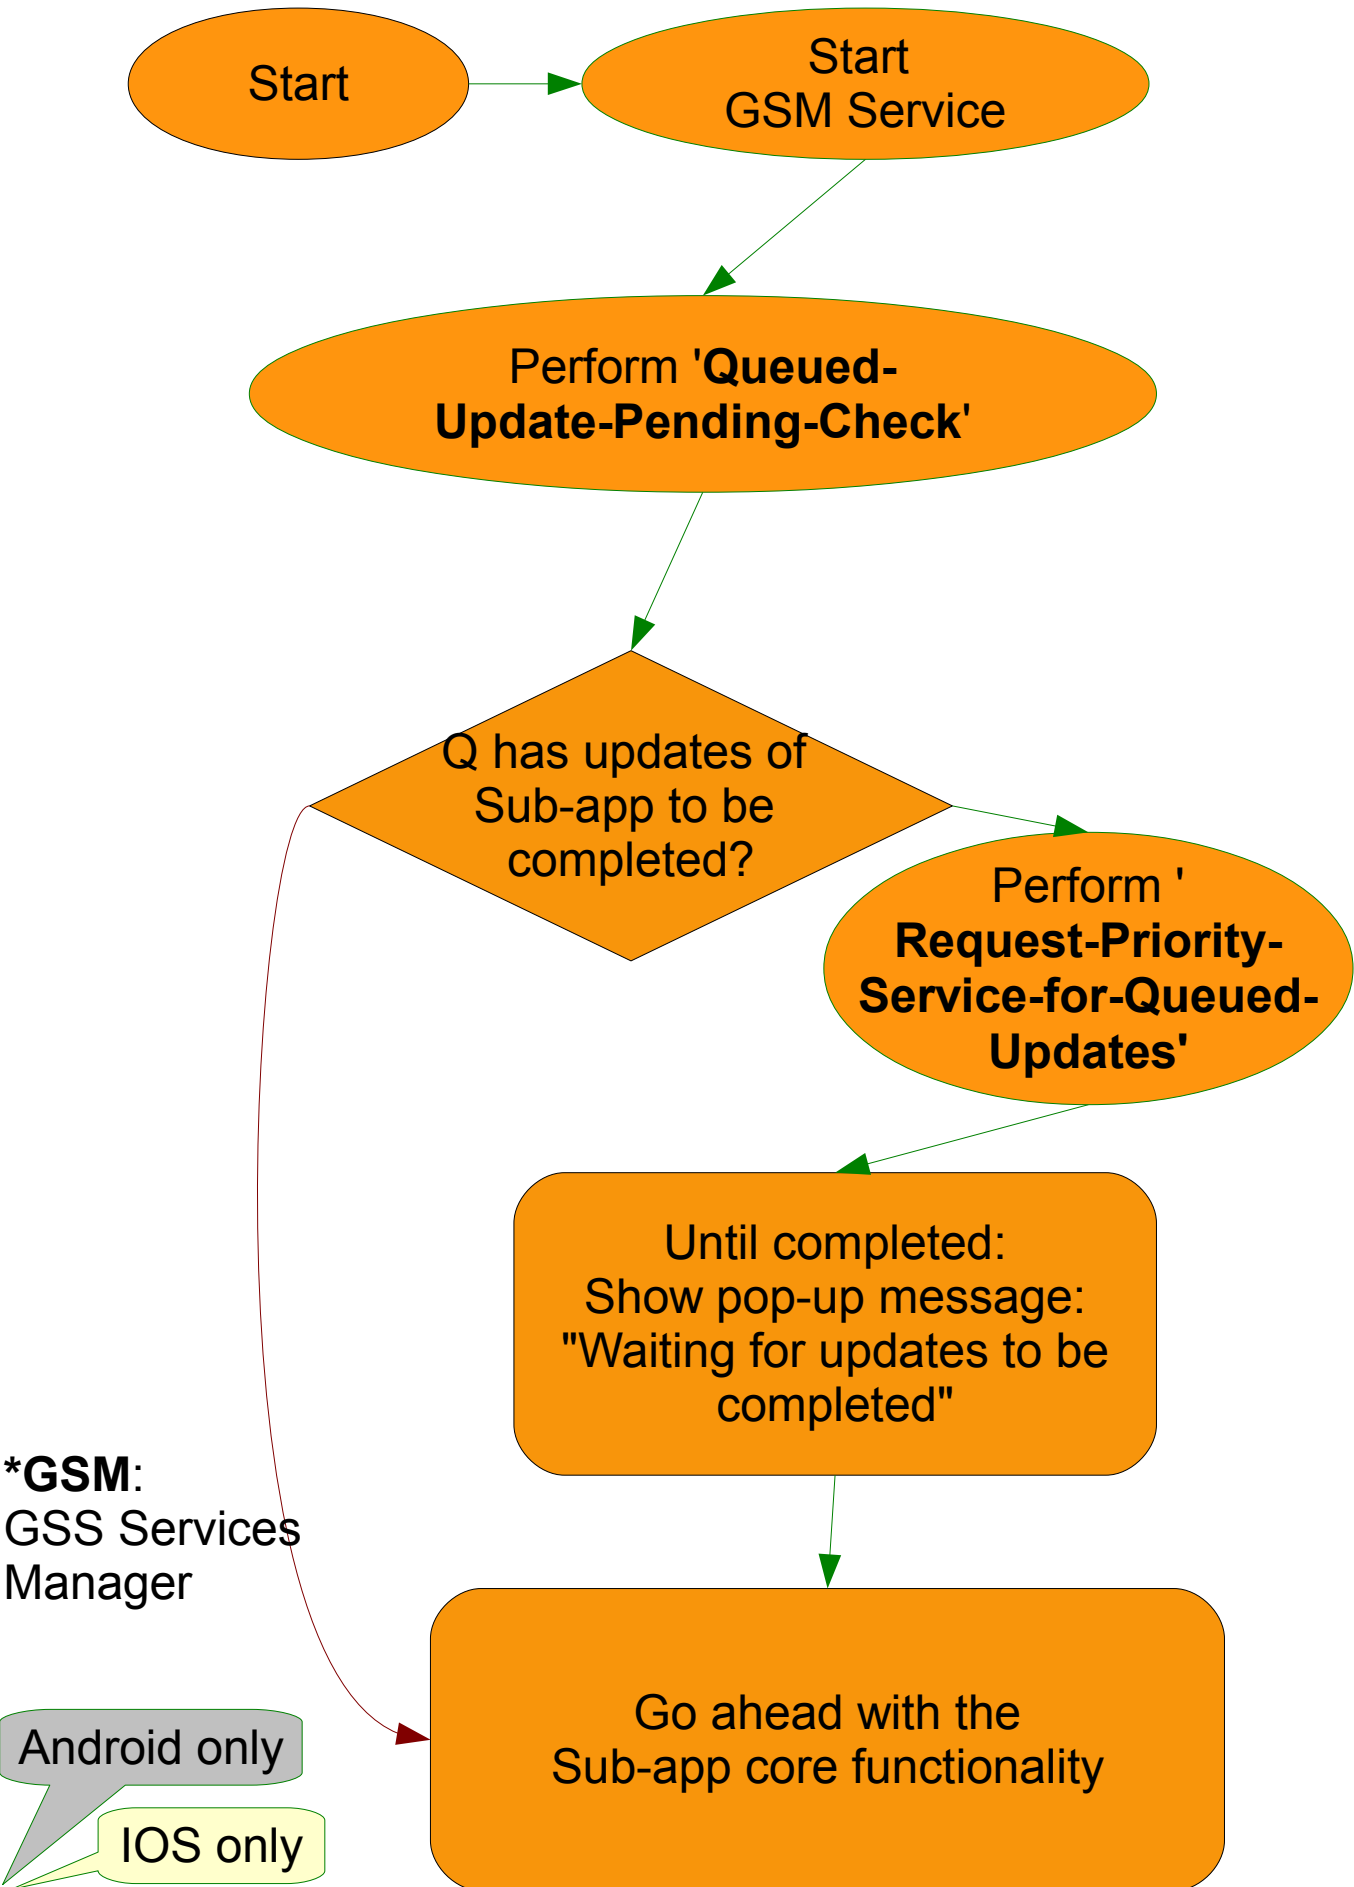


Sub-app: Queued-Update-Pending-Check

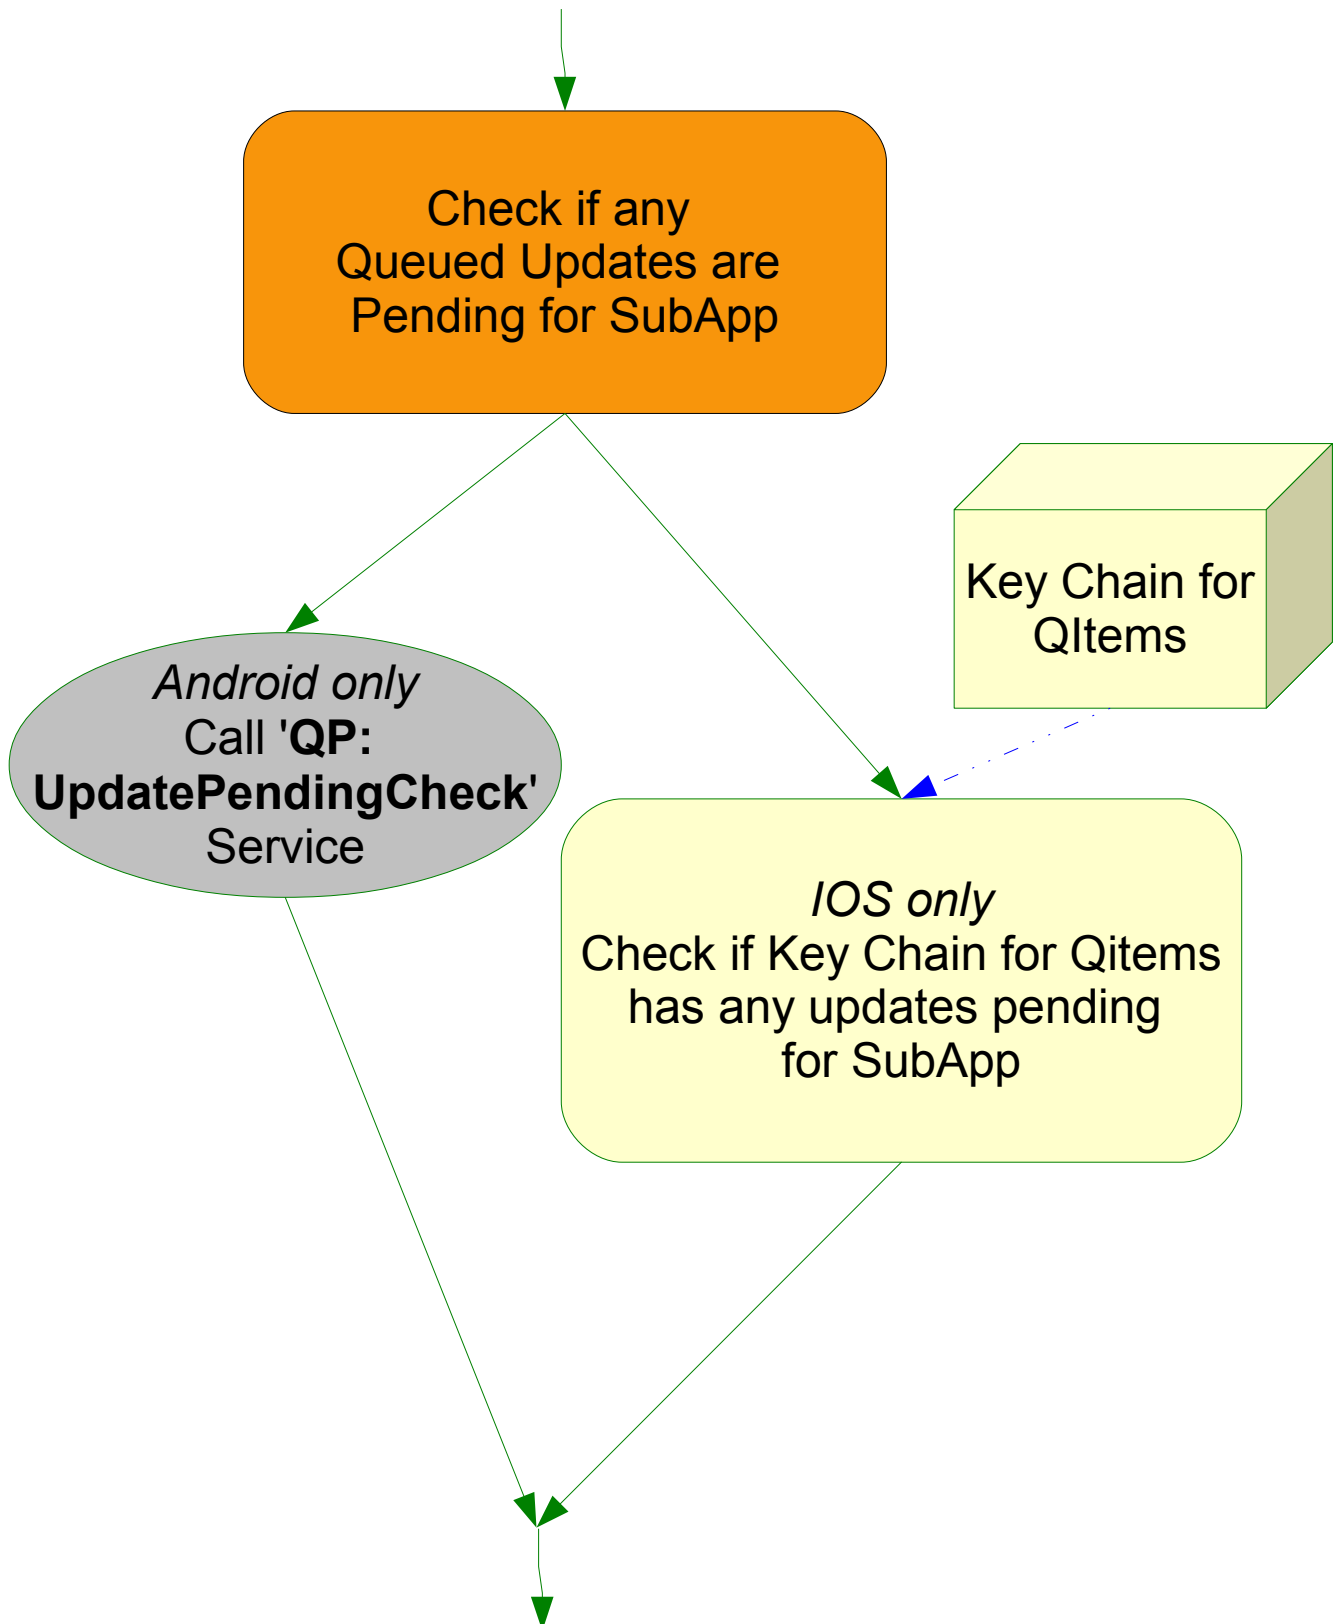


Sub-app: Request-Priority-Service-for-Queued-Updates

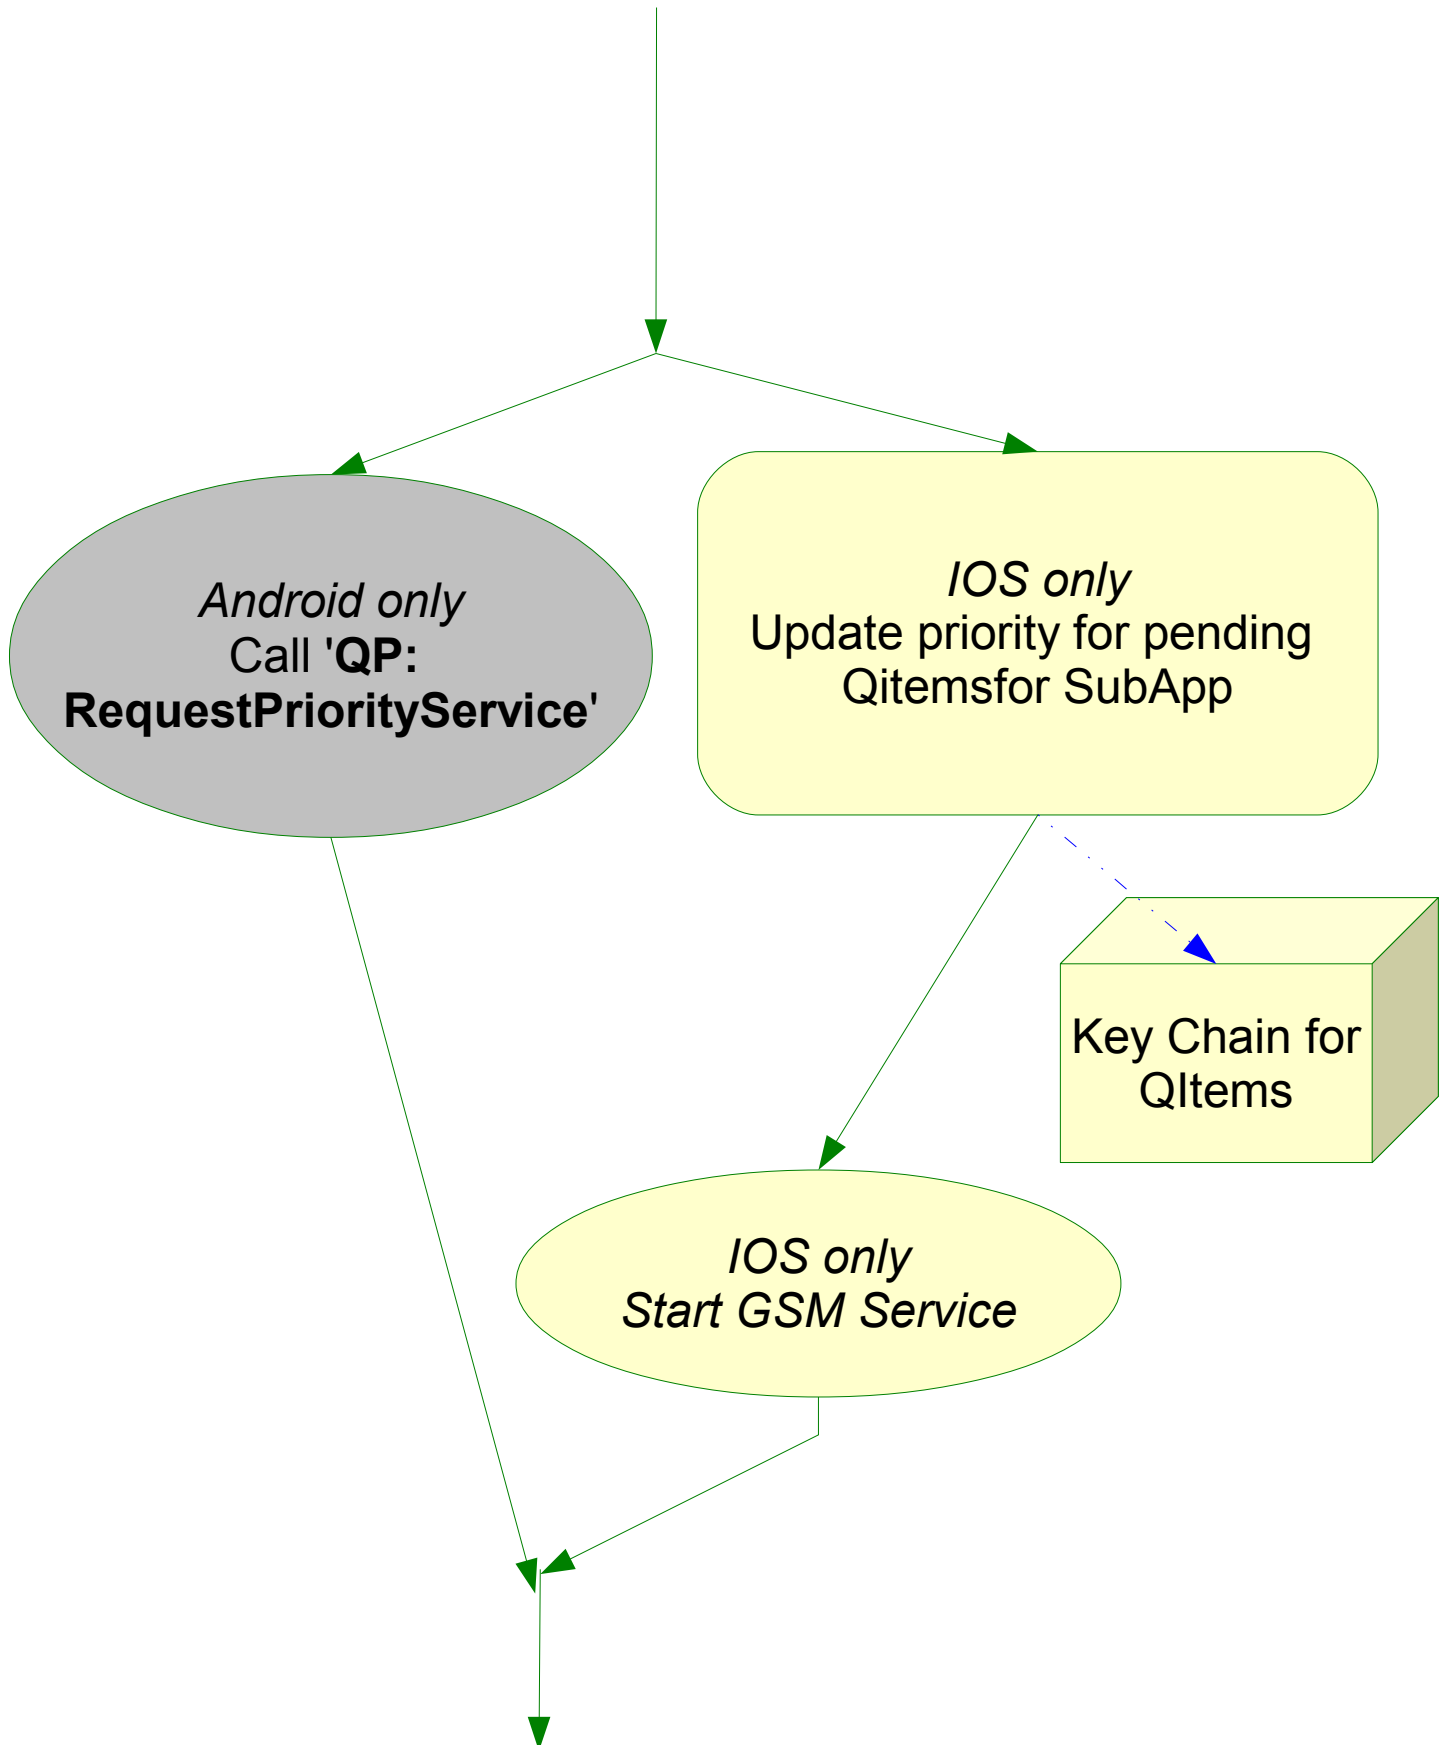


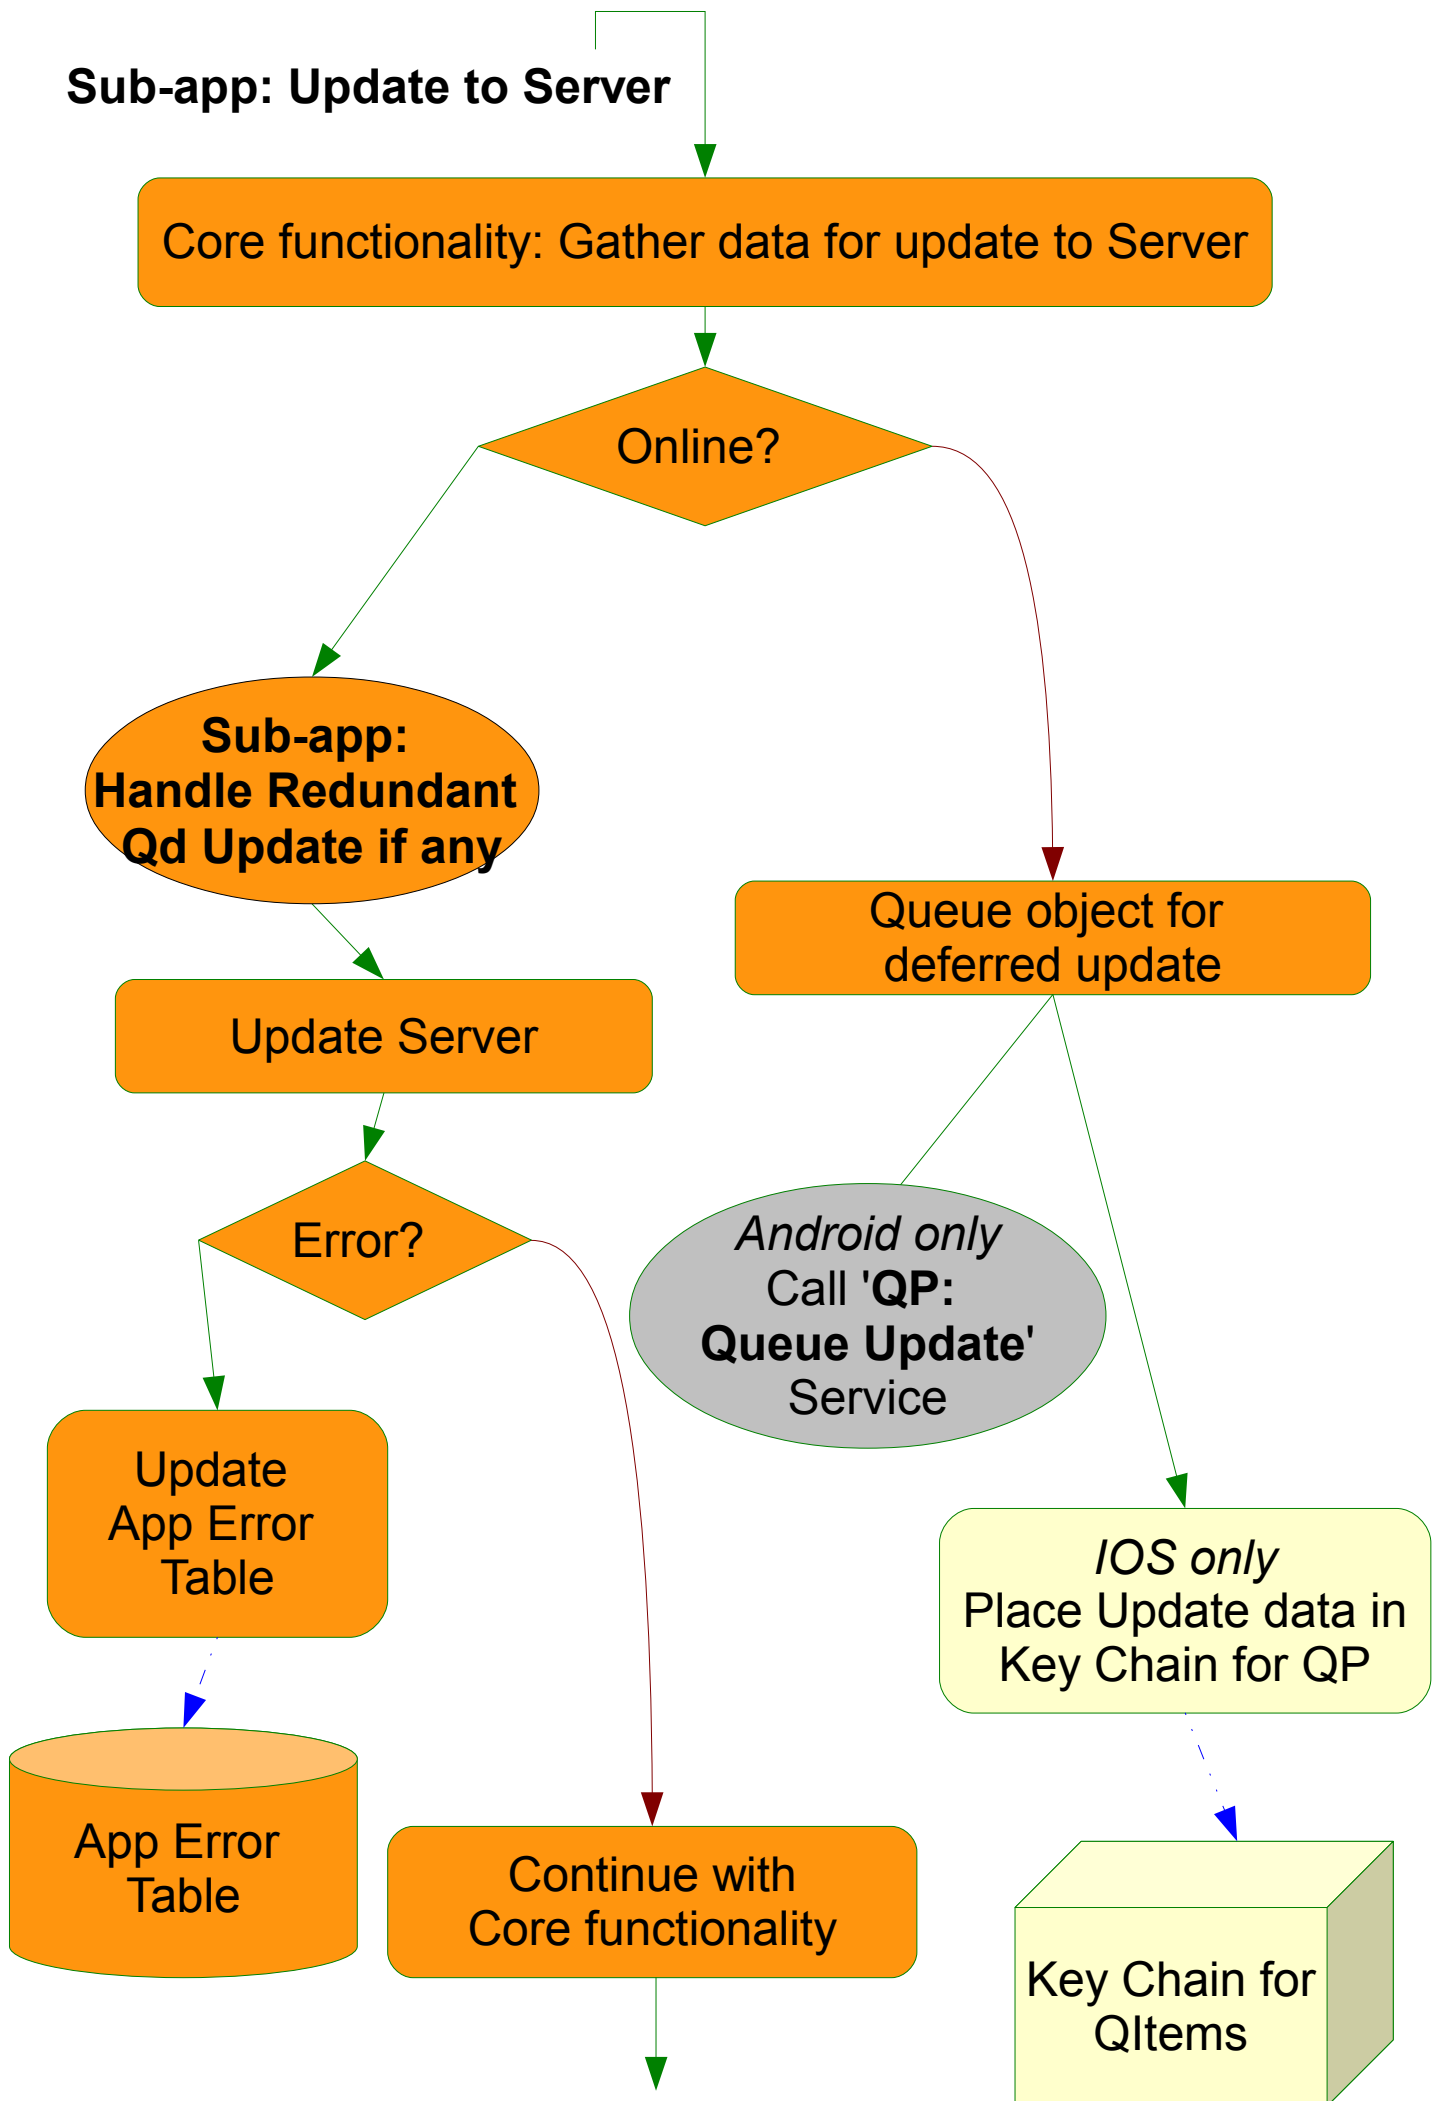

Sub-app: Handle Redundant Qd Update if any

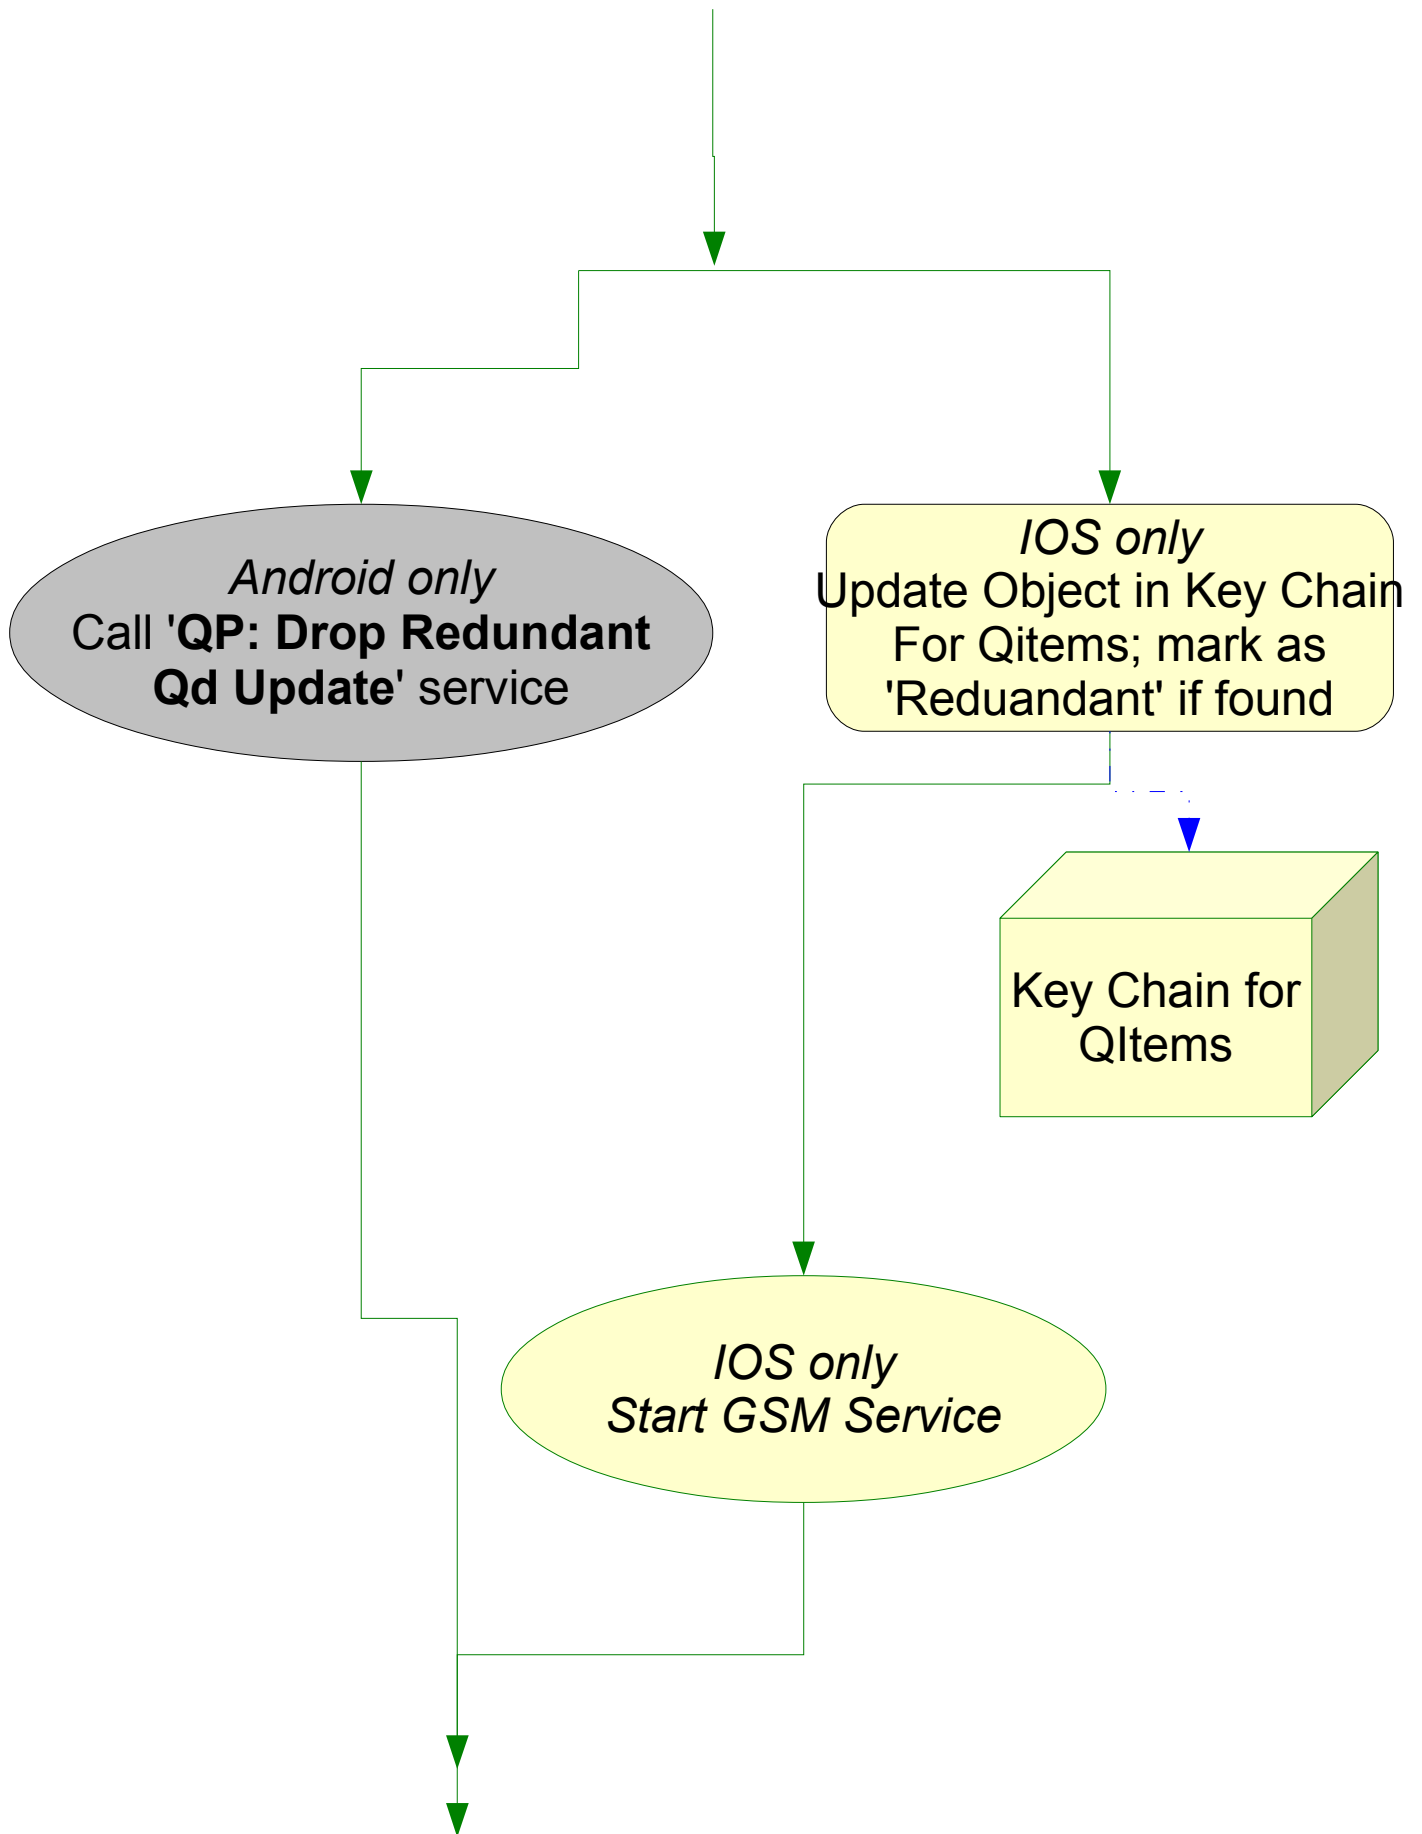


GSM: GSS Services Manager

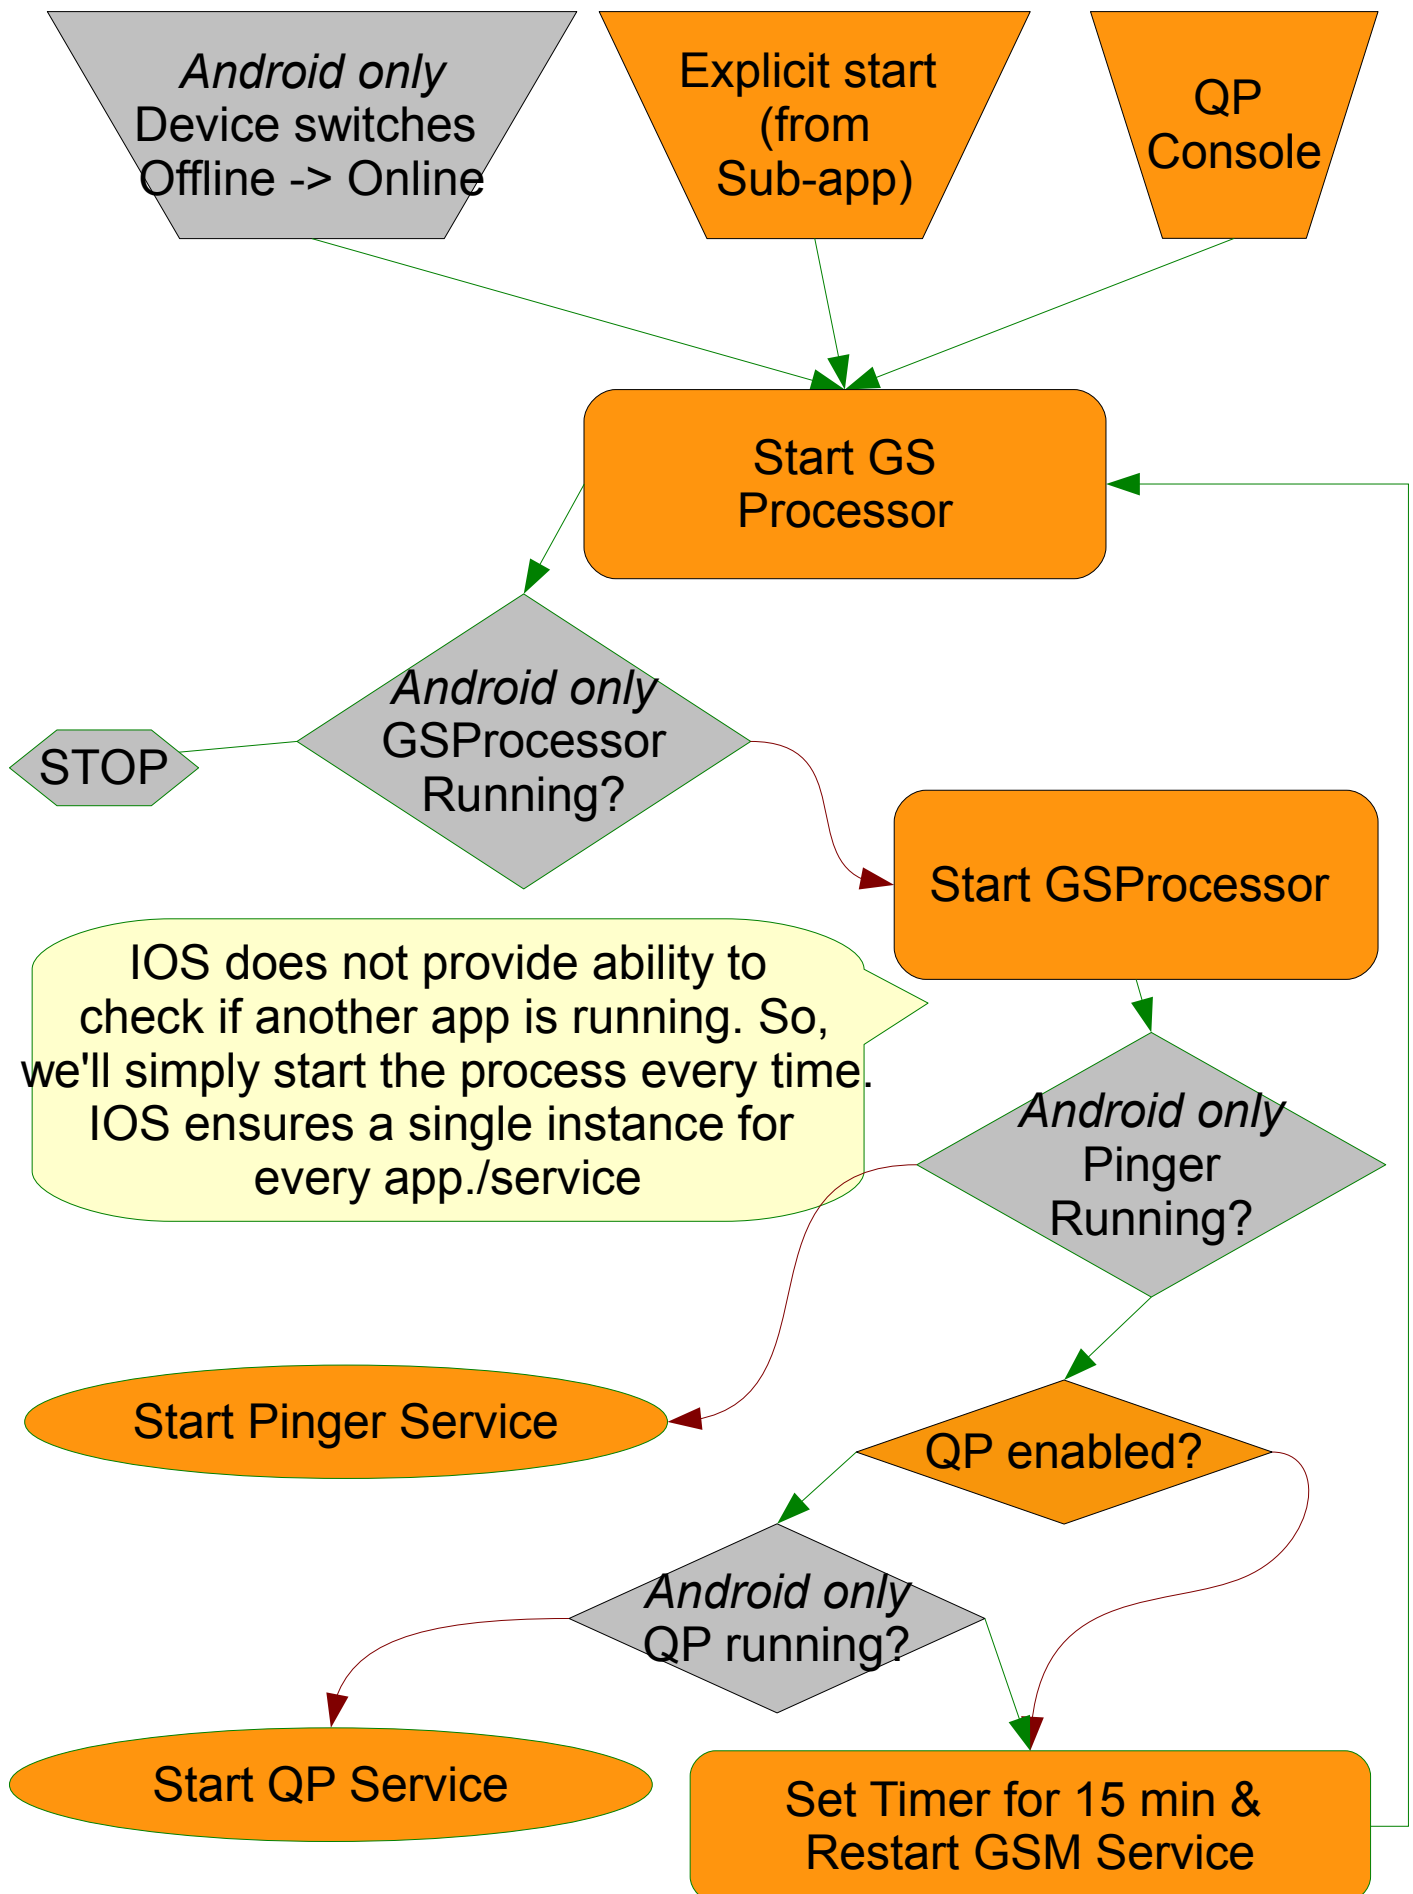


IOS does not provide ability to check if another app is running. So, we'll simply start the process every time. IOS ensures a single instance for every app./service


Pinger service

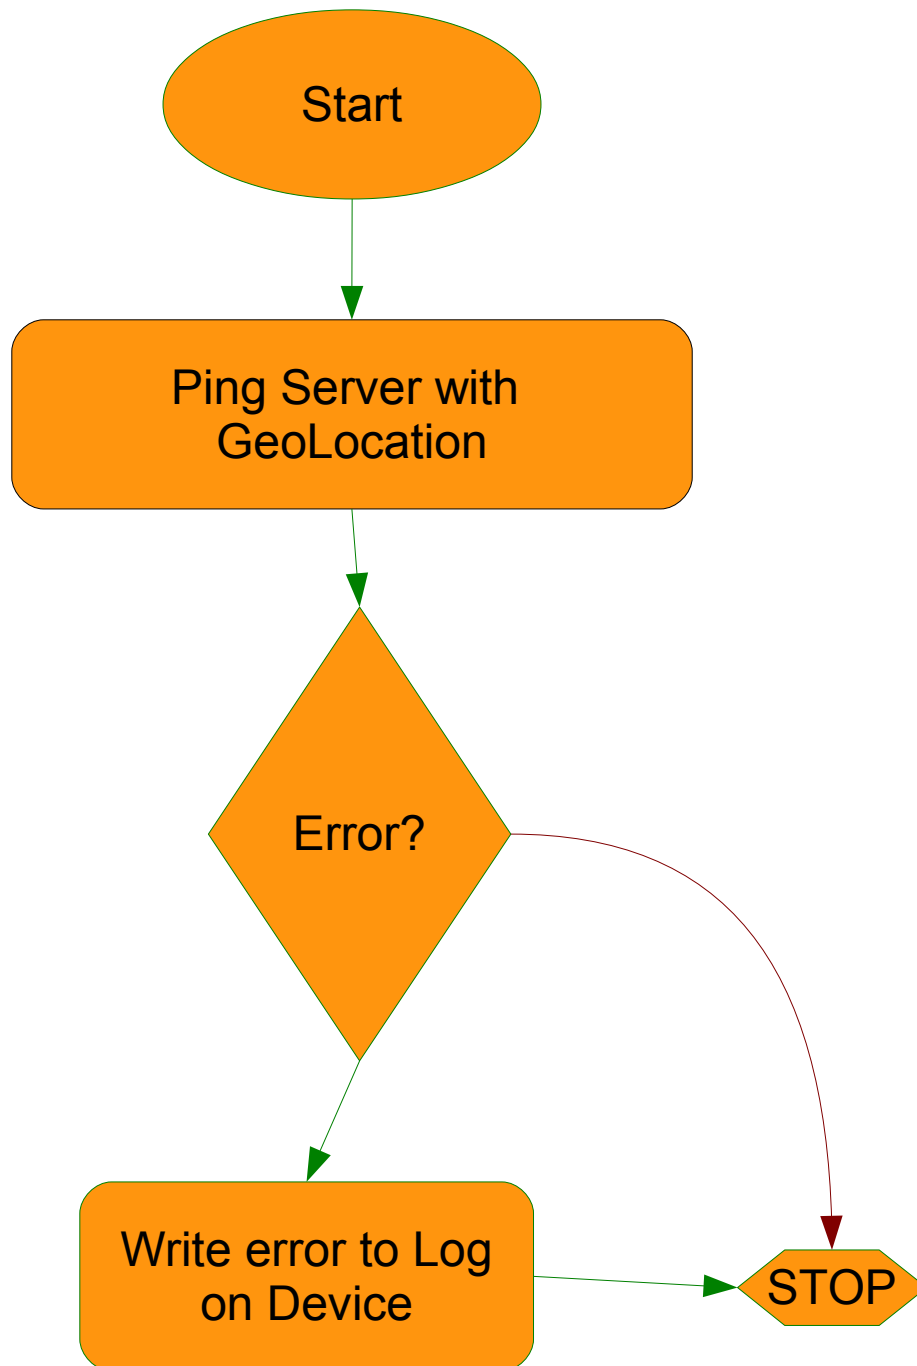


QP: Queue Processor

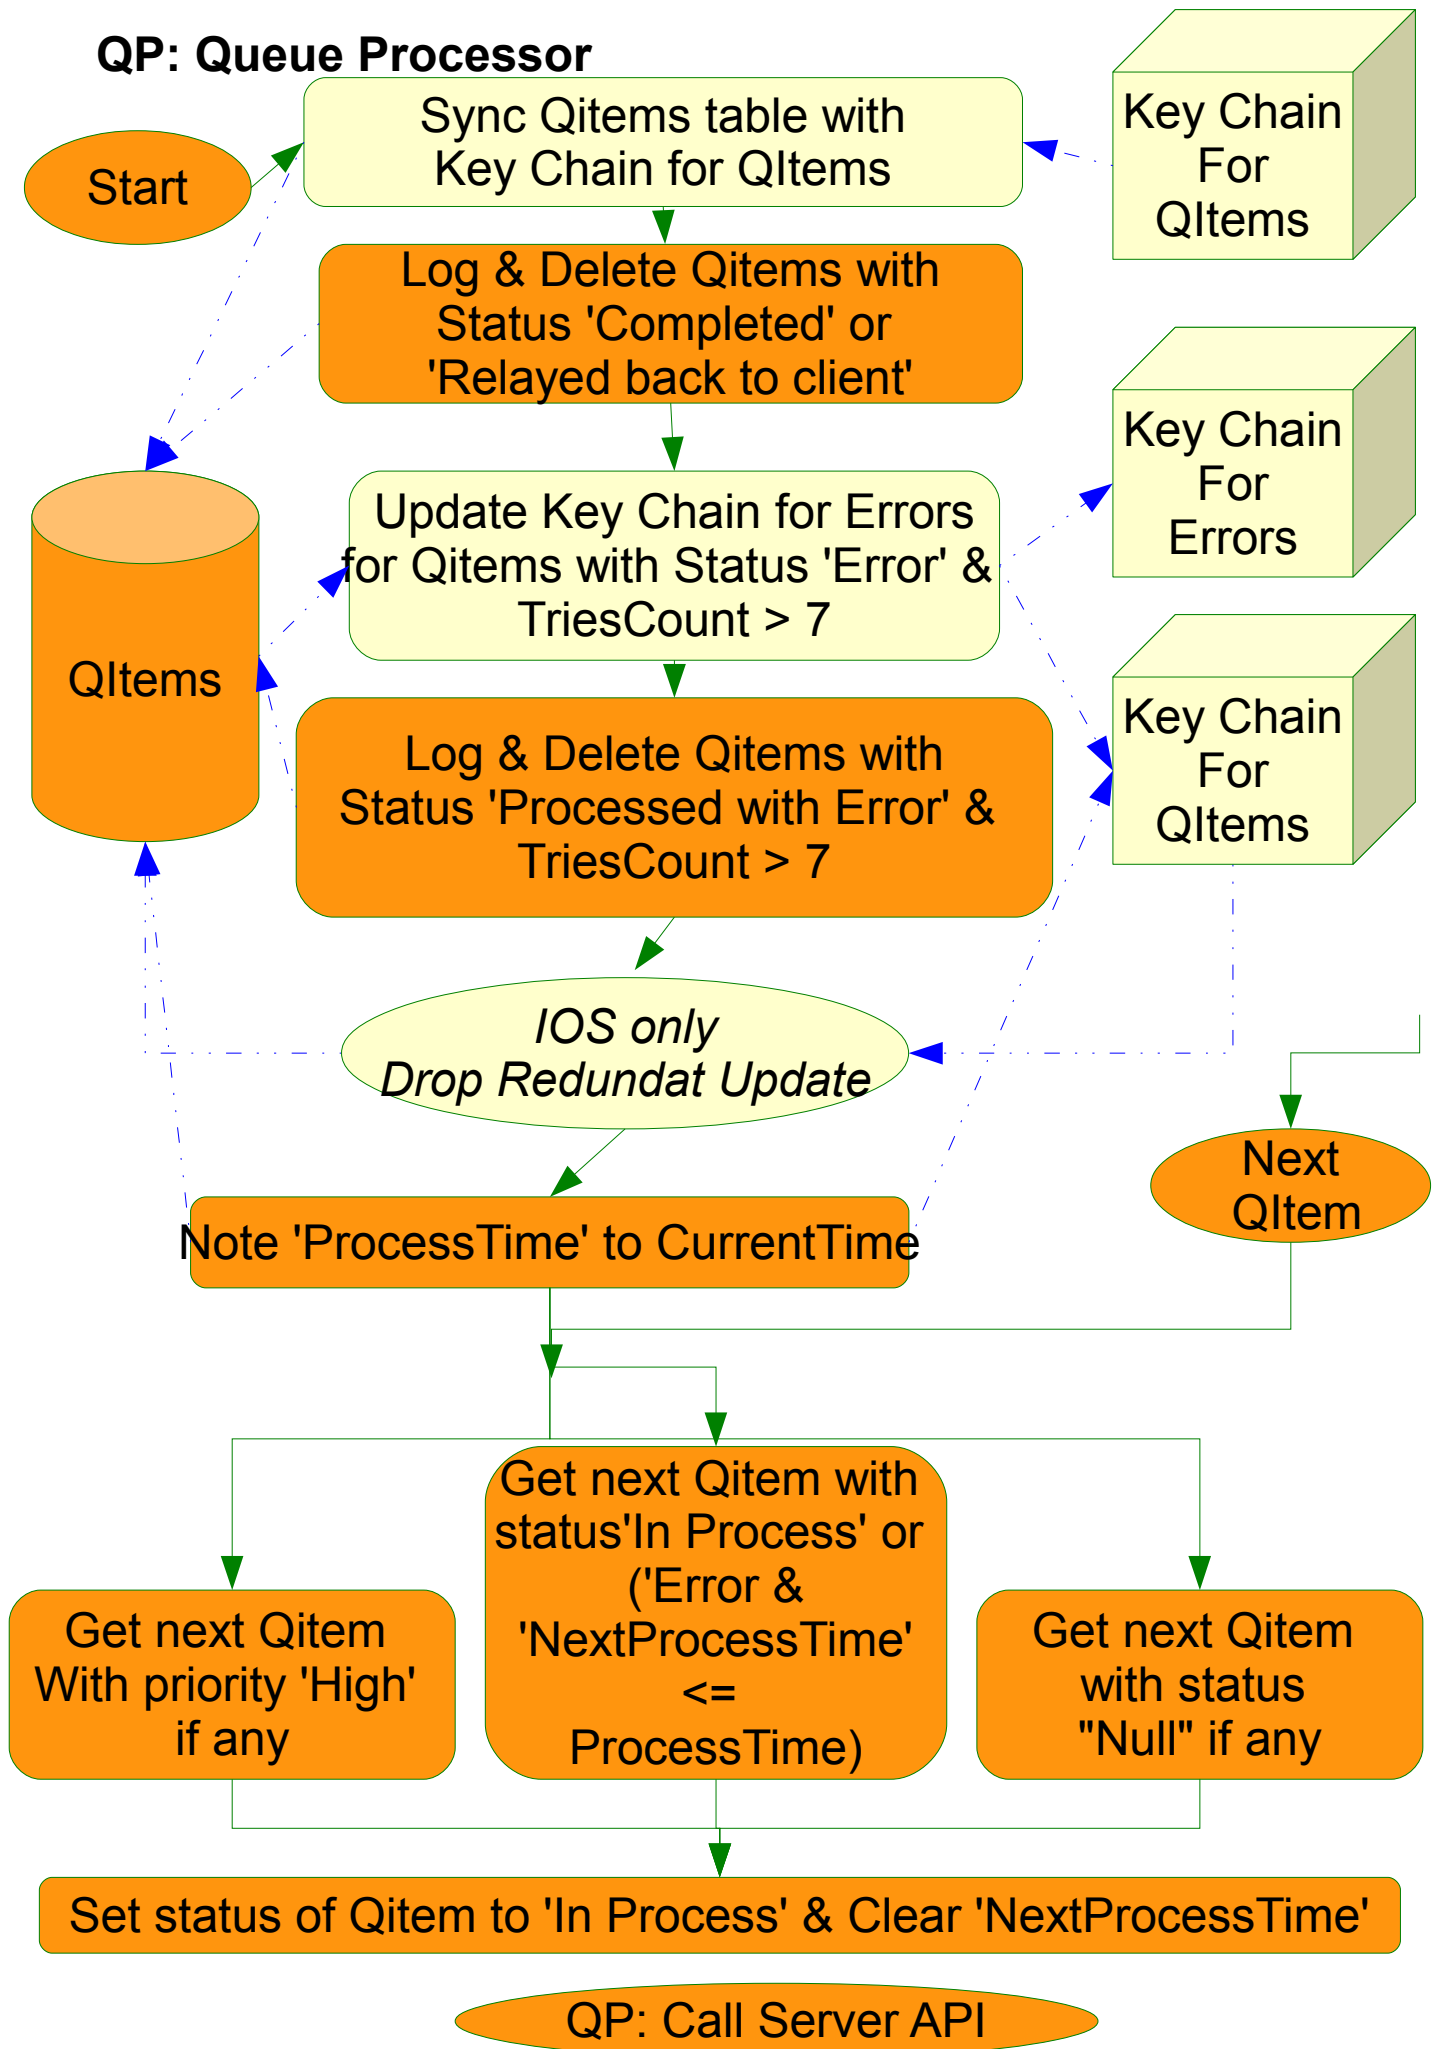

QP: Call Server API

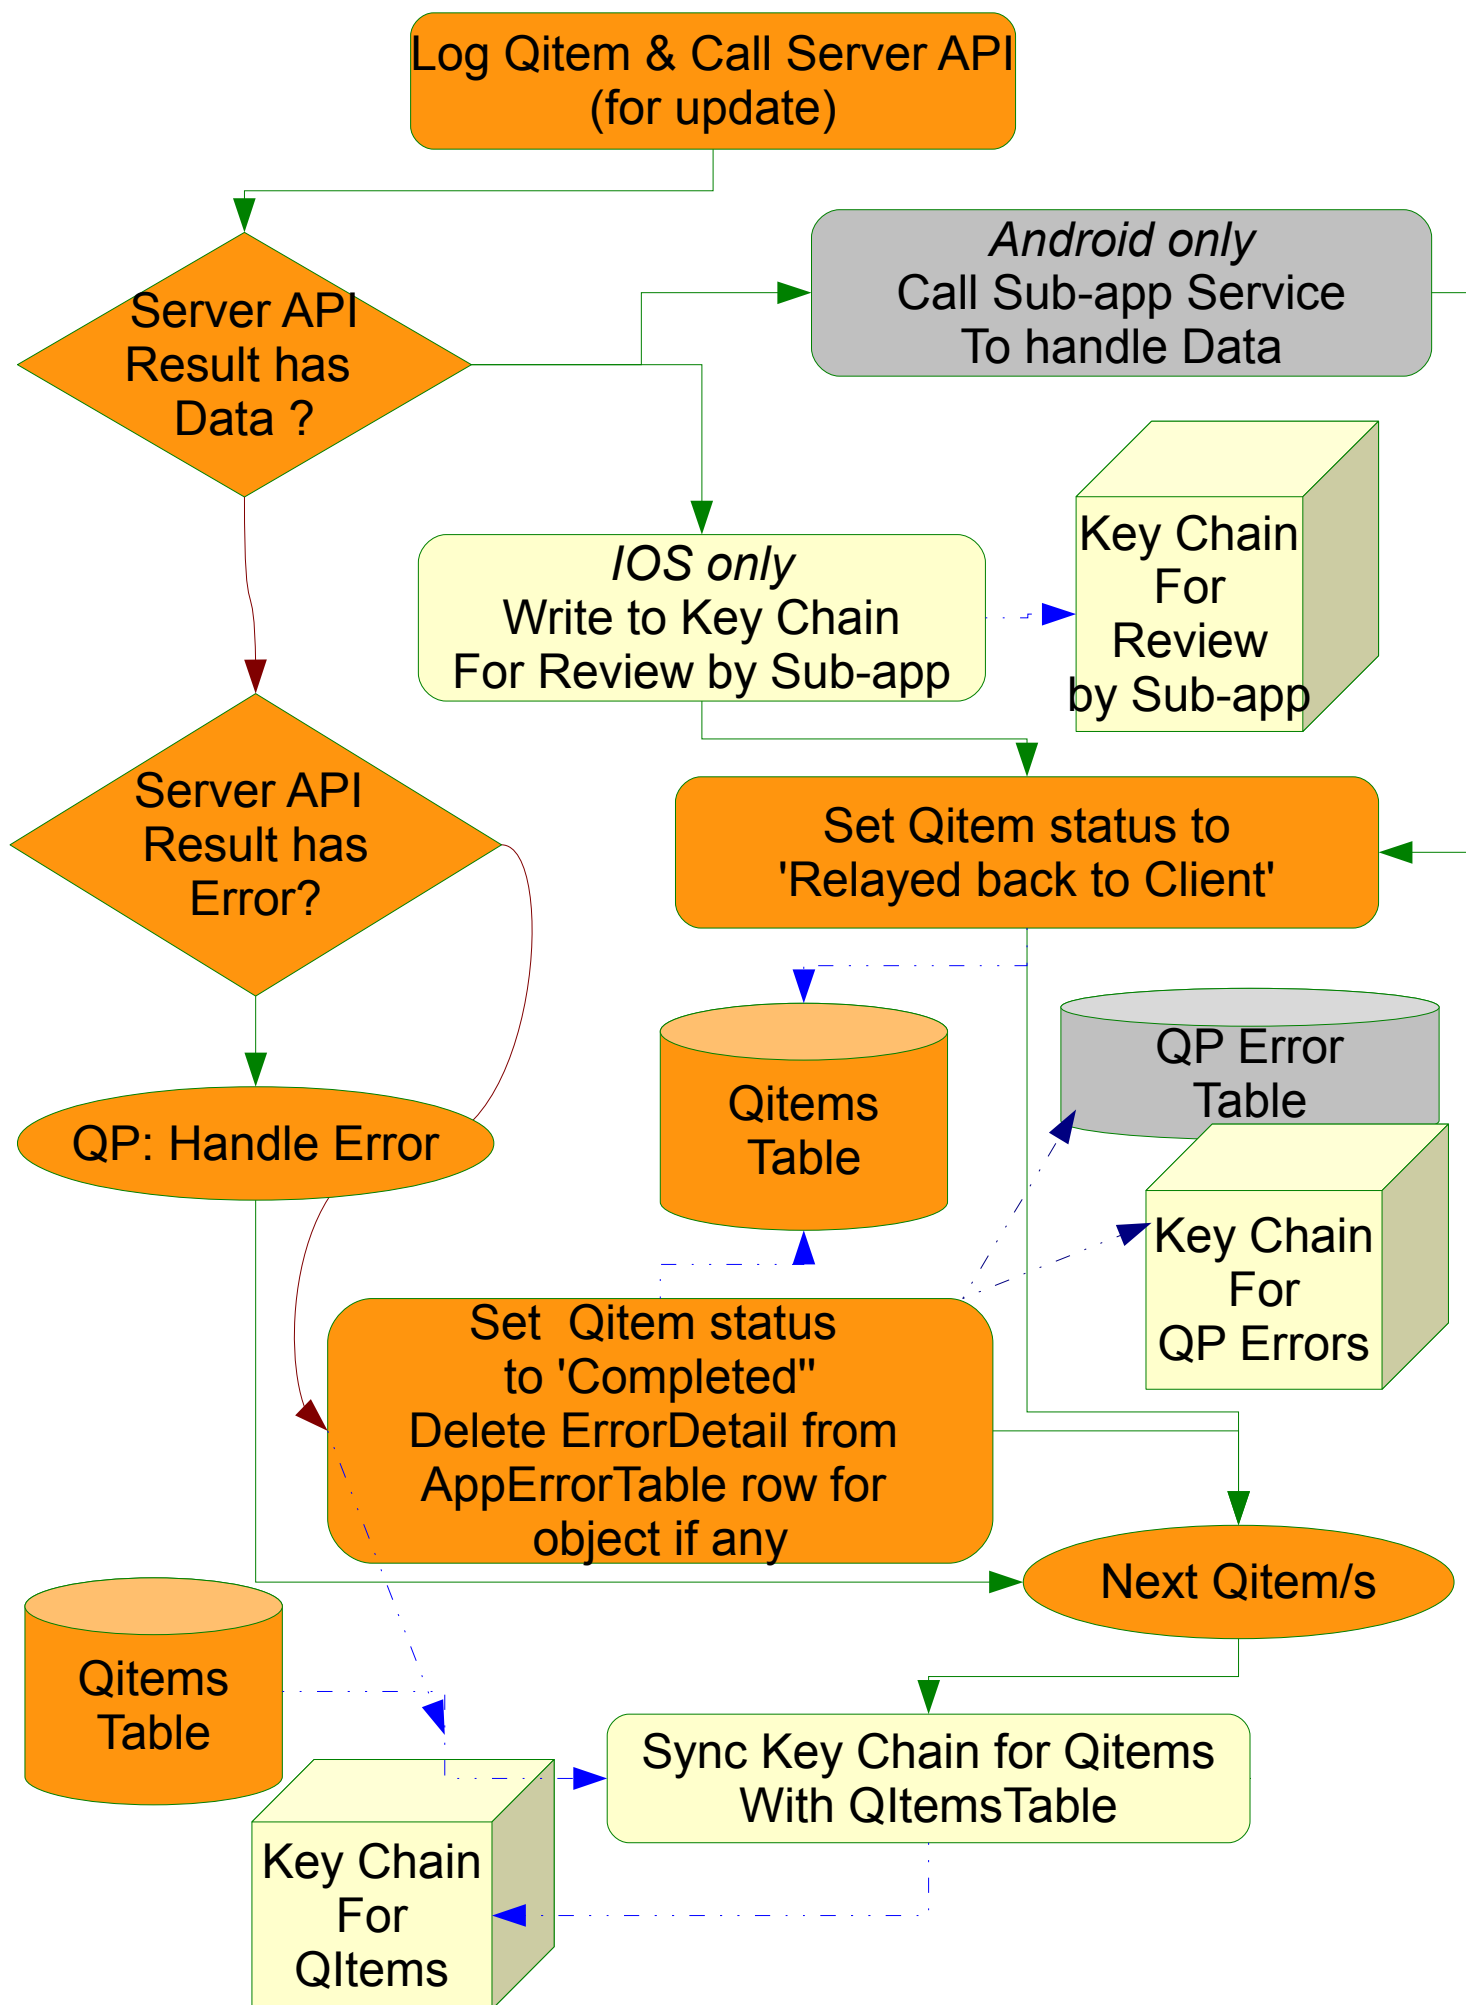

QP: Handle Error

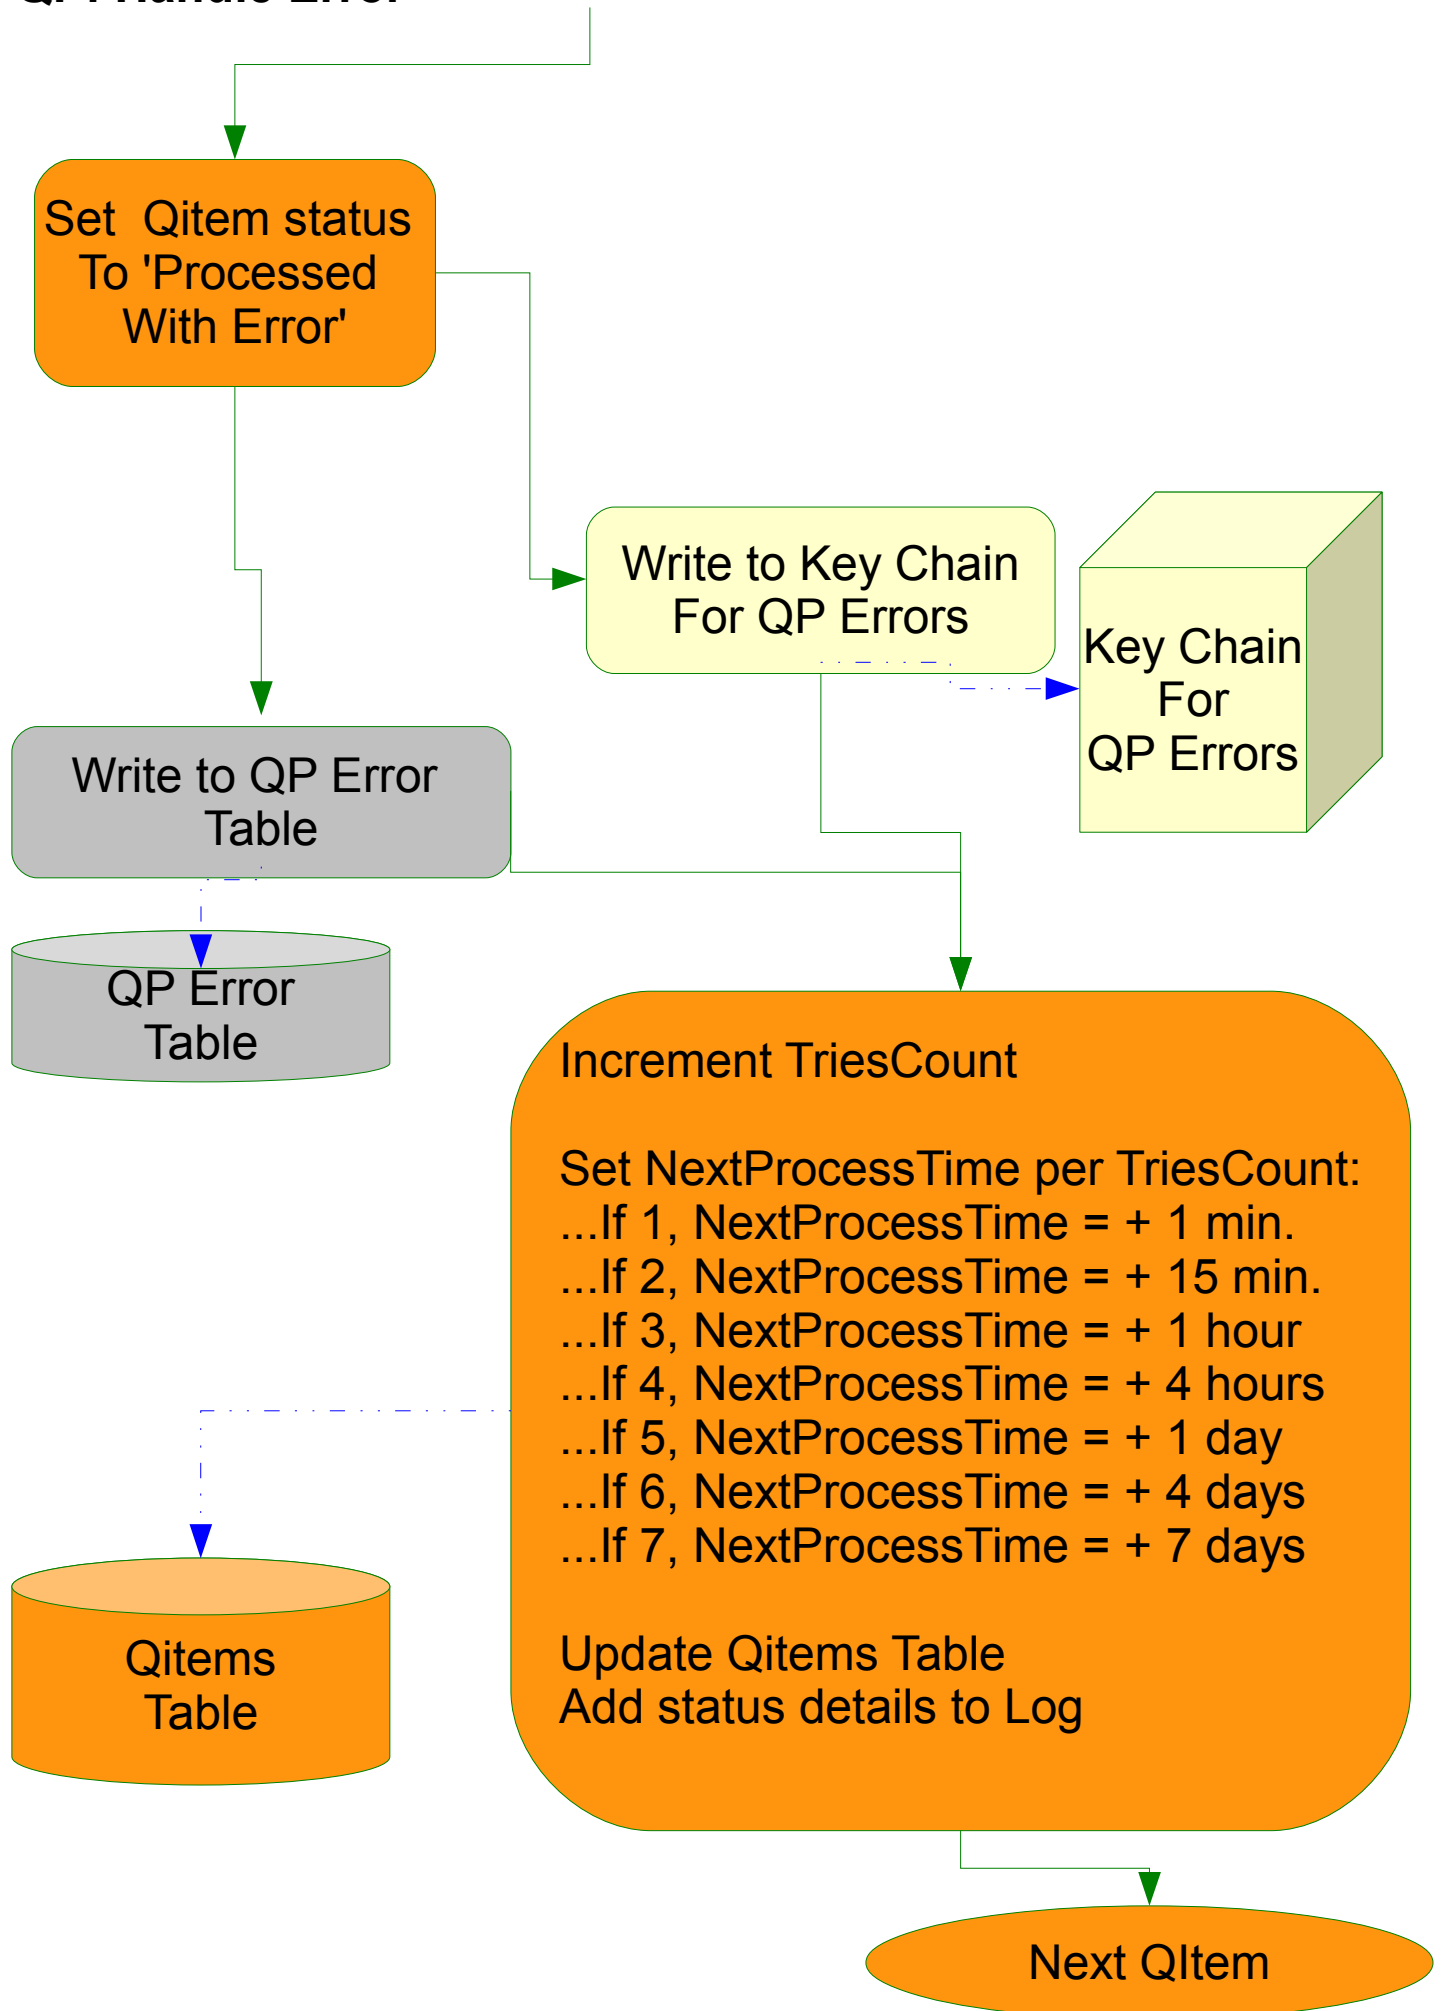

Sub-app: Error Display

