

## Results on Dataset-1

- Images here are just for reference. It is suggested to see from the results folder.

### 1. Without use of in-built Homography Estimation:


- For this dataset, the images are bit complex. So, the parameter for no. of iterations of RANSAC needs to be increased than the default value to find a best fit. Value I took = **1800**




:-----: 😊 :-----:

[Stitching of 2 Images] | [Stitching of 3 Images]

- Final Stitching of 4 Images:

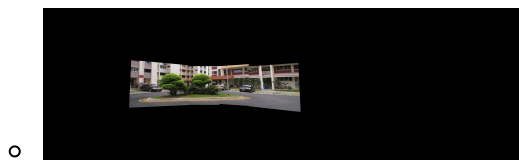

### 2. Using in-built Homography Estimation:

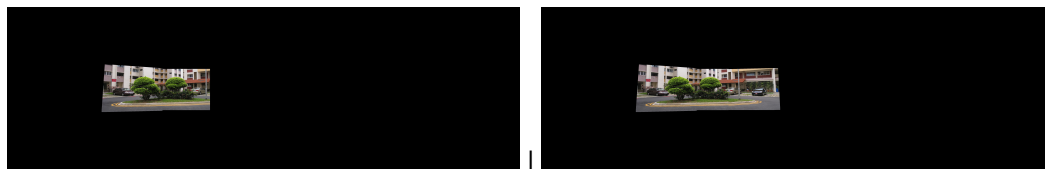

:-----: 😊 :-----:

[Stitching of 2 Images] | [Stitching of 3 Images]

- Final Stitching of 4 Images:

