

CHAPTER 8:

JAVA APPLETS

Java Applets

✓Java Applets:

A java program that can be embedded in HTML document.

✓appletviewer uses an HTML document to load an applet.

```
appletviewer WelcomeApplet.html
```

✓Applet can also be invoked and viewed using java enabled browser.

Java Applets

Run Applet in HTML

```
<html>
<applet code = “Welcome.class” width =“300” height = “40”>
</applet>
</html>
```

About Applets


- An applet is a Java class that extends the java.applet.Applet class.
- A main() method is not invoked on an applet, and an applet class will not define main().
- **init:** This method is intended for whatever initialization is needed for your applet.
  - ✓ It is called after the param tags inside the applet tag have been processed.

About Applets (2)


Applet class can call methods that can do:

- Get applet parameters
- Get the network location of the HTML file that contains the applet
- Get the network location of the applet class directory
- Print a status message in the browser
- Fetch an image
- Fetch an audio clip
- Play an audio clip
- Resize the applet

Applets (Example 1)

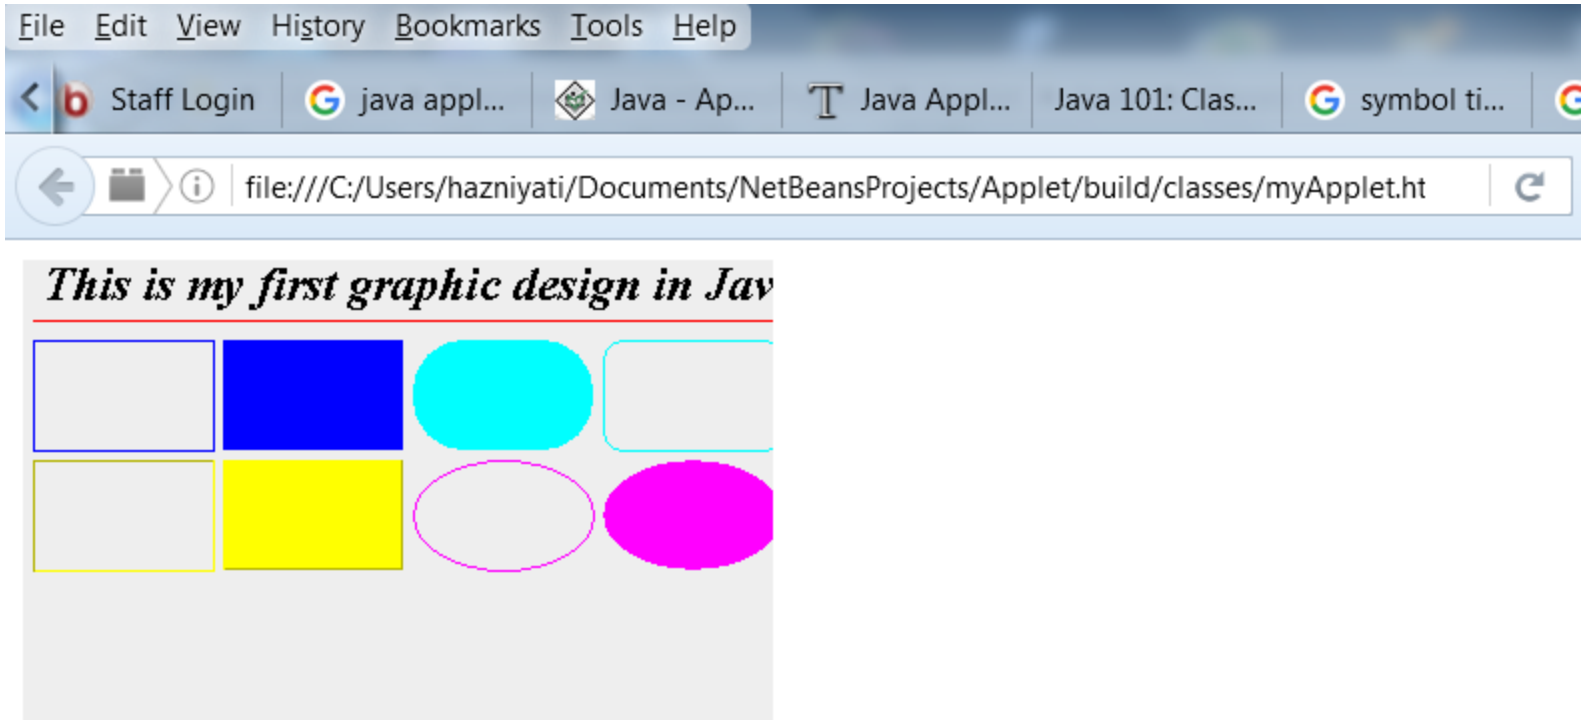

Applets (Example 2)

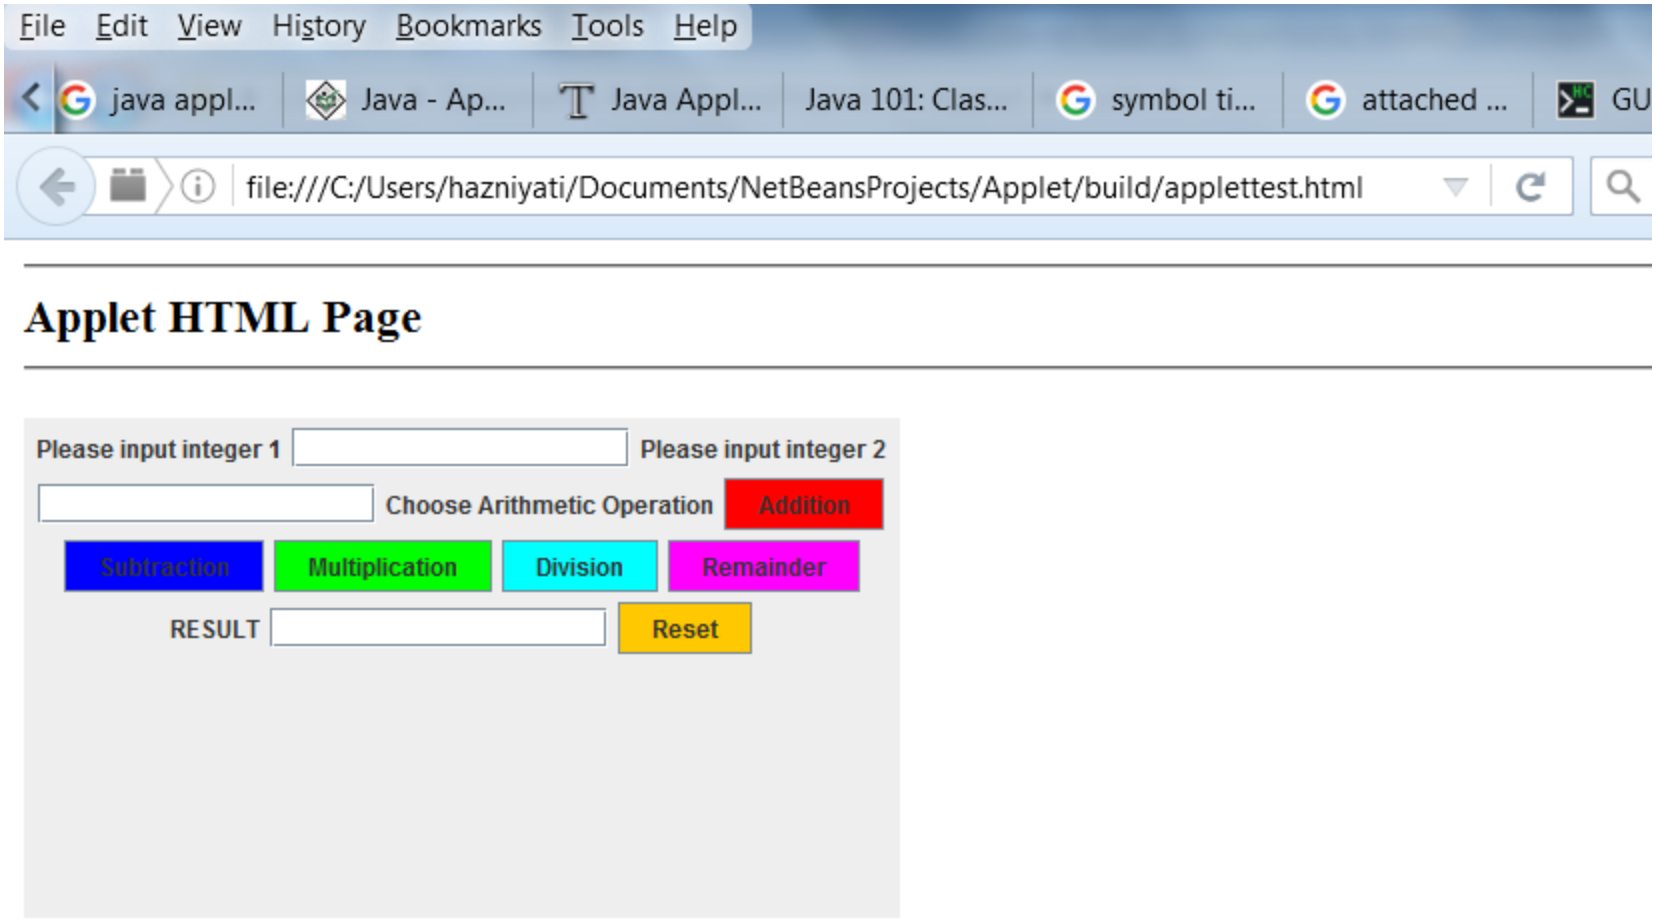

More On Applets

http://www.tutorialspoint.com/java/java_applet_basics.htm

https://flylib.com/books/en/1.206.1.139/1/