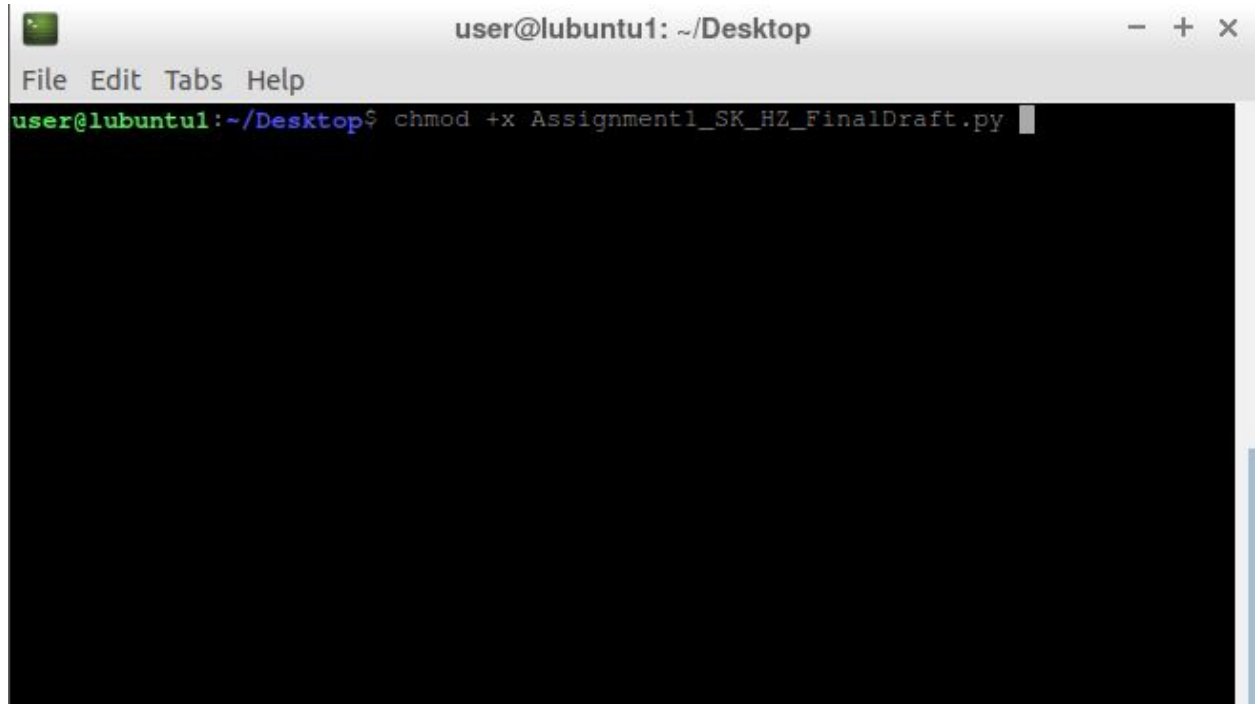


To Run the Python Program:

Change permissions with the following command

`chmod +x Assignment1_SK_HZ_FinalDraft.py`


A screenshot of a terminal window titled "user@lubuntu1: ~/Desktop". The window has a menu bar with "File", "Edit", "Tabs", and "Help". The terminal prompt is "user@lubuntu1:~/Desktop\$". The command "chmod +x Assignment1_SK_HZ_FinalDraft.py" has been entered and is followed by a cursor. The terminal background is black, and the text is in a monospaced font with some color coding (green for the prompt, blue for the path).

```
user@lubuntu1: ~/Desktop
File Edit Tabs Help
user@lubuntu1:~/Desktop$ chmod +x Assignment1_SK_HZ_FinalDraft.py
```

(Continued below)


To run the program, usage is as follows

`./Assignment1_SK-HZ_FinalDraft.py [path_of_text_file_goes_here]`

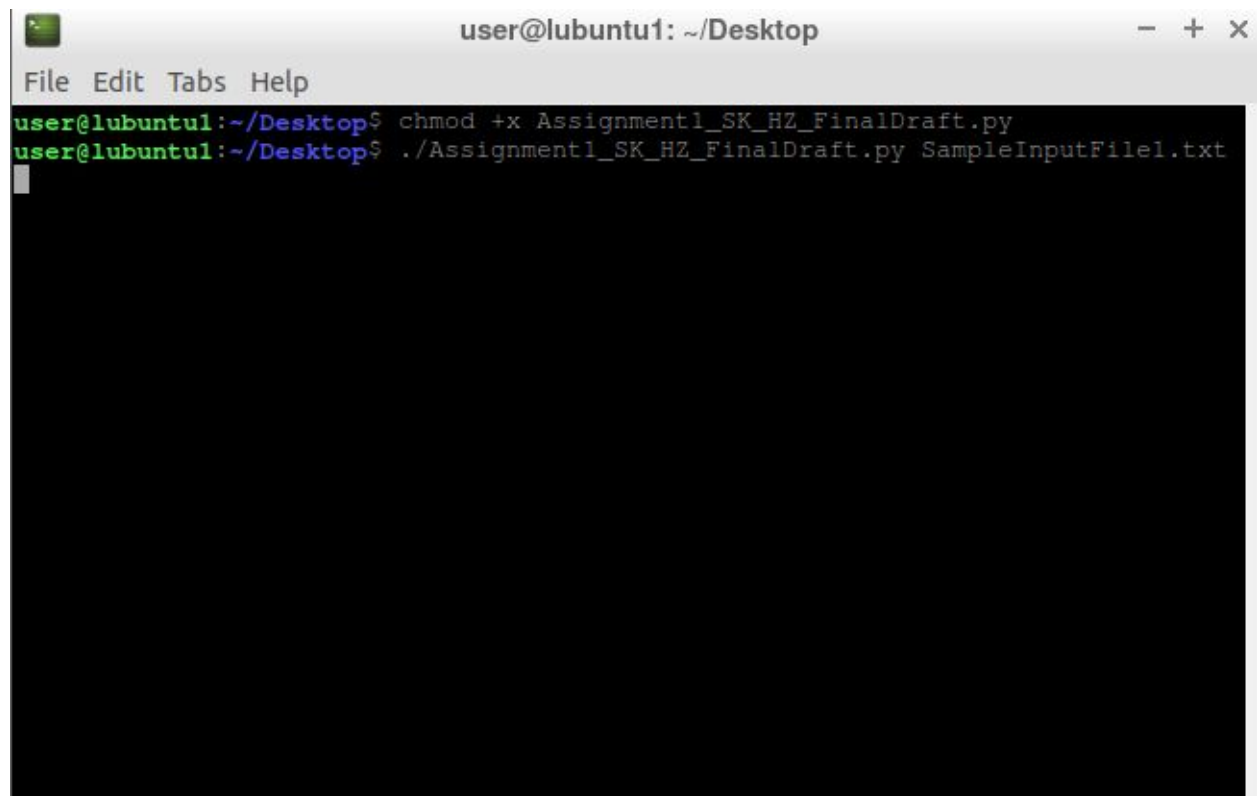A terminal window titled "user@lubuntu1: ~/Desktop" with standard window controls. The menu bar includes "File", "Edit", "Tabs", and "Help". The terminal shows two commands being executed: first, "chmod +x Assignment1_SK_HZ_FinalDraft.py" and second, "./Assignment1_SK_HZ_FinalDraft.py SampleInputFile1.txt". The prompt "user@lubuntu1:~/Desktop\$" is visible before each command. The terminal background is black with green and blue text.

```
user@lubuntu1: ~/Desktop
File Edit Tabs Help
user@lubuntu1:~/Desktop$ chmod +x Assignment1_SK_HZ_FinalDraft.py
user@lubuntu1:~/Desktop$ ./Assignment1_SK_HZ_FinalDraft.py SampleInputFile1.txt
```

This will output a text file in the same path the program was run, as 'output.txt'

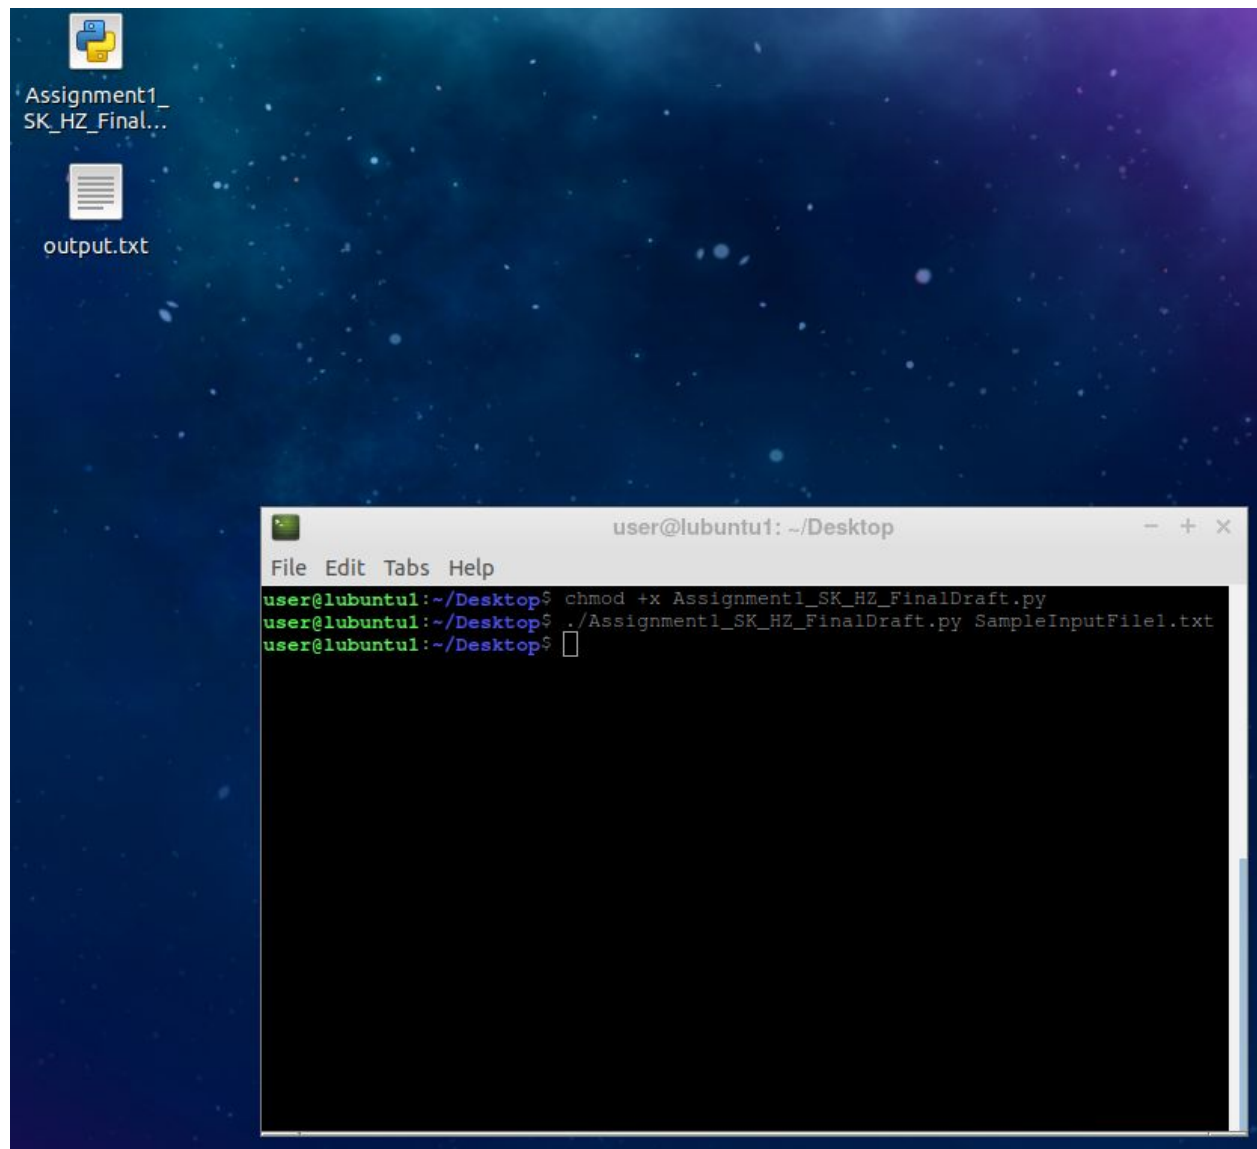

Contents of output.txt

output.txt		-	+	×
File Edit Search Options Help				
TOKENS	LEXEMES			
KEYWORD	int			
IDENTIFIER	num1			
SEPARATOR	,			
IDENTIFIER	num2			
SEPARATOR	,			
IDENTIFIER	large\$			
KEYWORD	if			
SEPARATOR	(			
IDENTIFIER	num1			
OPERATOR	>			
IDENTIFIER	num2			
SEPARATOR	)			
SEPARATOR	{			
IDENTIFIER	large			
OPERATOR	=			
IDENTIFIER	num1\$			
SEPARATOR	;			
SEPARATOR	}			
KEYWORD	else			
SEPARATOR	{			
IDENTIFIER	large			
OPERATOR	=			
IDENTIFIER	num2\$			
SEPARATOR	;			
SEPARATOR	}			
KEYWORD	while			
SEPARATOR	(			
IDENTIFIER	fahr			
OPERATOR	<			
IDENTIFIER	upper			
SEPARATOR	)			
IDENTIFIER	a			
OPERATOR	=			
REAL	23.00			
KEYWORD	whileend			