


headers/consts.h

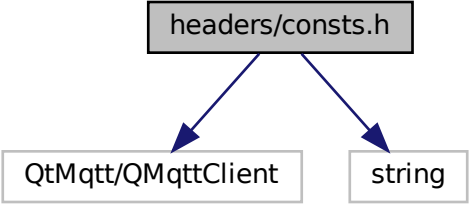

```
graph TD; A[headers/consts.h] --> B[QtMqtt/QMqttClient]; A --> C[string];
```

The diagram illustrates the dependencies of the file headers/consts.h. It is represented by a gray rectangular box at the top. Two blue arrows originate from the bottom of this box and point downwards to two separate white rectangular boxes. The left box contains the text QtMqtt/QMqttClient, and the right box contains the text string. This visualizes that the headers/consts.h file depends on both the QtMqtt/QMqttClient module and the standard C++ string type.

QtMqtt/QMqttClient

string