



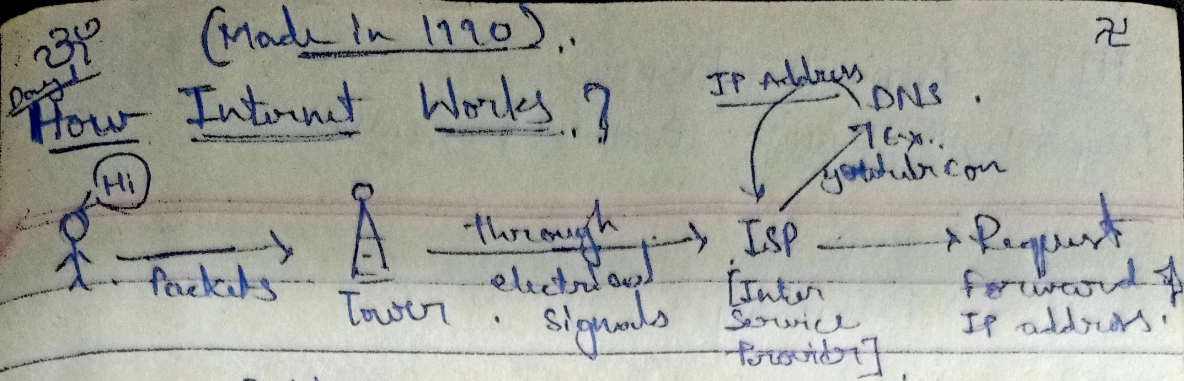

2 Ways

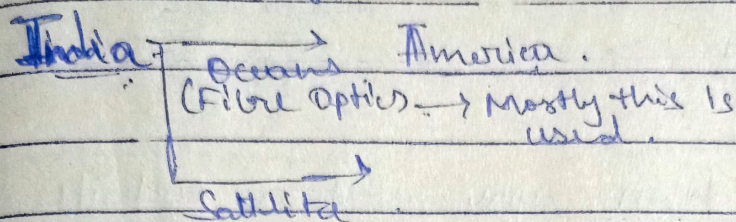

- Web 1.0 → Only Read
- Web 2.0 → Read + Write
- Web 3.0 → [Ex: Block chain]

Why? In this the ownership has the ownership (user).

Day-2

Client - Server Model

(User Side [browser, mobile app, etc])
(Client request bhijta hai)

Server = Computer / machine jaha website ka code, database, files stored hoti hain.

(Server request dekhta hai and response deta hai)
(this is called client-server relationship)

HTTP Request - Response Cycle [4 Steps]

(Hyper-text Transfer Protocol) → rules

- Step 1 → Request
- Step 2 → Browsing
- Step 3 → response
- Step 4 → render

What happens when you visit a website

url →

Cache

dns lookup

request to server

server processing

http response

browser renders page

Git And Github

Ctrl + Shift + .

Version Control for collaboration.
Tracks every change that you have made in file.

Folder/Directory

git init

Working directory

git add

Staging area

git commit -m "message"

local repository

git push

Server/cloud
Remote repository
github

store
What?
When?
Who?

• git clone link

git add

git commit -m "msg"

git push (this pushes into github)

for the first time you should use the next page commands.

HTML

Media tags

``

hyperlink

`<a target="_blank" href=" " > Link </a>`

`<video autoplay loop muted controls height="100" src="/video.mp4" > </video>`

`<audio controls src="/songs.mp3" > </audio>`

Form

`<form>`

`<input type="text" placeholder="Enter your name" >`

`</form>`

- colour
- datetime-local
- email
- password
- date
- checkbox

Ex:-

`<input name="gen" type="radio" > Male`

→ in this if we want to select only one thing then give the same name.

`<input name="gen" type="radio" > Female`
→ `id="gender"`

`<label for="gender" > Female </label>`

→ (If we click on text that Radio button will activate - , we can also do this for checkbox and also)

→ Required → (Mandatory)

Logo

Link: favicon

`<meta name="description" >`

CSS

border: 5px solid white; Boilerplate

color

border: none, dashed, dotted

* {

background color

margin: 0px;

font-size

border-radius

padding: 0px;

font-family

line-size: border-box

font-weight

}

font-style

body, html {

text-align

height: 100%;

text-transform: uppercase
lowercase

width: 100%;

for font (advance turika)

@font-face {

font-family: AnyName;

now you can use this in font family.

src: url(---);

}

linear gradient

background: linear-gradient (colour1, colour2);

• to right

• to left

• to right bottom

(to right, colour1, ---) ;
to left

=> (colour1 10%, colour2 30%);

: radial-gradient (

: conic-gradient (

Image (ogi)

background-image: url(---);

background-size: cover; : cover
: contain

background-position: center;

background-repeat: no-repeat;

image tag
object fit: cover;

Marginal & Padding → imaginary space andhari se


• imaginary space bhor se

position: absolute

• jo bhi element absolute hota hai wo uth jaata hai and agar tumhe us element ko move krna ho to wo kisi ke upar bhi a sakta hai.

• koi bhi element jiske position nahi hai upar top left bottom and z-index ki property kaam nahi karti

position: fixed

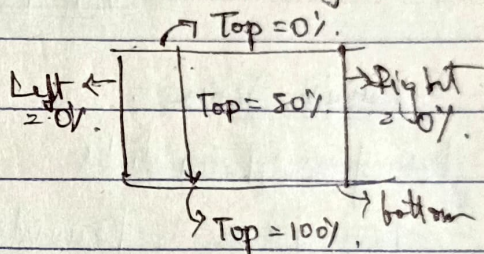


Sticky

• agar aapka ek div hai jiske andar ek aur element hai jo sticky hai to wo element scroll krte krte upar chipak jayega and tab tak wahi rahenga jab tak aapka poora parent scroll nahi hojata.

Display Flex → for Responsive & Better Layout.

Parent → display: flex.

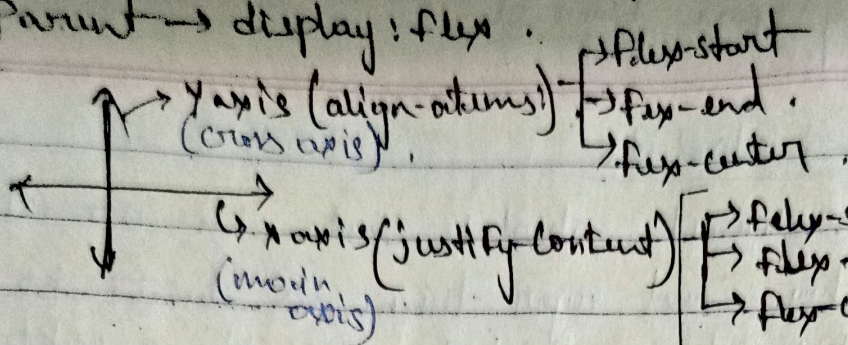

• these properties are same for x & y axis.

flex-start
flex-end
flex-center
space-between
space-around
space-evenly

* here we can also use gap property Ex: gap: 15px;

→ Remix Icon.

Transform & Translate

→ size the 50% age bhadya

* Transform: TranslateX(50%);
translate(-50%, -50%);

* ClipPath [Bunker File] → custom shapes

Parent

flex: wrap;
: nowrap

child

flex-shrink: 0, 1, 0

no shrink

10% shrink

* overflow: auto

Shadow (property)

box-shadow: 10px 10px 20px block
X X blur intensity

Same for text-shadow

GRID

Basic grid

display: grid;

grid-template-columns: 50% 50%;

rows: 1fr 2fr 1fr;

Divides into fraction
1:2:1 ratio of rows same for column also

: 100px minmax(200px, auto);

minimum takes
leftover or
we can give
400px.

gap: row-gap: 20px;
column-gap: 20px;
grid-gap: 20px; } for gap
between grids

align-items: center;

justify-items: center;

align-content: } start, end, center, space-between,
justify-content: } space-around, space evenly.

child

grid-column-start;

grid-column-end;

grid-row-start;

grid-row-end;

Ex:-

Header	
aside	Section
Footer	

* grid-template-areas (in mark) → create grid template column & row.

1) grid-template-areas: "header header"

"aside section"

"footer footer"

child.

3) go to each child div and write

grid area: header → for header div (same name)

grid area: aside → for aside div

