

Prepared By: Hatim Elbakkali

Topic: Course HTML

Year: 2025

1-CSS Syntax:	7
2-Selector:	7
2-1-Element Selector:	7
2-2-Class Selector:	7
2-3-ID Selector:	8
2-4-Descendant Selector:	8
3-Sibling Selectors:	9
3-1-Adjacent Sibling Selectors :	9
3-2-General Sibling Selectors(~) :	9
3-3-Child Selectors(>) :	9
4-Attributes Selector:	10
5-Box Model:	11
6-Border Radius:	12
7-Text:	13
7-1-Text Align:	13
7-3-Text Transform:	14
7-5-Text Decoration:	15
8-Font:	16
8-1-Font Family:	16

8-2-Font Size:	16
8-3-Font Style:	17
8-6-Font Short Hand:	18
9-Background:	19
9-1-Background repeat:	19
9-2-Background Attachment:	19
9-3-Background Position:	20
9-4-Background Size:	20
9-6-Background linear gradient:	21
9-7-Background radial gradient:	21
10-Position:	22
10-1-Float:	22
10-2-overflow:	22
10-3-Position:	23
10-4-Z_Index:	23
11-List and Table:	24
11-1-List Style:	24
11-2-Table Style:	24
12-CSS Units:	25

12-1-CSS Absolute Units:	25
12-3-More Used:	26
13-Pseudo classes:	27
13-1-All Pseudo classes (but in French):	27
14-Pseudo element:	28
14-1-All Pseudo Element (but in French):	28
15-Tranform:	29
15-1-Translate:	29
15-2-Scale:	29
15-4-Skew:	30
15-5-Matrix:	30
16-Transition:	31
16-1-Transition property:	31
16-2-Transition duration:	31
16-3-Transition timing function:	32
16-5- Shorthand Transition:	33
17-Animation:	34
17-1-Keyframes:	34
17-2-Animation:	35

17-2-1-Animation Name:	35
17-2-2-Animation duration:	35
17-2-3-Animation delay:	35
17-2-4-Animation iteration count:	36
17-2-5-Animation direction:	36
17-2-6-Animation timing function:	36
17-2-7-Animation fill mode:	37
17-2-8-Animation play state:	37
17-2-9-All Animation In Example:	38
18-Display:	39
18-1-Block:	39
18-2-Inline:	39
18-3-Inline-Block:	40
18-4-Display:none; :	40
18-5-visibility:	40
18-6-Opacity:	41
19-Flexbox:	42
19-1-Flexbox Parent:	42
19-1-1-The most important features of flex	

parent:	42
19-1-1-1-Flex Direction:	42
19-1-1-2-Flex Wrap:	43
19-1-1-3-Justify Content:	43
19-1-1-4-Align items:	44
19-1-1-5-Align Content:	45
19-2-Flexbox Self:	45
19-2-2-The most important features of flex	
parent:	46
19-2-2-1-Flex Grow:	46
19-2-2-2-Flex Shrink:	46
19-2-2-3-Flex Basis:	47
19-2-2-4-Flex (Shorthand):	47
19-2-2-5-Order:	48
19-2-2-6-Align Self:	48
19-2-2-7-Gap:	49
20-Grid:	50

CSS



CSS (Cascading Style Sheets) is a styling language that makes websites look beautiful and professionally designed.

1-CSS Syntax:

```
h1 {  
  color: black;  
}
```

like equals (=) Differentiate between elements

2-Selector:

it is a tool used to specify which HTML elements we want to apply formatting (style).

2-1-Element Selector:

Element selector: (باستخدام الاسم العنصر)

```
p {  
  color: blue;
```

2-2-Class Selector:

class selector: (باستخدام كلاس)

```
.title {  
  font-size: 20px;  
}
```

HTML

```
<p class="title">halm  
</p>
```

2-3-ID Selector:

ID Selector: (id # followed by)

```
#main {  
  background: yellow;  
}
```

HTML

```
<div id="main"> hain  
</div>
```

2-4-Descendant Selector:

Descendant Selector: (inheritance)

```
div p {  
  color: green;  
}
```

HTML

```
<div>  
  <p> </p>  
</div>
```

3-Sibling Selectors:

3-1-Adjacent Sibling Selectors :

This selects the item that comes directly after a particular item (only one sibling comes directly after it)

EX:

HTML	CSS	Output
<pre><h1> letter </h1> <p> A </p> <p> B </p></pre>	<pre>h1+p { color: green; }</pre>	<pre>letter A B</pre>

3-2-General Sibling Selectors(~) :

This selects all brothers (Siblings) that come after the item, not just the one immediately after it.

EX:

HTML	CSS	Output
<pre><h1> letter </h1> <p> A </p> <p> B </p></pre>	<pre>h1 ~ p { color: green; }</pre>	<pre>letter A B</pre>

3-3-Child Selectors(>) :

This selects only direct child element within a given element.

EX:

HTML	CSS	Output
<pre><div> <p> Ha </p> </div></pre>	<pre>div > p { color: green; }</pre>	<pre>Ha</pre>

4-Attributes Selector:

① [attribute]

② [attribute = "Value"] → selects the element that is exactly equal to a specified Value

③ [attribute ~="Value"] → ولكن تكون صفحوته بصفة ذات

④ [attribute |= "Value"] → متبوعة - او متساوية



⑤ [attribute ^="Value"] → Start with

⑥ [attribute \$="Value"] → end with

⑦ [attribute *="Value"] → anything value


5-Box Model:

Every element in an HTML page (such as `<div>`, `<p>`...) is ^{يعتبر} considered a Box and this box consists of four layers (content, padding, Border, Margin)

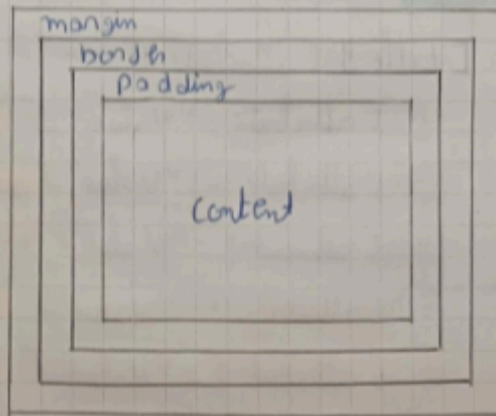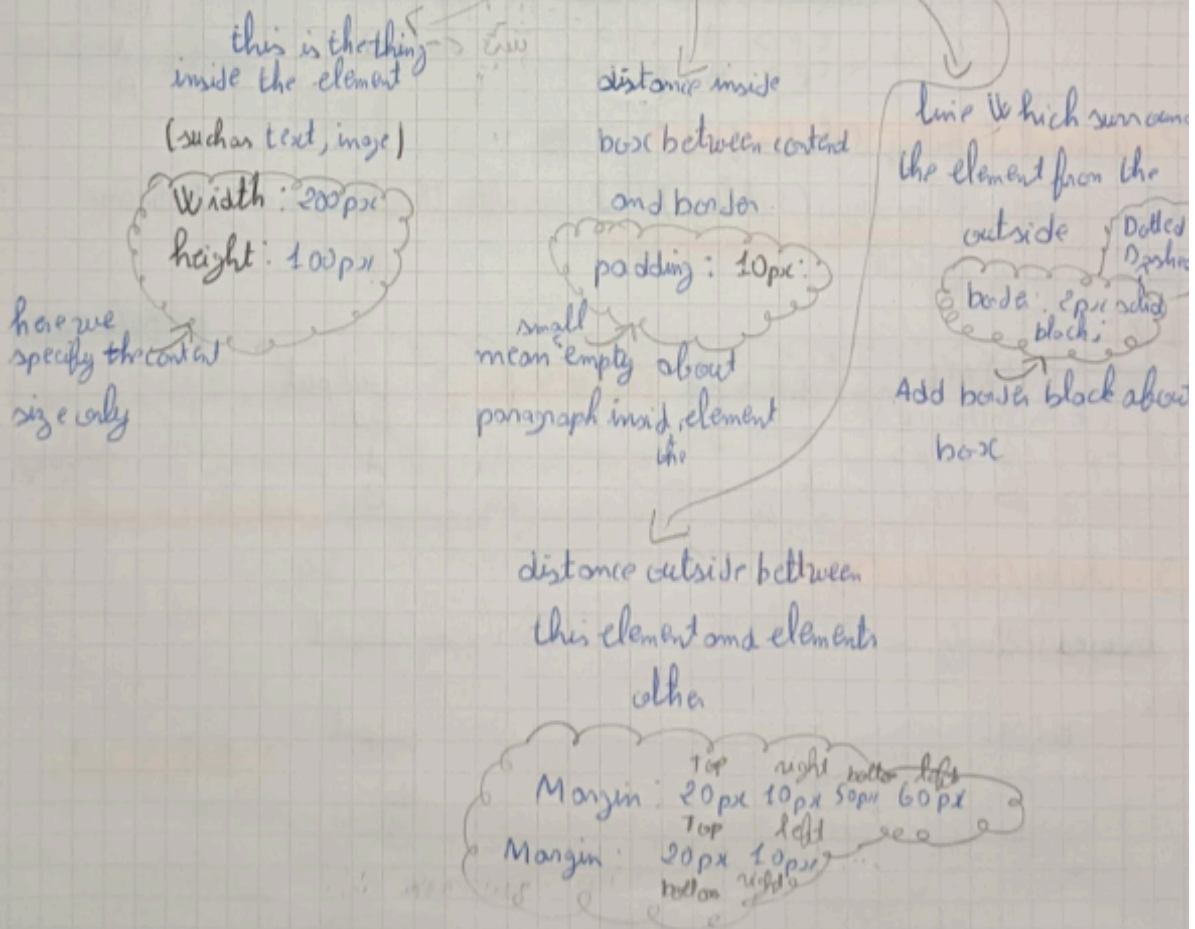


6-Border Radius:

used to make the corners of an element curved rather than sharp.

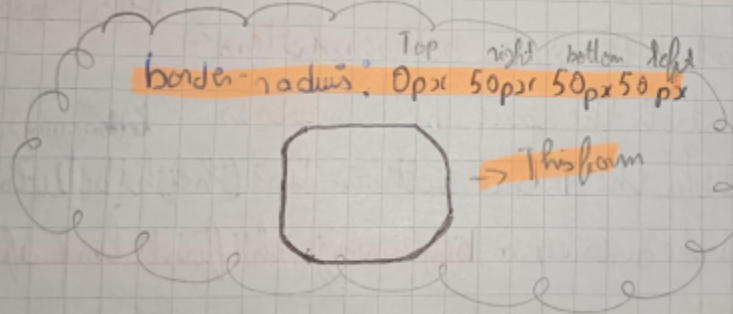


7-Text:

7-1-Text Align:

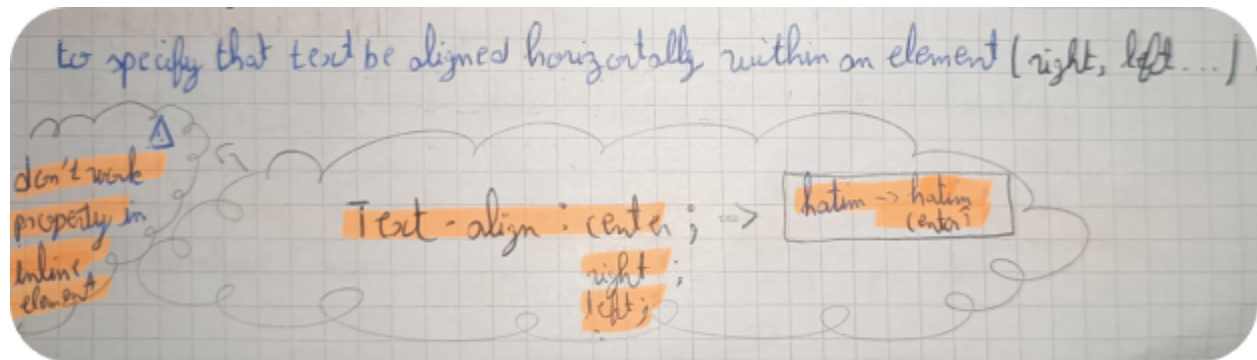

7-2-Text Direction:

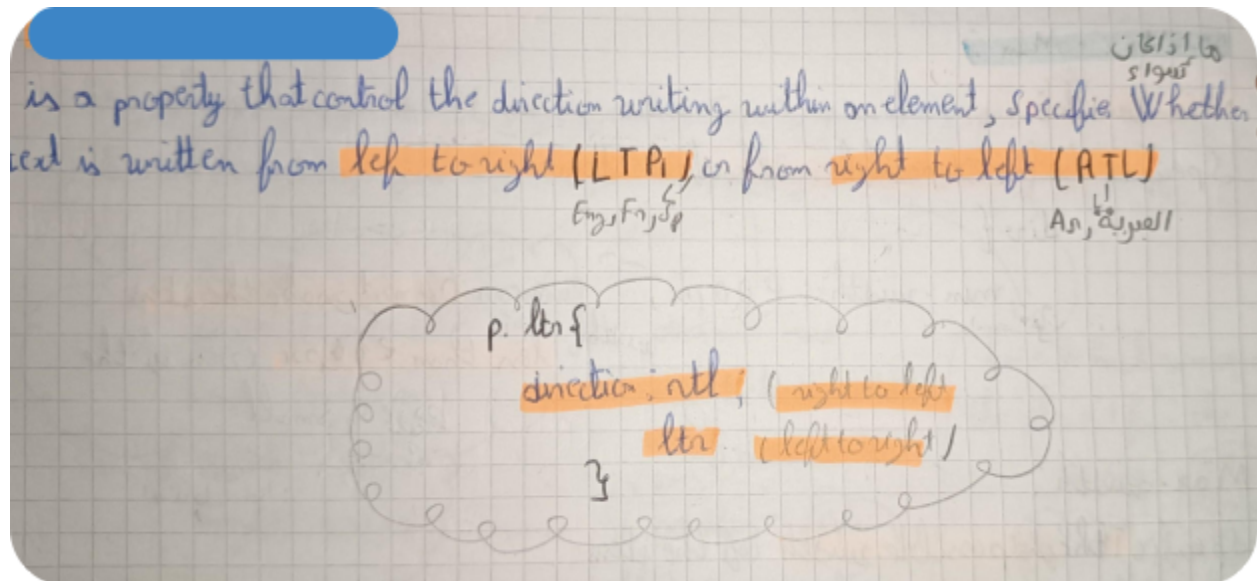

7-3-Text Transform:

They are used to change the shape of letters in text, such as converting them to uppercase or lowercase letters or capital.

كل حرف كبير
كل حرف صغير

كل حرف كبير

{

text-transform: uppercase

lowercase

capitalize

}

7-4-Text Spacing:

letter-spacing: controls the space between letters

Word-spacing: controls the space between words

line-height: controls the distance between lines (height between lines)

text-indent: Add the distance in beginning the first line of paragraph.


letter-spacing: 3px;

letter-word: 5px;


line-height: 1.2;

text-indent: 5px;


7-5-Text Decoration:

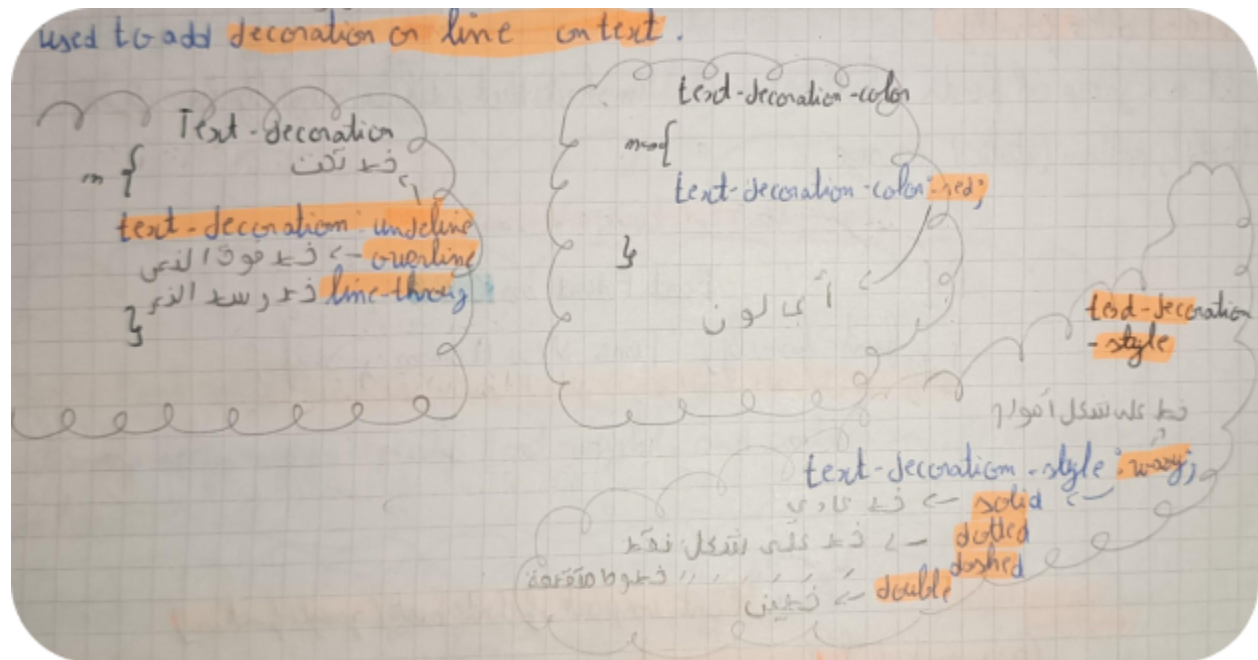

7-6-Text Shadow:

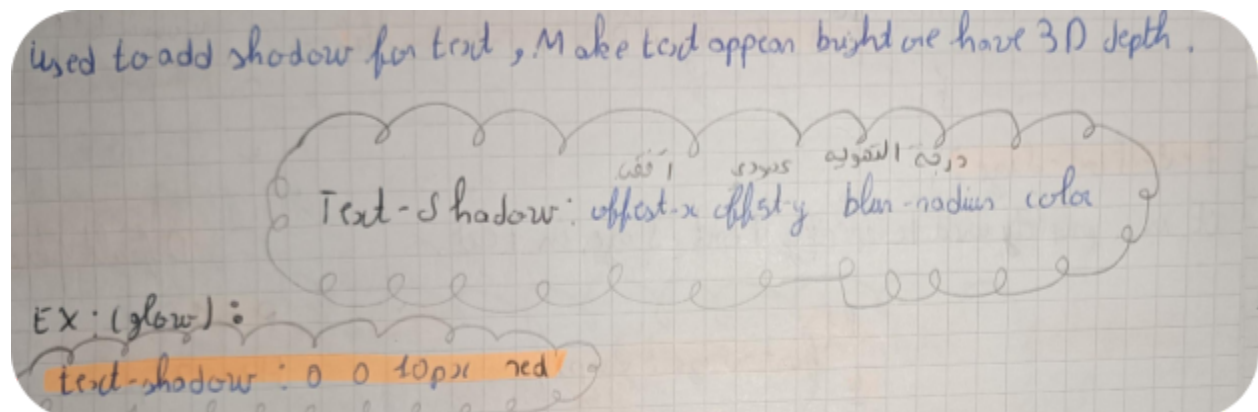

7-7-Whit-Space:

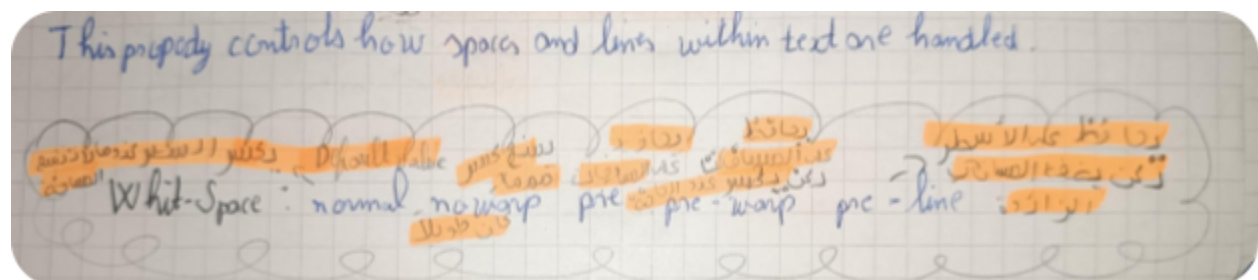

8-Font:

8-1-Font Family:

it is a group of fonts that are similar in shape but, differ slightly in weight (bold), pattern (italic), or size.

Font Found in CSS

```
p { font-family: "Times New Roman", serif; }
```

Font import of Internet (google font...)

```
@import url (...);
```

```
h3 { font-family: "BB H Sans Bold"; }
```

8-2-Font Size:

it is a property used to specify Font-Size in Text.


```
p { font-size: 20px; }
```

Default Value


p = 16px

H1 = 32px


8-3-Font Style:

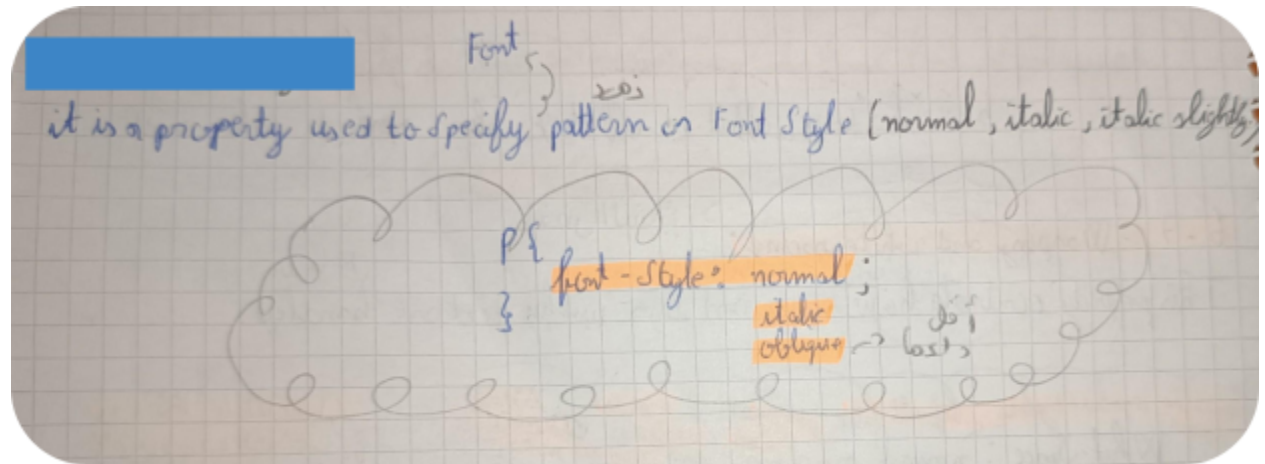


8-4-Font Variant:

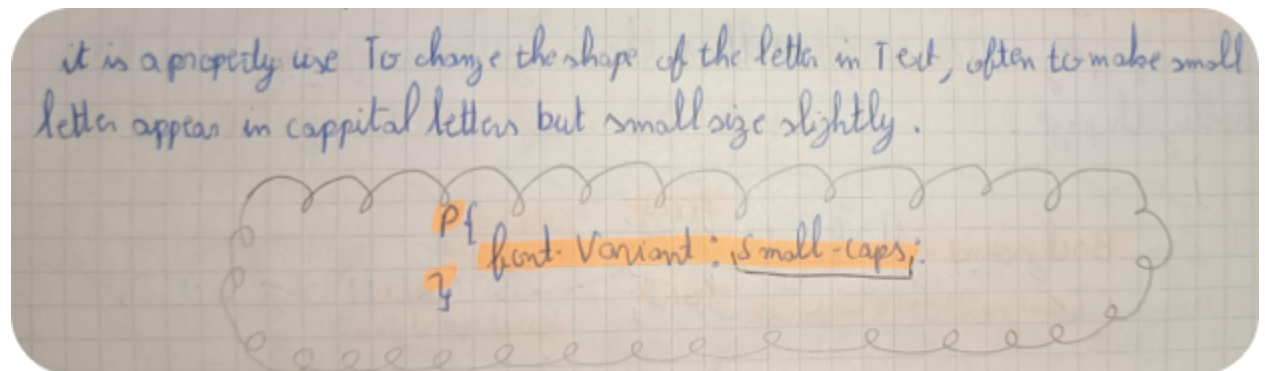

8-5-Font Weight:

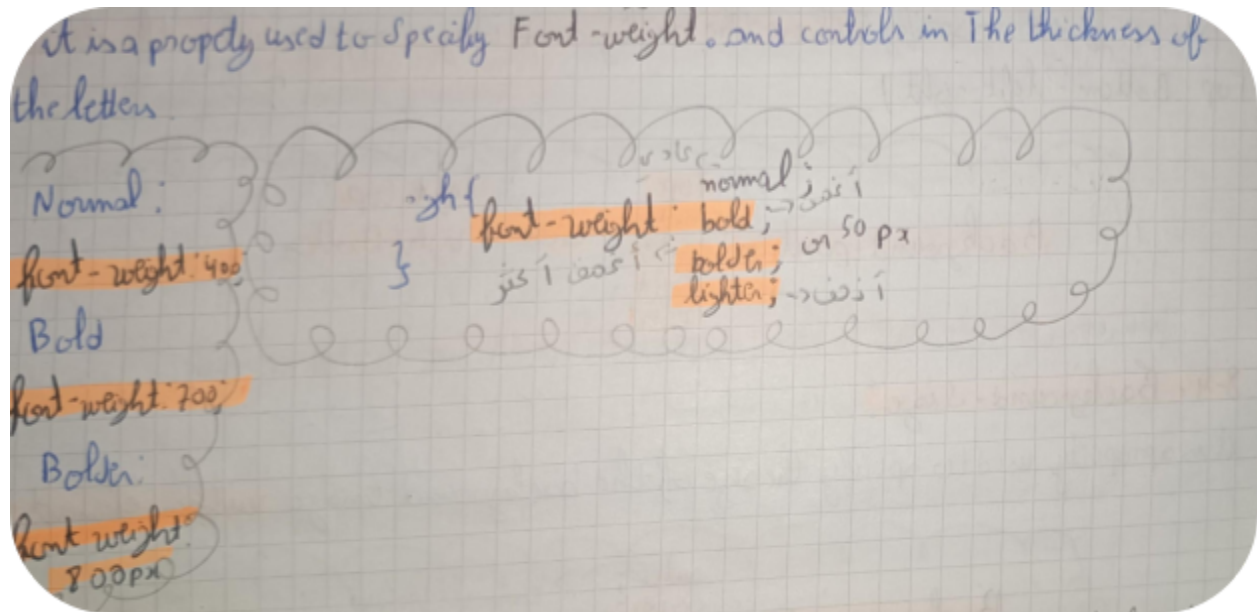

8-6-Font Short Hand:

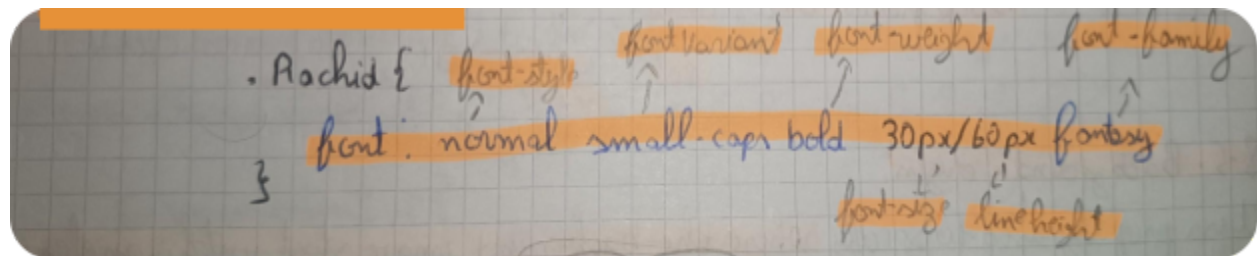


9-Background:

Used to insert a background(image, color....) into a page.


EX:

Background-image: url()

9-1-Background repeat:

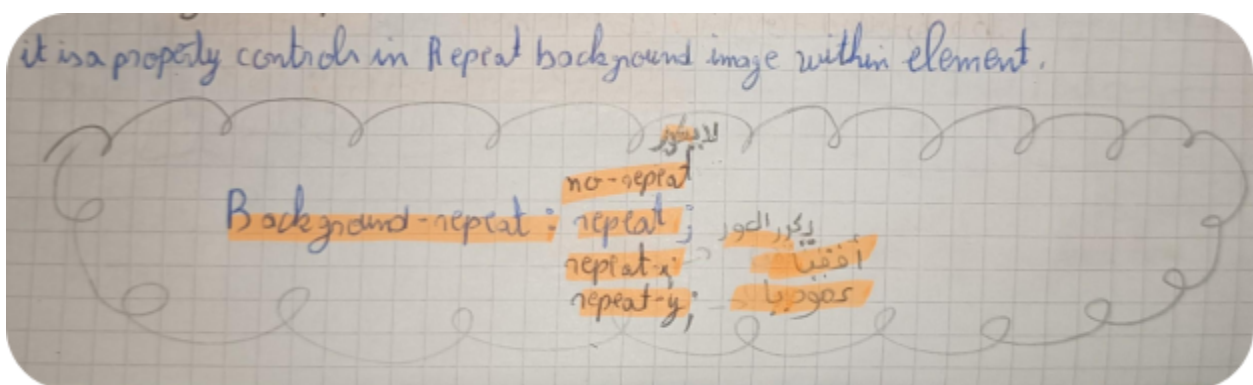

9-2-Background Attachment:

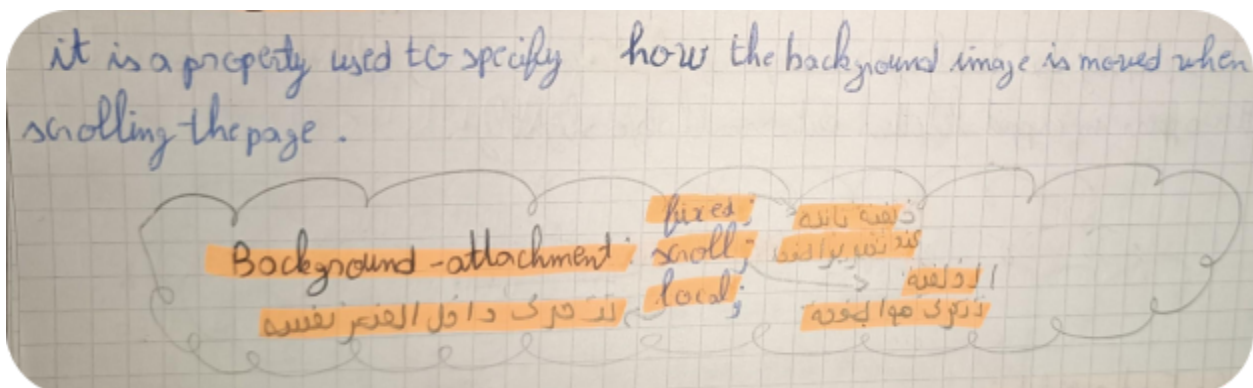

9-3-Background Position:

it is a property used to specify where the background image appears within the element (Top - Bottom - left - right).

Background-position: Top, Bottom, center, left, right, left top, right Bottom, = or { }

9-4-Background Size:

it is a property used to specify the size of the background image within element.

Background-size: auto, cover, contain, 50px, 80%, Default value, أكبر الصورة لتغطي كامل العنصر, الصورة تتناسب مع العنصر

9-5-Background origin:

it is a property used to specify where the background image start within an element

Background-origin: border-box, content-box, padding-box, تبدأ من حافة العنصر, تبدأ من حافة المحتوى, تبدأ من حافة المحتوى

9-6-Background linear gradient:

use to create a color gradient (two or more colors) that smoothly transitions from one color to another against the background of the element.

Background-image: linear-gradient(180deg, red, blue)

9-7-Background radial gradient:

use to create a color gradient, circle or ellipse.
shapes like

Background-image: radial-gradient(circle 100px at center, red, blue)

10-Position:


10-1-Float:

Used to move an element to the right or left within a page, so that other elements wrap around it. ^{تلف حول}

`float: left; or float: right; float: none;`

how to wrap around it?

EX:

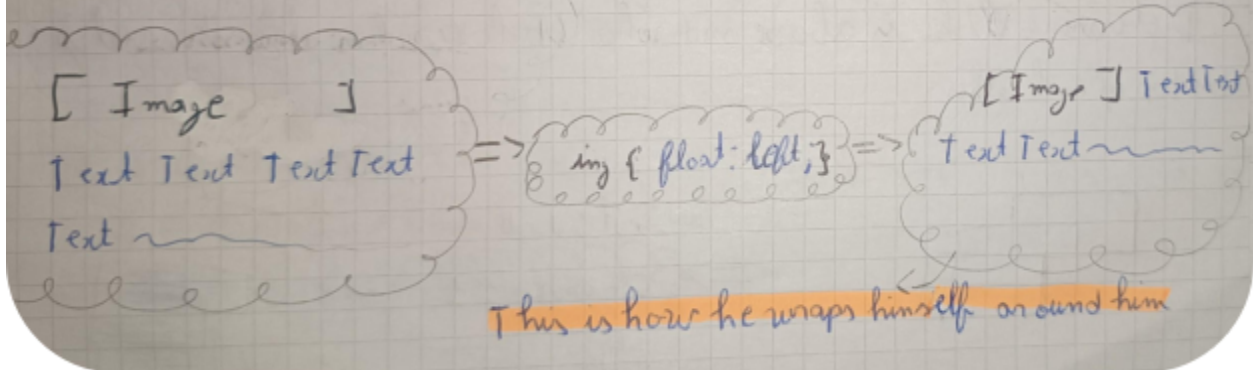

10-2-overflow:

They are used to determine what happens when the content of an item is longer than its allotted ^{مخصص} (When the content "exits" its boundaries ^{حدود})

^{تفصيل المحتوي الزائد داخل الإطار}

`overflow: hidden; ; overflow: scroll; ; overflow: visible;`

Default Value

10-3-Position:

used to specify a method placement of place item within the page

position: static; ^{يقترب ثباتا} Default Value Not use top, left, Bottom, Right	position: relative; ^{بالنسبة له} يقترب قليلا لكن مكانه الأصلي يبقى لا يغير أحد مكانه Use top, left
position: absolute; ^{يقترب نسبة} نسبة ثبات (body) إذا وجدنا يقترب للأب ولا يغير مكانه الأصلي نه يطغى فوق الصفحة Use: top, left, Bottom, Right	position: fixed; ^{يقترب} يقترب لكنه لا يغير مكانه في أي مكان النافذة ثبات لو كملت scroll

position: sticky;
 $\frac{1}{2}$
relative + fixed

10-4-Z_Index:

Determines Who is above and who is below when elements overlap on top of each other

كل لون أزرق يطغى


$\Rightarrow$ **z-index: 1**

كل مكانة القيمة أكبر يظهر فوق


كأنه يتر 2

11-List and Table:

11-1-List Style:

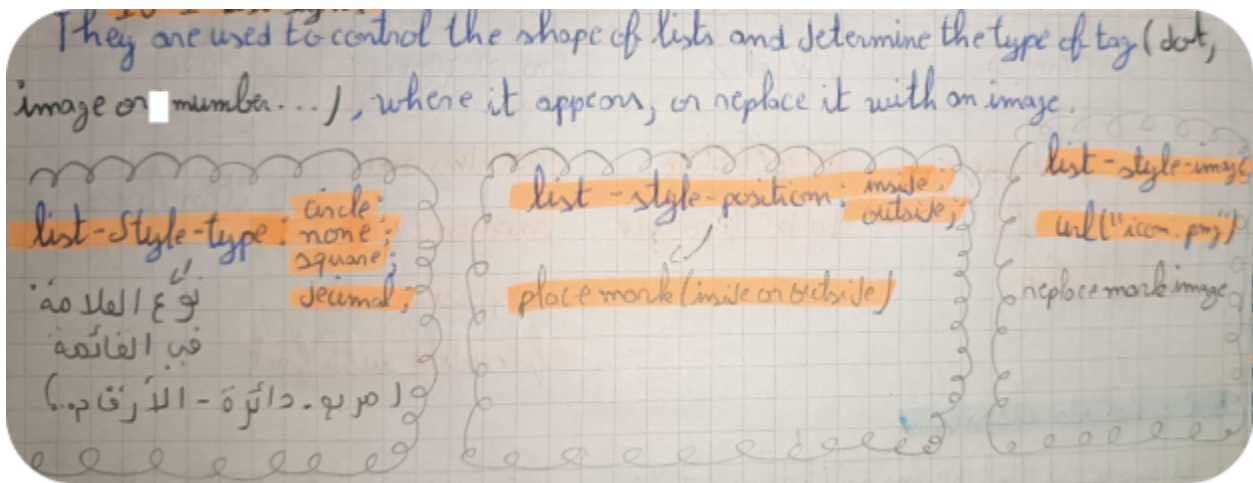

11-2-Table Style:

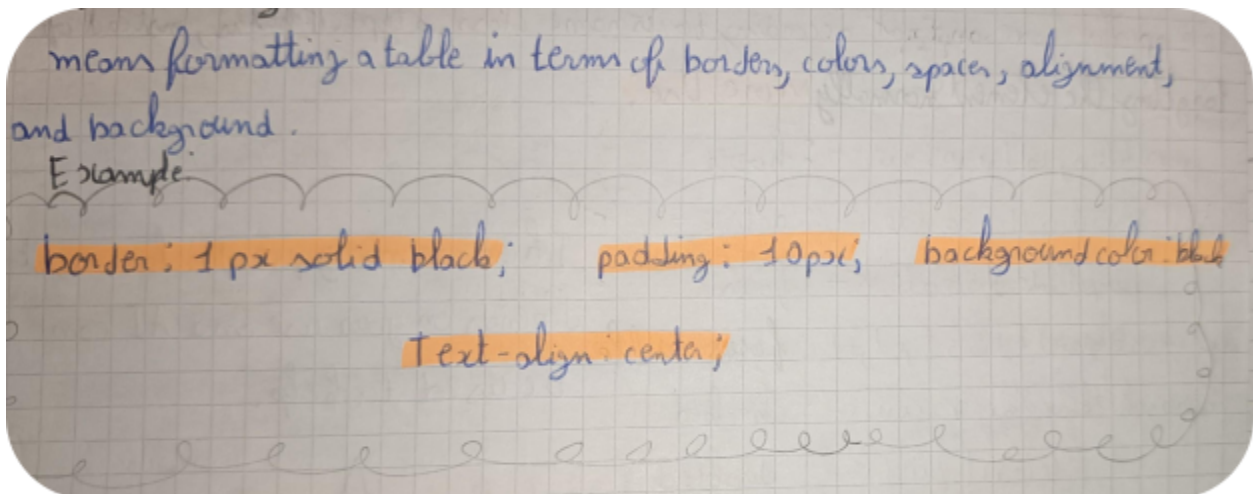

12-CSS Units:

These are the ways we measure:

- Width.
- height.
- Text-size.
- padding and margin.

12-1-CSS Absolute Units:

Does not change with screen or size.

Example:

px or cm or mm or in.


12-2-CSS Relative Units:

change depending on the screen size or item.

Ex:

% or em or rem or VW or Vh

12-3-More Used:

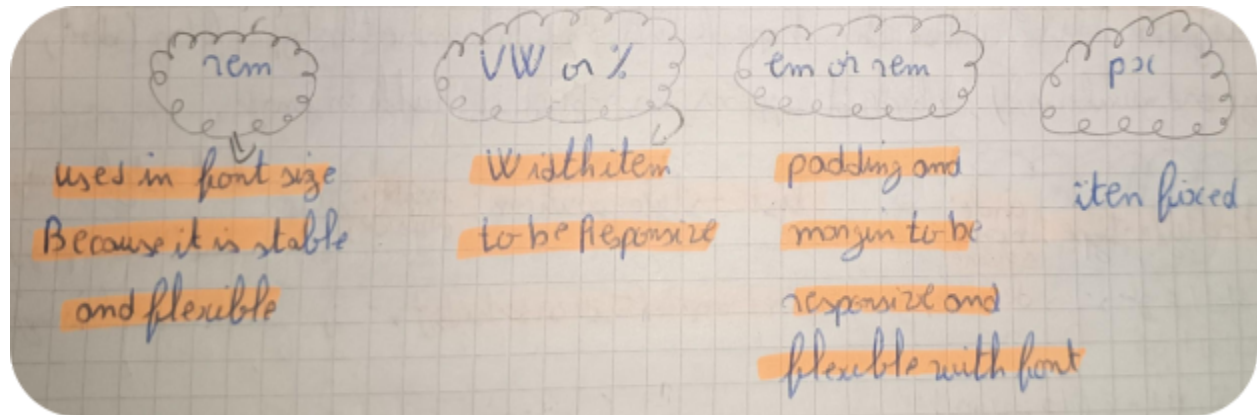

13-Pseudo classes:

it is a word that begins with two dots ":" used in CSS to select an element according to a specific case and not according to its name, class, or type.

More Use:

- hover : عند تمرير الماوس على العنصر
- active : عند ضغط المستعرض على العنصر
- focus : عند ضغط على العنصر
- required : إلزام الإدخال للمعلومات في العنصر
- checked : مستخدم في checkbox والعنصر
- disabled : لصنع التفاعل
- visited : أي أن الرابط لقد زرت
- empty : أي أن العنصر فارغ

There are many pseudo classes, it depends on your use and AI can be used to help.




13-1-All Pseudo classes (but in French):

Sélecteur	Exemple	Description
: checked	input :checked	Sélectionne tout élément <input> coché du formulaire
: disabled	input :disabled	Sélectionne chaque élément <input> désactivé
: empty	p :empty	Sélectionne chaque élément <p> qui n'a pas d'enfant
: enabled	input :enabled	Sélectionne chaque élément <input> activé
: first-of-type	p :first-of-type	Sélectionne chaque élément <p> qui est le premier élément <p> de son parent
: in-range	input :in-range	Sélectionne les éléments <input> avec une valeur située dans une plage spécifiée
: invalide	input :invalid	Sélectionne tous les éléments <input> avec une valeur invalide
: last-child	p :last-child	Sélectionne tous les éléments <p> qui sont les derniers enfants de leurs parents
: last-of-type	p :last-of-type	Sélectionne chaque élément <p> qui est le dernier élément <p> de son parent
: not(sélecteur)	:not(p)	Sélectionne tous les éléments qui ne sont pas des paragraphes
: nth-child (n)	p :nth-child(2)	Sélectionne chaque élément <p> qui est le deuxième enfant de son parent
: nth-last-child (n)	p :nth-last-child(2)	Sélectionne chaque élément <p> qui est le deuxième enfant de son parent, à partir du dernier enfant
: nth-last-of-type(n)	p :nth-last-of-type(2)	Sélectionne chaque élément <p> qui est le deuxième élément <p> de son parent, à partir du dernier enfant
: nth-of-type (n)	p :nth-of-type(2)	Sélectionne chaque élément <p> qui est le deuxième élément <p> de son parent
: only-of-type	p :only-of-type	Sélectionne chaque élément <p> qui est le seul élément <p> de son parent
: only-child	p :only-child	Sélectionne chaque élément <p> qui est le seul enfant de son parent
: optional	input :optional	Sélectionne les éléments <input> sans attribut "required"
: out-of-range	input :out-of-range	Sélectionne les éléments <input> qui ont des valeurs en dehors d'une plage spécifiée

Sélecteur	Exemple	Description
:read-only	input :read-only	Sélectionne les éléments <input> avec un attribut "readonly" spécifié
:read-write	input :read-write	Sélectionne les éléments <input> sans attribut "readonly"
:required	input :required	Sélectionne les éléments <input> avec un attribut "required" spécifié
root	root	Sélectionnez l'élément racine du document
:target	#news :target	Sélectionne l'élément #news actuellement actif
:valid	input :valid	Sélectionne tous les éléments <input> avec une valeur valide
:link	a :link	Sélectionne tous les liens non visités
:visited	a :visited	Sélectionnez tous les liens visités
:active	a :active	Sélectionne le lien actif
:hover	a :hover	Sélectionne les liens sur lesquels la souris passe
:focus	input :focus	Sélectionne l'élément <input> qui a le focus

14-Pseudo element:

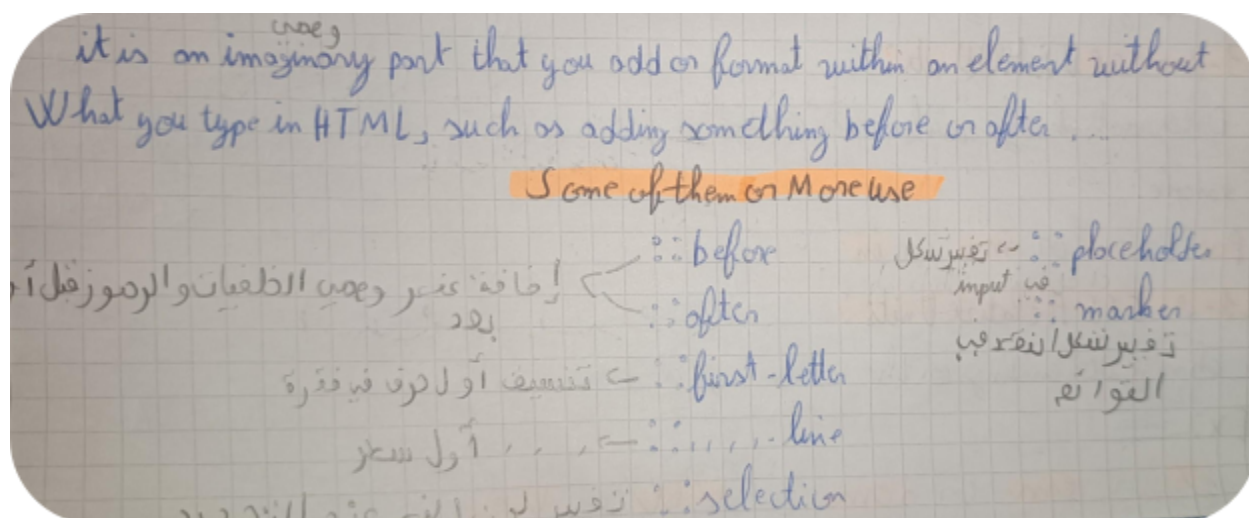


14-1-All Pseudo Element (but in French):

:first-letter	p :first-letter	Sélectionne la première lettre de chaque élément <p>
:first-line	p :first-line	Sélectionne la première ligne de chaque élément <p>
:first-child	p :first-child	Sélectionne tous les éléments <p> qui sont les premiers enfants de leurs parents
:before	p :before	Insérer du contenu avant chaque élément <p>
:after	p :after	Insérer du contenu après chaque élément <p>
:lang(it)	p :lang(it)	Sélectionne chaque élément <p> avec une valeur d'attribut lang commençant par "it"


15-Transform:

15-1-Translate:


- used to move an element from its place without changing its original place in the flow.
- flow is the natural way elements on a page are arranged from top to bottom and from left to right.

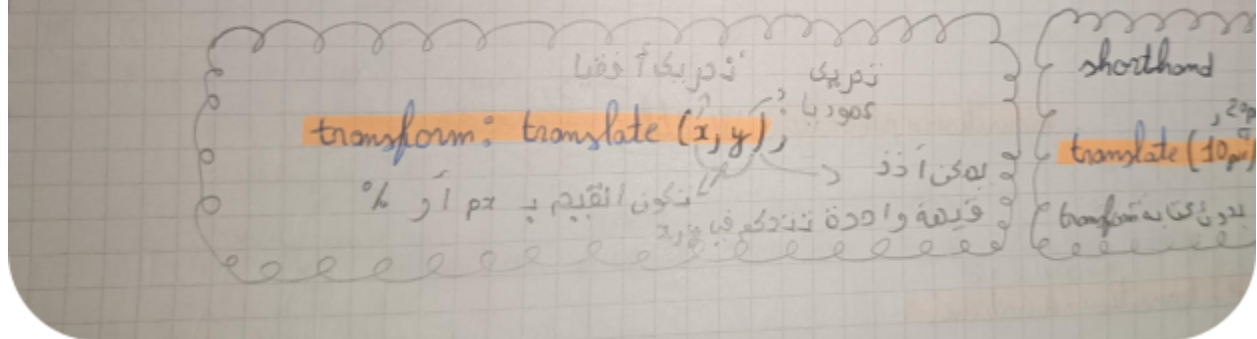

15-2-Scale:

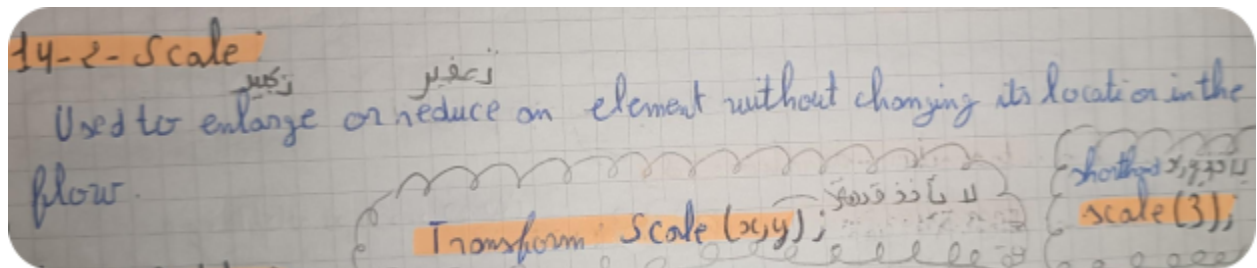

15-3-Rotate:

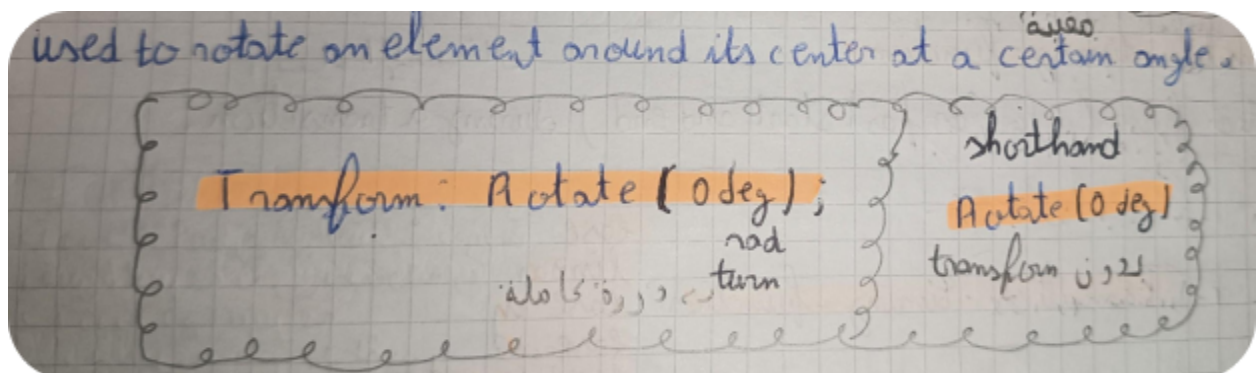

15-4-Skew:

used to tilt an element (oblique distortion) on the horizontal or vertical.

Transform: $\text{skew}(x, y)$; $\rightarrow$ degrees

horizontal $\rightarrow$ vertical

15-5-Matrix:

matrix (Scale x, skew y, skew x, scale y, translate x, translate y)

16-Transition:

Allows you to make a smooth movement when something in the element changes, (such as color, location...) instead of suddenly changing.

16-1-Transition property:

The property you want to make has movement such as (Width, color...)

`transition-property: Width;`

أي شيء
يتم تغييره


16-2-Transition duration:

إذا كان تم تحديد واحدة


`transition-duration: 5s;` →

هذه الحالة تم تحديد قيمتين
`transition-duration: 7s, 3s;` →

16-3-Transition timing function:

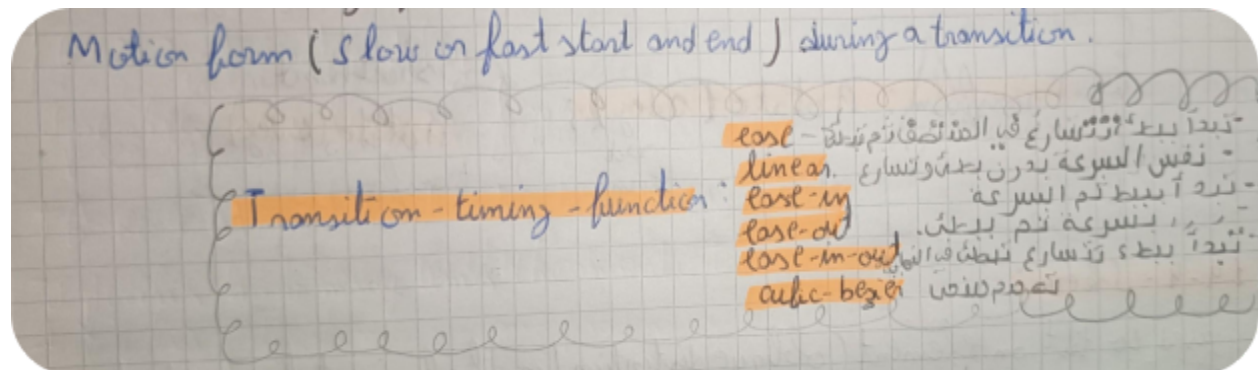

16-4-Transition delay:

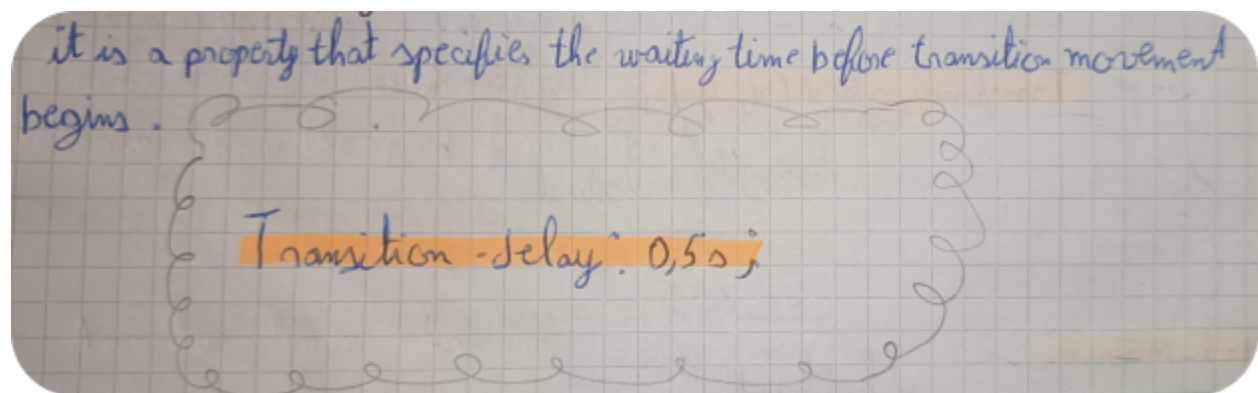

16-5- Shorthand Transition:

```
transition-property: width;  
,, , , , - duration: 1s;  
,, , , , - timing-function: ease;  
,, , , , - delay: 0, 3s;
```



Shorthand

```
transition: widthproperty 1sduration easetiming-function 0, 3sdelay;
```

17-Animation:

it is a method in CSS that lets you control the movement of element step by step, without using js you need two things: 1. @keyframes, 2. Animation

Specifies the movement steps

Apply movement to the element

17-1-Keyframes:

Specifies the movement steps.

Ex:

```
@keyframes hating {
  step <- 0% {
    translate: 100px 0px;
  }
  step <- 100% {
    translate: 0px 0px;
  }
}
```

animation name (hating) }
Apply movement to the element.

17-2-Animation:

Apply movement to the element.

17-2-1-Animation Name:

used to specify the name of the movement, you want to apply to the element.

EX:

```
• basic {  
  animation-name: fadeIn;  
}  
@keyframes fadeIn {
```

if you don't
use animation
name it won't
work

17-2-2-Animation duration:

Specifies the duration of an animation movement, meaning how long does the movement take from start to finish.

EX: (500ms)

17-2-3-Animation delay:

Specifies how long an element waits before the animation starts.

EX: (500ms)

17-2-4-Animation iteration count:

Specifies how many times the animation will be repeated.
Ex: (1000)

17-2-5-Animation direction:

Specifies ^{the} direction of animation movement in each iteration.
Ex: (normal)

17-2-6-Animation timing function:

determines how the speed of movement changes over time.

Ex:

Animation-timing-function:

ease-in;
ease-out;
ease-in-out;
ease;
linear;
cubic-bezier;

you explained
in a paragraph
16-3-transition
timing function

17-2-7-Animation fill mode:

Specifies what the element will look like before the animation starts and after it ends.

$$\exists x:$$

الفرضير جولانته الآعليه بعد انتهاء). none ;
 Animation-fill-mode : forwards; الفرضير متفتحة بجل الفرضير
 بآ ترتسبه في آ frame (keyframe).
 الفرضير ذة تنسبه آ frame قبل backwards;
 آ ن بيد آ الآ نميشين).
 (يجمع بين forwards و backwards). both ;

17-2-8-Animation play state:

controls turning animation on or off without deleting or restarting it from the beginning.

Animation-play-state: running; → Animation com (default)
paused; → Animation cobb

17-2-9-All Animation In Example:

```
.box{
  background-color: blue;
  width: 100px;
  height: 100px;
  animation-name: moveBox;
  , , , , - duration: 3s;
  , , , , - delay: 1s;
  , , , , - timing-function: ease-in
  animation-iteration-count: Infinite;
  animation-direction: alternate;
  animation-play-state: running;
  animation-fill-mode: both;
}
```

18-Display:

used to determine how an element is displayed on a page and how it behaves within a page.

18-1-Block:

it's like a big box that takes up the entire width of a line, starting on a new line and ending on a new line, you can control width, height, margin and padding.

EX:

Display: block;

18-2-Inline:

like a word within text, does not start a new line, nor does it take all the space, you cannot select width or height (not working), only right and left padding are allowed, but top and bottom (not working).

EX:

Display: inline;

18-3-Inline-Block:

- This type combines the features of block and inline.
- Appears next to other elements such as inline.
 - You can determine width and height.
 - You can control margin and padding all directions.

18-4-Display:none;:

The item completely disappears from the page as if it does not exist.

Display: none;

18-5-visibility:

The item remains in place but is not visible.

Visibility: hidden;

18-6-Opacity:

that controls the degree of transparency of an element.

(100%) 1 $\rightarrow$ 0, 1 (50%)

opacity : 0,5;

19-Flexbox:

is method for organizing elements within a page in a neat and flexible manner, so that they move and are easily distributed according to the available space.

19-1-Flexbox Parent:

is the parent element that we put `display: flex` on to be responsible for arranging the elements inside it.

19-1-1-The most important features of flex parent:

19-1-1-1-Flex Direction:

Determines the orientation of item inside the box (parent).

flex direction:

- `row` → أفقي
- `row-reverse` → أفقي و عكس
- `column` → عمودي
- `column-reverse` → عمودي و عكس

فبمطور x

19-1-1-2-Flex Wrap:

it is a property in Flex box that tells items to all stay on the same line or move to a new line when there is not enough space

nowrap; → تبقى العناصر كلها في سطر واحد
flex-wrap: wrap; → تسمح للعناصر بالنزول إلى السطر الجديد
wrap-reverse; → السطر الجديد يظهر فوق بدل تحت

19-1-1-3-Justify Content:

A property that controls the positioning of element horizontally (Default Value).

If the direction column → controls above and below (because the main axis becomes vertical).

If the direction row → controls the distribution on the right and left (because the main axis becomes horizontal).


flex-start; (العناصر ببداية المحور)
flex-end; (العناصر بنهاية المحور)
center; (في الوسط)
space-between; (الفجوة الأولى في البداية والأخيرة في النهاية والباقي متناسو)
space-around; (كل عنصر لديه مساحة حوله)
space-evenly; (كل المسافات متناسوية بين العناصر)
there's more

19-1-1-4-Align items:

controls the alignment of elements vertically (Default Value).

If `flex-direction: row` → alignment will be vertical (above/below)


If `flex-direction: column` → alignment will be horizontal (right/left)

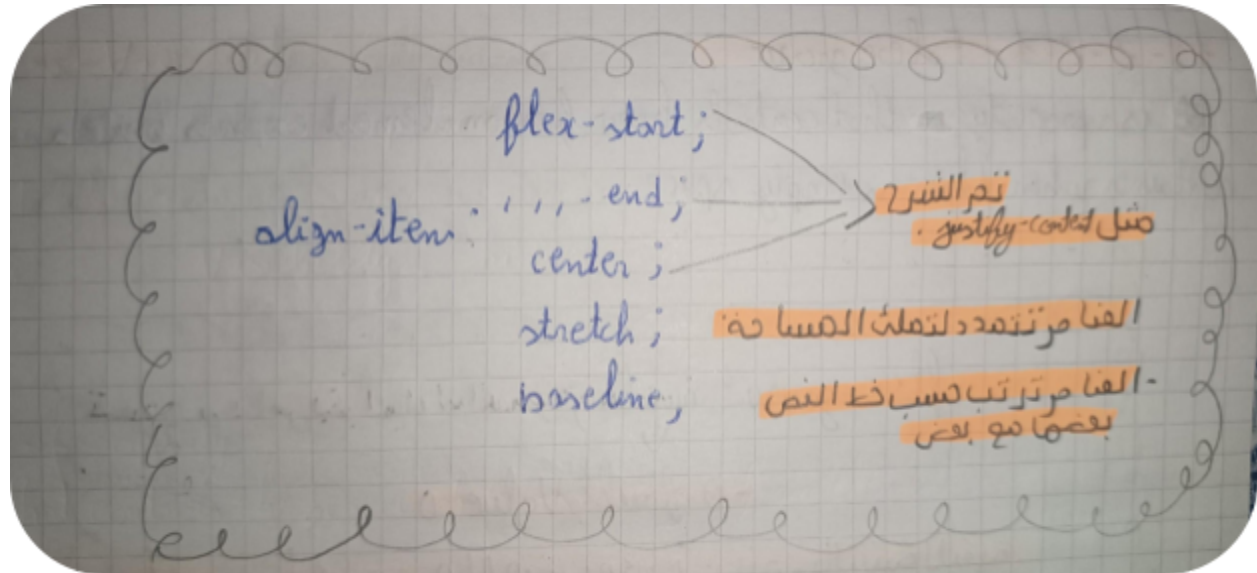

19-1-1-5-Align Content:

it only works when you have more than one line (meaning when you use flex-wrap). controls the space between lines (not element).

If you don't have multiple lines → align-content doesn't manage anything.

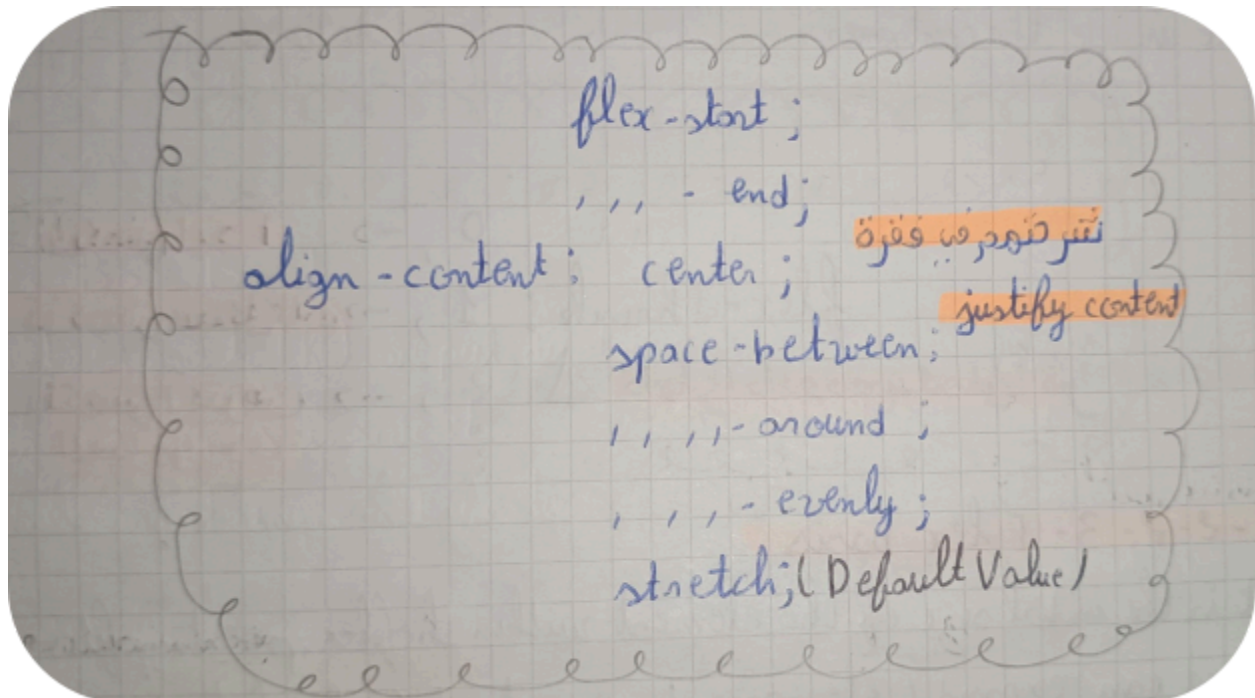

19-2-Flexbox Self:

is the element within Flexbox Parent (the son element) that can control it self, such as its location or size within the container, without affecting the second elements.

19-2-2-The most important features of flex parent:

19-2-2-1-Flex Grow:

is a property that controls how far an element expands inside a container when there is empty space.

`flex-grow: number;`

- Default Value 0

- أي رقم أكبر من 0 العنصر يمكن أن يتوسع بالنسبة للنقبة

19-2-2-2-Flex Shrink:

is a property that causes an element to shrink when there is not enough space inside the container.

لا تنكمش أبدًا -> 0

تنكمش بشكل عادي -> 1 `flex-shrink: 1;`

تنكمش أكثر من العنصر الذي -> 2 `flex-shrink: 2;` كلما زاد العدد تنكمش أكثر

19-2-2-3-Flex Basis:

it is the initial size of the element within the flex parent, after which the element can expand (flex-grow) or contract (flex-shrink) depending on the available space.

flex-basis: 200px; → العرض سيبدأ بـ 200px

19-2-2-4-Flex (Shorthand):

is shorthand three Value flex-grow, flex-shrink, flex-basis,

flex: 1 1 200px;

flex-grow

flex-shrink

flex-basis

19-2-2-5-Order:

it is a property that allows you to change the order of elements within the flex Parent without changing their order in HTML.

⚠ كلما كان الرقم أكبر يغير الأثير بين العناصر والعكس

order: 3;

19-2-2-6-Align Self:

controls the alignment of a single element according to the Flex direction specified in Flex Parent.


If flex direction was: row → cross axis = Vertical

.....; column → cross axis = horizontal

align-self: flex-start;
 flex-end;
 center;
 baseline;
 stretch;

نشرتهم
من قبل


19-2-2-7-Gap:

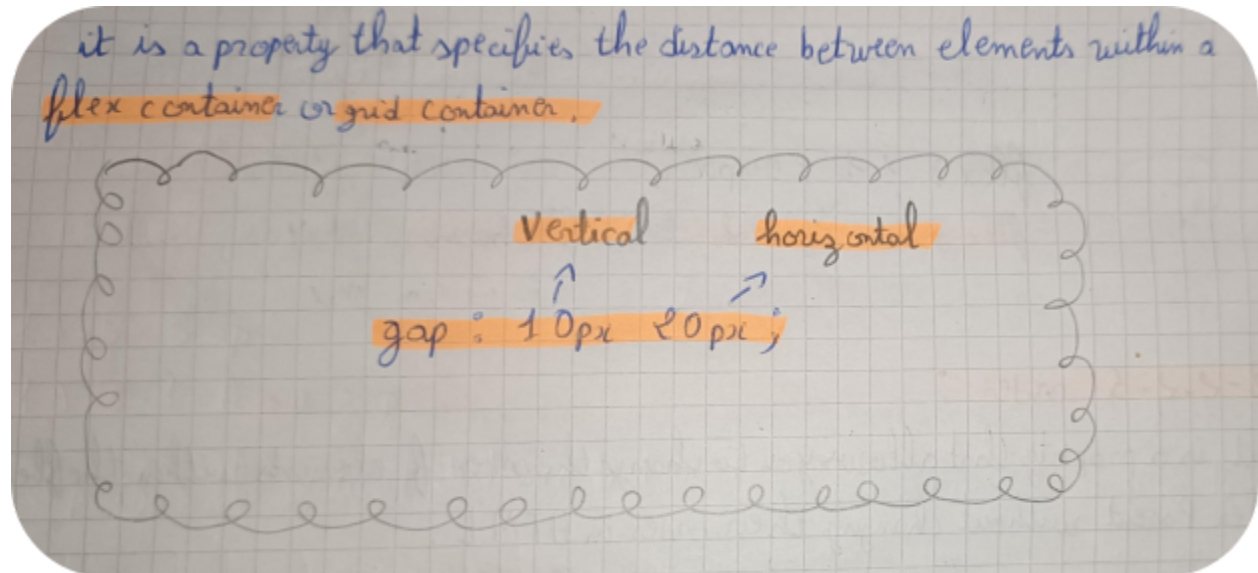

19-3-understand flexbox good:

Is To understand flexbox well go to url:

<https://nouvil.net/flex-box-game/>

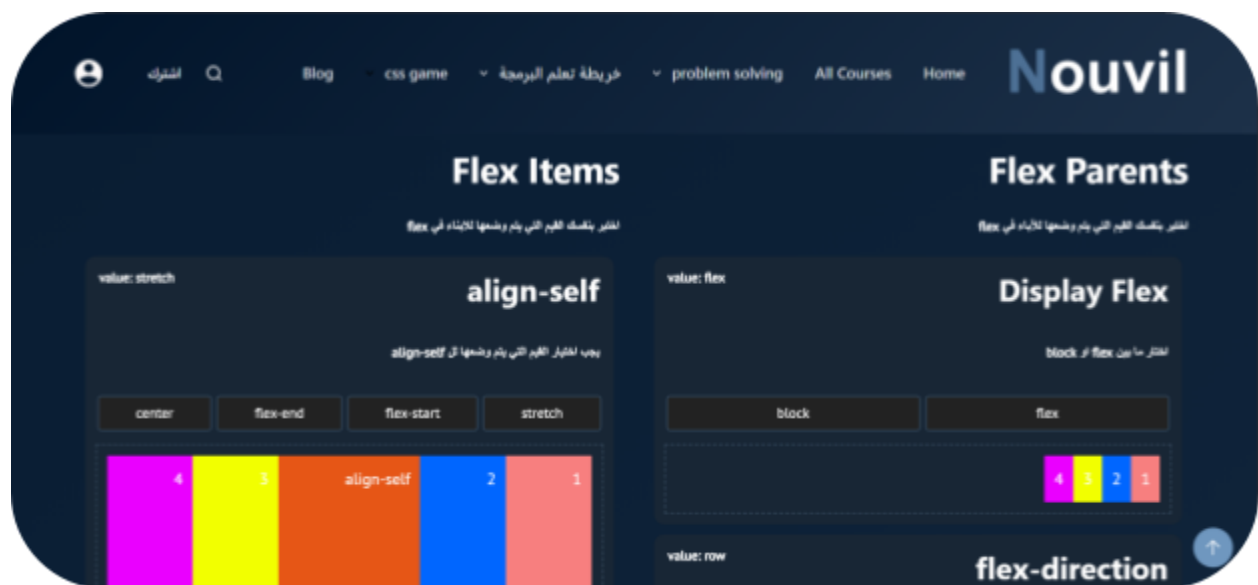

20-Grid:

that allows you to divide a page into a grid (rows + columns), and control the locations of elements with great ease.

display: grid;

20-1-Grid Template Columns:

used within the grid container to specify the number of columns.

	عمود الأول	عمود الثاني
	↑	↑
grid-template-columns :	100px	100px
	50%	50%

20-2-Grid Template Rows:

used within the grid container to specify the rows of a grid or the height of these rows.

grid-template-rows: 100px 200px;

20-3-Unit in Grid:

more used the unit in grid: px, fr, %, and auto.

px: A fix unit, specifying width or height.

fr (more used in grid): A unit specific to grid, meaning part of the available space.

%: Specifies the size as a percentage of the container area.

auto: Automatically takes size depending on the content within the columns or rows.

grid-template-rows: 1fr 1fr
columns: 30% 30% 60%

20-4-Repeat Grid:

is a function in CSS Grid that allows you to repeat a number of rows or columns with the same value instead of typing each one by hand.

I mean, instead of writing:

```
grid-template-columns: 1fr 1fr 1fr;  
grid-template-rows: 1fr 1fr;
```

We Use:

```
grid-template-columns: repeat(3, 1fr);  
grid-template-rows: repeat(2, 1fr);
```

20-5-Gap:

20-5-1-Row Gap :

Specifies the vertical distance between rows.

بأنه أي قيمة ليس px فقط
`row-gap: 20px;`

20-5-2-Column Gap :

Specifies the horizontal distance between columns.

`column-gap: 20px;`

20-5-3-ShortHand :

instead `Row-gap` or `column-gap` we use `gap`.


`gap: 20px 15px;`
row-gap column gap

20-6-Justify content, align item and align content :


Is like what's in the flex box and explained it in **19-Flex Box**.

20-7-Grid Self :

20-7-1-Grid Column :

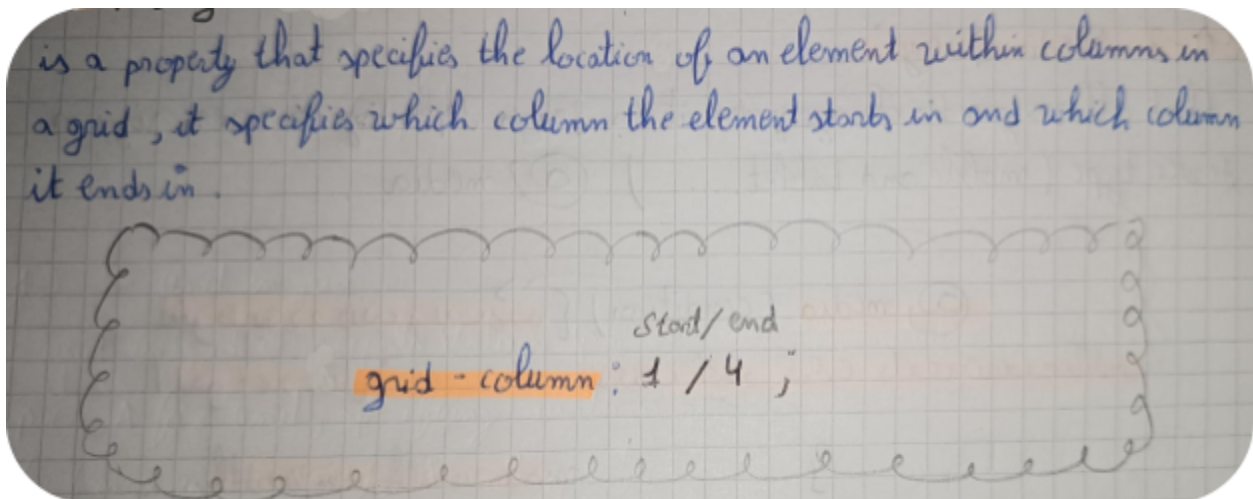

20-7-2-Grid Rows :

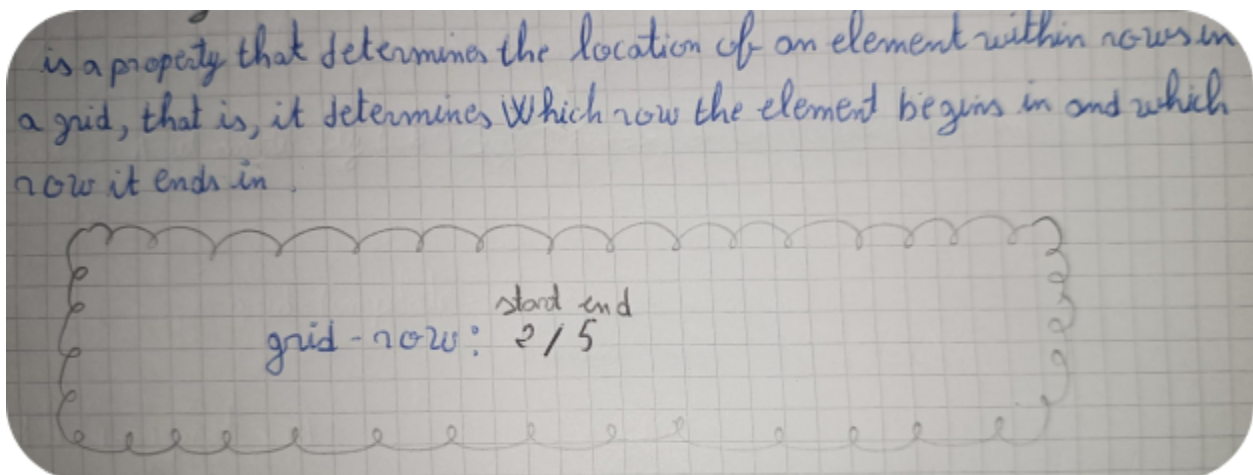

21-Responsive :

This means that the website design ^{بزنکيف} adapts to the size of the screen or device that the user sees: computer, laptop, tablet, or mobile.

21-1-Unit Relative :

He is the one who contributes to making the site responsive
as explained it in **12-2-CSS Relative Units**

21-2-Grid and Flexbox :

it is what contributes to the site's responsiveness to the site's organized arrangement. as explained it in **19-Flexbox** , **20-Grid**

21-3-Media Query:

that allows you to change your site's design depending on screen size or device type (mobile and tablet....) @ media ...

```
@media (condition) {  
    // CSS code (كود CSS) (بشرط ان يتحقق الشرط)  
}
```

القواعد التي
max width, min width ...

