

Prepared By: Hatim Elbakkali

Topic: Course HTML

Year: 2025

1-Information Before Entering HTML:	5
2-HTML Tags:	6
3-Components HTML:	7
4- Head:	8
5-Text:	9
8-Audio:	11
9-Video:	11
10-Table:	12
11-List:	13
11-1-Ordered List ():	13
11-2-Unordered List ():	14
12-Semantic Elements:	14
12-1-Non Semantic Elements:	15
12-2-Semantic Element:	15
13-Form:	16
14-Link:	17
15-Input Action Methode:	18
15-1-Name:	18

16-Input Type:	19
16-Check Box or Radio Box:	20
16-1-Radio Box:	20
16-2-Check Box:	20
17-Select Option:	21
18-Button:	21
19-Validate Textarea:	21
20-Download:	22

HTML



HTML it is the language that defines the structure of a page on the internet,such as (heading, paragraph, images and table....).

1-Information Before Entering HTML:

WWW (World Wide Web): it is a system that connects millions of websites and information on the Internet, so that you can browse them through a browser (chrome, Brave ...)

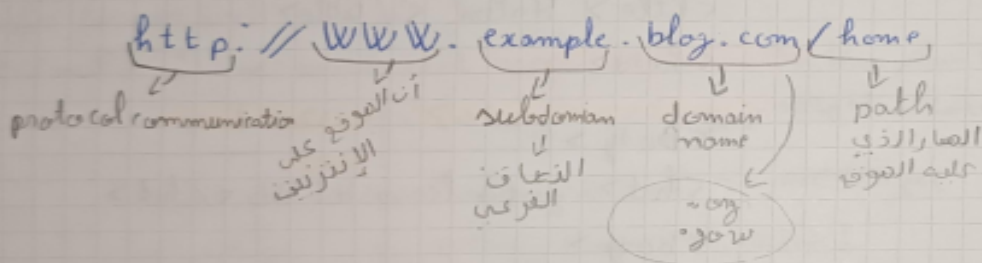
Web Page: is the basic unit of any website, located on a server, and accessible through a browser.

Browser: it is a program used to access the internet and view web pages, as it downloads content from servers and displays it to the user.

Server: it is a device or system that stores data and services (Web page and files ...) on the Internet, and allows other devices to access them on demand.

Server location - IP Address: You can access the web page using IP address, but, has to reach to web page. if use,

URL: Unified Resource location



how URL = IP Address?

DNS (Domain Name System): it is a system that links website names (URL) to their numerical addresses (IP addresses) so that the browser can access the correct server when typing the website name.

youtube.com → DNS → 142.250.46

2-HTML Tags:

are what build the structure of a web and determine the type of each element. it usually consists of:

الافتتاحية $\leftarrow$ `<tag>` Elements `</tag>` $\rightarrow$ الختامية

Each tag has a specific function, such as:

`<p>` $\rightarrow$ Text paragraph `<h1>` to `<h6>` $\rightarrow$ addresses

`<a>` $\rightarrow$ links `<ul>` and `<li>` $\rightarrow$ list

but some self-closing tags like `<img>` and `<br>`, don't need an end tag.

3-Components HTML:

الصفحة (HTML) ^{تُعرف باسم هذه}
الذي يتنوع على كود مفتوح
معلومات ومعرفة تيرغرافية
معلومات الصفحة الرئيسية
Tag Address

```
<! Doctype html >  
<html >  
  <head >  
    <title > Hatim </title>  
  </head >  
  <body >  
    <h1 > goto learn HTML </h1>  
  </body >  
</html >
```


4- Head:

give Page information and function are outside the page and linked in CSS and JS, but are not visible to the user.

```
<meta charset="utf-8" />
<title> hatin </title>
<meta name="description" content="Web site cooking" />
<meta name="keywords" content="html,css" />
<meta name="author" content="hatin El bakhali" />
<meta name="viewport" content="width=device-width, initial-scale=1" />
<meta http-equiv="refresh" content="5" />
<link rel="stylesheet" href="" />
<style></style>
<script></script>
```

ترميز الآتية
الصفحة
كل اللفظ

عنوان تيتول الصفحة

وصف مختصر
الصفحة

كلمات مفتاحية
تصف محتوى
الصفحة لتسهيل
البحث

السمو لى
الصفحة

يقلب الصفحة كل 5 ثواني

يربط صفحة CSS

داخل اللفظ CSS

JS

5-Text:

`<p></p>` paragraph Block
`<br>` breaks the line within the same paragraph
`<pre></pre>` (Block) Displays text as written in the code, with new space, and lines new.
`<span></span>`

6-Text Formatting:

Tags specific format text such as:

<code><small></small></code> : Used to make text appear 80% smaller than plain text	
<code></code> make text bold only	<code></code> Bold additional meaning (important, certain).
<code><i></i></code> make text italic only	<code></code> like <code><i></i></code> but used in quotes or sayings

`<mark></mark>` Text appears with a yellow background by default in most browsers, This is used to emphasize or highlight important words in text.

<u>

make text
underlined
Hatem

<ins>

like <u>, but meaning
it is new text added

<s>

make text
There is a line
in the middle.

like <s>, but meaning
text deleted.

<sub>

Displays text that
is slightly smaller
and lower than the
main line. Usually
used in
chemical formulas

(H₂O)

<sup>

Displays text slightly
smaller and raised above the line
(2³)

<sub>
<sup>

color

property is
used to set the
text or background
color

**<p style="color:
red;"**

or

**<p style="background-color:
yellow;"**

Method

- HEX code
- RGB
- RGBA

7-Image:

6-Image: *

Used to insert an image into a page

path image

King Sac: "Spider Mom. Jpg"

Title: "This is Spider Man"

height = "200"

alt "SpiderMan" width = "300"

أو لم تقرض
المؤسسة يظهر
النوع

8-Audio:

use to insert an **audio** into a page.

→ you can add loop or muted and auto play

< audio control >

path sound

<source src="lough.mp3" type="audio/mp3">

$\langle \dots, \dots, " , \dots, war , \dots, : " , /war" \rangle$

<audio>

9-Video:

use to insert an **video** into a page

thumb nail إصبع الإصبع

<Video control width = "100%" muted="true" autoplay poster = "1.png" preload="none">

pálh

Source Src - "Native.mp4" type - "Video/mp4"

```
<track default=" " kind=" " label=" " />
```

ی القاری

5. $\frac{1}{2}$ = "

11

subtle

none languages

الم
Cognition

10-Table:

Used to display data in rows and columns like tables in Excel.

Infrastructure:

Not support in HTML5

Table row

Represents one row in the table

```
<tr>  
  <th> Name </th>  
  <th> Age </th>  
</tr>
```

Table header

Head cell (usually bold and formatted)

Table Data

Data cell within a row

```
<tr>  
  <td> Hatim </td>  
  <td> 18 </td>  
</tr>
```

Colspan : it is a property use within the tag `<td>` or `<th>` to merge multiple columns into a single cell (horizontal merge)

Rowspan : it is a property used within the tag `<td>` or `<th>` to merge multiple rows into a single cell (Vertical merge).

Ex:

```
<tr>  
  <th rowspan="2"> country </th>  
  <th colspan="2"> city </th>  
</tr>
```

cellspacing: distance between cells (meaning external space) like the distance between house and house.

cellpadding: The space inside the cell between the text and its borders.

EX:

```
<table border="1" cellspacing="20" cellpadding="10">
```

organized tables:

<thead> (Table Head): contains heading rows (such as column headers).

<tbody> (Table body): contains normal data in the table.

<tfoot> (Table foot): contains rows below the table (such as totals or notes).

11-List:

11-1-Ordered List ():

Used when the order matters - items are numbered (1, 2, 3, ...)

EX:

```
<ol>  
<li>Wake up</li>
```

output:

1. Wake up

2- Unordered list ():

Used when the order does not matter - items shown with bullets.

EX:

```
<ul>  
<li>oranges</li>  
</ul>
```

output:

• oranges

11-2-Unordered List ():

Used When the order does not matter - items shown with bullets.

Ex: `<ul>`
 `<li>oranges</li>`
 `</ul>` } output:
 • oranges

11-3-Description List (<dl>):

Used for terms and their descriptions - like a dictionary.

Ex:

Diagram illustrating the structure of a Description List (<dl>):

- A cloud labeled "Description Term" points to the `<dt>` tag in the code.
- A cloud labeled "Description Definition" points to the `<dd>` tag in the code.

Code example:

```
<dl>  
  <dt> HTML </dt>  
  <dd> HyperText... </dd>  
</dl>
```

12-Semantic Elements:

it is a element that clearly describe their meaning to both the browser and the browser and the developer.

12-1-Non Semantic Elements:

These do not explain the meaning of the content within them, they are only used
elements
for **division** or **formatting**.

Ex:

`<span></span>` or `<div></div>`

12-2-Semantic Element:

`<header></header>` → **header page**

`<nav></nav>` → **navigation menu**

`<main></main>` → **main content**

`<article></article>` → **article**

`<section></section>` → **section of the page**

`<aside></aside>` → **content aside**

`<footer></footer>` → **footer page**

These elements give a clear meaning to the content, such as `<nav>` containing navigation link.

13-Form:

it is used to collect user data and send it to the server for processing.

`<form>`

`<fieldset>`

used to group a
set of fields
within
a form

titre `<legend> hاتم </legend>`
`<div>`

Appropriately used within
a `<label>` tag to associate
a label with (input, select...)
ID= for

`<label for="txt"> password </label>`

Describe fields

`<input id="txt" type="password" placeholder="enter your
password" required>`

Indicative
text appears
inside input

`</div>`

`</fieldset>`
`</form>`

The field is mand-
atory and cannot
be left blank.
When submitting
the form

14-Link:

two tags: `<a></a>` or `<link></link>`

the user to navigate
between pages.

The browser uses
it to link files (css,
JS...)

`<a href = "https://github.com">`
Github `</a>` #Hatin
name link Id = Hatin

target: it is a property that specifies where link
will open when the user clicks on it (-self, -blank)

`<link rel = "stylesheet"`
`href = "style.css"`

15-Input Action Methode:

Specifies how data is sent. There are two basic methods:

- Get: sends data in a URL

Ex: submit.php?username=habin & password=1234

but suitable for non-sensitive data. ↗

- Post:

Sends data into the request body (request body). More secure for sensitive data such as passwords

<form method="post">

15-1-Name:


2-name:


will
name the field that send to server

16-Input Type:

color  you can chose anything color

`<input type="color">`

`<input type="file">`  choose File


 `<input type="range" min="0" max="5" step="1" value="0">`


`<input type="search">` you can search

`<input type="url">` you can write URL only


`<input type="hidden">` hidden information

Time

`<input type="time">`  h | min | PM | ⌚

 `<input type="date">` m/d/y

`<input type="week">`


`<input type="datetime-local">`  Anything
Time . Date

16-Check Box or Radio Box:

16-1-Radio Box:

it is used to allow the user to choose only one option from a set of options.

```
<input type="radio" value="html" name="x">
```




هو النوع الذي لا يمكن اختيار أكثر من واحد
يعرف القارئ ما نوع البرنامج
ما نوع المعلومة و قوته
المعلومة نفسها

16-2-Check Box:

Used to allow the user to choose one or more from a set of options.

```
<input type="checkbox">
```



17-Select Option:

Used To create a drop-down list from which the user chooses one or more options.

`<select name = "country">` نام البلد
Represent each choice in list `<option Value = "monocco"> Monocco </option>`

`<optgroup> </optgroup>`: Used to divide options into option.

`<datalist> </datalist>`: Allows the user to choose an option from the list to type something of their own.

18-Button:

`<input type = "submit" Value = "login">`

send information
server

`<input type = "reset" Value = "clear">`

clear information

19-Validate Textarea:

it is used to create a multi-line text area in which the user can type long text (such as notes...)

`<textarea> </textarea>`

20-Download:

