



HAXE

Haxe 3 Manual

Haxe Foundation
September 12, 2014
(訳 : December 14, 2014)

Todo list

Could we have a big Haxe logo in the First Manual Page (Introduction) under the menu (a bit like a book cover ?) It looks a bit empty now and is a landing page for "Manual"	7
This generates the following output: too many 'this'. You may like a passive sentence: the following output will be generated...though this is to be avoided, generally . .	9
make sure the types are right for inc, dec, negate, and bitwise negate	13
While introducing the different operations, we should include that information as well, including how they differ with the "C" standard, see http://haxe.org/manual/operators	13
please review, doubled content	15
review please, sounds weird	15
for starters...please review	16
Is there a difference between <code>? y : Int</code> and <code>y : Null<Int></code> or can you even do the latter? Some more explanation and examples with native optional and Haxe optional arguments and how they relate to nullability would be nice.	17
please review future tense	17
Same as in 2.2, what is <code>Enum<T></code> syntax?	20
list arguments	20
please reformat	22
I don't really know how these work yet.	23
It seems a bit convoluted explanations. Should we maybe start by "decoding" the meaning of <code>Void -> Void</code> , then <code>Int -> Bool -> Float</code> , then maybe have samples using <code>\$type</code>	24
please review for correctness	33
You have marked "Map" for some reason	33
Mention <code>toString()/String</code> conversion somewhere in this chapter.	45
"parent class" should probably be used here, but I have no idea what it means, so I will refrain from changing it myself.	46
Describe <code>import a.*</code>	51
proper label and caption + code/identifier styling for diagram	52
Figure out wtf our rules are now for when this is checked.	85
Comprehensions are only listing Arrays, not Maps	86
what to use for listing of non-haxe code like <code>hxml</code> ?	97
Check if we can build GADTs this way.	108
I think C++ can use integer operations, but I don't know about any other targets. Only saw this mentioned in an old discussion thread, still true?	123

Contents

Todo list	1
1 導入	7
1.1 Haxeって何?	7
1.2 このドキュメントについて	8
1.2.1 著者と貢献者	8
1.3 Hello World	9
1.4 歴史	9
I 言語リファレンス	11
2 型	12
2.1 基本型	13
2.1.1 数値型	13
2.1.2 オーバーフロー	13
2.1.3 数値の演算子	13
2.1.4 Bool(真偽値)	14
2.1.5 Void	15
2.2 Nullable(null許容型)	15
2.2.1 オプション引数とnull許容	17
2.3 クラスインスタンス	17
2.3.1 クラスのコンストラクタ	18
2.3.2 継承	18
2.3.3 インターフェース	19
2.4 列挙型インスタンス	19
2.4.1 列挙型のコンストラクタ	20
2.4.2 列挙型を使う	21
2.5 匿名の構造体	22
2.5.1 JSONで構造体を書く	23
2.5.2 構造体の型のクラス記法	23
2.5.3 オプションのフィールド	23
2.5.4 パフォーマンスへの影響	24
2.6 関数型	24
2.6.1 オプション引数	24
2.6.2 デフォルト値	25
2.7 ダイナミック	26
2.7.1 型パラメータ付きのダイナミック	27
2.7.2 ダイナミックを実装(implements)する	27
2.8 抽象型(abstract)	28

2.8.1	暗黙のキャスト	29
2.8.2	演算子オーバーロード	32
2.8.3	配列アクセス	33
2.8.4	選択的関数	34
2.8.5	抽象型列挙体	34
2.8.6	抽象型フィールドの繰り上げ	35
2.8.7	コアタイプの抽象型	36
2.9	単相型	37
3	型システム	38
3.1	typedef	38
3.1.1	拡張	39
3.2	型パラメータ	39
3.2.1	制約	41
3.3	ジェネリック	41
3.3.1	ジェネリック型パラメータのコンストラクト	42
3.4	変性	43
3.5	単一化(Unification)	45
3.5.1	クラスとインターフェースの単一化	46
3.5.2	構造的部分型付け	46
3.5.3	単相	47
3.5.4	関数の戻り値	47
3.5.5	共通の基底型	47
3.6	Type Inference	47
3.6.1	Top-down Inference	48
3.6.2	Limitations	49
3.7	Modules and Paths	49
3.7.1	Module Sub-Types	50
3.7.2	Import	51
3.7.3	Resolution Order	52
4	Class Fields	55
4.1	Variable	55
4.2	Property	56
4.2.1	Common accessor identifier combinations	58
4.2.2	Impact on the type system	59
4.2.3	Rules for getter and setter	60
4.3	Method	61
4.3.1	Overriding Methods	62
4.3.2	Effects of variance and access modifiers	63
4.4	Access Modifier	64
4.4.1	Visibility	64
4.4.2	Inline	65
4.4.3	Dynamic	66
4.4.4	Override	66
5	Expressions	67
5.1	Blocks	67
5.2	Constants	68
5.3	Binary Operators	68
5.4	Unary Operators	68
5.5	Array Declaration	68

5.6	Object Declaration	69
5.7	Field Access	69
5.8	Array Access	69
5.9	Function Call	70
5.10	var	70
5.11	Local functions	70
5.12	new	71
5.13	for	71
5.14	while	71
5.15	do-while	72
5.16	if	72
5.17	switch	72
5.18	try/catch	73
5.19	return	73
5.20	break	74
5.21	continue	74
5.22	throw	74
5.23	cast	75
5.23.1	unsafe cast	75
5.23.2	safe cast	75
5.24	type check	76
6	Language Features	77
6.1	Conditional Compilation	77
6.2	Externs	78
6.3	Static Extension	79
6.3.1	In the Haxe Standard Library	79
6.4	Pattern Matching	80
6.4.1	Introduction	80
6.4.2	Enum matching	81
6.4.3	Variable capture	81
6.4.4	Structure matching	82
6.4.5	Array matching	82
6.4.6	Or patterns	83
6.4.7	Guards	83
6.4.8	Match on multiple values	83
6.4.9	Extractors	83
6.4.10	Exhaustiveness checks	85
6.4.11	Useless pattern checks	85
6.5	String Interpolation	86
6.6	Array Comprehension	86
6.7	Iterators	87
6.8	Function Bindings	89
6.9	Metadata	89
6.10	Access Control	91
6.11	Inline constructors	93
6.12	Remoting	93

II	Compiler Reference	94
7	Compiler Reference	95
7.1	Compiler Metadata	95
8	Compiler Features	96
8.1	Dead Code Elimination	96
8.2	Completion	97
8.2.1	Field Access	97
8.2.2	Call Arguments	97
8.2.3	Usage	97
8.2.4	Position	97
8.2.5	Metadata	97
8.3	Resources	97
8.3.1	Embedding resources	97
8.3.2	Retrieving text resources	97
8.3.3	Retrieving binary resources	98
8.3.4	Implementation details	98
8.4	Runtime Type Information	98
8.4.1	RTTI structure	99
9	Macros	101
9.1	Macro Context	102
9.2	Arguments	102
9.2.1	ExprOf	103
9.2.2	Constant Expressions	104
9.2.3	Rest Argument	104
9.3	Reification	105
9.3.1	Expression Reification	105
9.3.2	Type Reification	105
9.3.3	Class Reification	106
9.4	Tools	106
9.5	Type Building	107
9.5.1	Enum building	108
9.5.2	@:autoBuild	109
9.6	Limitations	110
9.6.1	Macro-in-Macro	110
9.6.2	Static extension	110
9.6.3	Build Order	111
9.6.4	Type Parameters	112
9.7	Initialization macros	112
III	Standard Library	113
10	Standard Library	114
10.1	String	114
10.2	Data Structures	114
10.2.1	Array	114
10.2.2	Vector	116
10.2.3	List	116
10.2.4	GenericStack	117

10.2.5	Map	117
10.2.6	Option	118
10.3	Regular Expressions	119
10.3.1	Matching	120
10.3.2	Groups	120
10.3.3	Replace	121
10.3.4	Split	122
10.3.5	Map	122
10.3.6	Implementation Details	122
10.4	Math	122
10.4.1	Special Numbers	123
10.4.2	Mathematical Errors	123
10.4.3	Integer Math	123
10.4.4	Extensions	124
10.5	Lambda	124
10.6	Reflection	124
10.7	Serialization	126
10.7.1	Serialization format	128
10.8	Json	129
10.8.1	Parsing JSON	130
10.8.2	Encoding JSON	130
10.8.3	Implementation details	130
10.9	Xml	131
10.10	Input/Output	131
10.11	Sys/sys	131
IV	Miscellaneous	132
11	Haxelib	133
11.1	Using a Haxe library with the Haxe Compiler	133
11.2	haxelib.json	134
11.2.1	Versioning	134
11.2.2	Dependencies	136
11.3	extraParams.html	136
11.4	Using Haxelib	136
12	Target Details	137
12.1	Javascript	137
12.1.1	Loading extern classes using "require" function	137
12.2	Flash	138
12.3	Neko	138
12.4	PHP	138
12.5	C++	138
12.5.1	Using C++ Defines	138
12.5.2	Using C++ Pointers	140
12.6	Java	140
12.7	C#	140

Chapter 1

導入

1.1 Haxeって何?

Haxeはオープンソースの高級プログラミング言語とコンパイラで構成されており、ECMAScript¹をもとにした構文で書いたプログラムをさまざまなターゲットの言語へとコンパイルすることを可能にします。適度な抽象化を行うため、複数のターゲットへコンパイル可能な1つのコードベースも作成できます。

Haxeは強く型付けされている一方で、必要に応じて型付けを弱めることも可能です。型情報を活用すれば、ターゲットの言語では実行時にしか発見できないようなエラーをコンパイル時に検出することができます。さらには、ターゲットへの変換時に最適化や堅牢なコードを生成するためにも使用されます。

現在、Haxeには9つのターゲット言語があり、さまざまな用途に利用できます。

名前	出力形式	主な用途
JavaScript	ソースコード	ブラウザ, デスクトップ, モバイル, サーバー
Neko	バイトコード	デスクトップ, サーバー
PHP	ソースコード	サーバー
Python	ソースコード	デスクトップ, サーバー
C++	ソースコード	デスクトップ, モバイル, サーバー
ActionScript 3	ソースコード	ブラウザ, デスクトップ, モバイル
Flash	バイトコード	ブラウザ, デスクトップ, モバイル
Java	ソースコード	デスクトップ, サーバー
C#	ソースコード	デスクトップ, モバイル, サーバー

この導入 (Chapter 1)の残りでは、Haxeのプログラムがどのようなものなのか、Haxeはが2005年に生まれてからどのように進化してきたのか、を概要でお送りします。

型 (Chapter 2)では、Haxeの7種類の異なる型についてとそれらがどう関わりあっているのかについて紹介します。型に関する話は、型システム (Chapter 3)へと続き、単一化(Unification)、型パラメータ、型推論についての解説がされます。

Class Fields (Chapter 4)では、Haxeのクラスの構造に関する全てをあつかいます。加えて、プロパティ、インラインフィールド、ジェネリック関数についてもあつかいます。

Expressions (Chapter 5)では、式を使用して実際にいくつかの動作をさせる方法をお見せします。

Language Features (Chapter 6)では、パターンマッチング、文字列補間、デッドコード削除のようなHaxeの詳細の機能について記述しています。ここで、Haxeの言語リファレンスは終わりです。

そして、Haxeのコンパイラリファレンスへと続きます。まずはCompiler Reference (Chapter 7)で基本的な内容を、そして、Compiler Features (Chapter 8)で高度な機能をあつかいます。最後

¹<http://www.ecma-international.org/publications/standards/Ecma-327.htm>

Could we have a big Haxe logo in the First Manual Page (Introduction) under the menu (a bit like a book cover ?) It looks a bit empty now and is a landing page for "Manual"

に[Macros \(Chapter 9\)](#)で、ありふれたタスクをHaxeマクロがどのように単純かするのを見ながら、刺激的なマクロの世界に挑んでいきます。

次の[Standard Library \(Chapter 10\)](#)では、Haxeの標準ライブラリに含まれる主要な型や概念を一つ一つ見ていきます。そして、[Haxelib \(Chapter 11\)](#)でHaxeのパッケージマネージャであるHaxelibについて学びます。

Haxeは様々なターゲット間の差を吸収してくれますが、場合によってはターゲットを直接的にあつかうことが重要になります。これが、[Target Details \(Chapter 12\)](#)の話題です。

1.2 このドキュメントについて

このドキュメントは、Haxe3の公式マニュアル(の非公式日本語訳)です。そのため、初心者向けのチュートリアルではなく、プログラミングは教えません。しかし、項目は大まかに前から順番に読めるように並べられてあり、前に出てきた項目と、次に出てくる項目との関連づけがされています。先の項目で後の項目で出てくる情報に触れた方が説明しやすい場所では、先にその情報に触れています。そのような場面ではリンクがされています。リンク先は、ほとんどの場合で先に読むべき内容ではありません。

このドキュメントでは、理論的な要素を実物としてつなげるために、たくさんのHaxeのソースコードを使います。これらのコードのほとんどはmain関数を含む完全なコードでありそのままコンパイルが可能です。いくつかはそうではなくコードの重要な部分の抜き出しです。

ソースコードは以下のように示されます：

1 Haxe code here

時々、Haxeがどのようなコードを出力をするかを見せるため、ターゲットのJavaScriptなどのコードも示します。

さらに、このドキュメントではいくつかの単語の定義を行います。定義は主に、新しい型やHaxe特有の単語を紹介するときに行われます。私たちが紹介するすべての新しい内容に対して定義をするわけではありません(例えば、クラスの定義など)。

定義は以下のように示されます。

Definition: 定義の名前
定義の説明

また、いくつかの場所にはトリビア欄を用意しています。トリビア欄では、Haxeの開発過程でどうしてもそのような決定がなされたのか、なぜその機能が過去のHaxeのバージョンから変更されたのかなど非公開の情報をお届けします。この情報は一般的には重要ではない、些細な内容なので読み飛ばしても構いません。

Trivia: トリビアについて
これはトリビアです

1.2.1 著者と貢献者

このドキュメントの大半の内容は、Haxe Foundationで働くSimon Krajewskiによって書かれました。そして、このドキュメントの貢献者である以下の方々に感謝の意を表します。

- Dan Korostelev: 追加の内容と編集
- Caleb Harper: 追加の内容と編集
- Josefiene Pertosa: 編集

- ・ Miha Lunar: 編集
- ・ Nicolas Cannasse: Haxe創始者

1.3 Hello World

次のプログラムはコンパイルして実行をすると“Hello World”と表示します:

```
1 class HelloWorld {  
2     static public function main():Void {  
3         trace("Hello World");  
4     }  
5 }
```

上記のコードは、HelloWorld.hxという名前で保存して、`haxe -main HelloWorld --interp`というコマンドでHaxeコンパイラを呼び出すと実際に動作させることが可能です。これでHelloWorld.hx:3: Hello worldという出力がされるはずです。このことから以下のいくつかのことを学ぶことができます。

This generates the following output: too many 'this'. You may like a passive sentence: the following output will be generated...though this is to be avoided, generally

- ・ Haxeのコードは、.hxという拡張子で保存する。
- ・ Haxeのコンパイラはコマンドラインツールであり、`-main HelloWorld`や`--interp`のようなパラメータをつけて呼び出すことができる。
- ・ Haxeのプログラムにはクラスがあり(HelloWorld、大文字から始まる)、クラスには関数がある(main、小文字からはじまる)。

1.4 歴史

Haxeのプロジェクトは、2005年10月22日にフランスの開発者のNicolas Cannasseによって、オープンソースのActionScript2コンパイラであるMTASC(Motion-Twin Action Script Compiler)と、Motion-Twinの社内言語であり、実験的に型推論をオブジェクト指向に取り入れたMTTypesの後継として始まりました。Nicolasのプログラミング言語の設計に対する長年の情熱と、Motion-Twinでゲーム開発者として働くことで異なる技術が混ざり合う機会を得たことが、まったく新しい言語の作成に結び付いたのです。

そのころのつづりはhaXeで、2006年の2月にAVMのバイトコードとNicolas自身が作成したNekoバーチャルマシン²への出力をサポートするベータ版がリリースされました。

この日からHaxeプロジェクトのリーダーであり続けるNicolas Cannasseは明確なビジョンをもってHaxeの設計を続け、そして2006年5月のHaxe1.0のリリースに導きました。この最初のメジャーリリースからJavascriptのコード生成をサポートの始まり、型推論や構造的な部分型などの現在のHaxeの機能のいくつかはすでにこのころからありました。

Haxe1では、2年間いくつかのマイナーリリースを行い、2006年8月にFlash AVM2ターゲットとhaxelibツール、2007年3月にActionScript3ターゲットを追加しました。この時期は安定性の改善に強く焦点が当てられ、その結果、数回のマイナーリリースが行われました。

Haxe2.0は2008年7月にリリースされました。Franco Ponticelliの好意により、このリリースにはPHPターゲットが含まれました。同様に、Hugh Sandersonの貢献により、2009年7月のHaxe2.04リリースでC++ターゲットが追加されました。

Haxe1と同じように、以降の数か月で安定性のためのリリースを行いました。そして2011年1月、macrosをサポートするHaxe2.07がリリースされました。このころに、Bruno GarciaがJavaScriptターゲットのメンテナとしてチームに加わり、2.08と2.09のリリースで劇的な改善が行われました。

²<http://nekovm.org>

2.09のリリース後、Simon Krajewskiがチームに加わり、Haxe3の出発に向けて働き始めました。さらにCauê WaneckのJavaとC#のターゲットがHaxeのビルドに取り込まれました。そしてHaxe2は次で最後のリリースとなることが決まり、2012年1月にHaxe2.10がリリースされました。

2012年の終盤、Haxe3にスイッチを切り替えて、Haxeコンパイラチームは、新しく設立されたHaxe Foundation³の援助を受けながら、次のメジャーバージョンに向かっていきました。そして、Haxe3は2013年の5月にリリースされました。

³<http://haxe-foundation.org>

Part I

言語リファレンス

Chapter 2

型

Haxeコンパイラは豊かな型システムを持っており、これがコンパイル時に型エラーを検出することを手助けします。型エラーとは、文字列による割り算や、整数のフィールドへのアクセス、不十分な(あるいは多すぎる)引数での関数呼び出し、といった型が不正である演算のことです。

いくつかの言語では、この安全性を得るためには各構文での明示的な型の宣言が強いられるので、コストがかかります。

```
1 var myButton:MySpecialButton = new MySpecialButton(); // AS3
2 MySpecialButton* myButton = new MySpecialButton(); // C++
```

一方、Haxeではコンパイラが型を推論できるため、この明示的な型注釈は必要ではありません。

```
1 var myButton = new MySpecialButton(); // Haxe
```

型推論の詳細については[Type Inference \(Section 3.6\)](#)で説明します。今のところは、上のコードの変数`myButton`は`MySpecialButton`のクラスインスタンスとわかると言っておけば十分でしょう。

Haxeの型システムは、以下の7つの型を認識します。

クラスインスタンス: クラスかインスタンスのオブジェクト

列挙型インスタンス: Haxeの列挙型(enum)の値

構造体: 匿名の構造体。例えば、連想配列。

関数: 引数と戻り値1つの型の複合型。

ダイナミック: あらゆる型に一致する、なんでも型。

抽象(abstract): 実行時には別の型となる、コンパイル時の型。

単態(monomorph): 後で別の型が付けられる未知(Unknown)の型。

ここからの節で、それぞれの型のグループとこれらがどうかかわっているのかについて解説していきます。

Definition: 複合型(Compound Type)

複合型というのは、従属する型を持つ型です。型パラメータ (3.2)を持つ型や、関数 (2.6)型がこれに当たります。

2.1 基本型

基本型はBoolとFloatとIntです。文法上、これらの値は以下のように簡単に識別可能です。

- trueとfalseはBool。
- 1、0、-1、0xFF0000はInt。
- 1.0、0.0、-1.0、1e10はFloat。

Haxeでは基本型はクラス (2.3)ではありません。これらは抽象型 (2.8)として実装されており、以降の項で解説するコンパイラ内部の演算処理に結び付けられています。

2.1.1 数値型

Type: Float
IEEEの64bit倍精度浮動小数点数を表します。

Type: Int
整数を表します。

IntはFloatが期待されるすべての場所で使用することが可能です (IntはFloatへの代入が可能で、Floatとして表現可能です)。ですが、逆はできません。FloatからIntへの代入は精度を失ってしまう場合があります、信頼できません。

2.1.2 オーバーフロー

パフォーマンスのためにHaxeコンパイラはオーバーフローに対する挙動を矯正しません。オーバーフローに対する挙動は、ターゲットのプラットフォームが責任を持ちます。各プラットフォームごとのオーバーフローの挙動を以下にまとめています。

C++, Java, C#, Neko, Flash: 一般的な挙動をもつ32Bit符号付き整数。

PHP, JS, Flash 8: ネイティブのInt型を持たない。Floatの上限(2^{52})を超えた場合に精度を失う。

代替手段として、プラットフォームごとの追加の計算を行う代わりに、正しいオーバーフローの挙動を持つhaxe.Int32とhaxe.Int64クラスが用意されています。

2.1.3 数値の演算子

make sure the types are right for inc, dec, negate, and bitwise negate

While introducing the different operations, we should include that information as well, including how they differ with the "C" standard, see [http:// haxe.org/ manual/operators](http://haxe.org/manual/operators)

算術演算				
演算子	演算	引数1	引数2	戻り値
++	1増加	Int	なし	Int
		Float	なし	Float
--	1減少	Int	なし	Int
		Float	なし	Float
+	加算	Float	Float	Float
		Float	Int	Float
		Int	Float	Float
		Int	Int	Int
-	減算	Float	Float	Float
		Float	Int	Float
		Int	Float	Float
		Int	Int	Int
*	乗算	Float	Float	Float
		Float	Int	Float
		Int	Float	Float
		Int	Int	Int
/	除算	Float	Float	Float
		Float	Int	Float
		Int	Float	Float
		Int	Int	Float
%	剰余	Float	Float	Float
		Float	Int	Float
		Int	Float	Float
		Int	Int	Int
比較演算				
演算子	演算	引数1	引数2	戻り値
==	等価	Float/Int	Float/Int	Bool
!=	不等価	Float/Int	Float/Int	Bool
<	より小さい	Float/Int	Float/Int	Bool
<=	より小さいか等しい	Float/Int	Float/Int	Bool
>	より大きい	Float/Int	Float/Int	Bool
>=	より大きい等しい	Float/Int	Float/Int	Bool
ビット演算				
演算子	演算	引数1	引数2	戻り値
~	ビット単位の否定(NOT)	Int	なし	Int
&	ビット単位の論理積(AND)	Int	Int	Int
	ビット単位の論理和(OR)	Int	Int	Int
^	ビット単位の排他的論理和(XOR)	Int	Int	Int
<<	左シフト	Int	Int	Int
>>	右シフト	Int	Int	Int
>>>	符号なしの右シフト	Int	Int	Int

2.1.4 Bool(真偽値)

Type: Bool
 真(true)または、偽(false)のどちらかになる値を表す。

Bool型の値は、if (5.16)やwhile (5.14)のような条件文によく表れます。以下の演算子は、Bool値を受け取ってBool値を返します。

- ・ && (and)
- ・ || (or)
- ・ ! (not)

Haxeは、Bool値の2項演算は、実行時に左から右へ必要な分だけ評価することを保証します。例えば、A && Bという式は、まずAを評価してAがtrueだった場合のみBが評価されます。同じように、A || BではAがtrueだった場合は、Bの値は意味を持たないので評価されません。

これは、以下のような場合に重要です。

```
1 if (object != null && object.field == 1) {  
2     ...  
3 }
```

objectがnullの場合にobject.fieldにアクセスするとランタイムエラーになりますが、事前にobject != nullのチェックをすることでエラーから守ることができます。

2.1.5 Void

Type: Void

Voidは型が存在しないことを表します。特定の場面(主に関数)で値を持たないことを表現するのに使います。

Voidは型システムにおける特殊な場合です。Voidは実際には型ではありません。Voidは特に関数の引数と戻り値で型が存在しないことを表現するのに使います。私たちはすでに最初の“Hello World”の例でVoidを使用しています。

please review, doubled content

```
1 class HelloWorld {  
2     static public function main():Void {  
3         trace("Hello World");  
4     }  
5 }
```

関数型について詳しくは関数型 (Section 2.6)で解説しますが、ここで軽く予習をしておきましょう。上の例のmain関数はVoid->Void型です。これは“引数は無く、戻り値も無い”という意味です。

Haxeでは、フィールドや変数に対してVoidを指定することはできません。以下のように書こうとするとエラーが発生します。

review please, sounds weird

```
1 // Arguments and variables of type Void  
2 // are not allowed  
3 var x:Void;
```

2.2 Nullable(null許容型)

Definition: Nullable

Haxeでは、ある型が値としてnullをとる場合にNullable(null許容型)であるとみなす。

プログラミング言語は、Nullableについてなにか1つ明確な定義を持つのが一般的です。ですが、Haxeではターゲットとなる言語のもともとの挙動に従うことで妥協しています。ターゲット言語のうちのいくつかは全てがデフォルト値としてnullをとり、その他は特定の型ではnullを許容しません。つまり、以下の2種類の言語を区別しなくてはなりません。

Definition: 静的ターゲット

静的ターゲットでは、その言語自体が基本型がnullを許容しないような型システムを持っています。この性質はFlash、C++、Java、C#ターゲットに当てはまります。

Definition: 動的ターゲット

動的ターゲットは型に関して寛容で、基本型がnullを許容します。これはJavaScriptとPHP、Neko、Flash 6-8ターゲットが当てはまります。

for starters...please
review

Definition: デフォルト値

基本型は、静的ターゲットではデフォルト値は以下になります。

Int: 0。

Float: FlashではNaN。その他の静的ターゲットでは0.0。

Bool: false。

その結果、Haxeコンパイラは静的ターゲットでは基本型に対するnullを代入することはできません。nullを代入するためには、以下のように基本型をNull<T>で囲う必要があります。

```
1 // error on static platforms
2 var a:Int = null;
3 var b:Null<Int> = null; // allowed
```

同じように、基本型はNull<T>で囲わなければnullと比較することはできません。

```
1 var a : Int = 0;
2 // error on static platforms
3 if( a == null ) { ... }
4 var b : Null<Int> = 0;
5 if( b != null ) { ... } // allowed
```

この制限はunification (3.5)が動作するすべての状況でかかります。

Type: Null<T>

静的ターゲットでは、Null<Int>、Null<Float>、Null<Bool>の型でnullを許容することが可能になります。動的ターゲットではNull<T>に効果はありません。また、Null<T>はその型がnullを持つことを表すドキュメントとしても使うことができます。

nullの値は隠匿されます。つまり、Null<T>やDynamicのnullの値を基本型に代入した場合には、デフォルト値が使用されます。

```
1 var n : Null<Int> = null;
2 var a : Int = n;
3 trace(a); // 0 on static platforms
```

2.2.1 オプション引数とnull許容

null許容について考える場合、オプション引数についても考慮しなくてはなりません。

特に、null許容ではないネイティブのオプション引数と、それとは異なる、null許容であるHaxe特有のオプション引数があります。この違いは以下のように、オプション引数にクエスチョンマークを付けることで作ります。

```
1 // x is a native Int (not nullable)
2 function foo(x : Int = 0) {...}
3 // y is Null<Int> (nullable)
4 function bar( ?y : Int) {...}
5 // z is also Null<Int>
6 function opt( ?z : Int = -1) {...}
```

Is there a difference between `? y : Int` and `y : Null<Int>` or can you even do the latter? Some more explanation and examples with native optional and Haxe optional arguments and how they relate to nullability would be nice.

Trivia: アーギュメント(Argument)とパラメータ(Parameter)

他のプログラミング言語では、よくアーギュメントとパラメータは同様の意味として使われます。Haxeでは、関数に関連する場合にアーギュメントを、型パラメータ (Section 3.2)と関連する場合にパラメータを使います。

2.3 クラスインスタンス

多くのオブジェクト指向言語と同じように、Haxeでも大抵のプログラムではクラスが最も重要なデータ構造です。Haxeのすべてのクラスは、明示された名前と、クラスの配置されたパスと、0個以上のクラスフィールドを持ちます。ここではクラスの一般的な構造とその関わり合いについて焦点を当てていきます。クラスフィールドの詳細については後で[Class Fields \(Chapter 4\)](#)の章で解説をします。

以下のサンプルコードが、この節で学ぶ基本になります。

```
1 class Point {
2     var x : Int;
3     var y : Int;
4     public function new(x, y) {
5         this.x = x;
6         this.y = y;
7     }
8     public function toString() {
9         return "Point("+x+", "+y+")";
10    }
11 }
```

意味的にはこれは不連続の2次元空間上の点を表現するものですが、このことはあまり重要ではありません。代わりにその構造に注目しましょう。

- ・ `class`のキーワードは、クラスを宣言していることを示すものです。
- ・ `Point`はクラス名です。型の識別子のルール (5)に従っているものが使用できます。
- ・ クラスフィールドは`{}`で囲われます。
- ・ `Int`型の`x`と`y`の2つの変数フィールドと、
- ・ クラスのコンストラクタとなる特殊な関数フィールド`new`と、

please review future tense

- ・ 通常の関数`toString`でクラスフィールドが構成されています。
- また、Haxeにはすべてのクラスと一致する特殊な型があります。

Type: `Class<T>`

この型はすべてのクラスの型と一致します。つまり、すべてのクラス(インスタンスではなくクラス)をこれに代入することができます。コンパイル時に、`Class<T>`は全てのクラスの型の共通の親の型となります。しかし、この関係性は生成されたコードに影響を与えません。

この型は、任意のクラスを要求するようなAPIで役立ちます。例えば、HaxeリフレクションAPI (10.6)のいくつかのメソッドがこれに当てはまります。

2.3.1 クラスのコンストラクタ

クラスのインスタンスは、クラスのコンストラクタを呼び出すことで生成されます。この過程は一般的にインスタンス化と呼ばれます。クラスインスタンスは、別名としてオブジェクトと呼ぶこともあります。ですが、クラス/クラスインスタンスと、列挙型/列挙型インスタンスという似た概念を区別するために、クラスインスタンスと呼ぶことが好まれます。

```
1 var p = new Point(-1, 65);
```

この例で、変数`p`に代入されたのが`Point`クラスのインスタンスです。`Point`のコンストラクタは`-1`と`65`の2つの引数を受け取り、これらをそれぞれインスタンスの`x`と`y`の変数に代入しています(クラスインスタンス (Section 2.3)で、定義を確認してください)。`new`の正確な意味については、後の5.12の節で再習します。現時点では、`new`はクラスのコンストラクタを呼び、適切なオブジェクトを返すものと考えておきましょう。

2.3.2 継承

クラスは他のクラスから継承ができます。Haxeでは、継承は`extends`キーワードを使って行います。

```
1 class Point3 extends Point {  
2     var z : Int;  
3     public function new(x, y, z) {  
4         super(x, y);  
5         this.z = z;  
6     }  
7 }
```

この関係は、よく”BはAである(is-a)”の関係とよく言われます。つまり、すべての`Point3`クラスのインスタンスは、同時に`Point`のインスタンスである、ということです。`Point`は`Point3`の親クラスであると言い、`Point3`は`Point`の子クラスであると言います。1つのクラスはたくさんの子クラスを持つことができますが、親クラスは1つしか持つことができません。ただし、“クラスXの親クラス”というのは、直接の親クラスだけでなく、親クラスの親クラスや、そのまた親、また親のクラスなどを指すこともよくあります。

上記のクラスは`Point`コンストラクタによく似ていますが、2つの新しい構文が登場しています。

- ・ `extends Point` は`Point`からの継承を意味します。
- ・ `super(x, y)` は親クラスのコンストラクタを呼び出します。この場合は`Point.new`です。

上の例ではコンストラクタを定義していますが、子クラスで自分自身のコンストラクタを定義する必要はありません。ただし、コンストラクタを定義する場合`super()`の呼び出しが必須になります。他のよくあるオブジェクト指向言語とは異なり、`super()`はコンストラクタの最初である必要はなく、どこで呼び出しても構いません。

また、クラスはその親クラスのメソッド (4.3)を`override`キーワードを明示して記述することで上書きすることができます。その効果と制限について詳しくはOverriding Methods (Section 4.3.1)であつかいます。

2.3.3 インターフェース

インターフェースはクラスのパブリックフィールドを記述するもので、クラスの署名ともいうべきものです。インターフェースは実装を持たず、構造に関する情報のみを与えます。

```
1 interface Printable {  
2     public function toString():String;  
3 }
```

この構文は以下の点をのぞいて、クラスによく似ています。

- interfaceキーワードをclassキーワードの代わりに使う。
- 関数が式 (5)を持たない。
- すべてのフィールドが型を明示する必要がある。

インタフェースは、構造的部分型 (3.5.2)とは異なり、クラス間の静的な関係性について記述します。以下のように明示的に宣言した場合にのみ、クラスはインターフェースと一致します。

```
1 class Point implements Printable { }
```

implementsキーワードの記述により、“PointはPrintableである(is-a)”の関係性が生まれます。つまり、すべてのPointのインスタンスは、Printableのインスタンスでもあります。クラスは親のクラスを1つしか持てませんが、以下のように複数のimplementsキーワードを使用することで複数のインターフェースを実装(implements)することが可能です。

```
1 class Point implements Printable implements Serializable
```

コンパイラは実装が条件を満たしているかの確認を行います。つまり、クラスが実際にインターフェースで要求されるフィールドを実装しているかを確かめます。フィールドの実装は、そのクラス自体と、その親となるいずれかのクラスの実装が考慮されます。

インターフェースのフィールドは、変数とプロパティのどちらであるかに対する制限は与えません:

```
1 interface Placeable {  
2     public var x:Float;  
3     public var y:Float;  
4 }  
5  
6 class Main implements Placeable {  
7     public var x:Float;  
8     public var y:Float;  
9     static public function main() { }  
10 }
```

Trivia: Implementsの構文

Haxeの3.0よりも前のバージョンでは、implementsキーワードはカンマで区切られていました。Javaのデファクトスタンダードに合わせるため、私たちはカンマを取り除くことに決定しました。これが、Haxe2と3の間の破壊的な変更の1つです。

2.4 列挙型インスタンス

Haxeには強力な列挙型(enum)をもっています。この列挙型は実際には代数的データ型 (ADT)¹に当たります。列挙型は式 (5)を持つことはできませんが、データ構造を表現するのに非常に役に立ちます。

¹http://en.wikipedia.org/wiki/Algebraic_data_type

```

1 enum Color {
2   Red;
3   Green;
4   Blue;
5   Rgb(r:Int, g:Int, b:Int);
6 }

```

このコードでは、enumは、赤、緑、青のいずれかか、またはRGB値で表現した色、を書き表しています。この文法の構造は以下の通りです。

- enumキーワードが、列挙型について定義することを宣言しています。
- Colorが列挙型の名前です。型の識別子のルール (5) に従うすべてのものが使用できます。
- 中カッコ {} で囲んだ中に列挙型のコンストラクタを記述します。
- RedとGreenとBlueには引数がありません。
- Rgbは、r、g、bの3つのInt型の引数を持ちます。

Haxの型システムには、すべての列挙型を統合する型があります。

Type: Enum<T>

すべての列挙型と一致する型です。コンパイル時に、Enum<T>は全ての列挙型の共通の親の型となります。しかし、この関係性は生成されたコードに影響を与えません。

Same as in 2.2, what is Enum<T> syntax?

2.4.1 列挙型のコンストラクタ

クラスと同じように、列挙型もそのコンストラクタを使うことでインスタンス化を行います。しかし、クラスとは異なり列挙型は複数のコンストラクタを持ち、以下のようにコンストラクタの名前を使って呼び出します。

```

1 var a = Red;
2 var b = Green;
3 var c = Rgb(255, 255, 0);

```

このコードでは変数a、b、cの型はColorです。変数cはRgbコンストラクタと引数を使って初期化されています。

list arguments

すべての列挙型のインスタンスはEnumValueという特別な型に対して代入が可能です。

Type: EnumValue

EnumValueはすべての列挙型のインスタンスと一致する特別な型です。この型はHaxeの標準ライブラリでは、すべての列挙型に対して可能な操作を提供するのに使われます。またユーザーのコードでは、特定の列挙型ではなく任意の列挙型のインスタンスを要求するAPIで利用できます。

以下の例からわかるように、列挙型とそのインスタンスを区別することは大切です。

```

1 enum Color {
2   Red;
3   Green;
4   Blue;
5   Rgb(r:Int, g:Int, b:Int);
6 }

```

```

7
8 class Main {
9     static public function main() {
10         var ec:EnumValue = Red; // valid
11         var en:Enum<Color> = Color; // valid
12         // Error: Color should be Enum<Color>
13         //var x:Enum<Color> = Red;
14     }
15 }

```

もし、上でコメント化されている行のコメント化が解除された場合、このコードはコンパイルできなくなります。これは、列挙型のインスタンスであるRedは、列挙型であるEnum<Color>型の変数には代入できないためです。

この関係性は、クラスとそのインスタンスの関係性に似ています。

Trivia: Enum<T>の型パラメータを具体化する

このマニュアルのレビューアの一は上のサンプルコードのColorとEnum<Color>の違いについて困惑しました。実際、型パラメータの具体化は意味のないもので、デモンストレーションのためのものでしかありませんでした。私たちはよく型を書くのを省いて、型についてあつかうのを型推論 (3.6)にまかせてしまいます。

しかし、型推論ではEnum<Color>ではないものが推論されます。コンパイラは、列挙型のコンストラクタをフィールドとしてみなした、仮の型を推論します。現在のHaxe3.2.0では、この仮の型について表現することは不可能であり、また表現する必要もありません。

2.4.2 列挙型を使う

列挙型は、有限の種類値のセットが許されることを表現するだけでも有用です。それぞれのコンストラクタについて多様性が示されるので、コンパイラはありうる全ての値が考慮されていることをチェックすることが可能です。これは、例えば以下のような場合です。

```

1 enum Color {
2     Red;
3     Green;
4     Blue;
5     Rgb(r:Int, g:Int, b:Int);
6 }
7
8 class Main {
9     static function main() {
10         var color = getColor();
11         switch (color) {
12             case Red: trace("Color was red");
13             case Green: trace("Color was green");
14             case Blue: trace("Color was blue");
15             case Rgb(r, g, b):
16                 trace("Color had a red value of " + r);
17         }
18     }
19
20     static function getColor():Color {
21         return Rgb(255, 0, 255);

```

```

22 }
23 }

```

getColor()の戻り値をcolorに代入し、その値でswitch式 (5.17)の分岐を行います。

初めのRed、Green、Blueの3ケースについては些細な内容で、ただColorの引数無しのコンストラクタとの一致するか調べています。最後のRgb(r, g, b)のケースでは、コンストラクタの引数の値をどうやって利用するのかがわかります。引数の値はケースの式の中で出てきたローカル変数として、varの式 (5.10)を使った場合と同じように、利用可能です。

switchの使い方について、より高度な情報は後のパターンマッチング (6.4)の節でお話します。

2.5 匿名の構造体

匿名の構造体は、型を明示せずに利用できるデータの集まりです。以下の例では、xとnameの2つのフィールドを持つ構造体を生成して、それぞれを12と"foo"の値で初期化しています。

```

1 class Structure {
2     static public function main() {
3         var myStructure = { x: 12, name: "foo" };
4     }
5 }

```

構文のルールは以下の通りです：

1. 構造体は中カッコ {} で囲う。
2. カンマで区切られた キーと値のペアのリストを持つ。
3. 識別子 (5)の条件を満たすカギと、値がコロンで区切られる。
4. 値には、Haxeのあらゆる式が当てはまる。

please reformat

ルール4は複雑にネストした構造体を含みます。例えば、以下のような。

```

1 var user = {
2     name : "Nicolas",
3     age : 32,
4     pos : [
5         { x : 0, y : 0 },
6         { x : 1, y : -1 }
7     ],
8 };

```

構造体のフィールドは、クラスと同じように、ドット(.)を使ってアクセスします。

```

1 // get value of name, which is "Nicolas"
2 user.name;
3 // set value of age to 33
4 user.age = 33;

```

特筆すべきは、匿名の構造体の使用は型システムを崩壊させないことです。コンパイラは実際に利用可能なフィールドにしかアクセスを許しません。つまり、以下のようなコードはコンパイルできません。

```

1 class Test {
2     static public function main() {
3         var point = { x: 0.0, y: 12.0 };
4         // { y : Float, x : Float } has no field z

```



```

5     point.z;
6   }
7 }

```

このエラーメッセージはコンパイラがpointの型を知っていることを表します。このpointの型は、xとyのFloat型のフィールドを持つ構造体であり、zというフィールドは持たないのでアクセスに失敗しました。このpointの型は型推論 (3.6)により識別され、そのおかげでローカル変数では型を明示しなくて済みます。ただし、pointが、クラスやインスタンスのフィールドだった場合、以下のように型の明示が必要になります。

```

1 class Path {
2     var start : { x : Int, y : Int };
3     var target : { x : Int, y : Int };
4     var current : { x : Int, y : Int };
5 }

```

このような冗長な型の宣言をさけるため、特にもっと複雑な構造体の場合、以下のようにtypedef (3.1)を使うことをお勧めします。

```

1 typedef Point = { x : Int, y : Int }
2
3 class Path {
4     var start : Point;
5     var target : Point;
6     var current : Point;
7 }

```

2.5.1 JSONで構造体を書く

以下のように、文字列の定数値をキーに使うJavaScript Object Notation(JSON)の構文を構造体に使うこともできます。

```

1 var point = { "x" : 1, "y" : -5 };

```

キーには文字列の定数値すべてが使えますが、フィールドがHaxeの識別子 (5)として有効である場合のみ型の一部として認識されます。そして、Haxeの構文では識別子として無効なフィールドにはアクセスできないため、リフレクション (10.6)のReflect.fieldとReflect.setFieldを使ってアクセスしなくてはなりません。

2.5.2 構造体の型のクラス記法

構造体の型を書く場合に、HaxeではClass Fields (Chapter 4)を書くときと同じ構文が使用できます。以下のtypedef (3.1)では、Int型のxのy変数フィールドを持つPoint型を定義しています。

```

1 typedef Point = {
2     var x : Int;
3     var y : Int;
4 }

```

2.5.3 オプションのフィールド

I don't really know how these work yet.

2.5.4 パフォーマンスへの影響

構造体をつかって、さらに構造的な部分型付け (3.5.2)を使った場合、動的ターゲット (2.2)ではパフォーマンスに影響はありません。しかし、静的ターゲット (2.2)では、動的な検査が発生するので通常は静的なフィールドアクセスよりも遅くなります。

2.6 関数型

It seems a bit convoluted explanations. Should we maybe start by "decoding" the meaning of Void -> Void, then Int -> Bool -> Float, then maybe have samples using \$type

関数型は、単相 (2.9)と共に、Haxeのユーザーからよく隠れている型の1つです。コンパイル時に式の型を出力させる\$typeという特殊な識別子を使えば、この型を以下のように浮かび上がらせることが可能です。

```
1 class FunctionType {
2     static public function main() {
3         // i : Int -> s : String -> Bool
4         $type(test);
5         $type(test(1, "foo")); // Bool
6     }
7
8     static function test(i:Int, s:String):Bool {
9         return true;
10    }
11 }
```

初めの\$typeの出力は、test関数の定義と強い類似性があります。では、その相違点を見てみます。

- ・ 関数の引数は、カンマではなく->で区切られる。
- ・ 引数の戻り値の型は、もう一つ->を付けた後に書かれる。

どちらの表記でも、test関数が1つ目の引数としてIntを受け取り、2つ目の引数としてString型を受け取り、Bool型の値を返すことはよくわかります。2つ目の\$type式のtest(1, "foo")のようにこの関数を呼び出すと、Haxeの型検査は1がIntに代入可能か、"foo"がStringに代入可能かをチェックします。そして、その呼び出し後の型は、testの戻り値の型のBoolとなります。

もし、ある関数の型が、別の関数の型を引数か戻り値に含む場合、丸かっこをグループ化に使うことができます。例えば、Int -> (Int -> Void) -> Voidは初めの引数の型がInt、2番目の引数がInt -> Voidで、戻り値がVoidの関数を表します。

2.6.1 オプション引数

オプション引数は、引数の識別子の直前にクエスチョンマーク(?)を付けることで表現できます。

```
1 class OptionalArguments {
2     static public function main() {
3         // ?i : Int -> ?s : String -> String
4         $type(test);
5         trace(test()); // i: null, s: null
6         trace(test(1)); // i: 1, s: null
7         trace(test(1, "foo")); // i: 1, s: foo
8         trace(test("foo")); // i: null, s: foo
9     }
10 }
```

```

11 static function test(?i:Int, ?s:String) {
12     return "i: " + i + ", s: " + s;
13 }
14 }

```

test関数は、2つのオプション引数を持ちます。Int型のiとString型のsです。これは3行目の関数型の出力に直接反映されています。

この例では、関数を4回呼び出しその結果を出力しています。

1. 初めの呼び出しは引数無し。
2. 2番目の呼び出しは1のみの引数。
3. 3番目の呼び出しは1と"foo"の2つの引数。
4. 4番目の呼び出しは"foo"のみの引数。

この出力を見ると、オプション引数が呼び出し時に省略されるとnullになることがわかります。つまり、これらの引数はnullが入る型でなくてはならないことになり、ここでnull許容 (2.2)に関する疑問が浮かび上がります。Haxeのコンパイラは静的ターゲット (2.2)に出力する場合に、オプションの基本型の引数の型をNull<T>であると推論することで、オプション引数の型がnull許容であることを保証しています。

初めの3つの呼び出しは直観的なものですが、4つ目の呼び出しには驚くかもしれません。後の引数に代入可能な値が渡されたため、オプション引数はスキップされています。

2.6.2 デフォルト値

Haxeでは、引数のデフォルト値として定数値を割り当てることが可能です。

```

1 class DefaultValues {
2     static public function main() {
3         // ?i : Int -> ?s : String -> String
4         $type(test);
5         trace(test()); // i: 12, s: bar
6         trace(test(1)); // i: 1, s: bar
7         trace(test(1, "foo")); // i: 1, s: foo
8         trace(test("foo")); // i: 12, s: foo
9     }
10
11     static function test(i = 12, s = "bar") {
12         return "i: " + i + ", s: " + s;
13     }
14 }

```

この例は、[オプション引数 \(Section 2.6.1\)](#)のものとよく似ています。違いは、関数の引数のiとsそれぞれに12と"bar"を代入していることだけです。これにより、引数が省略された場合にnullではなく、このデフォルト値が使われるようになります。

Haxeでのデフォルト値は、型の一部では無いので、出力時に呼び出し元で置き換えられるわけではありません(ただし、特有の動作を行うインライン (4.4.2)の関数を除く)。いくつかのターゲットでは、無視された引数に対してやはりnullを渡して、以下の関数と同じようなコードを生成します。

```

1 static function test(i = 12, s = "bar") {
2     if (i == null) i = 12;
3     if (s == null) s = "bar";
4     return "i: " + i + ", s: " + s;
5 }

```

つまり、パフォーマンスが要求されるコードでは、デフォルト値を使わない書き方をすることが重要だと考えてください。

2.7 ダイナミック

Haxeは静的な型システムを持っていますが、この型システムはDynamic型を使うことで事実上オフにすることが可能です。Dynamicな値は、あらゆるものに割り当て可能です。逆に、Dynamicに対してはあらゆる値を割り当て可能です。これにはいくつかの弱点があります。

- ・ 代入、関数呼び出しなど、特定の型を要求される場面でコンパイラが型チェックをしなくなります。
- ・ 特定の最適化が、特に静的ターゲットにコンパイルする場合に、効かなくなります。
- ・ よくある間違い(フィールド名のタイポなど)がコンパイル時に検出できなくなって、実行時のエラーが起きやすくなります。
- ・ [Dead Code Elimination \(Section 8.1\)](#)は、Dynamicを通じて使用しているフィールドを検出できません。

Dynamicが実行時に問題を起こすような例を考えるのはとても簡単です。以下の2行を静的ターゲットへコンパイルすることを考えてください。

```
1 var d:Dynamic = 1;  
2 d.foo;
```

これをコンパイルしたプログラムを、Flash Playerで実行した場合、Number にプロパティ foo が見つからず、デフォルト値もありません。というエラーが発生します。Dynamicを使わなければ、このエラーはコンパイル時に検出できます。

Trivia: Haxe3より前のDynamicの推論

Haxe3のコンパイラは型をDynamicとして推論することはないので、Dynamicを使いたい場合はそのことを明示しなければ行けません。以前のHaxeのバージョンでは、混ざった型のArrayをArray<Dynamic>として推論していました(例えば、[1, true, "foo"])。私たちはこの挙動はたくさんの型の問題を生み出すことに気づき、この仕様をHaxe3で取り除きました。

実際のところDynamicは使ってしまいましたが、多くの場面では他のもっと良い選択肢があるのでDynamicの使用は最低限にすべきです。例えば、Haxeの[Reflection \(Section 10.6\)](#) APIは、コンパイル時には構造のわからないカスタムのデータ構造をあつかう際に最も良い選択肢になりえます。

Dynamicは、単相(monomorph) (2.9)を単一化 (3.5)する場合に、特殊な挙動をします。以下のような場合に、とんでもない結果を生んでしまうので、単相がDynamicに拘束されることはありません。

```
1 class Main {  
2     static function main() {  
3         var jsonData = '[1, 2, 3]';  
4         var json = haxe.Json.parse(jsonData);  
5         $type(json); // Unknown<0>  
6         for (i in 0...json.length) {  
7             // Array access is not allowed on  
8             // {+ length : Int }  
9             trace(json[0]);  
10        }  
11    }  
12 }
```

Json.parseの戻り値はDynamicですが、ローカル変数のjsonの型はDynamicに拘束されません。単相のままです。そして、json.lengthのフィールドにアクセスした時に匿名の構造体 (2.5)として推論されて、それによりjson[0]の配列アクセスでエラーになっています。これは、jsonに対して、var json:Dynamicというように明示的にDynamicの型付けをすることで避けることができます。

Trivia: 標準ライブラリでのDynamic

DynamicはHaxe3より前の標準ライブラリではかなり頻繁に表れていましたが、Haxe3までの継続的な型システムの改善によってDynamicの出現頻度を減らすことができました。

2.7.1 型パラメータ付きのダイナミック

Dynamicは、型パラメータ (3.2)を付けても付けなくても良いという点でも特殊な型です。型パラメータを付けた場合、ダイナミック (Section 2.7)のすべてのフィールドがパラメータの型であることが強制されます。

```
1 var att : Dynamic<String> = xml.attributes;
2 // valid, value is a String
3 att.name = "Nicolas";
4 // dito (this documentation is quite old)
5 att.age = "26";
6 // error, value is not a String
7 att.income = 0;
```

2.7.2 ダイナミックを実装(implements)する

クラスはDynamicとDynamic<T>を実装 (2.3.3)することができます。これにより任意のフィールドへのアクセスが可能になります。Dynamicの場合、フィールドはあらゆる型になる可能性があり、Dynamic<T>の場合、フィールドはパラメータの型と矛盾しない型のみに強制されます。

```
1 class ImplementsDynamic
2     implements Dynamic<String> {
3     public var present:Int;
4     public function new() {}
5 }
6
7 class Main {
8     static public function main() {
9         var c = new ImplementsDynamic();
10        // valid, present is an existing field
11        c.present = 1;
12        // valid, assigned value is a String
13        c.stringField = "foo";
14        // error, Int should be String
15        //c.intField = 1;
16    }
17 }
```

Dynamicを実装しても、他のインターフェースが要求する実装を満たすことにはなりません。明示的な実装が必要です。

型パラメータなしのDynamicを実装したクラスでは、特殊なメソッドresolveを利用することができます。読み込みアクセス (4.2)がありフィールドが存在しなかった場合、resolveメソッドが以下のように呼び出されます。

```

1 class Resolve implements Dynamic<String> {
2     public var present: Int;
3     public function new() {}
4     function resolve(field: String) {
5         return "Tried to resolve " + field;
6     }
7 }
8
9 class Main {
10     static public function main() {
11         var c = new Resolve();
12         c.present = 2;
13         trace(c.present);
14         trace(c.resolveMe);
15     }
16 }

```

2.8 抽象型(abstract)

抽象(abstract)型は、実行時には別の型になる型です。抽象型は挙動を編集したり強化したりするために、具体型(=抽象型でない型)を“おおう”型を定義するコンパイル時の機能です。

```

1 abstract AbstractInt(Int) {
2     inline public function new(i: Int) {
3         this = i;
4     }
5 }

```

上記のコードからは以下を学ぶことができます。

- `abstract`キーワードは、抽象型を定義することを宣言している。
- `AbstractInt`は抽象型の名前であり、型の識別子のルールを満たすものなら何でも使える。
- 丸かっこ()の中は、その基底型の`Int`である。
- 中カッコ{}の中はフィールドで、
- `Int`型の`i`のみを引数とするコンストラクタの`new`関数がある。

Definition: 基底型

抽象型の基底型は、実行時にその抽象型を表すために使われる型です。基底型はたいていの場合は具体型ですが、別の抽象型である場合もあります。

構文はクラスを連想させるもので、意味合いもよく似ています。実際、抽象型のボディ部分(中カッコの開始以降)は、クラスフィールドとして構文解析することが可能です。抽象型はメソッド (4.3)と、実体 (4.2.3)の無いプロパティ (4.2)フィールドを持つことが可能です。

さらに、抽象型は以下のように、クラスと同じようにインスタンス化して使用することができます

```

1 class MyAbstract {
2     static public function main() {
3         var a = new AbstractInt(12);

```

```

4     trace(a); //12
5   }
6 }

```

はじめに書いたとおり、抽象型はコンパイル時の機能ですから、見るべきは上記のコードの実際の出力です。この出力例としては、簡潔なコードが出力されるJavaScriptが良いでしょう。上記のコードを `haxe -main MyAbstract -js myabstract.js` でコンパイルすると以下のようなJavaScriptが出力されます。

```

1 var a = 12;
2 console.log(a);

```

抽象型の `AbstractInt` は出力から完全に消えてしまい、その基底型の `Int` の値のみが残っています。これは、`AbstractInt` のコンストラクタがインライン化されて、そのインラインの式が値を `this` に代入します(インライン化については後の [Inline \(Section 4.4.2\)](#) で学びます)。これは、クラスのように考えていた場合、驚くべきことかもしれません。しかし、これこそが抽象型を使って表現したいことそのものです。抽象型のすべてのインラインのメンバメソッドでは `this` への代入が可能で、これにより“内部の値”が編集できます。

“もしメンバ関数で `inline` が宣言されていなかった場合、何が起こるのか?” というのは良い疑問です。そのようなコードははっきりと成立します。その場合、Haxe は実装クラスと呼ばれる `private` のクラスを生成します。この実装クラスは抽象型のメンバ関数を、最初の引数としてその基底型の `this` を加えた静的な(`static`)関数で持ちます。さらに実装の詳細の話をする、この実装クラスは選択的関数 ([2.8.4](#))でも使われます。

Trivia: 基本型と抽象型

抽象型が生まれる前には、基本型は `extern` クラスと列挙型で実装されていました。`Int` 型を `Float` 型の“子クラス”としてあつかうなどのいくつかの面では便利でしたが、一方で問題も引き起こしました。例えば、`Float` が `extern` クラスなので、実際のオブジェクトしか受け入れられないはずの空の構造体の型 `{}` として単一化できました。

2.8.1 暗黙のキャスト

クラスとは異なり抽象型は暗黙のキャストを許します。抽象型には2種類の暗黙のキャストがあります。

直接: 他の型から抽象型への直接のキャストを許します。これは `to` と `from` のルールを抽象型に設定することでできます。これは、その抽象型の基底型に単一化可能な型のみで利用可能です。

クラスフィールド: 特殊なキャスト関数を呼び出すことによるキャストを許します。この関数は `@:to` と `@:from` のメタデータを使って定義されます。この種類のキャストは全ての型で利用可能です。

下のコードは、直接キャストの例です。

```

1 abstract MyAbstract(Int) from Int to Int {
2   inline function new(i:Int) {
3     this = i;
4   }
5 }
6
7 class ImplicitCastDirect {
8   static public function main() {
9     var a:MyAbstract = 12;
10    var b:Int = a;
11  }
12 }

```

from Intかつto IntのMyAbstractを定義しました。これはIntを代入することが可能で、かつIntに代入することが可能だという意味です。このことは、9、10行目に表れています。まず、Intの12をMyAbstract型の変数aに代入しています(これはfrom Intの宣言により可能になります)。そして次に、Int型の変数bに、抽象型のインスタンスを代入しています(これはto Intの宣言により可能になります)。

クラスフィールドのキャストも同じ意味を持ちますが、定義の仕方はまったく異なります。

```
1 abstract MyAbstract(Int) {
2   inline function new(i:Int) {
3     this = i;
4   }
5
6   @:from
7   static public function fromString(s:String) {
8     return new MyAbstract(Std.parseInt(s));
9   }
10
11   @:to
12   public function toArray() {
13     return [this];
14   }
15 }
16
17 class ImplicitCastField {
18   static public function main() {
19     var a:MyAbstract = "3";
20     var b:Array<Int> = a;
21     trace(b); // [3]
22   }
23 }
```

静的な関数に@:fromを付けることで、その引数の型からその抽象型への暗黙のキャストを行う関数として判断されます。この関数はその抽象型の値を返す必要があります。staticを宣言する必要もあります。

同じように関数に@:toを付けることで、その抽象型からその戻り値の型への暗黙のキャストを行う関数として判断されます。この関数は普通はメンバ関数ですが、staticでも構いません。そして、これは選択的関数 (2.8.4)として働きます。

上の例では、fromStringメソッドが"3"の値をMyAbstract型の変数aへの代入を可能にし、toArrayメソッドがその抽象型インスタンスをArray<Int>型の変数bへの代入を可能にします。

この種類のキャストを使った場合、必要な場所でキャスト関数の呼び出しが発生します。このことはJavaScript出力を見ると明らかです。

```
1 var a = _ImplicitCastField.MyAbstract_Impl_
2   .fromString("3");
3 var b = _ImplicitCastField.MyAbstract_Impl_
4   .toArray(a);
```

これは2つのキャスト関数でインライン化 (4.4.2)を行うことでさらなる最適化を行うことができます。これにより出力は以下のように変わります。

```
1 var a = Std.parseInt("3");
2 var b = [a];
```

型Aから時の型Bへの代入の時にどちらかまたは両方が抽象型である場合に使われるキャストの選択アルゴリズムは簡単です。

1. Aが抽象型でない場合は3へ。
2. Aが、Bへの変換を持っている場合、これを適用して6へ。
3. Bが抽象型でない場合は5へ。
4. Bが、Aからの変換を持っている場合、これを適用して6へ。
5. 単一化失敗で、終了。
6. 単一化成功で、終了。

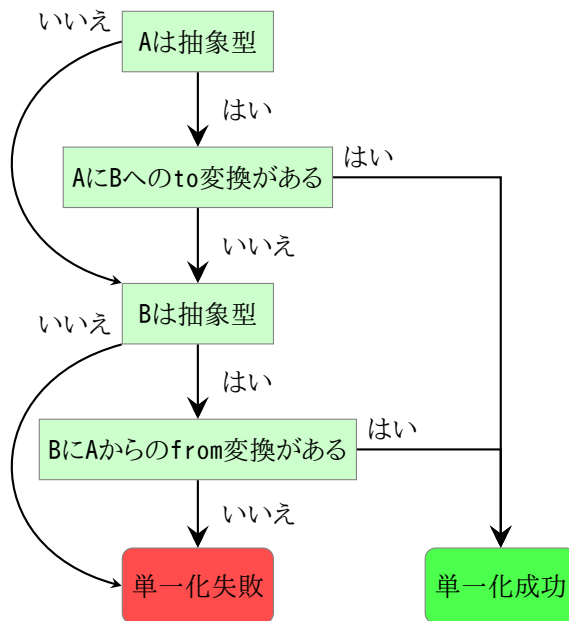


Figure 2.1: 選択アルゴリズムのフローチャート

意図的に暗黙のキャストは連鎖的ではありません。これは以下の例でわかります。

```

1 abstract A(Int) {
2   public function new() this = 0;
3   @:to public function toB() return new B();
4 }
5
6 abstract B(Int) {
7   public function new() this = 0;
8   @:to public function toC() return new C();
9 }
10
11 abstract C(Int) {
12   public function new() this = 0;
13 }
14
15 class Main {
16   static public function main() {

```



```

17     var a = new A();
18     var b:B = a; // valid, uses A.toB
19     var c:C = b; // valid, uses B.toC
20     var c:C = a; // error, A should be C
21 }
22 }

```

AからB、BからCへの個々のキャストは可能ですが、AからCへの連鎖的なキャストはできません。これは、キャスト方法が複数生まれてしまうことは避けて、選択アルゴリズムの簡潔さを保つためです。

2.8.2 演算子オーバーロード

抽象型ではクラスフィールドに`@:op`メタデータを付けることで、単項演算子と2項演算子のオーバーロードが可能です。

```

1 abstract MyAbstract(String) {
2   public inline function new(s:String) {
3     this = s;
4   }
5
6   @:op(A * B)
7   public function repeat(rhs:Int):MyAbstract {
8     var s:StringBuf = new StringBuf();
9     for (i in 0...rhs)
10       s.add(this);
11     return new MyAbstract(s.toString());
12   }
13 }
14
15 class AbstractOperatorOverload {
16   static public function main() {
17     var a = new MyAbstract("foo");
18     trace(a * 3); // foofoofoo
19   }
20 }

```

`@:op(A * B)`を宣言することで、`repeat`関数は、左辺が`MyAbstract`で右辺が`Int`の場合の`*`演算子による乗算の関数として利用されます。これは18行目で利用されています。この部分はJavaScriptにコンパイルすると以下のようになります。

```

1 console.log(_AbstractOperatorOverload.
2   MyAbstract_Impl_.repeat(a,3));

```

クラスフィールドによる暗黙の型変換 (2.8.1)と同様に、オーバーロードメソッドも要求された場所で呼び出しが発生します。上記の例の`repeat`関数は可換ではありません。`MyAbstract * Int`は動作しますが、`Int * MyAbstract`では動作しません。`Int * MyAbstract`でも動作させたい場合は`@:commutative`のメタデータが使えます。逆に、`MyAbstract * Int`ではなく`Int * MyAbstract`でのみ動作させたい場合、1つ目の引数で`Int`型、2つ目の引数で`MyAbstract`型を受け取る静的な関数をオーバーロードメソッドにすることができます。

単項演算子の場合もこれによく似ています。

```

1 abstract MyAbstract(String) {
2   public inline function new(s:String) {
3     this = s;

```

```

4   }
5
6   @:op(++A) public function pre()
7       return "pre" + this;
8   @:op(A++) public function post()
9       return this + "post";
10  }
11
12  class AbstractUnopOverload {
13      static public function main() {
14          var a = new MyAbstract("foo");
15          trace(++a); // prefoo
16          trace(a++); // foo post
17      }
18  }

```

2項演算子と単項演算子の両方とも、戻り値の型は何でも構いません。
 基底型が抽象型でそこで許容されている演算子でかつ戻り値を元の抽象型に代入可能なものについては、@:op関数のボディを省略することが可能です。

please review for correctness

2.8.3 配列アクセス

配列アクセスは、配列の特定の位置の値にアクセスするのに伝統的に使われている特殊な構文です。これは大抵の場合、Intのみを引数としますが、抽象型の場合はカスタムの配列アクセスを定義することが可能です。Haxeの標準ライブラリ (10)では、これをMap型に使っており、これには以下の2つのメソッドがあります。

You have marked "Map" for some reason

```

1  @:arrayAccess public inline function
2  get(key:K) return this.get(key);
3  @:arrayAccess public inline function
4  arrayWrite(k:K, v:V):V {
5      this.set(k, v);
6      return v;
7  }

```

配列アクセスのメソッドは以下の2種類があります。

- ・ @:arrayAccessメソッドが1つの引数を受け取る場合、それは読み取り用です。
- ・ @:arrayAccessメソッドが2つの引数を受け取る場合、それは書き込み用です。

上記のコードのgetメソッドとarrayWriteメソッドは、以下のように使われます。

```

1  class Main {
2      public static function main() {
3          var map = new Map();
4          map["foo"] = 1;
5          trace(map["foo"]);
6      }
7  }

```

ここでは以下のように出力に配列アクセスのフィールドの呼び出しが入ることになりますが、驚かないでください。

```

1 map.set("foo",1);
2 1;
3 console.log(map.get("foo"));

```

2.8.4 選択的関数

コンパイラは抽象型のメンバ関数を静的な(static)関数へと変化させるので、手で静的な関数を記述してそれを抽象型のインスタンスで使うことができます。この意味は、関数の最初の引数の型で、その関数が使えるようになる静的拡張 (6.3)に似ています。

```

1 abstract MyAbstract<T>(T) from T {
2     public function new(t:T) this = t;
3
4     function get() return this;
5
6     static public function
7     getString(v:MyAbstract<String>):String {
8         return v.get();
9     }
10 }
11
12 class SelectiveFunction {
13     static public function main() {
14         var a = new MyAbstract("foo");
15         a.getString();
16         var b = new MyAbstract(1);
17         // Int should be MyAbstract<String>
18         b.getString();
19     }
20 }

```

抽象型のMyAbstractのgetStringのメソッドは、最初の引数としてMyAbstract<String>を受け取ります。これにより、14行目の変数aの関数呼び出しが可能になります(aの型がMyAbstract<String>なので)。しかし、MyAbstract<Int>の変数bでは使えません。

Trivia: 偶然の機能

実際のところ選択的関数は意図して作られたというよりも、発見された機能です。この機能について初めて言及されてから実際に動作させるまでに必要だったのは軽微な修正のみでした。この発見が、Mapのような複数の型の抽象型にもつながっています。

2.8.5 抽象型列挙体

Since Haxe 3.1.0

抽象型の宣言に@:enumのメタデータを追加することで、その値を有限の値のセットを定義して使うことができます。

```

1 @:enum
2 abstract HttpStatus(Int) {
3     var NotFound = 404;
4     var MethodNotAllowed = 405;

```

```

5 }
6
7 class Main {
8     static public function main() {
9         var status = HttpStatus.NotFound;
10        var msg = printStatus(status);
11    }
12
13    static function
14    printStatus(status:HttpStatus) {
15        return switch(status) {
16            case NotFound:
17                "Not found";
18            case MethodNotAllowed:
19                "Method not allowed";
20        }
21    }
22 }

```

以下のJavaScriptへの出力を見ても明らかなように、Haxeは抽象型HttpStatusの全てのフィールドへのアクセスをその値に変換します。

```

1 Main.main = function() {
2     var status = 404;
3     var msg = Main.printStatus(status);
4 };
5 Main.printStatus = function(status) {
6     switch(status) {
7         case 404:
8             return "Not found";
9         case 405:
10            return "Method not allowed";
11     }
12 };

```

これはインライン変数 (4.4.2)によく似ていますが、いくつかの利点があります。

- ・ コンパイラがそのセットのすべての値が正しく型付けされていることを保証できます。
- ・ パターンマッチで、抽象型列挙体へのマッチング (6.4)を行う場合に網羅性 (6.4.10)がチェックされます。
- ・ 少ない構文でフィールドを定義できます。

2.8.6 抽象型フィールドの繰り上げ

Since Haxe 3.1.0

基底型をラップした場合、その機能性の“保ちたい”場合があります。繰り上がりの関数を手で書くのは面倒なので、Haxeでは@:forwardメタデータを利用できるようにしています。

```

1 @:forward(push, pop)
2 abstract MyArray<S>(Array<S>) {
3     public inline function new() {

```

```

4     this = [];
5   }
6 }
7
8 class Main {
9   static public function main() {
10     var myArray = new MyArray();
11     myArray.push(12);
12     myArray.pop();
13     // MyArray<Int> has no field length
14     //myArray.length;
15   }
16 }

```

この例では、抽象型のMyArrayがArrayをラップしています。この@:forwardメタデータは、基底型から繰り上がらせるフィールド2つを引数として与えられています。上記の例のmain関数は、MyArrayをインスタンス化して、そのpushとpopのメソッドにアクセスしています。コメント化されている行は、lengthフィールドは利用できないことを実演するものです。

ではどのようなコードが出力されるのか、いつものようにJavaScriptへの出力を見てみましょう。

```

1 Main.main = function() {
2   var myArray = [];
3   myArray.push(12);
4   myArray.pop();
5 };

```

全てのフィールドを繰り上げる場合は、引数なしの@:forwardを利用できます。もちろんこの場合でも、Haxeコンパイラは基底型にそのフィールドが存在していることを保証します。

Trivia: マクロとして実装

@:enumと@:forwardの両機能は、もともとはビルドマクロ (9.5)を利用して実装していました。この実装はマクロなしのコードから使う場合はうまく動作していましたが、マクロからこれらの機能を使った場合に問題を起こしました。このため、これらの機能はコンパイラへと移されました。

2.8.7 コアタイプの抽象型

Haxeの標準ライブラリは、基本型のセットをコアタイプの抽象型として定義しています。これらは@:coreTypeメタデータを付けることで識別されて、基底型の定義を欠きます。これらの抽象型もまた異なる型の表現として考えることができます。そして、その型はHaxeのターゲットのネイティブの型です。

カスタムのコアタイプの抽象型の導入は、Haxeのターゲットにその意味を理解させる必要があります、ほとんどのユーザーのコードで必要ないでしょう。ですが、マクロを使いたい人や、新しいHaxeのターゲットを作りたい人にとっては興味深い利用例があります

コアタイプの抽象型は、不透過の抽象型(他の型をラップする抽象型のこと)とは異なる以下の性質をもちます。

- ・ 基底型を持たない。
- ・ @:NotNullメタデータの注釈を付けない限り、null許容としてあつかわれる。
- ・ 式の無い配列アクセス (2.8.3)関数を定義できる。
- ・ Haxeの制限から離れた、式を持たない演算子オーバーロードのフィールド (2.8.2)が可能。

2.9 単相型

単相型は、単一化 (3.5) の過程で、他の異なる型へと形を変える型です。これについて詳しくは型推論 (3.6) の節で話します。

Chapter 3

型システム

私たちは型 (Chapter 2) の章でさまざまな種類の型について学んできました。ここからはそれらがお互いに関係しているかを見ていきます。まず、複雑な型に対して名前(別名)を与える仕組みである `Typedef` (3.1) の紹介から簡単に始めます。`typedef` は特に、型パラメータ (3.2) を持つ型で役に立ちます。

任意の2つの型について、その上位の型のグループが矛盾しないかをチェックすることで多くの型安全性が得られます。これがコンパイラが試みる単一化であり、[単一化\(Unification\)](#) (Section 3.5) の節で詳しく説明します。

すべての型はモジュールに所属し、パスを通して呼び出されます。[Modules and Paths](#) (Section 3.7) では、これらに関連した仕組みについて詳しい説明を行います。

3.1 typedef

`typedef` は匿名構造体 (2.5) の節で、すでに登場しています。そこでは複雑な構造体の型について名前を与えて簡潔にあつかう方法を見ています。この利用法は `typedef` が一体なにに良いのかを的確に表しています。構造体の型に対して名前を与えるのは、`typedef` の主たる用途かもしれません。実際のところ、この用途が一般的すぎて、多くのHaxeユーザーが `typedef` を構造体のためのものだと思っています。

`typedef` は他のあらゆる型に対して名前を与えることが可能です。

```
1 typedef IA = Array<Int>;
```

これにより `Array<Int>` が使われる場所で、代わりに `IA` を使うことが可能になります。この場合、ほんの数回のタイプ数しか減らせませんが、より複雑な複合型の場合は違います。これこそが、`typedef` と構造体が強く結びついて見える理由です。

```
1 typedef User = {  
2     var age : Int;  
3     var name : String;  
4 }
```

`typedef` はテキスト上の置き換えではなく、実は本物の型です。Haxe標準ライブラリの `Iterable` のように型パラメータ (3.2) を持つことができます。

```
1 typedef Iterable<T> = {  
2     function iterator() : Iterator<T>;  
3 }
```

3.1.1 拡張

拡張は、構造体が与えられた型のフィールドすべてと、加えていくつかのフィールドを持っていることを表すために使われます。

```
1 typedef IterableWithLength<T> = {
2   > Iterable<T>,
3   // read only property
4   var length(default, null):Int;
5 }
6
7 class Extension {
8   static public function main() {
9     var array = [1, 2, 3];
10    var t:IterableWithLength<Int> = array;
11  }
12 }
```

大なりの演算子を使うことで、追加のクラスフィールドを持つ`Iterable<T>`の拡張が作成されました。このケースでは、読み込み専用のプロパティ (4.2) であるInt型の`length`が要求されます。

`IterableWithLength<T>`に適合するためには、`Iterable<T>`にも適合してさらに読み込み専用のInt型のプロパティ`length`を持つてなきやいけません。例では、`Array`が割り当てられており、これはこれらの条件をすべて満たしています。

Since Haxe 3.1.0

複数の構造体を拡張することもできます。

```
1 typedef WithLength = {
2   var length(default, null):Int;
3 }
4
5 typedef IterableWithLengthAndPush<T> = {
6   > Iterable<T>,
7   > WithLength,
8   function push(a:T):Int;
9 }
10
11 class Extension2 {
12   static public function main() {
13     var array = [1, 2, 3];
14     var t:IterableWithLengthAndPush<Int> =
15       array;
16   }
17 }
```

3.2 型パラメータ

クラスフィールド (4)や列挙型コンストラクタ (2.4.1)のように、Haxeではいくつかの型についてパラメータ化を行うことができます。型パラメータは山カッコ<>内にカンマ区切りで記述することで、定義することができます。シンプルな例は、Haxe標準ライブラリの`Array`です。

```
1 class Array<T> {
2   function push(x : T) : Int;
3 }
```


Arrayのインスタンスが作られると、型パラメータTは単相 (2.9)となります。つまり、1度に1つの型であれば、あらゆる型を適用することができます。この適用は以下のどちらか方法で行います

明示的に、`new Array<String>()`のように型を記述してコンストラクタを呼び出して適用する。

暗黙に、型推論 (3.6)で適用する。例えば、`arrayInstance.push("foo")`を呼び出す。

型パラメータが付くクラスの定義の内部では、その型パラメータは不定の型です。制約 (3.2.1)が追加されない限り、コンパイラはその型パラメータはあらゆる型になりうるものと決めつけることになります。その結果、型パラメータのcast (5.23)を使わなければ、その型のフィールドにアクセスできなくなります。また、ジェネリック (3.3)にして適切な制約をつけない限り、その型パラメータの型のインスタンスを新しく生成することもできません。

以下は、型パラメータが使用できる場所についての表です。

パラメータが付く場所	型を適用する場所	備考
Class Enum Enumコンストラクタ 関数 構造体	インスタンス作成時 インスタンス作成時 インスタンス作成時 呼び出し時 インスタンス作成時	メンバフィールドにアクセスする際に型を適用することもできる メソッドと名前付きのローカル関数で利用可能

関数の型パラメータは呼び出し時に適用される、この型パラメータは(制約をつけない限り)あらゆる型を許容します。しかし、一回の呼び出しにつき適用は1つの型のみ可能です。このことは関数が複数の引数を持つ場合に役立ちます。

```
1 class FunctionTypeParameter {
2   static public function main() {
3     equals(1, 1);
4     // runtime message: bar should be foo
5     equals("foo", "bar");
6     // compiler error: String should be Int
7     equals(1, "foo");
8   }
9
10  static function
11  equals<T>(expected:T, actual:T) {
12    if (actual != expected) {
13      trace('$actual should be $expected');
14    }
15  }
16 }
```

`equals`関数の`expected`と`actual`の引数両方が、`T`型になっています。これは`equals`の呼び出しで2つの引数の型が同じでなければならないことを表しています。コンパイラは最初(両方の引数が`Int`型)と2つめ(両方の引数が`String`型)の呼び出しは認めていますが、3つ目の呼び出しはコンパイルエラーにします。

Trivia: 式の構文内での型パラメータ

なぜ、`method<String>(x)`のようにメソッドに型パラメータをつけた呼び出しができないのか?という質問をよくいただきます。このときのエラーメッセージはあまり参考になりませんが、これには単純な理由があります。それは、このコードでは、`<と>`の両方が2項演算子として構文解析されて、`(method <String>) (x)`と見なされるからです。

3.2.1 制約

型パラメータは複数の型で制約を与えることができます。

```
1 typedef Measurable = {
2     public var length(default, null):Int;
3 }
4
5 class Constraints {
6     static public function main() {
7         trace(test([]));
8         trace(test(["bar", "foo"]));
9         // String should be Iterable<String>
10        //test("foo");
11    }
12
13    static function
14    test<T:(Iterable<String>, Measurable)>(a:T) {
15        if (a.length == 0) return "empty";
16        return a.iterator().next();
17    }
18 }
```

testメソッドの型パラメータTは、Iterable<String>とMeasurableの型に制約されます。Measurableの方は、便宜上typedef (3.1)を使って、Int型の読み込み専用プロパティ (4.2) lengthを要求しています。つまり、以下の条件を満たせば、これらの制約と矛盾しません。

- Iterable<String>である
- かつ、Int型のlengthを持つ

7行目では空の配列で、8行目ではArray<String>でtest関数を呼び出すことができることを確認しました。しかし、10行目のStringの引数では制約チェックで失敗しています。これは、StringはIterable<T>と矛盾するからです。

3.3 ジェネリック

大抵の場合、Haxeコンパイラは型パラメータが付けられていた場合でも、1つのクラスや関数を生成します。これにより自然な抽象化が行われて、ターゲット言語のコードジェネレータは出力先の型パラメータはあらゆる型になりえると思いつくことになります。つまり、生成されたコードで型チェックが働き、動作が邪魔されることがあります。

クラスや関数は、:generic メタデータ (6.9)でジェネリック属性をつけることで一般化することができます。これにより、コンパイラは型パラメータの組み合わせごとのクラスまたは関数を修飾された名前で書き出します。このような設計により静的ターゲット (2.2)のパフォーマンスに直結するコード部位では、出力サイズの巨大化と引き換えに、速度を得られます。

```
1 @:generic
2 class MyArray<T> {
3     public function new() { }
4 }
5
6 class Main {
7     static public function main() {
```

```

8     var a = new MyArray<String>();
9     var b = new MyArray<Int>();
10 }
11 }

```

あまり使わない明示的なMyArray<String>の型宣言があり、よく使う型推論 (3.6)であつかっていますが、これが重要です。コンパイラは、コンストラクタの呼び出し時にジェネリッククラスの正確な型な型を知っている必要があります。このJavaScript出力は以下のような結果になります。

```

1 (function () { "use strict";
2 var Main = function() { }
3 Main.main = function() {
4     var a = new MyArray_String();
5     var b = new MyArray_Int();
6 }
7 var MyArray_Int = function() {
8 };
9 var MyArray_String = function() {
10 };
11 Main.main();
12 })();

```

MyArray<String>とMyArray<Int>は、それぞれMyArray_StringとMyArray_Intになっています。これはジェネリック関数でも同じです。

```

1 class Main {
2     static public function main() {
3         method("foo");
4         method(1);
5     }
6
7     @:generic static function method<T>(t:T) { }
8 }

```

JavaScript出力を見れば明白です。

```

1 (function () { "use strict";
2 var Main = function() { }
3 Main.method_Int = function(t) {
4 }
5 Main.method_String = function(t) {
6 }
7 Main.main = function() {
8     Main.method_String("foo");
9     Main.method_Int(1);
10 }
11 Main.main();
12 })();

```

3.3.1 ジェネリック型パラメータのコンストラクト

Definition: ジェネリック型パラメータ

型パラメータを持っているクラスまたはメソッドがジェネリックであるとき、その型パラメータもジェネリックであるという。

普通の型パラメータでは、`new T()`のようにその型をコンストラクトすることはできません。これは、Haxeが1つの関数を生成するために、そのコンストラクトが意味をなさないからです。しかし、型パラメータがジェネリックの場合は違います。これは、コンパイラはすべての型パラメータの組み合わせに対して別々の関数を生成しています。このため`new T()`のTを実際の型に置き換えることができます。

```
1 typedef Constructible = {
2   public function new(s:String):Void;
3 }
4
5 class Main {
6   static public function main() {
7     var s:String = make();
8     var t:haxe.Template = make();
9   }
10
11   @:generic
12   static function make<T:Constructible>():T {
13     return new T("foo");
14   }
15 }
```

ここでは、Tの実際の型の決定は、トップダウンの推論 (3.6.1)で行われることに注意してください。この方法での型パラメータのコンストラクトを行うには2つの必須事項があります。

1. ジェネリックであること
2. 明示的に、コンストラクタ (2.3.1)を持つように制約 (3.2.1)されていること

先ほどの例は、1つ目は`make`が`@:generic`メタデータを持っており、2つ目Tが`Constructible`に制約されています。`String`と`haxe.Template`の両方とも1つ`String`の引数のコンストラクタを持つのでこの制約に当てはまります。確かにJavascript出力は予測通りのものになっています。

```
1 var Main = function() { }
2 Main.__name__ = true;
3 Main.make_haxe_Template = function() {
4   return new haxe.Template("foo");
5 }
6 Main.make_String = function() {
7   return new String("foo");
8 }
9 Main.main = function() {
10   var s = Main.make_String();
11   var t = Main.make_haxe_Template();
12 }
```

3.4 変性(バリエーション)

変性とは他のものとの関連を表すもので、特に型パラメータに関するものが連想されます。そして、この文脈では驚くようなことがよく起こります。変性のエラーを起こすことはとても簡単です。

```

1 class Base {
2     public function new() { }
3 }
4
5 class Child extends Base { }
6
7 class Main {
8     public static function main () {
9         var children = [new Child()];
10        // Array<Child> should be Array<Base>
11        // Type parameters are invariant
12        // Child should be Base
13        var bases:Array<Base> = children;
14    }
15 }

```

見てわかるとおり、ChildはBaseに代入できるにもかかわらず、Array<Child>をArray<Base>に代入することはできません。この理由は少々予想外のものかもしれませんが。それはこの配列への書き込みが可能だからです。例えば、push()メソッドです。この変性のエラーを無視してしまうことは簡単です。

```

1 class Base {
2     public function new() { }
3 }
4
5 class Child extends Base { }
6
7 class OtherChild extends Base { }
8
9 class Main {
10    public static function main () {
11        var children = [new Child()];
12        // subvert type checker
13        var bases:Array<Base> = cast children;
14        bases.push(new OtherChild());
15        for(child in children) {
16            trace(child);
17        }
18    }
19 }

```

ここではcast (5.23)を使って型チェッカーを破壊して、12行目の代入を可能にしてしまっています。basesは元々の配列への参照を持っており、Array<Base>の型付けをされています。このため、Baseに適合する別の型のOtherChildを配列に追加できます。しかし、元々のchildrenの参照はArray<Child>のままです。そのため良くないことに繰り返し処理の中でOtherChildのインスタンスに出くわします。

もしArrayがpush()メソッドを持っておらず、他の編集方法も無かったならば、適合しない型を追加することができなくなるのでこの代入は安全になります。Haxeでは構造的部分型付け (3.5.2)を使って型を適切に制限することでこれを実現できます。

```

1 class Base {
2     public function new() { }
3 }
4
5 class Child extends Base { }

```

```

6
7 typedef MyArray<T> = {
8     public function pop():T;
9 }
10
11 class Main {
12     public static function main () {
13         var a = [new Child()];
14         var b:MyArray<Base> = a;
15     }
16 }

```

bはMyArray<Base>として型付けされており、MyArrayはpop()メソッドしか持たないため、安全に代入することができます。MyArrayには適合しない型を追加できるメソッドを持っておらず、このことは共変性と呼ばれます。

Definition: 共変性

複合型 (2) がそれを構成する型よりも一般的な型で構成される複合型に代入できる場合に、共変であるという。つまり、読み込みのみが許されて書き込みができない場合です。

Definition: 反変性

複合型 (2) がそれを構成する型よりも特殊な型で構成される複合型に代入できる場合に、反変であるという。つまり、書き込みのみが許されて読み込みができない場合です。

3.5 単一化(ユニフィケーション)

Mention toString()/String conversion somewhere in this chapter.

単一化は型システムの要であり、Haxeの堅牢さに大きく貢献しています。この節ではある型が他の型と適合するかどうかをチェックする過程を説明していきます。

Definition: 単一化

型Aの型Bでの単一化というのは、AがBに代入可能かを調べる指向性を持つプロセスです。型が単相 (2.9) の場合または単相を含む場合は、それを変化させることができます。

単一化のエラーは簡単に起こすことができます。

```

1 class Main {
2     static public function main() {
3         // Int should be String
4         var s:String = 1;
5     }
6 }

```

Int型の値をString型の変数に代入しようとしたので、コンパイラはIntをStringで単一化しようと試みます。これはもちろん許可されておらず、コンパイラは”Int should be String”というエラーを出力します。

このケースでは単一化は代入によって引き起こされており、この文脈は「代入可能」という定義に対して直感的です。ただ、これは単一化が働くケースのうちの1つでしかありません。

代入: a が b に代入された場合、 a の型は b で単一化されます。

関数呼び出し: 関数 (2.6)の型の紹介ですでに触れています。一般的に言うと、コンパイラは渡された最初の引数の型を要求される最初の引数の型で単一化し、渡された二番目の引数の型を要求される二番目の引数の型で単一化するということを、すべての引数で行います。

関数のreturn: 関数が`return e`の式をもつ場合は常に e の型は関数の戻り値の型で単一化されます。もし関数の戻り値の型が明示されていないならば、 e の型に型推論されて、それ以降の`return`式は e の型に推論されます。

配列の宣言: コンパイラは、配列の宣言では与えられたすべての型に共通する最小の型を見つけようとします。詳細は[共通の基底型 \(Section 3.5.5\)](#)を参照してください。

オブジェクトの宣言: オブジェクトを指定された型に対して宣言する場合、コンパイラは与えられたフィールドすべての型を要求されるフィールドの型で単一化します。

演算子の単一化: 特定の型を要求する特定の演算子は、与えられた型をその型で単一化します。例えば、`a && b`という式は a と b 両方を`Bool`で単一化します。式`a == b`は a を b で単一化します。

3.5.1 クラスとインターフェースの単一化

クラスのための単一化について定義を行う場合、単一化が指向性を持つことを心に留めておくべきです。より特殊なクラス(例えば、子クラス)を一般的なクラス(例えば、親クラス)に対して代入することはできますが、逆はできません。

以下のような、代入が許可されます。

- ・ 子クラスの親クラスへの代入
- ・ クラスの実装済みのインターフェースへの代入
- ・ インターフェースの親インターフェースへの代入

これらのルールは連結可能です。つまり、子クラスをその親クラスの親クラスへ代入可能であり、さらに親クラスが実装しているインターフェースへ代入可能であり、そのインターフェースの親インターフェースへ代入可能であるということです。

3.5.2 構造的部分型付け

Definition: 構造的部分型付け

構造的部分型付けは、同じ構造を持つ型の暗黙の関係を示します。

Haxeでは、構造的部分型付けはクラスインスタンスを構造体に代入するときのみ可能です。以下に、Haxe標準ライブラリ (10)のLambdaの一部の例を挙げます。

```
1 public static function empty<T>(it : Iterable<T>):Bool {
2     return !it.iterator().hasNext();
3 }
```

`empty`メソッドは、`Iterable`が要素を持つかをチェックします。この目的では、引数の型について、それが列挙可能(`Iterable`)であること以外に何も知る必要がありません。Haxe標準ライブラリにはたくさんある`Iterable<T>`で単一化できる型すべてで、これと呼び出すことができるわけです。この種の型付けは非常に便利ですが、静的ターゲットでは大量に使うとパフォーマンスの低下を招くことがあります。詳しくは[パフォーマンスへの影響 \(Section 2.5.4\)](#)に書かれています。

"parent class" should probably be used here, but I have no idea what it means, so I will refrain from changing it myself.

3.5.3 単相

単相 (2.9)である、あるいは単相を含む型についての単一化は[Type Inference \(Section 3.6\)](#)で詳しくあつかいます。

3.5.4 関数の戻り値

関数の戻り値の型の単一化ではVoid型 (2.1.5)も関連しており、Void型での単一化のはっきりとした定義が必要です。Void型は型の不在を表し、あらゆる型が代入できません。Dynamicでさえも代入できません。つまり、関数が明示的にDynamicを返すと定義されている場合、Voidを返してはいけません。

その逆も同じです。関数の戻り値がVoidであると宣言しているなら、Dynamicやその他すべての型は返すことができません。しかし、関数の型を代入する時のこの方向の単一化は許可されています。

```
1 var func:Void->Void = function() return "foo";
```

右辺の関数ははっきりとVoid->String型ですが、これをVoid->Void型のfunc変数に代入することができます。これはコンパイラが戻り値は無関係だと安全に判断できるからで、その結果Voidではないあらゆる型を代入できるようになります。

3.5.5 共通の基底型

複数の型の組み合わせが与えられたとき、そのすべての型が共通の基底型で単一化されます。

```
1 class Base {
2     public function new() { }
3 }
4
5 class Child1 extends Base { }
6 class Child2 extends Base { }
7
8 class UnifyMin {
9     static public function main() {
10         var a = [new Child1(), new Child2()];
11         $type(a); // Array<Base>
12     }
13 }
```

Baseとは書かれていないにも関わらず、HaxeコンパイラはChild1とChild2の共通の型としてBaseを推論しています。Haxeコンパイラはこの方法の単一化を以下の場面で採用しています。

- ・ 配列の宣言
- ・ if/else
- ・ switchのケース

3.6 Type Inference

The effects of type inference have been seen throughout this document and will continue to be important. A simple example shows type inference at work:

```
1 class TypeInference {
2     public static function main() {
3         var x = null;
```



```

4   $type(x); // Unknown<0>
5   x = "foo";
6   $type(x); // String
7   }
8 }

```

The special construct `$type` was previously mentioned in order to simplify the explanation of the [関数型 \(Section 2.6\)](#) type, so let us introduce it officially now:

Construct: `$type`

`$type` is a compile-time mechanism being called like a function, with a single argument. The compiler evaluates the argument expression and then outputs the type of that expression.

In the example above, the first `$type` prints `Unknown<0>`. This is a monomorph (2.9), a type that is not yet known. The next line `x = "foo"` assigns a `String` literal to `x`, which causes the unification (3.5) of the monomorph with `String`. We then see that the type of `x` indeed has changed to `String`.

Whenever a type other than [ダイナミック \(Section 2.7\)](#) is unified with a monomorph, that monomorph becomes that type: it morphs into that type. Therefore it cannot morph into a different type afterwards, a property expressed in the mono part of its name.

Following the rules of unification, type inference can occur in compound types:

```

1 class TypeInference2 {
2   public static function main() {
3     var x = [];
4     $type(x); // Array<Unknown<0>>
5     x.push("foo");
6     $type(x); // Array<String>
7   }
8 }

```

Variable `x` is first initialized to an empty `Array`. At this point we can tell that the type of `x` is an array, but we do not yet know the type of the array elements. Consequentially, the type of `x` is `Array<Unknown<0>>`. It is only after pushing a `String` onto the array that we know the type to be `Array<String>`.

3.6.1 Top-down Inference

Most of the time, types are inferred on their own and may then be unified with an expected type. In a few places, however, an expected type may be used to influence inference. We then speak of top-down inference.

Definition: Expected Type

Expected types occur when the type of an expression is known before that expression has been typed, e.g. because the expression is argument to a function call. They can influence typing of that expression through what is called top-down inference (3.6.1).

A good example are arrays of mixed types. As mentioned in [ダイナミック \(Section 2.7\)](#), the compiler refuses `[1, "foo"]` because it cannot determine an element type. Employing top-down inference, this can be overcome:

```

1 class Main {
2     static public function main() {
3         var a:Array<Dynamic> = [1, "foo"];
4     }
5 }

```

Here, the compiler knows while typing `[1, "foo"]` that the expected type is `Array<Dynamic>`, so the element type is `Dynamic`. Instead of the usual unification behavior where the compiler would attempt (and fail) to determine a common base type (3.5.5), the individual elements are typed against and unified with `Dynamic`.

We have seen another interesting use of top-down inference when construction of generic type parameters (3.3.1) was introduced:

```

1 typedef Constructible = {
2     public function new(s:String):Void;
3 }
4
5 class Main {
6     static public function main() {
7         var s:String = make();
8         var t:haxe.Template = make();
9     }
10
11     @:generic
12     static function make<T:Constructible>():T {
13         return new T("foo");
14     }
15 }

```

The explicit types `String` and `haxe.Template` are used here to determine the return type of `make`. This works because the method is invoked as `make()`, so we know the return type will be assigned to the variables. Utilizing this information, it is possible to bind the unknown type `T` to `String` and `haxe.Template` respectively.

3.6.2 Limitations

Type inference saves a lot of manual type hints when working with local variables, but sometimes the type system still needs some help. In fact, it does not even try to infer the type of a variable (4.1) or property (4.2) field unless it has a direct initialization.

There are also some cases involving recursion where type inference has limitations. If a function calls itself recursively while its type is not (completely) known yet, type inference may infer a wrong, too specialized type.

3.7 Modules and Paths

Definition: Module

All Haxe code is organized in modules, which are addressed using paths. In essence, each `.hx` file represents a module which may contain several types. A type may be `private`, in which case only its containing module can access it.

The distinction of a module and its containing type of the same name is blurry by design. In fact, addressing `haxe.ds.StringMap<Int>` can be considered shorthand for `haxe.ds.StringMap.StringMap<Int>`. The latter version consists of four parts:

1. the package `haxe.ds`
2. the module name `StringMap`
3. the type name `StringMap`
4. the type parameter `Int`

If the module and type name are equal, the duplicate can be removed, leading to the `haxe.ds.StringMap<Int>` short version. However, knowing about the extended version helps with understanding how module sub-types (3.7.1) are addressed.

Paths can be shortened further by using an import (3.7.2), which typically allows omitting the package part of a path. This may lead to usage of unqualified identifiers, for which understanding the resolution order (3.7.3) is required.

Definition: Type path

The (dot-)path to a type consists of the package, the module name and the type name. Its general form is `pack1.pack2.packN.ModuleName.TypeName`.

3.7.1 Module Sub-Types

A module sub-type is a type declared in a module with a different name than that module. This allows a single `.hx` file to contain multiple types, which can be accessed unqualified from within the module, and by using `package.Module.Type` from other modules:

```
1 var e:haxe.macro.Expr.ExprDef;
```

Here the sub-type `ExprDef` within module `haxe.macro.Expr` is accessed.

The sub-type relation is not reflected at runtime. That is, public sub-types become a member of their containing package, which could lead to conflicts if two modules within the same package try to define the same sub-type. Naturally the Haxe compiler detects these cases and reports them accordingly. In the example above, `ExprDef` is generated as `haxe.macro.ExprDef`.

Sub-types can also be made private:

```
1 private class C { ... }
2 private enum E { ... }
3 private typedef T { ... }
4 private abstract A { ... }
```

Definition: Private type

A type can be made private by using the `private` modifier. As a result, the type can only be directly accessed from within the module (3.7) it is defined in.

Private types, unlike public ones, do not become a member of their containing package.

The accessibility of types can be controlled more fine-grained by using access control (6.10).

3.7.2 Import

If a type path is used multiple times in a .hx file, it might make sense to use an `import` to shorten it. This allows omitting the package when using the type:

```
1 import haxe.ds.StringMap;
2
3 class Main {
4     static public function main() {
5         // instead of: new haxe.ds.StringMap();
6         new StringMap();
7     }
8 }
```

With `haxe.ds.StringMap` being imported in the first line, the compiler is able to resolve the unqualified identifier `StringMap` in the `main` function to this package. The module `StringMap` is said to be imported into the current file.

In this example, we are actually importing a module, not just a specific type within that module. This means that all types defined within the imported module are available:

```
1 import haxe.macro.Expr;
2
3 class Main {
4     static public function main() {
5         var e:Binop = OpAdd;
6     }
7 }
```

The type `Binop` is an enum (2.4) declared in the module `haxe.macro.Expr`, and thus available after the import of said module. If we were to import only a specific type of that module, e.g. `import haxe.macro.Expr.ExprDef`, the program would fail to compile with `Class not found : Binop`.

There several aspects worth knowing about importing:

- The bottommost import takes priority (detailed in [Resolution Order](#) (Section 3.7.3)).
- The static extension (6.3) keyword `using` implies the effect of `import`.
- If an enum is imported (directly or as part of a module import), all its enum constructors (2.4.1) are also imported (this is what allows the `OpAdd` usage in above example).

Furthermore, it is also possible to import static fields (4) of a class and use them unqualified:

```
1 import Math.random;
2
3 class Main {
4     static public function main() {
5         random();
6     }
7 }
```

Describe import a.*

Special care has to be taken with field names or local variable names that conflict with a package name: Since they take priority over packages, a local variable named `haxe` blocks off usage the entire `haxe` package.

3.7.3 Resolution Order

Resolution order comes into play as soon as unqualified identifiers are involved. These are expressions (5) in the form of `foo()`, `foo = 1` and `foo.field`. The last one in particular includes module paths such as `haxe.ds.StringMap`, where `haxe` is an unqualified identifier.

We describe the resolution order algorithm here, which depends on the following state:

- the declared local variables (5.10) (including function arguments)
- the imported (3.7.2) modules, types and statics
- the available static extensions (6.3)
- the kind (static or member) of the current field
- the declared member fields on the current class and its parent classes
- the declared static fields on the current class
- the expected type (3.6.1)
- the expression being `untyped` or not

proper label and caption + code/identifier styling for diagram

Given an identifier `i`, the algorithm is as follows:

1. If `i` is `true`, `false`, `this`, `super` or `null`, resolve to the matching constant and halt.
2. If a local variable named `i` is accessible, resolve to it and halt.
3. If the current field is static, go to 6.
4. If the current class or any of its parent classes has a field named `i`, resolve to it and halt.
5. If a static extension with a first argument of the type of the current class is available, resolve to it and halt.
6. If the current class has a static field named `i`, resolve to it and halt.
7. If an enum constructor named `i` is declared on an imported enum, resolve to it and halt.
8. If a static named `i` is explicitly imported, resolve to it and halt.
9. If `i` starts with a lower-case character, go to 11.
10. If a type named `i` is available, resolve to it and halt.
11. If the expression is not in `untyped` mode, go to 14
12. If `i` equals `__this__`, resolve to the `this` constant and halt.
13. Generate a local variable named `i`, resolve to it and halt.
14. Fail

For step 10, it is also necessary to define the resolution order of types:

1. If a type named `i` is imported (directly or as part of a module), resolve to it and halt.

2. If the current package contains a module named `i` with a type named `i`, resolve to it and halt.
3. If a type named `i` is available at top-level, resolve to it and halt.
4. Fail

For step 1 of this algorithm as well as steps 5 and 7 of the previous one, the order of import resolution is important:

- Imported modules and static extensions are checked from bottom to top with the first match being picked.
- Within a given module, types are checked from top to bottom.
- For imports, a match is made if the name equals.
- For static extensions (6.3), a match is made if the name equals and the first argument unifies (3.5). Within a given type being used as static extension, the fields are checked from top to bottom.

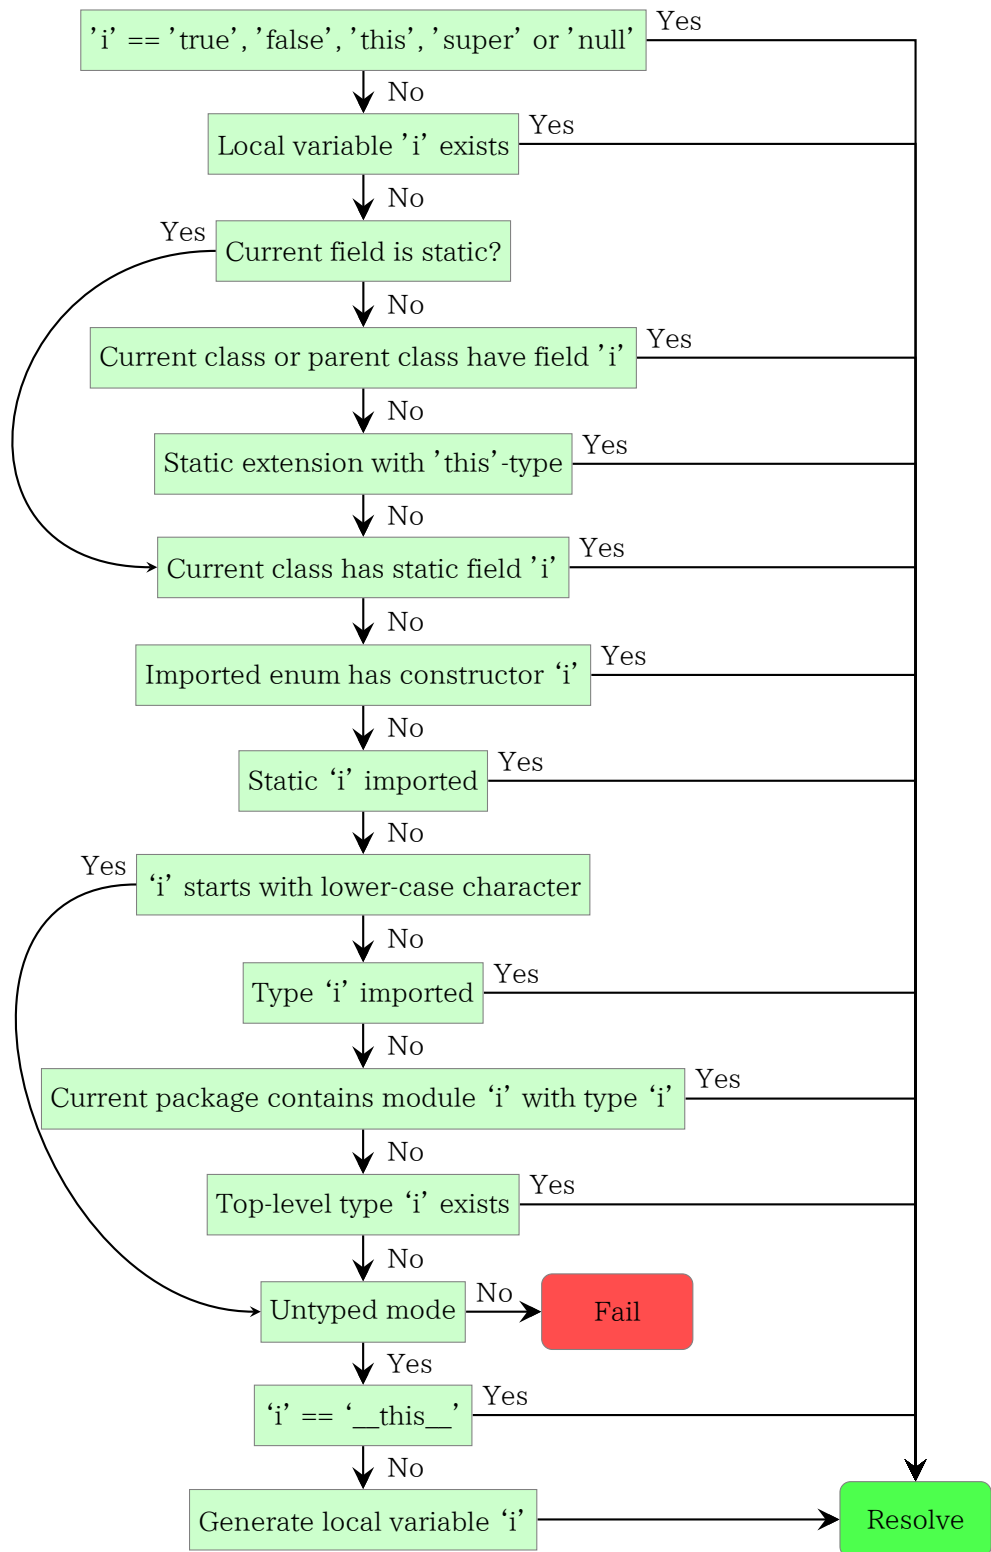


Figure 3.1: Resolution order of identifier 'i'

Chapter 4

Class Fields

Definition: Class Field

A class field is a variable, property or method of a class which can either be static or non-static. Non-static fields are referred to as member fields, so we speak of e.g. a static method or a member variable.

So far we have seen how types and Haxe programs in general are structured. This section about class fields concludes the structural part and at the same time bridges to the behavioral part of Haxe. This is because class fields are the place where expressions (5) are at home.

There are three kinds of class fields:

Variable: A variable (4.1) class field holds a value of a certain type, which can be read or written.

Property: A property (4.2) class field defines a custom access behavior for something that, outside the class, looks like a variable field.

Method: A method (4.3) is a function which can be called to execute code.

Strictly speaking, a variable could be considered to be a property with certain access modifiers. Indeed, the Haxe Compiler does not distinguish variables and properties during its typing phase, but they remain separated at syntax level.

Regarding terminology, a method is a (static or non-static) function belonging to a class. Other functions, such as a local functions (5.11) in expressions, are not considered methods.

4.1 Variable

We have already seen variable fields in several code examples of previous sections. Variable fields hold values, a characteristic which they share with most (but not all) properties:

```
1 class VariableField {  
2     static var member:String = "bar";  
3  
4     public static function main() {  
5         trace(member);  
    }
```



```

6     member = "foo";
7     trace(member);
8 }
9 }

```

We can learn from this that a variable

1. has a name (here: `member`),
2. has a type (here: `String`),
3. may have a constant initialization (here: `"bar"`) and
4. may have access modifiers (4.4) (here: `static`)

The example first prints the initialization value of `member`, then sets it to `"foo"` before printing its new value. The effect of access modifiers is shared by all three class field kinds and explained in a separate section.

It should be noted that the explicit type is not required if there is an initialization value. The compiler will infer (3.6) it in this case.

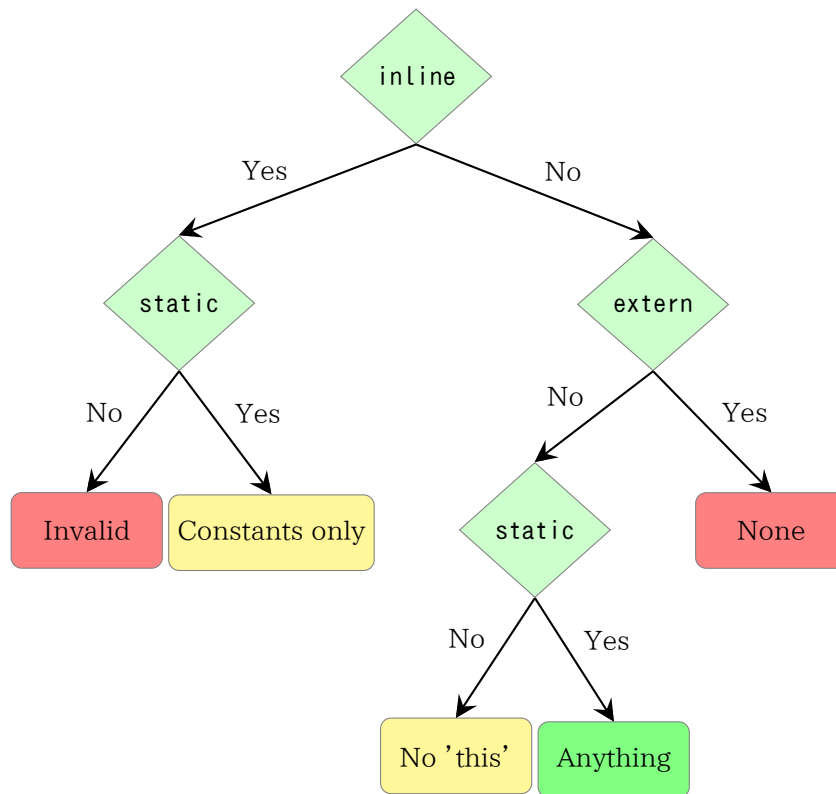


Figure 4.1: Initialization values of a variable field.

4.2 Property

Next to variables (4.1), properties are the second option for dealing with data on a class. Unlike variables however, they offer more control of which kind of field access should be

allowed and how it should be generated. Common use cases include:

- Have a field which can be read from anywhere, but only be written from within the defining class.
- Have a field which invokes a getter-method upon read-access.
- Have a field which invokes a setter-method upon write-access.

When dealing with properties, it is important to understand the two kinds of access:

Definition: Read Access

A read access to a field occurs when a right-hand side field access expression (5.7) is used. This includes calls in the form of `obj.field()`, where `field` is accessed to be read.

Definition: Write Access

A write access to a field occurs when a field access expression (5.7) is assigned a value in the form of `obj.field = value`. It may also occur in combination with read access (4.2) for special assignment operators such as `+=` in expressions like `obj.field += value`.

Read access and write access are directly reflected in the syntax, as the following example shows:

```
1 class Main {  
2     public var x(default, null):Int;  
3     static public function main() { }  
4 }
```

For the most part, the syntax is similar to variable syntax, and the same rules indeed apply. Properties are identified by

- the opening parenthesis (after the field name,
- followed by a special access identifier (here: `default`),
- with a comma , separating
- another special access identifier (here: `null`)
- before a closing parenthesis).

The access identifiers define the behavior when the field is read (first identifier) and written (second identifier). The accepted values are:

default: Allows normal field access if the field has public visibility, otherwise equal to `null` access.

null: Allows access only from within the defining class.

get/set: Access is generated as a call to an accessor method. The compiler ensures that the accessor is available.

dynamic: Like **get/set** access, but does not verify the existence of the accessor field.

never: Allows no access at all.

Definition: Accessor method

An accessor method (or short accessor) for a field named `field` of type `T` is a getter named `get_field` of type `Void->T` or a setter named `set_field` of type `T->T`.

Trivia: Accessor names

In Haxe 2, arbitrary identifiers were allowed as access identifiers and would lead to custom accessor method names to be admitted. This made parts of the implementation quite tricky to deal with. In particular, `Reflect.getProperty()` and `Reflect.setProperty()` had to assume that any name could have been used, requiring the target generators to generate meta-information and perform lookups.

We disallowed these identifiers and went for the `get_` and `set_` naming convention which greatly simplified implementation. This was one of the breaking changes between Haxe 2 and 3.

4.2.1 Common accessor identifier combinations

The next example shows common access identifier combinations for properties:

```
1 class Main {
2     // read from outside, write only within Main
3     public var ro(default, null):Int;
4
5     // write from outside, read only within Main
6     public var wo(null, default):Int;
7
8     // access through getter get_x and setter
9     // set_x
10    public var x(get, set):Int;
11
12    // read access through getter, no write
13    // access
14    public var y(get, never):Int;
15
16    // required by field x
17    function get_x() return 1;
18
19    // required by field x
20    function set_x(x) return x;
21
22    // required by field y
23    function get_y() return 1;
24
25    function new() {
26        var v = x;
27        x = 2;
28        x += 1;
29    }
30
31    static public function main() {
```

```

32     new Main();
33 }
34 }

```

The Javascript output helps understand what the field access in the `main`-method is compiled to:

```

1 var Main = function() {
2     var v = this.get_x();
3     this.set_x(2);
4     var _g = this;
5     _g.set_x(_g.get_x() + 1);
6 };

```

As specified, the read access generates a call to `get_x()`, while the write access generates a call to `set_x(2)` where 2 is the value being assigned to `x`. The way the `+=` is being generated might look a little odd at first, but can easily be justified by the following example:

```

1 class Main {
2     public var x(get, set):Int;
3     function get_x() return 1;
4     function set_x(x) return x;
5
6     public function new() { }
7
8     static public function main() {
9         new Main().x += 1;
10    }
11 }

```

What happens here is that the expression part of the field access to `x` in the `main` method is complex: It has potential side-effects, such as the construction of `Main` in this case. Thus, the compiler cannot generate the `+=` operation as `new Main().x = new Main().x + 1` and has to cache the complex expression in a local variable:

```

1 Main.main = function() {
2     var _g = new Main();
3     _g.set_x(_g.get_x() + 1);
4 }

```

4.2.2 Impact on the type system

The presence of properties has several consequences on the type system. Most importantly, it is necessary to understand that properties are a compile-time feature and thus require the types to be known. If we were to assign a class with properties to `Dynamic`, field access would not respect accessor methods. Likewise, access restrictions no longer apply and all access is virtually public.

When using `get` or `set` access identifier, the compiler ensures that the getter and setter actually exists. The following problem does not compile:

```

1 class Main {
2     // Method get_x required by property x is
3     // missing
4     public var x(get, null):Int;
5     static public function main() {}

```

6 }

The method `get_x` is missing, but it need not be declared on the class defining the property itself as long as a parent class defines it:

```
1 class Base {
2     public function get_x() return 1;
3 }
4
5 class Main extends Base {
6     // ok, get_x is declared by parent class
7     public var x(get, null):Int;
8
9     static public function main() {}
10 }
```

The dynamic access modifier works exactly like `get` or `set`, but does not check for the existence

4.2.3 Rules for getter and setter

Visibility of accessor methods has no effect on the accessibility of its property. That is, if a property is `public` and defined to have a getter, that getter may be defined as `private` regardless.

Both getter and setter may access their physical field for data storage. The compiler ensures that this kind of field access does not go through the accessor method if made from within the accessor method itself, thus avoiding infinite recursion:

```
1 class Main {
2     public var x(default, set):Int;
3
4     function set_x(newX) {
5         return x = newX;
6     }
7
8     static public function main() {}
9 }
```

However, the compiler assumes that a physical field exists only if at least one of the access identifiers is `default` or `null`.

Definition: Physical field

A field is considered to be physical if it is either

- a variable (4.1)
- a property (4.2) with the read-access or write-access identifier being `default` or `null`
- a property (4.2) with `:isVar` metadata (6.9)

If this is not the case, access to the field from within an accessor method causes a compilation error:

```

1 class Main {
2   // This field cannot be accessed because it
3   // is not a real variable
4   public var x(get, set):Int;
5
6   function get_x() {
7     return x;
8   }
9
10  function set_x(x) {
11    return this.x = x;
12  }
13
14  static public function main() {}
15 }

```

If a physical field is indeed intended, it can be forced by attributing the field in question with the `:isVar` metadata (6.9):

```

1 class Main {
2   // @isVar forces the field to be physical
3   // allowing the program to compile.
4   @:isVar public var x(get, set):Int;
5
6   function get_x() {
7     return x;
8   }
9
10  function set_x(x) {
11    return this.x = x;
12  }
13
14  static public function main() {}
15 }

```

Trivia: Property setter type

It is not uncommon for new Haxe users to be surprised by the type of a setter being required to be `T->T` instead of the seemingly more natural `T->Void`. After all, why would a setter have to return something?

The rationale is that we still want to be able to use field assignments using setters as right-side expressions. Given a chain like `x = y = 1`, it is evaluated as `x = (y = 1)`. In order to assign the result of `y = 1` to `x`, the former must have a value. If `y` had a setter returning `Void`, this would not be possible.

4.3 Method

While variables (4.1) hold data, methods are defining behavior of a program by hosting expressions (5). We have seen method fields in every code example of this document with even the initial Hello World (1.3) example containing a `main` method:

```

1 class HelloWorld {
2     static public function main():Void {
3         trace("Hello World");
4     }
5 }

```

Methods are identified by the `function` keyword. We can also learn that they

1. have a name (here: `main`),
2. have an argument list (here: empty `()`),
3. have a return type (here: `Void`),
4. may have access modifiers (4.4) (here: `static` and `public`) and
5. may have an expression (here: `{trace(trace("Hello World"));}`).

We can also look at the next example to learn more about arguments and return types:

```

1 class Main {
2     static public function main() {
3         myFunc("foo", 1);
4     }
5
6     static function myFunc(f:String, i) {
7         return true;
8     }
9 }

```

Arguments are given by an opening parenthesis (after the field name, a comma , separated list of argument specifications and a closing parenthesis). Additional information on the argument specification is described in 関数型 (Section 2.6).

The example demonstrates how type inference (3.6) can be used for both argument and return types. The method `myFunc` has two arguments but only explicitly gives the type of the first one, `f`, as `String`. The second one, `i`, is not type-hinted and it is left to the compiler to infer its type from calls made to it. Likewise, the return type of the method is inferred from the `return true` expression as `Bool`.

4.3.1 Overriding Methods

Overriding fields is instrumental for creating class hierarchies. Many design patterns utilize it, but here we will explore only the basic functionality. In order to use overrides in a class, it is required that this class has a parent class (2.3.2). Let us consider the following example:

```

1 class Base {
2     public function new() { }
3     public function myMethod() {
4         return "Base";
5     }
6 }
7
8 class Child extends Base {
9     public override function myMethod() {
10         return "Child";

```

```

11 }
12 }
13
14 class Main {
15     static public function main() {
16         var child:Base = new Child();
17         trace(child.myMethod()); // Child
18     }
19 }

```

The important components here are

- the class `Base` which has a method `myMethod` and a constructor,
- the class `Child` which extends `Base` and also has a method `myMethod` being declared with `override`, and
- the `Main` class whose `main` method creates an instance of `Child`, assigns it to a variable `child` of explicit type `Base` and calls `myMethod()` on it.

The variable `child` is explicitly typed as `Base` to highlight an important difference: At compile-time the type is known to be `Base`, but the runtime still finds the correct method `myMethod` on class `Child`. It is then obvious that the field access is resolved dynamically at runtime.

4.3.2 Effects of variance and access modifiers

Overriding adheres to the rules of variance (3.4). That is, their argument types allow contravariance (less specific types) while their return type allows covariance (more specific types):

```

1 class Base {
2     public function new() { }
3 }
4
5 class Child extends Base {
6     private function method(obj:Child):Child {
7         return obj;
8     }
9 }
10
11 class ChildChild extends Child {
12     public override function
13     method(obj:Base):ChildChild {
14         return null;
15     }
16 }
17
18 class Main {
19     static public function main() { }
20 }

```

Intuitively, this follows from the fact that arguments are “written to” the function and the return value is “read from” it.

The example also demonstrates how visibility (4.4.1) may be changed: An overriding field may be **public** if the overridden field is **private**, but not the other way around.

It is not possible to override fields which are declared as **inline** (4.4.2). This is due to the conflicting concepts: While inlining is done at compile-time by replacing a call with the function body, overriding fields necessarily have to be resolved at runtime.

4.4 Access Modifier

4.4.1 Visibility

Fields are by default private, meaning that only the class and its sub-classes may access them. They can be made public by using the **public** access modifier, allowing access from anywhere.

```
1 class MyClass {
2     static public function available() {
3         unavailable();
4     }
5     static private function unavailable() { }
6 }
7
8 class Main {
9     static public function main() {
10         MyClass.available();
11         // Cannot access private field unavailable
12         MyClass.unavailable();
13     }
14 }
```

Access to field **available** of class **MyClass** is allowed from within **Main** because it is denoted as being **public**. However, while access to field **unavailable** is allowed from within class **MyClass**, it is not allowed from within class **Main** because it is **private** (explicitly, although this identifier is redundant here).

The example demonstrates visibility through static fields, but the rules for member fields are equivalent. The following example demonstrates visibility behavior for when inheritance (2.3.2) is involved.

```
1 class Base {
2     public function new() { }
3     private function baseField() { }
4 }
5
6 class Child1 extends Base {
7     private function child1Field() { }
8 }
9
10 class Child2 extends Base {
11     public function child2Field() {
12         var child1 = new Child1();
13         child1.baseField();
14         // Cannot access private field child1Field
15         child1.child1Field();
16     }
17 }
```

```

16 }
17 }
18
19 class Main {
20     static public function main() { }
21 }

```

We can see that access to `child1.baseField()` is allowed from within `Child2` even though `child1` is of a different type, `Child1`. This is because the field is defined on their common ancestor class `Base`, contrary to field `child1Field` which can not be accessed from within `Child2`.

Omitting the visibility modifier usually defaults the visibility to `private`, but there are exceptions where it becomes `public` instead:

1. If the class is declared as `extern`.
2. If the field is declared on an interface (2.3.3).
3. If the field overrides (4.3.1) a public field.

Trivia: Protected

Haxe has no notion of a `protected` keyword known from Java, C++ and other object-oriented languages. However, its `private` behavior is equal to those language's protected behavior, so Haxe actually lacks their real private behavior.

4.4.2 Inline

The `inline` keyword allows function bodies to be directly inserted in place of calls to them. This can be a powerful optimization tool, but should be used judiciously as not all functions are good candidates for inline behavior. The following example demonstrates the basic usage:

```

1 class Main {
2     static inline function mid(s1:Int, s2:Int) {
3         return (s1 + s2) / 2;
4     }
5
6     static public function main() {
7         var a = 1;
8         var b = 2;
9         var c = mid(a, b);
10    }
11 }

```

The generated Javascript output reveals the effect of inline:

```

1 (function () { "use strict";
2 var Main = function() { }
3 Main.main = function() {
4     var a = 1;
5     var b = 2;
6     var c = (a + b) / 2;
7 }

```

```

8 Main.main();
9 })();

```

As evident, the function body `(s1 + s2) / 2` of field `mid` was generated in place of the call to `mid(a, b)`, with `s1` being replaced by `a` and `s2` being replaced by `b`. This avoids a function call which, depending on the target and frequency of occurrences, may yield noticeable performance improvements.

It is not always easy to judge if a function qualifies for being inline. Short functions that have no writing expressions (such as `a = assignment`) are usually a good choice, but even more complex functions can be candidates. However, in some cases inlining can actually be detrimental to performance, e.g. because the compiler has to create temporary variables for complex expressions.

4.4.3 Dynamic

Methods can be denoted with the `dynamic` keyword to make them (re-)bindable:

```

1 class Main {
2     static dynamic function test() {
3         return "original";
4     }
5
6     static public function main() {
7         trace(test()); // original
8         test = function() { return "new"; }
9         trace(test()); // new
10    }
11 }

```

The first call to `test()` invokes the original function which returns the `String` "original". In the next line, `test` is assigned a new function. This is precisely what `dynamic` allows: Function fields can be assigned a new function. As a result, the next invocation of `test()` returns the `String` "new".

Dynamic fields cannot be `inline` for obvious reasons: While inlining is done at compile-time, dynamic functions necessarily have to be resolved at runtime.

4.4.4 Override

The access modifier `override` is required when a field is declared which also exists on a parent class (2.3.2). Its purpose is to ensure that the author of a class is aware of the override as this may not always be obvious in large class hierarchies. Likewise, having `override` on a field which does not actually override anything (e.g. due to a misspelled field name) triggers an error as well.

The effects of overriding fields are detailed in [Overriding Methods \(Section 4.3.1\)](#). This modifier is only allowed on method (4.3) fields.

Chapter 5

Expressions

Expressions in Haxe define what a program does. Most expressions are found in the body of a method ([4.3](#)), where they are combined to express what that method should do. This section explains the different kinds of expressions. Some definitions help here:

Definition: Name

A general name may refer to

- a type,
- a local variable,
- a local function or
- a field.

Definition: Identifier

Haxe identifiers start with an underscore `_`, a dollar `$`, a lower-case character `a-z` or an upper-case character `A-Z`. After that, any combination and number of `_`, `A-Z`, `a-z` and `0-9` may follow.

Further limitations follow from the usage context, which are checked upon typing:

- Type names must start with an upper-case letter `A-Z` or an underscore `_`.
- Leading dollars are not allowed for any kind of name ([5](#)) (dollar-names are mostly used for macro reification ([9.3](#))).

5.1 Blocks

A block in Haxe starts with an opening curly brace `{` and ends with a closing curly brace `}`. A block may contain several expressions, each of which is followed by a semicolon `;`. The general syntax is thus:

```
1 {  
2     expr1;  
3     expr2;
```

```

4   ...
5   exprN;
6 }

```

The value and by extension the type of a block-expression is equal to the value and the type of the last sub-expression.

Blocks can contain local variables declared by `var` expression (5.10), as well as local functions declared by `function` expressions (5.11). These are available within the block and within sub-blocks, but not outside the block. Also, they are available only after their declaration. The following example uses `var`, but the same rules apply to `function` usage:

```

1 {
2   a; // error, a is not declared yet
3   var a = 1; // declare a
4   a; // ok, a was declared
5   {
6     a; // ok, a is available in sub-blocks
7   }
8   // ok, a is still available after
9   // sub-blocks
10  a;
11 }
12 a; // error, a is not available outside

```

At runtime, blocks are evaluated from top to bottom. Control flow (e.g. exceptions (5.18) or return expressions (5.19)) may leave a block before all expressions are evaluated.

5.2 Constants

The Haxe syntax supports the following constants:

Int: An integer (2.1.1), such as `0`, `1`, `97121`, `-12`, `0xFF0000`.

Float: A floating point number (2.1.1), such as `0.0`, `1.`, `.3`, `-93.2`.

String: A string of characters (10.1), such as `""`, `"foo"`, `' '`, `'bar'`.

true,false: A boolean (2.1.4) value.

null: The null value.

Furthermore, the internal syntax structure treats identifiers (5) as constants, which may be relevant when working with macros (9).

5.3 Binary Operators

5.4 Unary Operators

5.5 Array Declaration

Arrays are initialized by enclosing comma `,` separated values in brackets `[]`. A plain `[]` represents the empty array, whereas `[1, 2, 3]` initializes an array with three elements 1, 2 and 3.

The generated code may be less concise on platforms that do not support array initialization. Essentially, such initialization code then looks like this:

```
1 var a = new Array();
2 a.push(1);
3 a.push(2);
4 a.push(3);
```

This should be considered when deciding if a function should be inlined (4.4.2) as it may inline more code than visible in the syntax.

Advanced initialization techniques are described in [Array Comprehension](#) (Section 6.6).

5.6 Object Declaration

Object declaration begins with an opening curly brace { after which **key:value**-pairs separated by comma , follow, and which ends in a closing curly brace }.

```
1 {
2     key1:value1,
3     key2:value2,
4     ...
5     keyN:valueN
6 }
```

Further details of object declaration are described in the section about anonymous structures (2.5).

5.7 Field Access

Field access is expressed by using the dot . followed by the name of the field.

```
1 object.fieldName
```

This syntax is also used to access types within packages in the form of **pack.Type**.

The typer ensures that an accessed field actually exist and may apply transformations depending on the nature of the field. If a field access is ambiguous, understanding the resolution order (3.7.3) may help.

5.8 Array Access

Array access is expressed by using an opening bracket [followed by the index expression and a closing bracket].

```
1 expr[indexExpr]
```

This notation is allowed with arbitrary expressions, but at typing level only certain combinations are admitted:

- **expr** is of **Array** or **Dynamic** and **indexExpr** is of **Int**
- **expr** is an abstract type (2.8) which defines a matching array access (2.8.3)

5.9 Function Call

Functions calls consist of an arbitrary subject expression followed by an opening parenthesis `(`, a comma `,` separated list of expressions as arguments and a closing parenthesis `)`.

```
1 subject(); // call with no arguments
2 subject(e1); // call with one argument
3 subject(e1, e2); // call with two arguments
4 // call with multiple arguments
5 subject(e1, ..., eN);
```

5.10 var

The `var` keyword allows declaring multiple variables, separated by comma `,`. Each variable has a valid identifier (5) and optionally a value assignment following the assignment operator `=`. Variables can also have an explicit type-hint.

```
1 var a; // declare local a
2 var b:Int; // declare variable b of type Int
3 // declare variable c, initialized to value 1
4 var c = 1;
5 // declare variable d and variable e
6 // initialized to value 2
7 var d,e = 2;
```

The scoping behavior of local variables is described in [Blocks](#) (Section 5.1).

5.11 Local functions

Haxe supports first-class functions and allows declaring local functions in expressions. The syntax follows class field methods (4.3):

```
1 class Main {
2     static public function main() {
3         var value = 1;
4         function myLocalFunction(i) {
5             return value + i;
6         }
7         trace(myLocalFunction(2)); // 3
8     }
9 }
```

We declare `myLocalFunction` inside the block expression (5.1) of the `main` class field. It takes one argument `i` and adds it to `value`, which is defined in the outside scope.

The scoping is equivalent to that of variables (5.10) and for the most part writing a named local function can be considered equal to assigning an unnamed local function to a local variable:

```
1 var myLocalFunction = function(a) { }
```

However, there are some differences related to type parameters and the position of the function. We speak of a “lvalue” function if it is not assigned to anything upon its declaration, and an “rvalue” function otherwise.

- Lvalue functions require a name and can have type parameters (3.2).
- Rvalue functions may have a name, but cannot have type parameters.

5.12 new

The **new** keyword signals that a class (2.3) or an abstract (2.8) is being instantiated. It is followed by the type path (3.7) of the type which is to be instantiated. It may also list explicit type parameters (3.2) enclosed in `<>` and separated by comma `,`. After an opening parenthesis `(` follow the constructor arguments, again separated by comma `,`, with a closing parenthesis `)` at the end.

```
1 class Main<T> {
2     static public function main() {
3         new Main<Int>(12, "foo");
4     }
5
6     function new(t:T, s:String) { }
7 }
```

Within the `main` method we instantiate an instance of `Main` itself, with an explicit type parameter `Int` and the arguments `12` and `"foo"`. As we can see, the syntax is very similar to the function call syntax (5.9) and it is common to speak of “constructor calls”.

5.13 for

Haxe does not support traditional for-loops known from C. Its **for** keyword expects an opening parenthesis `(`, then a variable identifier followed by the keyword `in` and an arbitrary expression used as iterating collection. After the closing parenthesis `)` follows an arbitrary loop body expression.

```
1 for (v in e1) e2;
```

The typer ensures that the type of `e1` can be iterated over, which is typically the case if it has an `iterator` method returning an `Iterator<T>`, or if it is an `Iterator<T>` itself.

Variable `v` is then available within loop body `e2` and holds the value of the individual elements of collection `e1`.

The type of a **for** expression is always `Void`, meaning it has no value and cannot be used as right-side expression.

The control flow of loops can be affected by **break** (5.20) and **continue** (5.21) expressions.

5.14 while

A normal while loop starts with the **while** keyword, followed by an opening parenthesis `(`, the condition expression and a closing parenthesis `)`. After that follows the loop body expression:

```
1 while(condition) expression;
```

The condition expression has to be of type `Bool`.

Upon each iteration, the condition expression is evaluated. If it evaluates to `false`, the loop stops, otherwise it evaluates the loop body expression.


```

1 class Main {
2     static public function main() {
3         var f = 0.0;
4         while (f < 0.5) {
5             trace(f);
6             f = Math.random();
7         }
8     }
9 }

```

This kind of while-loop is not guaranteed to evaluate the loop body expression at all: If the condition does not hold from the start, it is never evaluated. This is different for do-while loops (5.15).

5.15 do-while

A do-while loop starts with the `do` keyword followed by the loop body expression. After that follows the `while` keyword, an opening parenthesis `(`, the condition expression and a closing parenthesis `)`:

```

1 do expression while(condition);

```

The condition expression has to be of type `Bool`.

As the syntax suggests, the loop body expression is always evaluated at least once, unlike while (5.14) loops.

5.16 if

Conditional expressions come in the form of a leading `if` keyword, a condition expression enclosed in parentheses `()` and a expression to be evaluated in case the condition holds:

```

1 if (condition) expression;

```

The condition expression has to be of type `Bool`.

Optionally, `expression` may be followed by the `else` keyword as well as another expression to be evaluated if the condition does not hold:

```

1 if (condition) expression1 else expression2;

```

Here, `expression2` may consist of another `if` expression:

```

1 if (condition1) expression1
2 else if(condition2) expression2
3 else expression3

```

If the value of an `if` expression is required, e.g. for `var x = if(condition) expression1 else expression2`, the typer ensures that the types of `expression1` and `expression2` unify (3.5). If no `else` expression is given, the type is inferred to be `Void`.

5.17 switch

A basic switch expression starts with the `switch` keyword and the switch subject expression, as well as the case expressions between curly braces `{}`. Case expressions either start

with the `case` keyword and are followed by a pattern expression, or consist of the `default` keyword. In both cases a colon `:` and an optional case body expression follows:

```
1 switch subject {
2     case pattern1: case-body-expression-1;
3     case pattern2: case-body-expression-2;
4     default: default-expression;
5 }
```

Case body expressions never “fall through”, so the `break` (5.20) keyword is not supported in Haxe.

Switch expressions can be used as value; in that case the types of all case body expressions and the default expression must unify (3.5).

Further details on syntax of pattern expressions are detailed in [Pattern Matching](#) (Section 6.4).

5.18 try/catch

Haxe allows catching values using its `try/catch` syntax:

```
1 try try-expr
2 catch(varName1:Type1) catch-expr-1
3 catch(varName2:Type2) catch-expr-2
```

If during runtime the evaluation of `try-expression` causes a `throw` (5.22), it can be caught by any subsequent `catch` block. These blocks consist of

- a variable name which holds the thrown value,
- an explicit type annotation which determines which types of values to catch, and
- the expression to execute in that case.

Haxe allows throwing and catching any kind of value, it is not limited to types inheriting from a specific exception or error class. Catch blocks are checked from top to bottom with the first one whose type is compatible with the thrown value being picked.

This process has many similarities to the compile-time unification (3.5) behavior. However, since the check has to be done at runtime there are several restrictions:

- The type must exist at runtime: Class instances (2.3), enum instances (2.4), abstract core types (2.8.7) and Dynamic (2.7).
- Type parameters can only be Dynamic (2.7).

5.19 return

A `return` expression can come with or without a value expression:

```
1 return;
2 return expression;
```

It leaves the control-flow of the innermost function it is declared in, which has to be distinguished when local functions (5.11) are involved:

```

1 function f1() {
2     function f2() {
3         return;
4     }
5     f2();
6     expression;
7 }

```

The `return` leaves local function `f2`, but not `f1`, meaning `expression` is still evaluated.

If `return` is used without a value expression, the typer ensures that the return type of the function it returns from is of `Void`. If it has a value expression, the typer unifies (3.5) its type with the return type (explicitly given or inferred by previous `return` expressions) of the function it returns from.

5.20 break

The `break` keyword leaves the control flow of the innermost loop (`for` or `while`) it is declared in, stopping further iterations:

```

1 while(true) {
2     expression1;
3     if (condition) break;
4     expression2;
5 }

```

Here, `expression1` is evaluated for each iteration, but as soon as `condition` holds, `expression2` is not evaluated anymore.

The typer ensures that it appears only within a loop. The `break` keyword in `switch` cases (5.17) is not supported in Haxe.

5.21 continue

The `continue` keyword ends the current iteration of the innermost loop (`for` or `while`) it is declared in, causing the loop condition to be checked for the next iteration:

```

1 while(true) {
2     expression1;
3     if(condition) continue;
4     expression2;
5 }

```

Here, `expression1` is evaluated for each iteration, but if `condition` holds, `expression2` is not evaluated for the current iteration. Unlike `break`, iterations continue.

The typer ensures that it appears only within a loop.

5.22 throw

Haxe allows throwing any kind of value using its `throw` syntax:

```

1 throw expr

```

A value which is thrown like this can be caught by `catch` blocks (5.18). If no such block catches it, the behavior is target-dependent.

5.23 cast

Haxe allows two kinds of casts:

```
1 cast expr; // unsafe cast
2 cast (expr, Type); // safe cast
```

5.23.1 unsafe cast

Unsafe casts are useful to subvert the type system. The compiler types `expr` as usual and then wraps it in a monomorph (2.9). This allows the expression to be assigned to anything.

Unsafe casts do not introduce any dynamic (2.7) types, as the following example shows:

```
1 class Main {
2     public static function main() {
3         var i = 1;
4         $type(i); // Int
5         var s = cast i;
6         $type(s); // Unknown<0>
7         Std.parseInt(s);
8         $type(s); // String
9     }
10 }
```

Variable `i` is typed as `Int` and then assigned to variable `s` using the unsafe cast `cast i`. This causes `s` to be of an unknown type, a monomorph. Following the usual rules of unification (3.5), it can then be bound to any type, such as `String` in this example.

These casts are called "unsafe" because the runtime behavior for invalid casts is not defined. While most dynamic targets (2.2) are likely to work, it might lead to undefined errors on static targets (2.2).

Unsafe casts have little to no runtime overhead.

5.23.2 safe cast

Unlike unsafe casts (5.23.1), the runtime behavior in case of a failing cast is defined for safe casts:

```
1 class Base {
2     public function new() { }
3 }
4
5 class Child1 extends Base {}
6
7 class Child2 extends Base {}
8
9 class Main {
10     public static function main() {
11         var child1:Base = new Child1();
12         var child2:Base = new Child2();
13         cast(child1, Base);
14         // Exception: Class cast error
15         cast(child1, Child2);
16     }
```

17 }

In this example we first cast a class instance of type `Child1` to `Base`, which succeeds because `Child1` is a child class (2.3.2) of `Base`. We then try to cast the same class instance to `Child2`, which is not allowed because instances of `Child2` are not instances of `Child1`.

The Haxe compiler guarantees that an exception of type `String` is thrown (5.22) in this case. This exception can be caught using a `try/catch` block (5.18).

Safe casts have a runtime overhead. It is important to understand the the compiler already generates type checks, so it is redundant to add manual checks, e.g. using `Std.is`. The intended usage is to try the safe cast and catch the `String` exception.

5.24 type check

Since Haxe 3.1.0

It is possible to employ compile-time type checks using the following syntax:

```
1 (expr : type)
```

The parentheses are mandatory. Unlike safe casts (5.23.2) this construct has no run-time impact. It has two compile-time implications:

1. Top-down inference (3.6.1) is used to type `expr` with type `type`.
2. The resulting typed expression is unified (3.5) with type `type`.

This has the usual effect of both operations such as the given type being used as expected type when performing unqualified identifier resolution (3.7.3) and the unification checking for abstract casts (2.8.1).

Chapter 6

Language Features

6.1 Conditional Compilation

Haxe allows conditional compilation by using `#if`, `#elseif` and `#else` and checking for compiler flags.

Definition: Compiler Flag

A compiler flag is a configurable value which may influence the compilation process. Such a flag can be set by invoking the command line with `-D key=value` or just `-D key`, in which case the value defaults to "1". The compiler also sets several flags internally to pass information between different compilation steps.

This example demonstrates usage of conditional compilation:

```
1 class ConditionalCompilation {
2     public static function main(){
3         #if !debug
4             trace("ok");
5         #elseif (debug_level > 3)
6             trace(3);
7         #else
8             trace("debug level too low");
9         #end
10    }
11 }
```

Compiling this without any flags will leave only the `trace("ok");` line in the body of the `main` method. The other branches are discarded while parsing the file. As a consequence, these branches must still contain valid Haxe syntax, but the code is not type-checked.

The conditions after `#if` and `#elseif` allow the following expressions:

- Any identifier is replaced by the value of the compiler flag by the same name. Note that `-D some-flag` from command line leads to the flags `some-flag` and `some_flag` to be defined.
- The values of `String`, `Int` and `Float` constants are used directly.
- The boolean operators `&&` (and), `||` (or) and `!` (not) work as expected.

- The operators `==`, `!=`, `>`, `>=`, `<`, `<=` can be used to compare values.
- Parentheses `()` can be used to group expressions as usual.

An exhaustive list of all built-in defines can be obtained by invoking the Haxe Compiler with the `--help-defines` argument. The Haxe Compiler allows multiple `-D` flags per compilation.

6.2 Externs

Externs can be used to describe target-specific interaction in a type-safe manner. They are defined like normal classes, except that

- the `class` keyword is preceded by the `extern` keyword,
- methods (4.3) have no expressions and
- all argument and return types are explicit.

A common example from the Haxe Standard Library (10) is the `Math` class, as an excerpt shows:

```
1 extern class Math
2 {
3     static var PI(default,null) : Float;
4     static function floor(v:Float):Int;
5 }
```

We see that externs can define both methods and variables (actually, `PI` is declared as a read-only property (4.2)). Once this information is available to the compiler, it allows field access accordingly and also knows the types:

```
1 class Main {
2     static public function main() {
3         var pi = Math.floor(Math.PI);
4         $type(pi); // Int
5     }
6 }
```

This works because the return type of method `floor` is declared to be `Int`.

The Haxe Standard Library comes with many externs for the Flash and Javascript target. They allow accessing the native APIs in a type-safe manner and are instrumental for designing higher-level APIs. There are also externs for many popular native libraries on `haxelib` (11).

The Flash, Java and C# targets allow direct inclusion of native libraries from command line (7). Target-specific details are explained in the respective sections of [Target Details](#) (Chapter 12).

Some targets such as Python or JavaScript may require generating additional "import" code that loads an `extern` class from a native module. Haxe provides ways to declare such dependencies also described in respective sections [Target Details](#) (Chapter 12).

6.3 Static Extension

Definition: Static Extension

A static extension allows pseudo-extending existing types without modifying their source. In Haxe this is achieved by declaring a static method with a first argument of the extending type and then bringing the defining class into context through `using`.

Static extensions can be a powerful tool which allows augmenting types without actually changing them. The following example demonstrates the usage:

```
1 using Main.IntExtender;
2
3 class IntExtender {
4     static public function triple(i:Int) {
5         return i * 3;
6     }
7 }
8
9 class Main {
10     static public function main() {
11         trace(12.triple());
12     }
13 }
```

Clearly, `Int` does not natively provide a `triple` method, yet this program compiles and outputs 36 as expected. This is because the call to `12.triple()` is transformed into `IntExtender.triple(12)`. There are three requirements for this:

1. Both the literal 12 and the first argument of `triple` are of type `Int`.
2. The class `IntExtender` is brought into context through `using Main.IntExtender`.
3. `Int` does not have a `triple` field by itself (if it had, that field would take priority over the static extension).

Static extensions are usually considered syntactic sugar and indeed they are, but it is worth noting that they can have a dramatic effect on code readability: Instead of nested calls in the form of `f1(f2(f3(f4(x))))`, chained calls in the form of `x.f4().f3().f2().f1()` can be used.

Following the rules previously described in [Resolution Order \(Section 3.7.3\)](#), multiple `using` expressions are checked from bottom to top, with the types within each module as well as the fields within each type being checked from top to bottom. Using a module (as opposed to a specific type of a module, see [Modules and Paths \(Section 3.7\)](#)) as static extension brings all its types into context.

6.3.1 In the Haxe Standard Library

Several classes in the Haxe Standard Library are suitable for static extension usage. The next example shows the usage of `StringTools`:

```
1 using StringTools;
2
```



```

3 class Main {
4     static public function main() {
5         "adc".replace("d", "b");
6     }
7 }

```

While `String` does not have a `replace` functionality by itself, the `using StringTools` static extension provides one. As usual, the Javascript output nicely shows the transformation:

```

1 Main.main = function() {
2     StringTools.replace("adc", "d", "b");
3 }

```

The following classes from the Haxe Standard Library are designed to be used as static extensions:

`StringTools`: Provides extended functionality on strings, such as replacing or trimming.

`Lambda`: Provides functional methods on iterables.

`haxe.EnumTools`: Provides type information functionality on enums and their instances.

`haxe.macro.Tools`: Provides different extensions for working with macros (see [Tools \(Section 9.4\)](#)).

Trivia: “using” using

Since the `using` keyword was added to the language, it has been common to talk about certain problems with “using using” or the effect of “using using”. This makes for awkward English in many cases, so the author of this manual decided to call the feature by what it actually is: Static extension.

6.4 Pattern Matching

6.4.1 Introduction

Pattern matching is the process of branching depending on a value matching given, possibly deep patterns. In Haxe, all pattern matching is done within a `switch` expression ([5.17](#)) where the individual `case` expressions represent the patterns. Here we will explore the syntax for different patterns using this data structure as running example:

```

1 enum Tree<T> {
2     Leaf(v:T);
3     Node(l:Tree<T>, r:Tree<T>);
4 }

```

Some pattern matcher basics include:

- Patterns will always be matched from top to bottom.
- The topmost pattern that matches the input value has its expression executed.
- A `_` pattern matches anything, so `case _:` is equal to `default:`

6.4.2 Enum matching

Enums can be matched by their constructors in a natural way:

```
1  var myTree = Node(Leaf("foo"),
2      Node(Leaf("bar"), Leaf("foobar")));
3  var match = switch(myTree) {
4      // matches any Leaf
5      case Leaf(_): "0";
6      // matches any Node that has r = Leaf
7      case Node(_, Leaf(_)): "1";
8      // matches any Node that has has
9      // r = another Node, which has
10     // l = Leaf("bar")
11     case Node(_, Node(Leaf("bar"), _)): "2";
12     // matches anything
13     case _: "3";
14 }
15 trace(match); // 2
```

The pattern matcher will check each case from top to bottom and pick the first one that matches the input value. The following manual interpretation of each case rule helps understanding the process:

case Leaf(_): matching fails because myTree is a Node

case Node(_, Leaf(_)): matching fails because the right sub-tree of myTree is not a Leaf, but another Node

case Node(_, Node(Leaf("bar"), _)): matching succeeds

case _: this is not checked here because the previous line matched

6.4.3 Variable capture

It is possible to catch any value of a sub-pattern by matching it against an identifier:

```
1  var myTree = Node(Leaf("foo"),
2      Node(Leaf("bar"), Leaf("foobar")));
3  var name = switch(myTree) {
4      case Leaf(s): s;
5      case Node(Leaf(s), _): s;
6      case _: "none";
7  }
8  trace(name); // foo
```

This would return one of the following:

- If myTree is a Leaf, its name is returned.
- If myTree is a Node whose left sub-tree is a Leaf, its name is returned (this will apply here, returning "foo").
- Otherwise "none" is returned.

It is also possible to use = to capture values which are further matched:

```

1  var node = switch(myTree) {
2      case Node(leafNode = Leaf("foo"), _):
3          leafNode;
4      case x: x;
5  }
6  trace(node); // Leaf(foo)

```

Here, `leafNode` is bound to `Leaf("foo")` if the input matches that. In all other cases, `myTree` itself is returned: `case x` works similar to `case _` in that it matches anything, but with an identifier name like `x` it also binds the matched value to that variable.

6.4.4 Structure matching

It is also possible to match against the fields of anonymous structures and instances:

```

1  var myStructure = {
2      name: "haxe",
3      rating: "awesome"
4  };
5  var value = switch(myStructure) {
6      case { name: "haxe", rating: "poor" }:
7          throw false;
8      case { rating: "awesome", name: n }:
9          n;
10     case _:
11         "no awesome language found";
12 }
13 trace(value); // haxe

```

In the second case we bind the matched `name` field to identifier `n` if `rating` matches "awesome". Of course this structure could also be put into the `Tree` from the previous example to combine structure and enum matching.

A limitation with regards to class instances is that you cannot match against fields of their parent class.

6.4.5 Array matching

Arrays can be matched on fixed length:

```

1  var myArray = [1, 6];
2  var match = switch(myArray) {
3      case [2, _]: "0";
4      case [_, 6]: "1";
5      case []: "2";
6      case [_, _, _]: "3";
7      case _: "4";
8  }
9  trace(match); // 1

```

This will trace 1 because `array[1]` matches 6, and `array[0]` is allowed to be anything.

6.4.6 Or patterns

The `|` operator can be used anywhere within patterns to describe multiple accepted patterns:

```
1 var match = switch(7) {  
2   case 4 | 1: "0";  
3   case 6 | 7: "1";  
4   case _: "2";  
5 }  
6 trace(match); // 1
```

If there is a captured variable in an or-pattern, it must appear in both its sub-patterns.

6.4.7 Guards

It is also possible to further restrict patterns with the `case ... if(condition):` syntax:

```
1 var myArray = [7, 6];  
2 var s = switch(myArray) {  
3   case [a, b] if (b > a):  
4     b + ">" + a;  
5   case [a, b]:  
6     b + "<=" + a;  
7   case _: "found something else";  
8 }  
9 trace(s); // 6<=7
```

The first case has an additional guard condition `if (b > a)`. It will only be selected if that condition holds, otherwise matching continues with the next case.

6.4.8 Match on multiple values

Array syntax can be used to match on multiple values:

```
1 var s = switch [1, false, "foo"] {  
2   case [1, false, "bar"]: "0";  
3   case [_, true, _]: "1";  
4   case [_, false, _]: "2";  
5 }  
6 trace(s); // 2
```

This is quite similar to usual array matching, but there are differences:

- The number of elements is fixed, so patterns of different array length will not be accepted.
- It is not possible to capture the switch value in a variable, i.e. `case x` is not allowed (`case _` still is).

6.4.9 Extractors

Since Haxe 3.1.0

Extractors allow applying transformations to values being matched. This is often useful when a small operation is required on a matched value before matching can continue:

```

1 enum Test {
2     TString(s:String);
3     TInt(i:Int);
4 }
5
6 class Main {
7     static public function main() {
8         var e = TString("f0o");
9         switch(e) {
10             case TString(temp):
11                 switch(temp.toLowerCase()) {
12                     case "foo": true;
13                     case _: false;
14                 }
15             case _: false;
16         }
17     }
18 }

```

Here we have to capture the argument value of the `TString` enum constructor in a variable `temp` and use a nested switch on `temp.toLowerCase()`. Obviously, we want matching to succeed if `TString` holds a value of "foo" regardless of its casing. This can be simplified with extractors:

```

1 enum Test {
2     TString(s:String);
3     TInt(i:Int);
4 }
5
6 class Main {
7     static public function main() {
8         var e = TString("f0o");
9         var success = switch(e) {
10             case TString(_.toLowerCase() => "foo"):
11                 true;
12             case _:
13                 false;
14         }
15     }
16 }

```

Extractors are identified by the `extractorExpression => match expression`. The compiler generates code which is similar to the previous example, but the original syntax was greatly simplified. Extractors consist of two parts, which are separated by the `=>` operator:

1. The left side can be any expression, where all occurrences of underscore `_` are replaced with the currently matched value.
2. The right side is a pattern which is matched against the result of the evaluation of the left side.

Since the right side is a pattern, it can contain another extractor. The following example "chains" two extractors:

```

1 class Main {
2   static public function main() {
3     switch(3) {
4       case add(_, 1) => mul(_, 3) => a:
5         trace(a);
6     }
7   }
8
9   static function add(i1:Int, i2:Int) {
10    return i1 + i2;
11  }
12
13  static function mul(i1:Int, i2:Int) {
14    return i1 * i2;
15  }
16 }

```

This traces 12 as a result of the calls to `add(3, 1)`, where 3 is the matched value, and `mul(4, 3)` where 4 is the result of the `add` call. It is worth noting that the `a` on the right side of the second `=>` operator is a capture variable (6.4.3).

It is currently not possible to use extractors within or-patterns (6.4.6):

```

1 class Main {
2   static public function main() {
3     switch("foo") {
4       // Extractors in or patterns are not
5       // allowed
6       case (_.toLowerCase() => "foo") | "bar":
7     }
8   }
9 }

```

However, it is possible to have or-patterns on the right side of an extractor, so the previous example would compile without the parentheses.

6.4.10 Exhaustiveness checks

The compiler ensures that no possible cases are forgotten:

```

1 switch(true) {
2   case false:
3 } // Unmatched patterns: true

```

The matched type `Bool` admits two values `true` and `false`, but only `false` is checked.

Figure out wtf our rules are now for when this is checked.

6.4.11 Useless pattern checks

In a similar fashion, the compiler detects patterns which will never match the input value:

```

1 switch(Leaf("foo")) {
2   case Leaf(_)
3   | Leaf("foo"): // This pattern is unused
4   case Node(l, r):

```

```

5     case _: // This pattern is unused
6 }

```

6.5 String Interpolation

With Haxe 3 it is no longer necessary to manually concatenate parts of a string due to the introduction of String Interpolation. Special identifiers, denoted by the dollar sign \$ within a String enclosed by single-quote ' characters, are evaluated as if they were concatenated identifiers:

```

1 var x = 12;
2 // The value of x is 12
3 trace('The value of x is $x');

```

Furthermore, it is possible to include whole expressions in the string by using `${expr}`, with `expr` being any valid Haxe expression:

```

1 var x = 12;
2 // The sum of 12 and 3 is 15
3 trace('The sum of $x and 3 is ${x + 3}');

```

String interpolation is a compile-time feature and has no impact on the runtime. The above example is equivalent to manual concatenation, which is exactly what the compiler generates:

```

1 trace("The sum of " + x +
2      " and 3 is " + (x + 3));

```

Of course the use of single-quote enclosed strings without any interpolation remains valid, but care has to be taken regarding the \$ character as it triggers interpolation. If an actual dollar-sign should be used in the string, `$$` can be used.

Trivia: String Interpolation before Haxe 3

String Interpolation has been a Haxe feature since version 2.09. Back then, the macro `Std.format` had to be used, being both slower and less comfortable than the new string interpolation syntax.

6.6 Array Comprehension

Comprehensions are only listing Arrays, not Maps

Array comprehension in Haxe uses existing syntax to allow concise initialization of arrays. It is identified by `for` or `while` constructs:

```

1 class Main {
2     static public function main() {
3         var a = [for (i in 0...10) i];
4         trace(a); // [0,1,2,3,4,5,6,7,8,9]
5
6         var i = 0;
7         var b = [while(i < 10) i++];
8         trace(b); // [0,1,2,3,4,5,6,7,8,9]
9     }
10 }

```

Variable `a` is initialized to an array holding the numbers 0 to 9. The compiler generates code which adds the value of each loop iteration to the array, so the following code would be equivalent:

```
1 var a = [];  
2 for (i in 0...10) a.push(i);
```

Variable `b` is initialized to an array with the same values, but through a different comprehension style using `while` instead of `for`. Again, the following code would be equivalent:

```
1 var i = 0;  
2 var a = [];  
3 while(i < 10) a.push(i++);
```

The loop expression can be anything, including conditions and nested loops, so the following works as expected:

```
1 class AdvArrayComprehension {  
2     static public function main() {  
3         var a = [  
4             for (a in 1...11)  
5                 for(b in 2...4)  
6                     if (a % b == 0)  
7                         a+ "/" +b  
8         ];  
9         // [2/2,3/3,4/2,6/2,6/3,8/2,9/3,10/2]  
10        trace(a);  
11    }  
12 }
```

6.7 Iterators

With Haxe it is very easy to define custom iterators and iterable data types. These concepts are represented by the types `Iterator<T>` and `Iterable<T>` respectively:

```
1 typedef Iterator<T> = {  
2     function hasNext() : Bool;  
3     function next() : T;  
4 }  
5  
6 typedef Iterable<T> = {  
7     function iterator() : Iterator<T>;  
8 }
```

Any class (2.3) which structurally unifies (3.5.2) with one of these types can be iterated over using a for-loop (5.13). That is, if the class defines methods `hasNext` and `next` with matching return types it is considered an iterator, if it defines a method `iterator` returning an `Iterator<T>` it is considered an iterable type.

```
1 class MyStringIterator {  
2     var s:String;  
3     var i:Int;  
4  
5     public function new(s:String) {
```



```

6      this.s = s;
7      i = 0;
8  }
9
10     public function hasNext() {
11         return i < s.length;
12     }
13
14     public function next() {
15         return s.charAt(i++);
16     }
17 }
18
19 class Main {
20     static public function main() {
21         var myIt = new MyStringIterator("string");
22         for (chr in myIt) {
23             trace(chr);
24         }
25     }
26 }

```

The type `MyStringIterator` in this example qualifies as iterator: It defines a method `hasNext` returning `Bool` and a method `next` returning `String`, making it compatible with `Iterator<String>`. The `main` method instantiates it, then iterates over it.

```

1 class MyArrayWrap<T> {
2     var a:Array<T>;
3     public function new(a:Array<T>) {
4         this.a = a;
5     }
6
7     public function iterator() {
8         return a.iterator();
9     }
10 }
11
12 class Main {
13     static public function main() {
14         var myWrap = new MyArrayWrap([1, 2, 3]);
15         for (elt in myWrap) {
16             trace(elt);
17         }
18     }
19 }

```

Here we do not setup a full iterator like in the previous example, but instead define that the `MyArrayWrap<T>` has a method `iterator`, effectively forwarding the iterator method of the wrapped `Array<T>` type.

6.8 Function Bindings

Haxe 3 allows binding functions with partially applied arguments. Each function type can be considered to have a `bind` field, which can be called with the desired number of arguments in order to create a new function. This is demonstrated here:

```
1 class Bind {
2     static public function main() {
3         var map = new Map<Int, String>();
4         var f = map.set.bind(_, "12");
5         $type(map.set); // Int -> String -> Void
6         $type(f); // Int -> Void
7         f(1);
8         f(2);
9         f(3);
10        trace(map); // {1 => 12, 2 => 12, 3 => 12}
11    }
12 }
```

Line 4 binds the function `map.set` to a variable named `f`, and applies `12` as second argument. The underscore `_` is used to denote that this argument is not bound, which is shown by comparing the types of `map.set` and `f`: The bound `String` argument is effectively cut from the type, turning a `Int->String->Void` type into `Int->Void`.

A call to `f(1)` then actually invokes `map.set(1, "12")`, the calls to `f(2)` and `f(3)` are analogous. The last line proves that all three indices indeed are mapped to the value `"12"`.

The underscore `_` can be skipped for trailing arguments, so the the first argument could be bound through `map.set.bind(1)`, yielding a `String->Void` function that sets a new value for index `1` on invocation.

Trivia: Callback

Prior to Haxe 3, Haxe used to know a `callback`-keyword which could be called with a function argument followed by any number of binding arguments. The name originated from a common usage where a callback-function is created with the `this`-object being bound.

Callback would allow binding of arguments only from left to right as there was no support for the underscore `_`. The choice to use an underscore was controversial and several other suggestions were made, none of which were considered superior. After all, the underscore `_` at least looks like it's saying "fill value in here", which nicely describes its semantics.

6.9 Metadata

Several constructs can be attributed with custom metadata:

- `class` and `enum` declarations
- Class fields
- Enum constructors
- Expressions

These metadata information can be obtained at runtime through the `haxe.rtti.Meta` API:

```
1 import haxe.rtti.Meta;
2
3 @author("Nicolas")
4 @debug
5 class MyClass {
6     @range(1, 8)
7     var value:Int;
8
9     @broken
10    @:noCompletion
11    static function method() { }
12 }
13
14 class Main {
15     static public function main() {
16         // { author : ["Nicolas"], debug : null }
17         trace(Meta.getType(MyClass));
18         // [1,8]
19         trace(Meta.getFields(MyClass).value.range);
20         // { broken: null }
21         trace(Meta.getStatics(MyClass).method);
22     }
23 }
```

We can easily identify metadata by the leading `@` character, followed by the metadata name and, optionally, by a number of comma-separated constant arguments enclosed in parentheses.

- Class `MyClass` has an `author` metadata with a single `String` argument `"Nicolas"`, as well as a `debug` metadata without arguments.
- The member variable `value` has a `range` metadata with two `Int` arguments `1` and `8`.
- The static method `method` has a `broken` metadata without arguments, as well as a `:noCompletion` metadata without arguments.

The `main` method accesses these metadata values using their API. The output reveals the structure of the obtained data:

- There is a field for each metadata, with the field name being the metadata name.
- The field values correspond to the metadata arguments. If there are no arguments, the field value is `null`. Otherwise the field value is an array with one element per argument.
- Metadata starting with `:` is omitted. This kind of metadata is known as compiler metadata.

Allowed values for metadata arguments are:

- Constants (5.2)
- Arrays declarations (5.5) (if all their elements qualify)
- Object declarations (5.6) (if all their field values qualify)

6.10 Access Control

Access control can be used if the basic visibility (4.4.1) options are not sufficient. It is applicable at class-level and at field-level and knows two directions:

Allowing access: The target is granted access to the given class or field by using the `:allow(target)` metadata (6.9).

Forcing access: A target is forced to allow access to the given class or field by using the `:access(target)` metadata (6.9).

In this context, a target can be the dot-path (3.7) to

- a class field,
- a class or abstract type, or
- a package.

If it is a class or abstract type, access modification extends to all fields of that type. Likewise, if it is a package, access modification extends to all types of that package and recursively to all fields of these types.

```
1 @:allow(Main)
2 class MyClass {
3     static private var foo: Int;
4 }
5
6 class Main {
7     static public function main() {
8         MyClass.foo;
9     }
10 }
```

Here, `MyClass.foo` can be accessed from the `main`-method because `MyClass` is annotated with `@:allow(Main)`. This would also work with `@:allow(Main.main)` and both versions could alternatively be annotated to the field `foo` instead of the class `MyClass`:

```
1 class MyClass {
2     @:allow(Main.main)
3     static private var foo: Int;
4 }
5
6 class Main {
7     static public function main() {
8         MyClass.foo;
9     }
10 }
```

If a type cannot be modified to allow this kind of access, the accessing method may force access:

```
1 class MyClass {
2     static private var foo: Int;
3 }
4
```

```

5 class Main {
6   @:access(MyClass.foo)
7   static public function main() {
8     MyClass.foo;
9   }
10 }

```

The `@:access(MyClass.foo)` annotation effectively subverts the visibility of the `foo` field within the `main`-method.

Trivia: On the choice of metadata

The access control language feature uses the Haxe metadata syntax instead of additional language-specific syntax. There are several reasons for that:

- Additional syntax often adds complexity to the language parsing, and also adds (too) many keywords.
- Additional syntax requires additional learning by the language user, whereas metadata syntax is something that is already known.
- The metadata syntax is flexible enough to allow extension of this feature.
- The metadata can be accessed/generated/modified by Haxe macros.

Of course, the main drawback of using metadata syntax is that you get no error report in case you misspell either the metadata key (`@:accesss` for instance) or the class/package name. However, with this feature you will get an error when you try to access a private field that you are not allowed to, therefore there is no possibility for silent errors.

Since Haxe 3.1.0

If access is allowed to an interface ([2.3.3](#)), it extends to all classes implementing that interface:

```

1 class MyClass {
2   @:allow(I)
3   static private var foo: Int;
4 }
5
6 interface I { }
7
8 class Main implements I {
9   static public function main() {
10     MyClass.foo;
11   }
12 }

```

This is also true for access granted to parent classes, in which case it extends to all child classes.

Trivia: Broken feature

Access extension to child classes and implementing classes was supposed to work in Haxe 3.0 and even documented accordingly. While writing this manual it was found that this part of the access control implementation was simply missing.

6.11 Inline constructors

Since Haxe 3.1.0

If a constructor is declared to be inline (4.4.2), the compiler may try to optimize it away in certain situations. There are several requirements for this to work:

- The result of the constructor call must be directly assigned to a local variable.
- The expression of the constructor field must only contain assignments to its fields.

The following example demonstrates constructor inlining:

```
1 class Point {
2   public var x:Float;
3   public var y:Float;
4
5   public inline function
6   new(x:Float, y:Float) {
7     this.x = x;
8     this.y = y;
9   }
10 }
11
12 class Main {
13   static public function main() {
14     var pt = new Point(1.2, 9.3);
15   }
16 }
```

A look at the Javascript output reveals the effect:

```
1 Main.main = function() {
2   var pt_x = 1.2;
3   var pt_y = 9.3;
4 };
```

6.12 Remoting

Part II

Compiler Reference

Chapter 7

Compiler Reference

7.1 Compiler Metadata

Chapter 8

Compiler Features

8.1 Dead Code Elimination

Dead Code Elimination, or DCE, is a compiler feature which removes unused code from the output. After typing, the compiler evaluates the DCE entry-points (usually the main-method) and recursively determines which fields and types are used. Used fields are marked accordingly and unmarked fields are then removed from their classes.

DCE has three modes which are set when invoking the command line:

- dce std: Only classes in the Haxe Standard Library are affected by DCE. This is the default setting on all targets but Javascript.
- dce no: No DCE is performed.
- dce full: All classes are affected by DCE. This is the default setting when targeting Javascript.

The DCE-algorithm works well with typed code, but may fail when dynamic (2.7) or reflection (10.6) is involved. This may require explicit marking of fields or classes as being used by attributing the following metadata:

@:keep: If used on a class, the class along with all fields is unaffected by DCE. If used on a field, that field is unaffected by DCE.

@:keepSub: If used on a class, it works like **@:keep** on the annotated class as well as all subclasses.

@:keepInit: Usually, a class which had all fields removed by DCE (or is empty to begin with) is removed from the output. By using this metadata, empty classes are kept.

If a class needs to be marked with **@:keep** from the command line instead of editing its source code, there is a compiler macro available for doing so: `--macro keep('type dot path')` See the [haxe.compiler.Compiler.keep API](#) for details of this macro. It will mark package, module or sub-type to be kept by DCE and includes them for compilation.

The compiler automatically defines the flag `dce` with a value of either `"std"`, `"no"` or `"full"` depending on the active mode. This can be used in conditional compilation (6.1).

Trivia: DCE-rewrite

DCE was originally implemented in Haxe 2.07. This implementation considered a function to be used when it was explicitly typed. The problem with that was that several features, most importantly interfaces, would cause all class fields to be typed in order to verify type-safety. This effectively subverted DCE completely, prompting the rewrite for Haxe 2.10.

Trivia: DCE and try.haxe.org

DCE for the Javascript target saw vast improvements when the website <http://try.haxe.org> was published. Initial reception of the generated Javascript code was mixed, leading to a more fine-grained selection of which code to eliminate.

8.2 Completion

8.2.1 Field Access

8.2.2 Call Arguments

8.2.3 Usage

8.2.4 Position

8.2.5 Metadata

8.3 Resources

Haxe provides simple resource embedding system that can be used for embedding files directly into the compiled application.

While it may be not optimal to embed large assets, like images or music in the application file, it comes in very handy to embed smaller resources, like configuration or XML data.

8.3.1 Embedding resources

External files are embedded using the `-resource` compiler argument:

```
-resource hello_message.txt@welcome
```

The string after the `@` symbol is the resource identifier. It will be used in the code for retrieving the resource. It can be omitted (together with the `@` symbol), then the file name will become a resource identifier.

8.3.2 Retrieving text resources

To retrieve the content of an embedded resource, we use the static method `getString` of `haxe.Resource` passing a resource identifier to it:

what to use for listing of non-haxe code like `html`?

```

1 class Main {
2     static function main() {
3         trace(haxe.Resource.getString("welcome"));
4     }
5 }

```

The code above will display the content of the `hello_message.txt` file that we included earlier using `welcome` as the identifier.

8.3.3 Retrieving binary resources

While it's not recommended to embed large binary files in the application, it still may be useful to embed binary data. Binary representation of an embedded resource can be accessed using the static method `getBytes` of `haxe.Resource`:

```

1 class Main {
2     static function main() {
3         var bytes =
4             haxe.Resource.getBytes("welcome");
5         trace(bytes.readString(0, bytes.length));
6     }
7 }

```

The return type of `getBytes` method is `haxe.io.Bytes`, an object providing access to individual bytes of the data.

8.3.4 Implementation details

Haxe uses target platform's native resource embedding, if there is one, providing its own implementation otherwise.

- Flash resources are embedded as `ByteArray` definitions
- C# resources are included in the compiled assembly
- Java resources are packed in the resulting JAR file
- C++ resources are stored in global byte array constants.
- JavaScript resources are serialized in Haxe serialization format and stored in a static field of `haxe.Resource` class.
- Neko resources are stored as strings in a static field of `haxe.Resource` class.

8.4 Runtime Type Information

The Haxe compiler generates runtime type information (RTTI) for classes that are annotated or extend classes that are annotated with the `:rtti` metadata. This information is stored as a XML string in a static field `__rtti` and can be processed through `haxe.rtti.XmlParser`. The resulting structure is described in [RTTI structure \(Section 8.4.1\)](#). Since Haxe 3.2.0

The type `haxe.rtti.Rtti` has been introduced in order to simplify working with RTTI. Retrieving this information is now very easy:

```

1 @:rtti
2 class Main {
3     var x:String;
4     static function main() {
5         var rtti = haxe.rtti.Rtti.getRtti(Main);
6         trace(rtti);
7     }
8 }

```

8.4.1 RTTI structure

General type information

path: The type path (3.7) of the type.

module: The type path of the module (3.7) containing the type.

file: The full slash path of the .hx file containing the type. This might be `null` in case there is no such file, e.g. if the type is defined through a macro (9).

params: An array of strings representing the names of the type parameters (3.2) the type has. As of Haxe 3.2.0, this does not include the constraints (3.2.1).

doc: The documentation of the type. This information is only available if the compiler flag (6.1) `-D use_rtti_doc` was in place. Otherwise, or if the type has no documentation, the value is `null`.

isPrivate: Whether or not the type is private (3.7.1).

platforms: A list of strings representing the targets where the type is available.

meta: The meta data the type was annotated with.

Class type information

isExtern: Whether or not the class is extern (6.2).

isInterface: Whether or not the class is actually an interface (2.3.3).

superClass: The class' parent class defined by its type path and list of type parameters.

interfaces: The list of interfaces defined by their type path and list of type parameters.

fields: The list of member class fields (4), described in [Class field information \(Section 8.4.1\)](#).

statics: The list of static class fields, described in [Class field information \(Section 8.4.1\)](#).

tdynamic: The type which is dynamically implemented (2.7.2) by the class, or `null` if no such type exists.

Enum type information

isExtern: Whether or not the enum is extern (6.2).

constructors: The list of enum constructors.

Abstract type information

to: An array containing the defined implicit to casts ([2.8.1](#)).

from: An array containing the defined implicit from casts ([2.8.1](#)).

impl: The class type information ([8.4.1](#)) of the implementing class.

athis: The underlying type ([2.8](#)) of the abstract.

Class field information

name: The name of the field.

type: The type of the field.

isPublic: Whether or not the field is public ([4.4.1](#)).

isOverride: Whether or not the field overrides ([4.4.4](#)) another field.

doc: The documentation of the field. This information is only available if the compiler flag ([6.1](#)) `-D use_rtti_doc` was in place. Otherwise, or if the field has no documentation, the value is `null`.

get: The read access behavior ([4.2](#)) of the field.

set: The write access behavior ([4.2](#)) of the field.

params:

params: An array of strings representing the names of the type parameters ([3.2](#)) the field has. As of Haxe 3.2.0, this does not include the constraints ([3.2.1](#)).

platforms: A list of strings representing the targets where the field is available.

meta: The meta data the field was annotated with.

line: The line number where the field is defined. This information is only available if the field has an expression. Otherwise the value is `null`.

overloads: The list of available overloads for the fields, or `null` if no overloads exists.

Enum constructor information

name: The name of the constructor.

args: The list of arguments the constructor has, or `null` if no arguments are available.

doc: The documentation of the constructor. This information is only available if the compiler flag ([6.1](#)) `-D use_rtti_doc` was in place. Otherwise, or if the constructor has no documentation, the value is `null`.

platforms: A list of strings representing the targets where the constructor is available.

meta: The meta data the constructor was annotated with.

Chapter 9

Macros

Macros are without a doubt the most advanced feature in Haxe. They are often perceived as dark magic that only a select few are capable of mastering, yet there is nothing magical (and certainly nothing dark) about them.

Definition: Abstract Syntax Tree (AST)

The AST is the result of parsing Haxe code into a typed structure. This structure is exposed to macros through the types defined in the file `haxe/macro/Expr.hx` of the Haxe Standard Library.

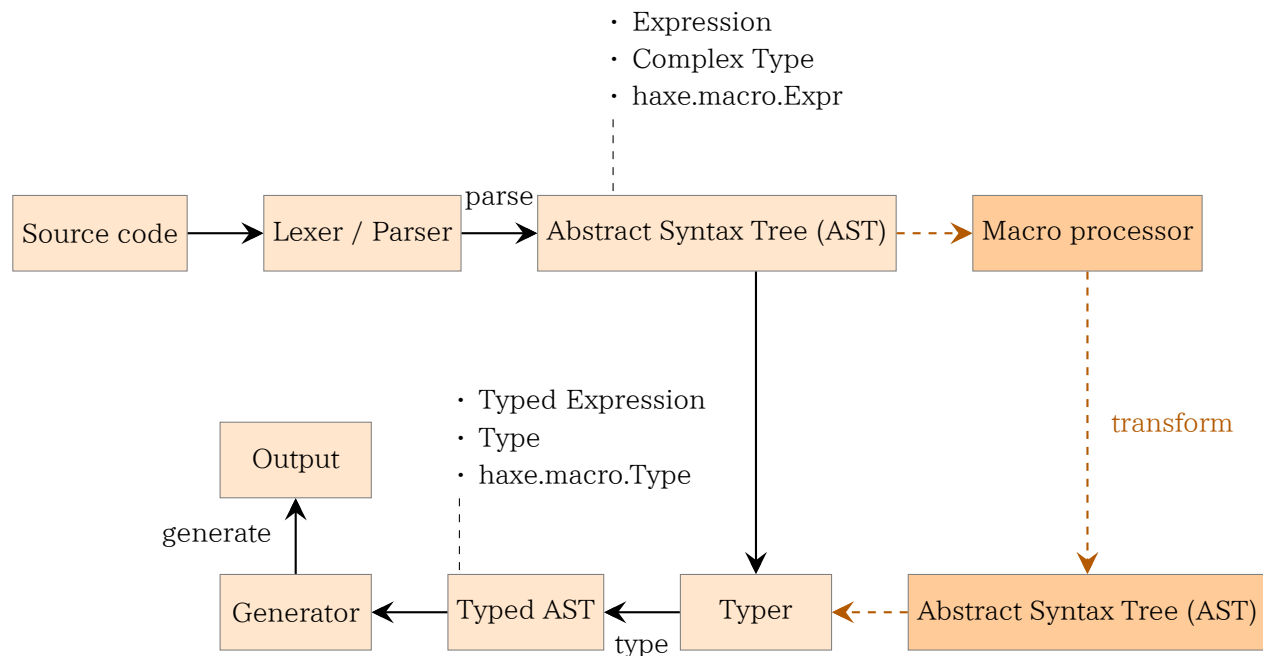


Figure 9.1: The role of macros during compilation.

A basic macro is a syntax-transformation. It receives zero or more expressions (5) and also returns an expression. If a macro is called, it effectively inserts code at the place it

was called from. In that respect, it could be compared to a preprocessor like `#define` in C++, but a Haxe macro is not a textual replacement tool.

We can identify different kinds of macros, which are run at specific compilation stages:

Initialization Macros: These are provided by command line using the `--macro` compiler parameter. They are executed after the compiler arguments were processed and the typer context has been created, but before any typing was done (see [Initialization macros](#) ([Section 9.7](#))).

Build Macros: These are defined for classes, enums and abstracts through the `@:build` or `@:autoBuild` metadata ([6.9](#)). They are executed per-type, after the type has been set up (including its relation to other types, such as inheritance for classes) but before its fields are typed (see [Type Building](#) ([Section 9.5](#))).

Expression Macros: These are normal functions which are executed as soon as they are typed.

9.1 Macro Context

Definition: Macro Context

The macro context is the environment in which the macro is executed. Depending on the macro type, it can be considered to be a class being built or a function being typed. Contextual information can be obtained through the `haxe.macro.Context` API.

Haxe macros have access to different contextual information depending on the macro type. Other than querying such information, the context also allows some modifications such as defining a new type or registering certain callbacks. It is important to understand that not all information is available for all macro kinds, as the following examples demonstrate:

- Initialization macros will find that the `Context.getLocal*()` methods return `null`. There is no local type or method in the context of an initialization macro.
- Only build macros get a proper return value from `Context.getBuildFields()`. There are no fields being built for the other macro kinds.
- Build macros have a local type (if incomplete), but no local method, so `Context.getLocalMethod()` returns `null`.

The context API is complemented by the `haxe.macro.Compiler` API detailed in [Initialization macros](#) ([Section 9.7](#)). While this API is available to all macro kinds, care has to be taken for any modification outside of initialization macros. This stems from the natural limitation of undefined build order ([9.6.3](#)), which could cause e.g. a flag definition through `Compiler.define()` to take effect before or after a conditional compilation ([6.1](#)) check against that flag.

9.2 Arguments

Most of the time, arguments to macros are expressions represented as an instance of enum `Expr`. As such, they are parsed but not typed, meaning they can be anything conforming to

Haxe's syntax rules. The macro can then inspect their structure, or (try to) get their type using `haxe.macro.Context.typeof()`.

It is important to understand that arguments to macros are not guaranteed to be evaluated, so any intended side-effect is not guaranteed to occur. On the other hand, it is also important to understand that an argument expression may be duplicated by a macro and used multiple times in the returned expression:

```
1 import haxe.macro.Expr;
2
3 class Main {
4     static public function main() {
5         var x = 0;
6         var b = add(x++);
7         trace(x); // 2
8     }
9
10    macro static function add(e:Expr) {
11        return macro $e + $e;
12    }
13 }
```

The macro `add` is called with `x ++` as argument and thus returns `x ++ + x ++` using expression reification (9.3.1), causing `x` to be incremented twice.

9.2.1 ExprOf

Since `Expr` is compatible with any possible input, Haxe provides the type `haxe.macro.ExprOf<T>`. For the most part, this type is identical to `Expr`, but it allows constraining the type of accepted expressions. This is useful when combining macros with static extensions (6.3):

```
1 import haxe.macro.Expr;
2 using Main;
3
4 class Main {
5     static public function main() {
6         identity("foo");
7         identity(1);
8         "foo".identity();
9         // Int has no field identity
10        //1.identity();
11    }
12
13    macro static function
14    identity(e:ExprOf<String>) {
15        return e;
16    }
17 }
```

The two direct calls to `identity` are accepted, even though the argument is declared as `ExprOf<String>`. It might come as a surprise that the `Int 1` is accepted, but it is a logical consequence of what was explained about macro arguments (9.2): The argument expressions are never typed, so it is not possible for the compiler to check their compatibility by unifying (3.5).

This is different for the next two lines which are using static extensions (note the using Main): For these it is mandatory to type the left side ("foo" and 1) first in order to make sense of the identity field access. This makes it possible to check the types against the argument types, which causes 1.identity() to not consider Main.identity() as a suitable field.

9.2.2 Constant Expressions

A macro can be declared to expect constant (5.2) arguments:

```
1 class Main {
2     static public function main() {
3         const("foo", 1, 1.5, true);
4     }
5
6     macro static function
7     const(s:String, i:Int, f:Float, b:Bool) {
8         trace(s);
9         trace(i);
10        trace(f);
11        trace(b);
12        return macro null;
13    }
14 }
```

With these it is not necessary to detour over expressions as the compiler can use the provided constants directly.

9.2.3 Rest Argument

If the final argument of a macro is of type `Array<Expr>`, the macro accepts an arbitrary number of extra arguments which are available from that array:

```
1 import haxe.macro.Expr;
2
3 class Main {
4     static public function main() {
5         myMacro("foo", a, b, c);
6     }
7
8     macro static function
9     myMacro(e1:Expr, extra:Array<Expr>) {
10        for (e in extra) {
11            trace(e);
12        }
13        return macro null;
14    }
15 }
```

9.3 Reification

The Haxe Compiler allows reification of expressions, types and classes to simplify working with macros. The syntax for reification is `macro expr`, where `expr` is any valid Haxe expression.

9.3.1 Expression Reification

Expression reification is used to create instances of `haxe.macro.Expr` in a convenient way. The Haxe Compiler accepts the usual Haxe syntax and translates it to an expression object. It supports several escaping mechanisms, all of which are triggered by the `$` character:

`${}` and `$e{}`: `Expr -> Expr` This can be used to compose expressions. The expression within the delimiting `{ }` is executed, with its value being used in place.

`$a{}`: `Expr -> Array<Expr>` If used in a place where an `Array<Expr>` is expected (e.g. call arguments, block elements), `$a{}` treats its value as that array. Otherwise it generates an array declaration.

`$b{}`: `Array<Expr> -> Expr` Generates a block expression from the given expression array.

`$i{}`: `String -> Expr` Generates an identifier from the given string.

`$p{}`: `Array<String> -> Expr` Generates a field expression from the given string array.

`$v{}`: `Dynamic -> Expr` Generates an expression depending on the type of its argument. This is only guaranteed to work for basic types (2.1) and enum instances (2.4).

This kind of reification only works in places where the internal structure expects an expression. This disallows `object.${fieldName}`, but `object.$fieldName` works. This is true for all places where the internal structure expects a string:

- field access `object.$name`
- variable name `var $name = 1;`

Since Haxe 3.1.0

- field name `{ $name: 1 }`
- function name `function $name() { }`
- catch variable name `try e() catch($name:Dynamic) {}`

9.3.2 Type Reification

Type reification is used to create instances of `haxe.macro.Expr.ComplexType` in a convenient way. It is identified by a `macro : Type`, where `Type` can be any valid type path expression. This is similar to explicit type hints in normal code, e.g. for variables in the form of `var x:Type`.

Each constructor of `ComplexType` has a distinct syntax:

TPath: `macro : pack.Type`

TFunction: `macro : Arg1 -> Arg2 -> Return`

```

TAnonymous: macro : { field: Type }
TParent: macro : (Type)
TExtend: macro : {> Type, field: Type }
TOptional: macro : ?Type

```

9.3.3 Class Reification

It is also possible to use reification to obtain an instance of `haxe.macro.Expr.TypeDefinition`. This is indicated by the `macro class` syntax as shown here:

```

1 class Main {
2   macro static function
3   generateClass(funcName:String) {
4     var c = macro class MyClass {
5       public function new() { }
6       public function $funcName() {
7         trace($v{funcName} + " was called");
8       }
9     }
10    haxe.macro.Context.defineType(c);
11    return macro new MyClass();
12  }
13
14  public static function main() {
15    var c = generateClass("myFunc");
16    c.myFunc();
17  }
18 }

```

The generated `TypeDefinition` instance is typically passed to `haxe.macro.Context.defineType` in order to add a new type to the calling context (not the macro context itself).

This kind of reification can also be useful to obtain instances of `haxe.macro.Expr.Field`, which are available from the `fields` array of the generated `TypeDefinition`.

9.4 Tools

The Haxe Standard Library comes with a set of tool-classes to simplify working with macros. These classes work best as static extensions (6.3) and can be brought into context either individually or as a whole through using `haxe.macro.Tools`. These classes are:

ComplexTypeTools: Allows printing `ComplexType` instances in a human-readable way. Also allows determining the `Type` corresponding to a `ComplexType`.

ExprTools: Allows printing `Expr` instances in a human-readable way. Also allows iterating and mapping expressions.

MacroStringTools: Offers useful operations on strings and string expressions in macro context.

TypeTools: Allows printing `Type` instances in a human-readable way. Also offers several useful operations on types, such as unifying (3.5) them or getting their corresponding `ComplexType`.

Trivia: The tinkerbelt library and why Tools.hx works

We learned about static extensions that using a module implies that all its types are brought into static extension context. As it turns out, such a type can also be a typedef (3.1) to another type. The compiler then considers this type part of the module, and extends static extension accordingly.

This “trick” was first used in Juraj Kirchheim’s tinkerbelt¹ library for exactly the same purpose. Tinkerbelt provided many useful macro tools long before they made it into the Haxe Compiler and Haxe Standard Library. It remains the primary library for additional macro tools and offers other useful functionality as well.

9.5 Type Building

Type-building macros are different from expression macros in several ways:

- They do not return expressions, but an array of class fields. Their return type must be set explicitly to `Array<haxe.macro.Expr.Field>`.
- Their context (9.1) has no local method and no local variables.
- Their context does have build fields, available from `haxe.macro.Context.getBuildFields()`.
- They are not called directly, but are argument to a `@:build` or `@:autoBuild` metadata (6.9) on a class (2.3) or enum (2.4) declaration.

The following example demonstrates type building. Note that it is split up into two files for a reason: If a module contains a `macro` function, it has to be typed into macro context as well. This is often a problem for type-building macros because the type to be built could only be loaded in its incomplete state, before the building macro has run. We recommend to always define type-building macros in their own module.

```
1 import haxe.macro.Context;
2 import haxe.macro.Expr;
3
4 class TypeBuildingMacro {
5     macro static public function
6     build(fieldName:String):Array<Field> {
7         var fields = Context.getBuildFields();
8         var newField = {
9             name: fieldName,
10            doc: null,
11            meta: [],
12            access: [AStatic, APublic],
13            kind: FVar(macro : String,
14                macro "my default"),
15            pos: Context.currentPos()
16        };
17        fields.push(newField);
18        return fields;
19    }
20 }
```

```

1 @:build(TypeBuildingMacro.build("myFunc"))
2 class Main {
3     static public function main() {
4         trace(Main.myFunc); // my default
5     }
6 }

```

The `build` method of `TypeBuildingMacro` performs three steps:

1. It obtains the build fields using `Context.getBuildFields()`.
2. It declares a new `haxe.macro.expr.Field` field using the `funcName` macro argument as field name. This field is a `String` variable (4.1) with a default value `"my default"` (from the `kind` field) and is public and static (from the `access` field).
3. It adds the new field to the build field array and returns it.

This macro is argument to the `@:build` metadata on the `Main` class. As soon as this type is required, the compiler does the following:

1. It parses the module file, including the class fields.
2. It sets up the type, including its relation to other types through inheritance (2.3.2) and interfaces (2.3.3).
3. It executes the type-building macro according to the `@:build` metadata.
4. It continues typing the class normally with the fields returned by the type-building macro.

This allows adding and modifying class fields at will in a type-building macro. In our example, the macro is called with a `"myFunc"` argument, making `Main.myFunc` a valid field access.

If a type-building macro should not modify anything, the macro can return `null`. This indicates to the compiler that no changes are intended and is preferable to returning `Context.getBuildFields()`.

9.5.1 Enum building

Building enums (2.4) is analogous to building classes with a simple mapping:

- Enum constructors without arguments are variable fields `FVar`.
- Enum constructors with arguments are method fields `FFun`.

Check if we can build GADTs this way.

```

1 import haxe.macro.Context;
2 import haxe.macro.Expr;
3
4 class EnumBuildingMacro {
5     macro static public function
6     build():Array<Field> {
7         var noArgs =
8             makeEnumField("A", FVar(null, null));
9         var eFunc = macro function(value:Int) { };

```

```

10     var fInt = switch (eFunc.expr) {
11         case EFunction(_, f): f;
12         case _: throw "false";
13     }
14     var intArg =
15         makeEnumField("B", FFun(fInt));
16     return [noArgs, intArg];
17 }
18
19 static function makeEnumField(name, kind) {
20     return {
21         name: name,
22         doc: null,
23         meta: [],
24         access: [],
25         kind: kind,
26         pos: Context.currentPos()
27     }
28 }
29 }

```

```

1 @:build(EnumBuildingMacro.build())
2 enum E { }
3
4 class Main {
5     static public function main() {
6         switch(E.A) {
7             case A:
8             case B(v):
9         }
10    }
11 }

```

Because enum `E` is annotated with a `:build` metadata, the called macro builds two constructors `A` and `B` “into” it. The former is added with the kind being `FVar(null, null)`, meaning it is a constructor without argument. For the latter, we use reification (9.3.1) to obtain an instance of `haxe.macro.Expr.Function` with a singular `Int` argument.

The `main` method proves the structure of our generated enum by matching (6.4) it. We can see that the generated type is equivalent to this:

```

1 enum E {
2     A;
3     B(value: Int);
4 }

```

9.5.2 @:autoBuild

If a class has the `:autoBuild` metadata, the compiler generates `:build` metadata on all extending classes. If an interface has the `:autoBuild` metadata, the compiler generates `:build` metadata on all implementing classes and all extending interfaces. Note that `:autoBuild` does not imply `:build` on the class/interface itself.

```

1 import haxe.macro.Context;
2 import haxe.macro.Expr;
3
4 class AutoBuildingMacro {
5     macro static public
6     function fromInterface():Array<Field> {
7         trace("fromInterface: ");
8         + Context.getLocalType();
9         return null;
10    }
11
12    macro static public
13    function fromBaseClass():Array<Field> {
14        trace("fromBaseClass: ");
15        + Context.getLocalType();
16        return null;
17    }
18 }

```

```

1 @:autoBuild(AutoBuildingMacro.fromInterface())
2 interface I { }
3
4 interface I2 extends I { }
5
6 @:autoBuild(AutoBuildingMacro.fromBaseClass())
7 class Base { }
8
9 class Main extends Base implements I2 {
10     static public function main() { }
11 }

```

This outputs during compilation:

```

1 AutoBuildingMacro.hx:6:
2   fromInterface: TInst(I2,[])
3 AutoBuildingMacro.hx:6:
4   fromInterface: TInst(Main,[])
5 AutoBuildingMacro.hx:11:
6   fromBaseClass: TInst(Main,[])

```

It is important to keep in mind that the order of these macro executions is undefined, which is detailed in [Build Order](#) ([Section 9.6.3](#)).

9.6 Limitations

9.6.1 Macro-in-Macro

9.6.2 Static extension

The concepts of static extensions ([6.3](#)) and macros are somewhat conflicting: While the former requires a known type in order to determine used functions, macros execute before typing on plain syntax. It is thus not surprising that combining these two features can lead to issues. Haxe 3.0 would try to convert the typed expression back to a syntax expression,

which is not always possible and may lose important information. We recommend that it is used with caution.
Since Haxe 3.1.0

The combination of static extensions and macros was reworked for the 3.1.0 release. The Haxe Compiler does not even try to find the original expression for the macro argument and instead passes a special `@:this this` expression. While the structure of this expression conveys no information, the expression can still be typed correctly:

```
1 import haxe.macro.Context;
2 import haxe.macro.Expr;
3
4 using Main;
5 using haxe.macro.Tools;
6
7 class Main {
8     static public function main() {
9         "foo".test();
10    }
11
12    macro static function
13    test(e:ExprOf<String>) {
14        trace(e.toString()); // @:this this
15        // TInst(String,[])
16        trace(Context.typeof(e));
17        return e;
18    }
19 }
```

9.6.3 Build Order

The build order of types is unspecified and this extends to the execution order of build-macros (9.5). While certain rules can be determined, we strongly recommend to not rely on the execution order of build-macros. If type building requires multiple passes, this should be reflected directly in the macro code. In order to avoid multiple build-macro execution on the same type, state can be stored in static variables or added as metadata (6.9) to the type in question:

```
1 import haxe.macro.Context;
2 import haxe.macro.Expr;
3
4 #if !macro
5 @:autoBuild(MyMacro.build())
6 #end
7 interface I1 { }
8
9 #if !macro
10 @:autoBuild(MyMacro.build())
11 #end
12 interface I2 { }
13
14 class C implements I1 implements I2 { }
```



```

15
16 class MyMacro {
17     macro static public function
18     build():Array<Field> {
19         var c = Context.getLocalClass().get();
20         if (c.meta.has(":processed")) return null;
21         c.meta.add(":processed",[], c.pos);
22         // process here
23         return null;
24     }
25 }
26
27 class Main {
28     static public function main() { }
29 }

```

With both interfaces `I1` and `I2` having `:autoBuild` metadata, the `build` macro is executed twice for class `C`. We guard against duplicate processing by adding a custom `:processed` metadata to the class, which can be checked during the second macro execution.

9.6.4 Type Parameters

9.7 Initialization macros

Initialization macros are invoked from command line by using the `--macro callExpr(args)` command. This registers a callback which the compiler invokes after creating its context, but before typing what was argument to `-main`. This then allows configuring the compiler in some ways.

If the argument to `--macro` is a call to a plain identifier, that identifier is looked up in the class `haxe.macro.Compiler` which is part of the Haxe Standard Library. It comes with several useful initialization macros which are detailed in its [API](#).

As an example, the `include` macro allows inclusion of an entire package for compilation, recursively if necessary. The command line argument for this would then be `--macro include('some.pack', true)`.

Of course it is also possible to define custom initialization macros to perform various tasks before the real compilation. A macro like this would then be invoked via `--macro some.Class.theMacro(args)`. For instance, as all macros share the same context ([9.1](#)), an initialization macro could set the value of a static field which other macros use as configuration.

Part III

Standard Library

Chapter 10

Standard Library

Standard library

10.1 String

Type: `String`
A `String` is a sequence of characters.

10.2 Data Structures

10.2.1 Array

An `Array` is a collection of elements. It has one type parameter (3.2) which corresponds to the type of these elements. Arrays can be created in three ways:

1. By using their constructor: `new Array()`
2. By using array declaration syntax (5.5): `[1, 2, 3]`
3. By using array comprehension (6.6): `[for (i in 0...10) if (i % 2 == 0) i]`

Arrays come with an API [API](#) to cover most use-cases. Additionally they allow read and write array access (5.8):

```
1 class Main {  
2   static public function main() {  
3     var a = [1, 2, 3];  
4     trace(a[1]); // 2  
5     a[1] = 1;  
6     trace(a[1]); // 1  
7   }  
8 }
```

Since array access in Haxe is unbounded, i.e. it is guaranteed to not throw an exception, this requires further discussion:

- If a read access is made on a non-existing index, a target-dependent value is returned.

- If a write access is made with a positive index which is out of bounds, `null` (or the default value (2.2) for basic types (2.1) on static targets (2.2)) is inserted at all positions between the last defined index and the newly written one.
- If a write access is made with a negative index, the result is unspecified.

Arrays define an iterator (6.7) over their elements. This iteration is typically optimized by the compiler to use a `while` loop (5.14) with array index:

```

1 class Main {
2   static public function main() {
3     var scores = [110, 170, 35];
4     var sum = 0;
5     for (score in scores) {
6       sum += score;
7     }
8     trace(sum); // 315
9   }
10 }

```

Haxe generates this optimized Javascript output:

```

1 Main.main = function() {
2   var scores = [110, 170, 35];
3   var sum = 0;
4   var _g = 0;
5   while(_g < scores.length) {
6     var score = scores[_g];
7     ++_g;
8     sum += score;
9   }
10  console.log(sum);
11 };

```

Haxe does not allow arrays of mixed types unless the parameter type is forced to `Dynamic` (2.7):

```

1 class Main {
2   static public function main() {
3     // Compile Error: Arrays of mixed types are
4     // only allowed if the type is forced to
5     // Array<Dynamic>
6     //var myArray = [10, "Bob", false];
7
8     // Array<Dynamic> with mixed types
9     var myExplicitArray:Array<Dynamic> =
10      [10, "Sally", true];
11   }
12 }

```

Trivia: Dynamic Arrays

In Haxe 2, mixed type array declarations were allowed. In Haxe 3, arrays can have mixed types only if they are explicitly declared as `Array<Dynamic>`.

10.2.2 Vector

A **Vector** is an optimized fixed-length collection of elements. Much like **Array** (10.2.1), it has one type parameter (3.2) and all elements of a vector must be of the specified type, it can be iterated over using a for loop (5.13) and accessed using array access syntax (2.8.3). However, unlike **Array** and **List**, vector length is specified on creation and cannot be changed later.

```
1 class Main {
2     static function main() {
3         var vec = new haxe.ds.Vector(10);
4
5         for (i in 0...vec.length) {
6             vec[i] = i;
7         }
8
9         trace(vec[0]); // 0
10        trace(vec[5]); // 5
11        trace(vec[9]); // 9
12    }
13 }
```

`haxe.ds.Vector` is implemented as an abstract type (2.8) over a native array implementation for given target and can be faster for fixed-size collections, because the memory for storing its elements is pre-allocated.

10.2.3 List

A **List** is a collection for storing elements. On the surface, a list is similar to an **Array** (Section 10.2.1). However, the underlying implementation is very different. This results in several functional differences:

1. A list can not be indexed using square brackets, i.e. `[0]`.
2. A list can not be initialized.
3. There are no list comprehensions.
4. A list can freely modify/add/remove elements while iterating over them.

See the **List API** for details about the list methods. A simple example for working with lists:

```
1 class ListExample {
2     static public function main() {
3         var myList = new List<Int>();
4         for (ii in 0...5)
5             myList.add(ii);
6         trace(myList); // {0, 1, 2, 3, 4}
7     }
8 }
```

10.2.4 GenericStack

A `GenericStack`, like `Array` and `List` is a container for storing elements. It has one type parameter (3.2) and all elements of the stack must be of the specified type. See the [GenericStack API](#) for details about its methods. Here is a small example program for initializing and working with a `GenericStack`.

```
1 import haxe.ds.GenericStack;
2
3 class GenericStackExample {
4     static public function main() {
5         var myStack = new GenericStack<Int>();
6         for (ii in 0...5)
7             myStack.add(ii);
8         trace(myStack); //{4, 3, 2, 1, 0}
9         trace(myStack.pop()); //4
10    }
11 }
```

Trivia: `FastList`

In Haxe 2, the `GenericStack` class was known as `FastList`. Since its behavior more closely resembled a typical stack, the name was changed for Haxe 3.

The `Generic` in `GenericStack` is literal. It is attributed with the `:generic` metadata. Depending on the target, this can lead to improved performance on static targets. See [ジェネリック](#) (Section 3.3) for more details.

10.2.5 Map

A `Map` is a container composed of key, value pairs. A `Map` is also commonly referred to as an associative array, dictionary, or symbol table. The following code gives a short example of working with maps:

```
1 class Main {
2     static public function main() {
3         // Maps are initialized like arrays, but
4         // use '=>' operator. Maps can have their
5         // key value types defined explicitly
6         var map1:Map<Int, String> =
7             [1 => "one", 2=>"two"];
8
9         // Or they can infer their key value types
10        var map2 = [
11            "one"=>1,
12            "two"=>2,
13            "three"=>3
14        ];
15        $type(map2); // Map<String, Int>
16
17        // Keys must be unique
18        // Error: Duplicate Key
```

```

19 //var map3 = [1=>"dog", 1=>"cat"];
20
21 // Maps values can be accessed using array
22 // accessors "[]"
23 var map4 = ["M"=>"Monday", "T"=>"Tuesday"];
24 trace(map4["M"]); //Monday
25
26 // Maps iterate over their values by
27 // default
28 var valueSum;
29 for (value in map4) {
30     trace(value); // Monday ¶n Tuesday
31 }
32
33 // Can iterate over keys by using the
34 // keys() method
35 for (key in map4.keys()) {
36     trace(key); // M ¶n T
37 }
38
39 // Like arrays, a new Map can be made using
40 // comprehension
41 var map5 = [
42     for (key in map4.keys())
43     key => "FRIDAY!!"
44 ];
45 // {M => FRIDAY!!, T => FRIDAY!!}
46 trace(map5);
47 }
48 }

```

See the [Map API](#) for details of its methods.

Under the hood, a `Map` is an abstract [\(2.8\)](#) type. At compile time, it gets converted to one of several specialized types depending on the key type:

- `String`: `haxe.ds.StringMap`
- `Int`: `haxe.ds.IntMap`
- `EnumValue`: `haxe.ds.EnumValueMap`
- `{}`: `haxe.ds.ObjectMap`

The `Map` type does not exist at runtime and has been replaced with one of the above objects.

`Map` defines array access [\(2.8.3\)](#) using its key type.

10.2.6 Option

An option is an enum [\(2.4\)](#) in the Haxe Standard Library which is defined like so:

```

1 enum Option<T> {
2     Some(v:T);
3     None;
4 }

```

It can be used in various situations, such as communicating whether or not a method had a valid return and if so, what value it returned:

```
1 import haxe.ds.Option;
2
3 class Main {
4     static public function main() {
5         var result = trySomething();
6         switch (result) {
7             case None:
8                 trace("Got None");
9             case Some(s):
10                 trace("Got a value: " +s);
11         }
12     }
13
14     static function
15     trySomething():Option<String> {
16         if (Math.random() > 0.5) {
17             return None;
18         } else {
19             return Some("Success");
20         }
21     }
22 }
```

10.3 Regular Expressions

Haxe has built-in support for regular expressions¹. They can be used to verify the format of a string, transform a string or extract some regular data from a given text.

Haxe has special syntax for creating regular expressions. We can create a regular expression object by typing it between the `~/` combination and a single `/` character:

```
1 var r = ~/haxe/i;
```

Alternatively, we can create regular expression with regular syntax:

```
1 var r = new EReg("haxe", "i");
```

First argument is a string with regular expression pattern, second one is a string with flags (see below).

We can use standard regular expression patterns such as:

- `.` any character
- `*` repeat zero-or-more
- `+` repeat one-or-more
- `?` optional zero-or-one
- `[A-Z0-9]` character ranges

¹http://en.wikipedia.org/wiki/Regular_expression

- `[^r¶n¶t]` character not-in-range
- `(...)` parenthesis to match groups of characters
- `^` beginning of the string (beginning of a line in multiline matching mode)
- `$` end of the string (end of a line in multiline matching mode)
- `|` "OR" statement.

For example, the following regular expression matches valid email addresses:

```
1 ~/[A-Z0-9._%]+@[A-Z0-9.-]+%. [A-Z][A-Z][A-Z]?/i;
```

Please notice that the `i` at the end of the regular expression is a flag that enables case-insensitive matching.

The possible flags are the following:

- `i` case insensitive matching
- `g` global replace or split, see below
- `m` multiline matching, `^` and `$` represent the beginning and end of a line
- `s` the dot `.` will also match newlines (Neko, C++, PHP and Java targets only)
- `u` use UTF-8 matching (Neko and C++ targets only)

10.3.1 Matching

Probably one of the most common uses for regular expressions is checking whether a string matches the specific pattern. The `match` method of a regular expression object can be used to do that:

```
1 class Main {
2     static function main() {
3         var r = ~/world/;
4         var str = "hello world";
5         // true : 'world' was found in the string
6         trace(r.match(str));
7         trace(r.match("hello !")); // false
8     }
9 }
```

10.3.2 Groups

Specific information can be extracted from a matched string by using groups. If `match()` returns true, we can get groups using the `matched(X)` method, where `X` is the number of a group defined by regular expression pattern:

```
1 class Main {
2     static function main() {
3         var str = "Nicolas is 26 years old";
4         var r =
5             ~/([A-Za-z]+) is ([0-9]+) years old/;
6         r.match(str);
```

```

7     trace(r.matched(1)); // "Nicolas"
8     trace(r.matched(2)); // "26"
9 }
10 }

```

Note that group numbers start with 1 and `r.matched(0)` will always return the whole matched substring.

The `r.matchedPos()` will return the position of this substring in the original string:

```

1 class Main {
2     static function main() {
3         var str = "abcdeeeefghi";
4         var r = ~/e+/;
5         r.match(str);
6         trace(r.matched(0)); // "eeeeee"
7         // { pos : 4, len : 5 }
8         trace(r.matchedPos());
9     }
10 }

```

Additionally, `r.matchedLeft()` and `r.matchedRight()` can be used to get substrings to the left and to the right of the matched substring:

```

1 class Main {
2     static function main() {
3         var r = ~/b/;
4         r.match("abc");
5         trace(r.matchedLeft()); // a
6         trace(r.matched(0)); // b
7         trace(r.matchedRight()); // c
8     }
9 }

```

10.3.3 Replace

A regular expression can also be used to replace a part of the string:

```

1 class Main {
2     static function main() {
3         var str = "aaabcbcbcbz";
4         // g : replace all instances
5         var r = ~/b[^c]/g;
6         // "aaabcbcbcbxx"
7         trace(r.replace(str, "xx"));
8     }
9 }

```

We can use `$X` to reuse a matched group in the replacement:

```

1 class Main {
2     static function main() {
3         var str = "{hello} {0} {again}";
4         var r = ~/{([a-z]+)}/g;
5         // "*hello* {0} *again*"
6         trace(r.replace(str, "*$1*"));

```

```
7 }  
8 }
```

10.3.4 Split

A regular expression can also be used to split a string into several substrings:

```
1 class Main {  
2     static function main() {  
3         var str = "XaaaYababZbbbW";  
4         var r = ~/[ab]+/g;  
5         // ["X","Y","Z","W"]  
6         trace(r.split(str));  
7     }  
8 }
```

10.3.5 Map

The `map` method of a regular expression object can be used to replace matched substrings using a custom function:

```
1 class Main {  
2     static function main() {  
3         var r = ~/world/;  
4         var s = "Hello, world!";  
5         var s2 = r.map(s, function(r) {  
6             return "Haxe";  
7         });  
8         trace(s2); // Hello, Haxe!  
9     }  
10 }
```

This function takes a regular expression object as its first argument so we may use it to get additional information about the match being done.

10.3.6 Implementation Details

Regular Expressions are implemented:

- in JavaScript, the runtime is providing the implementation with the object `RegExp`.
- in Neko and C++, the PCRE library is used
- in Flash, PHP, C# and Java, native implementations are used
- in Flash 6/8, the implementation is not available

10.4 Math

Haxe includes a floating point math library for some common mathematical operations. Most of the fuctions operate on and return `floats`. However, an `Int` can be used where

a `Float` is expected, and Haxe also converts `Int` to `Float` during most numeric operations (see [数値の演算子 \(Section 2.1.3\)](#) for more details).

Here are some example uses of the math library. See the [Math API](#) for all available functions.

```
1 class MathExample {
2     static public function main() {
3
4         var x = 1/2;
5         var y = 20.2;
6         var z = -2;
7
8         trace(Math.abs(z)); //2
9         trace(Math.sin(x*Math.PI)); //1
10        trace(Math.ceil(y)); //21
11
12        // log is the natural logarithm
13        trace(Math.log(Math.exp(5))); //5
14
15        // Output for neko target, may vary
16        // depending on platform
17        trace(1/0); //inf
18        trace(-1/0); //-inf
19        trace(Math.sqrt(-1)); //nan
20    }
21 }
```

10.4.1 Special Numbers

The math library has definitions for several special numbers:

- NaN (Not a Number): returned when a mathematically incorrect operation is executed, e.g. `Math.sqrt(-1)`
- `POSITIVE_INFINITY`: e.g. divide a positive number by zero
- `NEGATIVE_INFINITY`: e.g. divide a negative number by zero
- `PI` : 3.1415...

10.4.2 Mathematical Errors

Although neko can fluidly handle mathematical errors, like division by zero, this is not true for all targets. Depending on the target, mathematical errors may produce exceptions and ultimately errors.

10.4.3 Integer Math

If you are targeting a platform that can utilize integer operations, e.g. integer division, it should be wrapped in `Std.int()` for improved performance. The Haxe Compiler can then optimize for integer operations. An example:

```
1     var intDivision = Std.int(6.2/4.7);
```

I think C++ can use integer operations, but I don't know about any other targets. Only saw this mentioned in an old discussion thread, still true?

10.4.4 Extensions

It is common to see [Static Extension \(Section 6.3\)](#) used with the math library. This code shows a simple example:

```
1 class MathStaticExtension {
2     /* Converts an angle in radians to degrees */
3     inline public static function
4     toDegrees (radians :Float) :Float
5     {
6         return radians * 180/Math.PI;
7     }
8 }
```

```
1 using MathStaticExtension;
2 class TestMath{
3     public static function main(){
4         var ang = 1/2*Math.PI;
5         trace(ang.toDegrees()); //90
6     }
7 }
```

10.5 Lambda

10.6 Reflection

Haxe supports runtime reflection of types and fields. Special care has to be taken here because runtime representation generally varies between targets. In order to use reflection correctly it is necessary to understand what kind of operations are supported and what is not. Given the dynamic nature of reflection, this can not always be determined at compile-time.

The reflection API consists of two classes:

Reflect: A lightweight API which works best on anonymous structures ([2.5](#)), with limited support for classes ([2.3](#)).

Type: A more robust API for working with classes and enums ([2.4](#)).

The available methods are detailed in the API for [Reflect](#) and [Type](#).

Reflection can be a powerful tool, but it is important to understand why it can also cause problems. As an example, several functions expect a String ([10.1](#)) argument and try to resolve it to a type or field. This is vulnerable to typing errors:

```
1 class Main {
2     static function main() {
3         trace(Type.resolveClass("Mian")); // null
4     }
5 }
```

However, even if there are no typing errors it is easy to come across unexpected behavior:

```

1 class Main {
2   static function main() {
3     // null
4     trace(Type.resolveClass("haxe.Template"));
5   }
6 }

```

The problem here is that the compiler never actually “sees” the type `haxe.Template`, so it does not compile it into the output. Furthermore, even if it were to see the type there could be issues arising from dead code elimination (8.1) eliminating types or fields which are only used via reflection.

Another set of problems comes from the fact that, by design, several reflection functions expect arguments of type `Dynamic` (2.7), meaning the compiler cannot check if the passed in arguments are correct. The following example demonstrates a common mistake when working with `callMethod`:

```

1 class Main {
2   static function main() {
3     // wrong
4     // Reflect.callMethod(Main, "f", []);
5     // right
6     Reflect.callMethod(Main,
7       Reflect.field(Main, "f"), []);
8   }
9
10  static function f() {
11    trace('Called');
12  }
13 }

```

The commented out call would be accepted by the compiler because it assigns the string `"f"` to the function argument `func` which is specified to be `Dynamic`.

A good advice when working with reflection is to wrap it in a few functions within an application or API which are called by otherwise type-safe code. An example could look like this:

```

1 typedef MyStructure = {
2   name: String,
3   score: Int
4 }
5
6 class Main {
7   static function main() {
8     var data = reflective();
9     // At this point data is nicely typed as
10    // MyStructure
11  }
12
13  static function reflective():MyStructure {
14    // Work with reflection here to get some
15    // values we want to return.
16    return {
17      name: "Reflection",
18      score: 0
19    }
20  }
21 }

```

```
19 }
20 }
21 }
```

While the method `reflective` could internally work with reflection (and `Dynamic` for that matter) a lot, its return value is a typed structure which the callers can use in a type-safe manner.

10.7 Serialization

Many runtime values can be serialized and deserialized using the `haxe.Serializer` and `haxe.Unserializer` classes. Both support two usages:

1. Create an instance and continuously call the `serialize/unserialize` method to handle multiple values.
2. Call their static `run` method to serialize/deserialize a single value.

The following example demonstrates the first usage:

```
1 import haxe.Serializer;
2 import haxe.Unserializer;
3
4 class Main {
5     static function main() {
6         var serializer = new Serializer();
7         serializer.serialize("foo");
8         serializer.serialize(12);
9         var s = serializer.toString();
10        trace(s); // y3:fooi12
11
12        var unserializer = new Unserializer(s);
13        trace(unserializer.unserialize()); // foo
14        trace(unserializer.unserialize()); // 12
15    }
16 }
```

The result of the serialization (here stored in local variable `s`) is a String (10.1) and can be passed around at will, even remotely. Its format is described in [Serialization format](#) (Section 10.7.1).

Supported values

- `null`
- `Bool`, `Int` and `Float` (including infinities and `NaN`)
- `String`
- `Date`
- `haxe.io.Bytes` (encoded as base64)
- `Array` (10.2.1) and `List` (10.2.3)

- `haxe.ds.StringMap`, `haxe.ds.IntMap` and `haxe.ds.ObjectMap`
- anonymous structures (2.5)
- Haxe class instances (2.3) (not native ones)
- enum instances (2.4)

Serialization configuration Serialization can be configured in two ways. For both a static variable can be set to influence all `haxe.Serializer` instances, and a member variable can be set to only influence a specific instance:

USE_CACHE, useCache: If true, repeated objects are serialized by reference. This can avoid infinite loops for recursive data at the expense of longer serialization time. By default, this value is `false`.

USE_ENUM_INDEX, useEnumIndex: If true, enum constructors are serialized by their index instead of their name. This can make the serialization string shorter but breaks if enum constructors are inserted into the type before deserialization. By default, this value is `false`.

Deserialization behavior If the serialization result is stored and later used for deserialization, care has to be taken to maintain compatibility when working with class and enum instances. It is then important to understand exactly how unserialization is implemented.

- The type has to be available in the runtime where the deserialization is made. If dead code elimination (8.1) is active, a type which is used only through serialization might be removed.
- Each `Unserializer` has a member variable `resolver` which is used to resolve classes and enums by name. Upon creation of the `Unserializer` this is set to `Unserializer.DEFAULT_RESOLVER`. Both that and the instance member can be set to a custom resolver.
- Classes are resolved by name using `resolver.resolveClass(name)`. The instance is then created using `Type.createEmptyInstance`, which means that the class constructor is not called. Finally, the instance fields are set according to the serialized value.
- Enums are resolved by name using `resolver.resolveEnum(name)`. The enum instance is then created using `Type.createEnum`, using the serialized argument values if available. If the constructor arguments were changed since serialization, the result is unspecified.

Custom (de)serialization If a class defines the member method `hxSerialize`, that method is called by the serializer and allows custom serialization of the class. Likewise, if a class defines the member method `hxUnserialize` it is called by the deserializer:

```

1 import haxe.Serializer;
2 import haxe.Unserializer;
3
4 class Main {
5
6     var x:Int;
7     var y:Int;
8

```



```

9      static function main() {
10         var s = Serializer.run(new Main(1, 2));
11         var c:Main = Unserializer.run(s);
12         trace(c.x); // 1
13         trace(c.y); // -1
14     }
15
16     function new(x, y) {
17         this.x = x;
18         this.y = y;
19     }
20
21     @:keep
22     function hxSerialize(s:Serializer) {
23         s.serialize(x);
24     }
25
26     @:keep
27     function hxUnserialize(u:Unserializer) {
28         x = u.unserialize();
29         y = -1;
30     }
31 }

```

In this example we decide that we want to ignore the value of member variable `y` and do not serialize it. Instead we default it to `-1` in `hxUnserialize`. Both methods are annotated with the `:keep` metadata to prevent dead code elimination (8.1) from removing them as they are never properly referenced in the code.

10.7.1 Serialization format

Each supported value is translated to a distinct prefix character, followed by the necessary data.

null: `n`

Int: `z` for zero, or `i` followed by the integer itself (e.g. `i456`)

Float: NaN: `k`

negative infinity: `m`

positive infinity: `p`

normal Float: `d` followed by the float display (e.g. `d1.45e-8`)

Bool: `t` for true, `f` for false

String: `y` followed by the url encoded string length, then `:` and the url encoded string (e.g. `y10:hi%20there for "hi there"..`

String (cached): `R` followed by the string cache ID (e.g. `R456`). String caching is always enabled.

name-value pairs: a serialized string representing the name, followed by the value

structure: `o` followed by the list of name-value pairs, followed by `g` (e.g. `oy1:xi2y1:kng` for `{x:2, k:null}`)

List: `l` followed by the list of serialized items, followed by `h` (e.g. `lnnh` for a list of two `null` values)

Array: `a` followed by the list of serialized items, followed by `h`. For multiple consecutive `null` values, `u` followed by the number of `null` values is used (e.g. `ai1i2u4i7ni9h` for `[1,2,null,null,null,null,7,null,9]`)

Date: `v` followed by the date itself (e.g. `d2010-01-01 12:45:10`)

`haxe.ds.StringMap`: `b` followed by the name-value pairs, followed by `h` (e.g. `by1:xi2y1:knh` for `{"x" => 2, "k" => null}`)

`haxe.ds.IntMap`: `q` followed by the key-value pairs, followed by `h`. Each key is represented as `:<int>` (e.g. `q:4n:5i45:6i7h` for `{4 => null, 5 => 45, 6 => 7}`)

`haxe.ds.ObjectMap`: `M` followed by serialized value pairs representing the key and value, followed by `h`

`haxe.io.Bytes`: `s` followed by the length of the base64 encoded bytes, then `:` and the byte representation using the codes `A-Za-z0-9%` (e.g. `s3:AAA` for 2 bytes equal to `0, s10:SGVsbG8gIQ` for `haxe.io.Bytes.ofString("Hello !")`)

exception: `x` followed by the exception value

class instance: `c` followed by the serialized class name, followed by the name-value pairs of the fields, followed by `g` (e.g. `cy5:Pointy1:xzy1:yzg` for `new Point(0, 0)` (having two integer fields `x` and `y`))

enum instance (by name): `w` followed by the serialized enum name, followed by the serialized constructor name, followed by the number of arguments, followed by the argument values (e.g. `wy3:Fooy1:A0` for `Foo.A` (with no arguments), `wy3:Fooy1:B2i4n` for `Foo.B(4, null)`)

enum instance (by index): `j` followed by the serialized enum name, followed by `:`, followed by the constructor index, followed by the number of arguments, followed by the argument values (e.g. `wy3:Foo0:0` for `Foo.A` (with no arguments), `wy3:Foo1:2i4n` for `Foo.B(4, null)`)

custom: `C` followed by the class name, followed by the custom serialized data, followed by `g`

cache references: `r` followed by the cache index

10.8 Json

Haxe provides built-in support for (de-)serializing JSON² data via the `haxe.Json` class.

²<http://en.wikipedia.org/wiki/JSON>

10.8.1 Parsing JSON

Use the `haxe.Json.parse` static method to parse JSON data and obtain a Haxe value from it:

```
1 class Main {
2     static function main() {
3         var s = '{"rating": 5}';
4         var o = haxe.Json.parse(s);
5         trace(o); // { rating: 5 }
6     }
7 }
```

Note that the type of the object returned by `haxe.Json.parse` is `Dynamic`, so if the structure of our data is well-known, we may want to specify a type using anonymous structures (2.5). This way we provide compile-time checks for accessing our data and most likely more optimal code generation, because compiler knows about types in a structure:

```
1 typedef MyData = {
2     var name:String;
3     var tags:Array<String>;
4 }
5
6 class Main {
7     static function main() {
8         var s = '{
9             "name": "Haxe",
10            "tags": ["awesome"]
11        }';
12         var o:MyData = haxe.Json.parse(s);
13         trace(o.name); // Haxe (a string)
14         // awesome (a string in an array)
15         trace(o.tags[0]);
16     }
17 }
```

10.8.2 Encoding JSON

Use the `haxe.Json.stringify` static method to encode a Haxe value into a JSON string:

```
1 class Main {
2     static function main() {
3         var o = {rating: 5};
4         var s = haxe.Json.stringify(o);
5         trace(s); // {"rating":5}
6     }
7 }
```

10.8.3 Implementation details

The `haxe.Json` API automatically uses native implementation on targets where it is available, i.e. JavaScript, Flash and PHP and provides its own implementation for other targets.

Usage of Haxe own implementation can be forced with `-D haxeJSON` compiler argument. This will also provide serialization of enums (2.4) by their index, maps (10.2.5) with string keys and class instances.

Older browsers (Internet Explorer 7, for instance) may not have native JSON implementation. In case it's required to support them, we can include one of the JSON implementations available on the internet in the HTML page. Alternatively, a `-D old_browser` compiler argument that will make `haxe.Json` try to use native JSON and fallback to its own implementation in case it's not available can be used.

10.9 Xml

10.10 Input/Output

10.11 Sys/sys

Part IV

Miscellaneous

Chapter 11

Haxelib

Haxelib is the library manager that comes with any Haxe distribution. Connected to a central repository, it allows submitting and retrieving libraries and has multiple features beyond that. Available libraries can be found at <http://lib.haxe.org>.

A basic Haxe library is a collection of `.hx` files. That is, libraries are distributed by source code by default, making it easy to inspect and modify their behavior. Each library is identified by a unique name, which is utilized when telling the Haxe Compiler which libraries to use for a given compilation.

11.1 Using a Haxe library with the Haxe Compiler

Any installed Haxe library can be made available to the compiler through the `-lib <library-name>` argument. This is very similar to the `-cp <path>` argument, but expects a library name instead of a directory path. These commands are explained thoroughly in [Compiler Reference](#) (Chapter 7).

For our exemplary usage we chose a very simple Haxe library called “random”. It provides a set of static convenience methods to achieve various random effects, such as picking a random element from an array.

```
1 class Main {  
2     static public function main() {  
3         var elt = Random.fromArray([1, 2, 3]);  
4         trace(elt);  
5     }  
6 }
```

Compiling this without any `-lib` argument causes an error message along the lines of `Unknown identifier : Random`. This shows that installed Haxe libraries are not available to the compiler by default unless they are explicitly added. A working command line for above program is `haxe -lib random -main Main --interp`.

If the compiler emits an error `Error: Library random is not installed : run 'haxelib install random'` the library has to be installed via the `haxelib` command first. As the error message suggests, this is achieved through `haxelib install random`. We will learn more about the `haxelib` command in [Using Haxelib](#) (Section 11.4).

11.2 haxelib.json

Each Haxe library requires a `haxelib.json` file in which the following attributes are defined:

name: The name of the library. It must contain at least 3 characters among the following:

$A - Z a - z 0 - 9 _ .$

. In particular, no spaces are allowed.

url: The URL of the library, i.e. where more information can be found.

license: The license under which the library is released. Can be `GPL`, `LGPL`, `BSD`, `Public` (for Public Domain) or `MIT`.

tags: An array of tag-strings which are used on the repository website to sort libraries.

description: The description of what the library is doing.

version: The version string of the library. This is detailed in [Versioning](#) (Section 11.2.1).

releasenote: The release notes of the current version.

contributors: An array of user names which identify contributors to the library.

dependencies: An object describing the dependencies of the library. This is detailed in [Dependencies](#) (Section 11.2.2).

The following JSON is a simple example of a `haxelib.json`:

```
1 {
2   "name": "useless_lib",
3   "url" :
4     "https://github.com/jasononeil/useless/",
5   "license": "MIT",
6   "tags": ["cross", "useless"],
7   "description":
8     "This library is useless in the same way on
9     every platform",
10  "version": "1.0.0",
11  "releasenote":
12    "Initial release, everything is working
13    correctly",
14  "contributors": ["Juraj", "Jason", "Nicolas"],
15  "dependencies": {
16    "tink_macros": "",
17    "nme": "3.5.5"
18  }
19 }
```

11.2.1 Versioning

Haxelib uses a simplified version of [SemVer](#). The basic format is this:

```
1 major.minor.patch
```

These are the basic rules:

- Major versions are incremented when you break backwards compatibility - so old code will not work with the new version of the library.
- Minor versions are incremented when new features are added.
- Patch versions are for small fixes that do not change the public API, so no existing code should break.
- When a minor version increments, the patch number is reset to 0. When a major version increments, both the minor and patch are reset to 0.

Examples:

"0.0.1": A first release. Anything with a "0" for the major version is subject to change in the next release - no promises about API stability!

"0.1.0": Added a new feature! Increment the minor version, reset the patch version

"0.1.1": Realised the new feature was broken. Fixed it now, so increment the patch version

"1.0.0": New major version, so increment the major version, reset the minor and patch versions. You promise your users not to break this API until you bump to 2.0.0

"1.0.1": A minor fix

"1.1.0": A new feature

"1.2.0": Another new feature

"2.0.0": A new version, which might break compatibility with 1.0. Users are to upgrade cautiously.

If this release is a preview (Alpha, Beta or Release Candidate), you can also include that, with an optional release number:

```
1 major.minor.patch-(alpha/beta/rc).release
```

Examples:

"1.0.0-alpha": The alpha of 1.0.0 - use with care, things are changing!

"1.0.0-alpha.2": The 2nd alpha

"1.0.0-beta": Beta - things are settling down, but still subject to change.

"1.0.0-rc.1": The 1st release candidate for 1.0.0 - you shouldn't be adding any more features now

"1.0.0-rc.2": The 2nd release candidate for 1.0.0

"1.0.0": The final release!

11.2.2 Dependencies

As of Haxe 3.1.0, haxelib supports only exact version matching for dependencies. Dependencies are defined as part of the `haxelib.json` (11.2), with the library name serving as key and the expected version (if required) as value in the format described in [Versioning](#) (Section 11.2.1).

We have seen an example of this when introducing `haxelib.json`:

```
1 "dependencies": {  
2   "tink_macros": "",  
3   "nme": "3.5.5"  
4 }
```

This adds two dependencies to the given Haxe library:

1. The library “tink_macros” can be used in any version. Haxelib will then always try to use the latest version.
2. The library “nme” is required in version “3.5.5”. Haxelib will make sure that this exact version is used, avoiding potential breaking changes with future versions.

11.3 extraParams.html

If you add a file named `extraParams.html` to your library root (at the same level as `haxelib.json`), these parameters will be automatically added to the compilation parameters when someone use your library with `-lib`.

11.4 Using Haxelib

If the `haxelib` command is executed without any arguments, it prints an exhaustive list of all available arguments.

Chapter 12

Target Details

12.1 Javascript

12.1.1 Loading extern classes using "require" function

Since Haxe 3.2.0

Modern JavaScript platforms, such as Node.js provide a way of loading objects from external modules using the "require" function. Haxe supports automatic generation of "require" statements for `extern` classes.

This feature can be enabled by specifying `@:jsRequire` metadata for the extern class. If our `extern` class represents a whole module, we pass a single argument to the `@:jsRequire` metadata specifying the name of the module to load:

```
1 @:jsRequire("fs")
2 extern class FS {
3     static function readFileSync(path:String,
4         encoding:String):String;
5 }
```

In case our `extern` class represents an object within a module, second `@:jsRequire` argument specifies an object to load from a module:

```
1 @:jsRequire("http", "Server")
2 extern class HTTPServer {
3     function new();
4 }
```

The second argument is a dotted-path, so we can load sub-objects in any hierarchy.

If we need to load custom JavaScript objects in runtime, a `js.Lib.require` function can be used. It takes `String` as its only argument and returns `Dynamic`, so it is advised to be assigned to a strictly typed variable.

12.2 Flash

12.3 Neko

12.4 PHP

12.5 C++

12.5.1 Using C++ Defines

- ANDROID_HOST
- ANDROID_NDK_DIR
- ANDROID_NDK_ROOT
- BINDIR
- DEVELOPER_DIR
- HXCPP
- HXCPP_32
- HXCPP_COMPILE_CACHE
- HXCPP_COMPILE_THREADS
- HXCPP_CONFIG
- HXCPP_CYGWIN
- HXCPP_DEPENDS_OK
- HXCPP_EXIT_ON_ERROR
- HXCPP_FORCE_PDB_SERVER
- HXCPP_M32
- HXCPP_M64
- HXCPP_MINGW
- HXCPP_MSVC
- HXCPP_MSVC_CUSTOM
- HXCPP_MSVC_VER
- HXCPP_NO_COLOR
- HXCPP_NO_COLOUR
- HXCPP_VERBOSE
- HXCPP_WINXP_COMPAT
- IPHONE_VER

- LEGACY_MACOSX_SDK
- LEGACY_XCODE_LOCATION
- MACOSX_VER
- MSVC_VER
- NDKV
- NO_AUTO_MSVC
- PLATFORM
- QNX_HOST
- QNX_TARGET
- TOOLCHAIN_VERSION
- USE_GCC_FILETYPES
- USE_PRECOMPILED_HEADERS
- android
- apple
- blackberry
- cygwin
- dll_import
- dll_import_include
- dll_import_link
- emcc
- emscripten
- gph
- hardfp
- haxe_ver
- ios
- iphone
- iphoneos
- iphonesim
- linux
- linux_host
- mac_host

- macos
- mingw
- rpi
- simulator
- tizen
- toolchain
- webos
- windows
- windows_host
- winrt
- xcompile

12.5.2 Using C++ Pointers

12.6 Java

12.7 C#