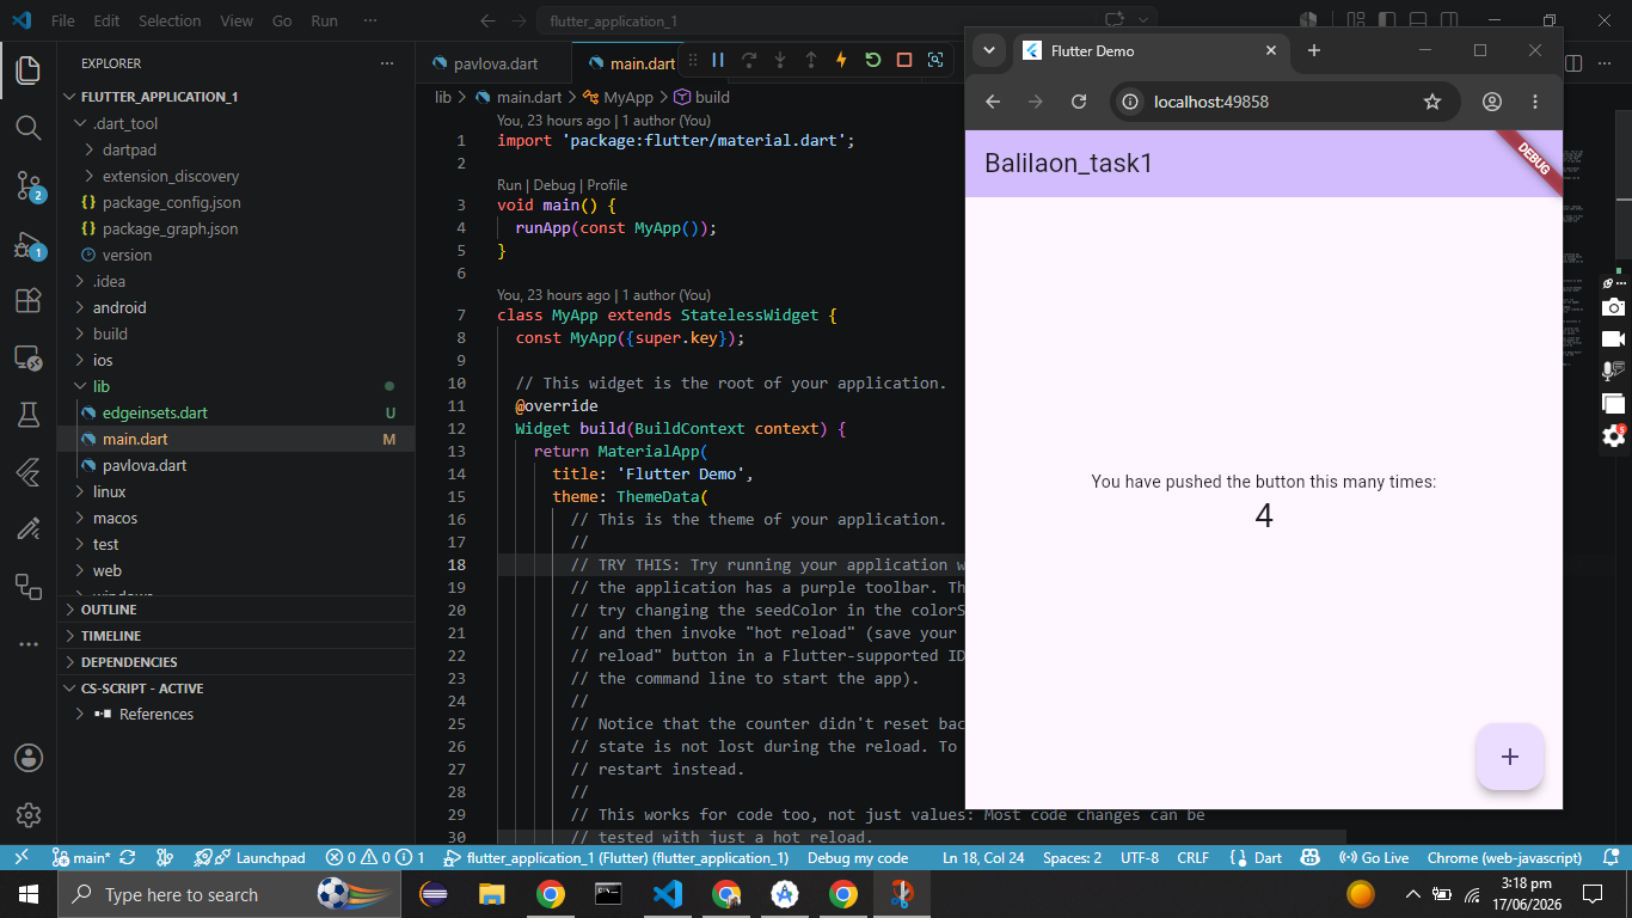

File Edit Selection View Go Run
flutter_application_1
EXPLORER
FLUTTER_APPLICATION_1
.dart_tool
dartpad
extension_discovery
package_config.json
package_graph.json
version
.idea
android
build
ios
lib
edgeinsets.dart U
main.dart M
pavlova.dart
linux
macos
test
web
OUTLINE
TIMELINE
DEPENDENCIES
CS-SCRIPT - ACTIVE
References
pavlova.dart
main.dart
lib > main.dart > MyApp > build
You, 23 hours ago | 1 author (You)
import 'package:flutter/material.dart';
Run | Debug | Profile
void main() {
runApp(const MyApp());
}
You, 23 hours ago | 1 author (You)
class MyApp extends StatelessWidget {
const MyApp({super.key});
// This widget is the root of your application.
@override
Widget build(BuildContext context) {
return MaterialApp(
title: 'Flutter Demo',
theme: ThemeData(
// This is the theme of your application.
// TRY THIS: Try running your application w
// the application has a purple toolbar. Th
// try changing the seedColor in the colorS
// and then invoke "hot reload" (save your
// reload" button in a Flutter-supported ID
// the command line to start the app).
// Notice that the counter didn't reset bac
// state is not lost during the reload. To
// restart instead.
// This works for code too, not just values: Most code changes can be
// tested with just a hot reload.
Flutter Demo
localhost:49858
Balilaon_task1
DEBUG
You have pushed the button this many times:
4
main*
Launchpad
flutter_application_1 (Flutter) (flutter_application_1)
Debug my code
Ln 18, Col 24
Spaces: 2
UTF-8
CRLF
Dart
Go Live
Chrome (web-javascript)
Type here to search
3:18 pm
17/06/2026