


Trellix API Reference Release 2025.1

Last Updated: May 19, 2026

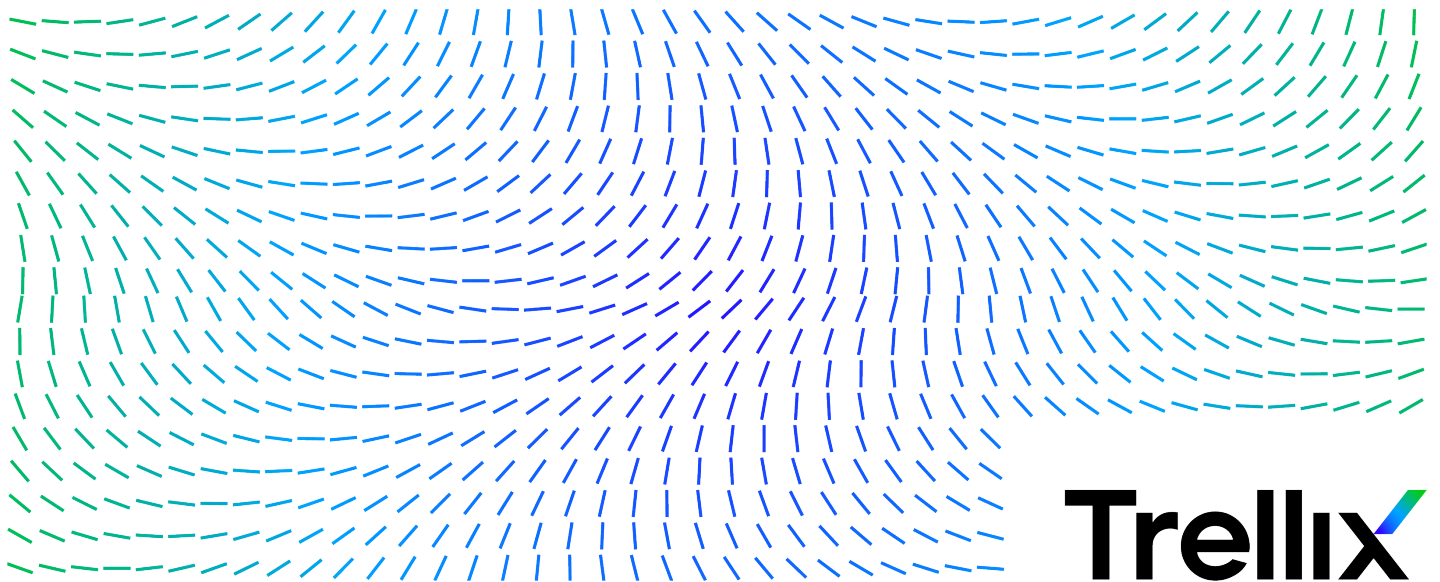

Contents


Alerts.....	4
Alert request.....	4
Alert response	11
cURL code sample: alerts	20
Alert details request	21
cURL code sample: alert details	24
Alert acknowledgment request.....	25
cURL code sample: alert acknowledgment	28
Triage Bundle APIs.....	29
Initiate triage bundle creation API	30
Check triage bundle download status API.....	31
Retrieve the created bundle package API	32
Alert notification settings	32
Enable email notifications	34
Enable email notification flags.....	35
Email notification properties	36
Email notification recipient management	37
Enable HTTP notifications	38
Enable HTTP notification flags.....	39
HTTP protocol properties.....	40
HTTP notification consumer management	41
Enable Rsyslog notification	42
Enable Rsyslog notification flags.....	43
Rsyslog protocol properties.....	44
Rsyslog notification consumer management	45

Enable SNMP log notifications.	46
Enable SNMP notification flags	47
SNMP protocol properties	48
SNMP notification consumer management	49
Daily digest configurations.	50
Enable alert type notifications globally	51
Disable alert type notifications globally.	52

Alerts

The alert request uses the HTTP GET method to retrieve alert data from your appliance. The responses to your alert request can be formatted in either JSON or XML. On the Central Management System appliance, you can use the alert acknowledgment request to confirm that you have reviewed the alert so that it is no longer listed in the Web UI.

The following flow chart shows how to issue a basic alert request:

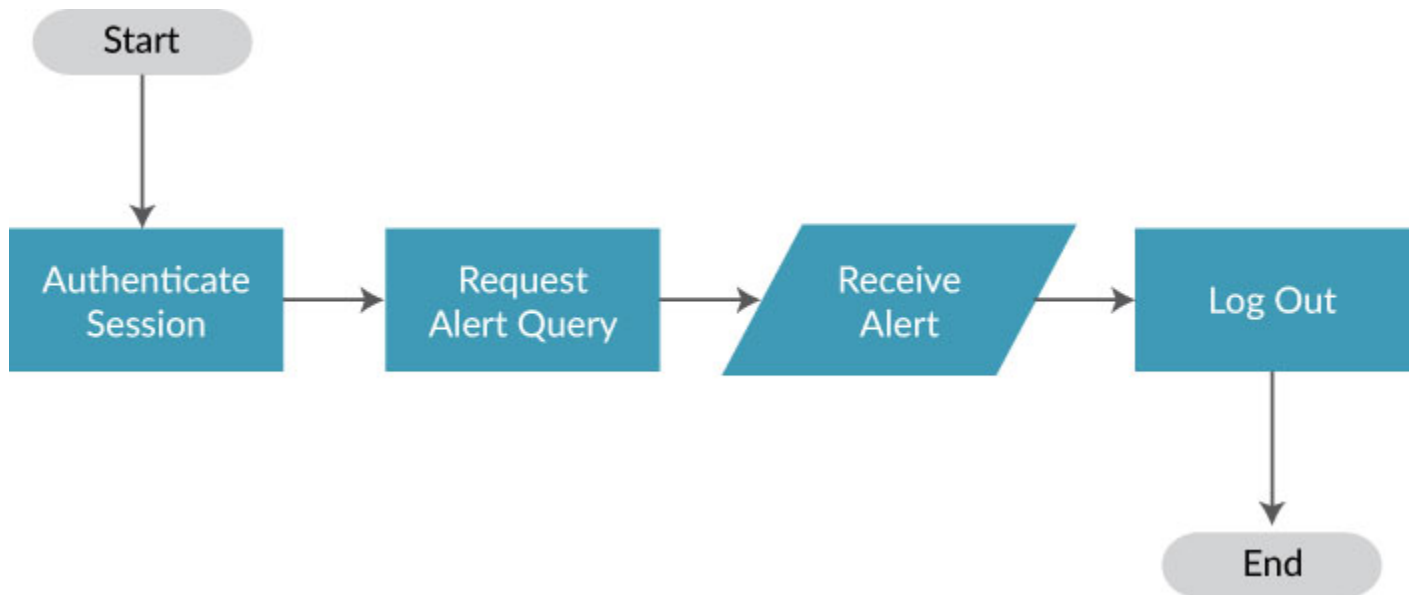

Note

Responses are limited to 200 alerts; this limit cannot be changed. If there are more alerts than 200, the HTTP response code is 206. To avoid receiving the 206 code, reduce the duration of your request until the HTTP response code is 200. By default, requests are limited to a 12-hour duration. Alerts are either retrieved for the 12 hours after the start time or the 12 hours preceding the end time. You can specify the duration using the `duration` option.

This section covers the following:

- View existing alerts. See [Alert request](#).
- Acknowledge a single alert. See [Alert acknowledgment request](#).
- Configure alert notifications. See [Alert notification settings](#).

Alert request

You can request existing alert profiles using an HTTP GET request. You can also apply filters to requests. To view existing alerts, send the following HTTP GET request URL and headers:

```
GET https://<address>/wsapis/[v1.2.0|v2.0.0]/alerts?<filters>
```

Availability

This command is available on the following appliances:

- Central Management System
- Malware Analysis
- Email Security — Server
- File Protect
- Network Security

Headers:

```
X-FeApi-Token: [API-Token]  
X-FeClient-Token: [Client-Token]  
Accept: [Content-Type]
```

Options

- `address`—The IP address of the appliance running the Web Services API.
- `API-Token`—This token authenticates the session. By default, the session times out after 15 minutes of inactivity.
- `Client-Token`—(Optional) This client token is provided by Trellix. For more information about the client token, contact your sales representative.
- `Content-Type`—(Optional) You can request responses in one of two alert formats:
 - `application/xml`—(Default) If content type is not specified, alerts are delivered in the XML format.
 - `application/json`—Specify this option to receive alerts in JSON format.



Note

The JSON output uses the pretty-print format, which includes line breaks between values.

Filters

Use the filters in the following table to limit your request.

Filter	Description
alert_id	Specifies the ID number of the alert to retrieve. Syntax: ?alert_id=id_number OR /alert/id_number Example: alerts?alert_id=13705 OR alerts/alert/13705
alert_limit_override	Overrides the limit of the number of alerts. Syntax: ?alert_limit_override=<true or false> Example: alerts?alert_limit_override=true
callback_domain	Searches for alerts that include callbacks to the specified domain. Syntax: callback_domain=domain Example: callback_domain=onecompany.com
dst_ip	The destination IPv4 address related to the malware alert. Syntax: dst_ip=ip_address Example: dst_ip=xxx.xxx.xxx.xxx
duration	Specifies the time interval to search. This filter is used with either the start_time OR end_time filter. If duration, start time, and end time are not specified, the system defaults to duration=48_hours, end_time=current_time. If only duration is specified, the end_time defaults to current time. Note: You cannot specify both a start_time filter and an end_time filter in the same request. Syntax: duration=time_interval • 1_hour • 2_hours • 6_hours • 12_hours • 24_hours • 48_hours Example:

Filter	Description
	<code>duration=1_hour&start_time=2017-06-21T16:30:00.000-07:00</code>
<code>end_time</code>	Specifies the end time of the search. This filter is used with the <code>duration</code> filter. If the <code>end_time</code> is specified but not the <code>duration</code>, the system defaults to <code>duration=12_hours</code>, ending at the specified <code>end_time</code>.  Note: You cannot specify both a <code>start_time</code> filter and an <code>end_time</code> filter in the same request. Syntax: <code>end_time=YYYY-MM-DDTHH:mm:ss.sss-OH:om</code> • YYYY—Year (1900 and later) • MM—Month (01-12) • DD—Day (01-31) • HH—Hour (01-24) • mm—Minutes (01-59) • ss.sss—Seconds (01-59.999) • OH:om—Time offset from UTC Example: <code>duration=1_hour&end_time=2017-06-21T16:30:00.000-07:00</code>
<code>file_name</code>	The name of the malware file. Syntax: <code>file_name="file_name"</code> Example: <code>file_name="Trojan.Zlob"</code>
<code>file_type</code>	The malware file type. Syntax: <code>file_type=file_type</code> Example: <code>file_type=com</code>
<code>include_oschanges</code>	Includes or removes OS changes. Syntax: <code>alerts?include_oschanges=<true or false></code> Example: <code>alerts?include_oschanges=false</code>

Filter	Description
info_level	Specifies the level of information to be returned. The default is concise. • concise • normal • extended Syntax: info_level=option Example: info_level=normal  Note: When using API v1.2.0 at info_level normal or extended, the response includes ATI data. This information is not included in the response when using v2.0.0. To retrieve ATI data for the specific alert ID, use the ATI details request.
limit	Specifies the number of alerts to be returned. Syntax: limit=number_of_alerts Example: alerts?limit=20
malware_name	The name of the malware object. Syntax: malware_name=name Example: malware_name=trojan.exe
malware_type	The type of the malware object: • domain_match • malware_callback • malware_object • web_infection • infection_match • riskware-infection • riskware-callback • riskware-object Syntax: malware_type=name Example: malware_type=malware_object cURL example: curl -kqg -H "\$c" "https://<base>/v2.0.0/"

Filter	Description
	alerts?include_riskware=true&malware_type=riskware-callback"
md5	Searches for alerts that include a specific MD5 hash.  Note: The md5 filter is not time dependent; it does not default to duration=12_hours. Syntax: md5=md5hash Example: md5=8bc944dbd052ef51652e70a5104492e3  Note: The system tests for a valid MD5 hash. Using this filter without a qualified MD5 hash will return a 400 Bad Request response.
offset	Offset is the starting point from where the alert listing will start. If the offset is zero, the returned alerts list will start from the first alert. If the offset is 5, the returned alerts list will start from the 5th alert. Syntax: offset=alert_number Example: alerts?offset=10
recipient_email	The email address of the malware object receiver. This filter does not default to duration=12_hours. Syntax: recipient_email=email_address Example: recipient_email=jane.doe@somecompany.com
sender_email	The email address of the malware object sender. This filter does not default to duration=12_hours. Syntax: sender_email=email_address Example: sender_email=jane.doe@somecompany.com
src_ip	The source IPv4 address related to the malware alert.

Filter	Description
	Syntax: <code>src_ip=ip_address</code> Example: <code>src_ip=xxx.xxx.xxx.xxx</code>
<code>start_time</code>	Specifies the start time of the search. This filter is used with the <code>duration</code> filter. If the <code>start_time</code> is specified but not the <code>duration</code>, the system defaults to <code>duration=12_hours</code>, starting at the specified <code>start_time</code>.  Note: You cannot specify both a <code>start_time</code> filter and an <code>end_time</code> filter in the same request. Syntax: <code>start_time=YYYY-MM-DDTHH:mm:ss.sss-OH:om</code> • <code>YYYY</code>—Year (1900 and later) • <code>MM</code>—Month (01-12) • <code>DD</code>—Day (01-31) • <code>HH</code>—Hour (01-24) • <code>mm</code>—Minutes (01-59) • <code>ss.sss</code>—Seconds (01-59.999) • <code>OH:om</code>—Time offset from UTC Example: <code>duration=1_hour&start_time=2017-06-21T16:30:00.000-07:00</code>
<code>url</code>	Searches for a specific alert URL. Syntax: <code>url=url</code> Example: <code>url=http://cms/alerts/list?id=3</code>

Example request with no filtering

 Note

In this example, the search's `duration` filter will be set to `12_hours` (default), and the `end_time` filter will be set to the current time (default).

```
GET https://xxx.xxx.xxx.xxx:443/wsapis/v2.0.0/alerts?
```

Request headers:

```
X-FeApi-Token: xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx
X-FeClient-Token: BigDataInc
```

Example request with filtering

This example specifies the start time and duration.

```
GET https://xxx.xxx.xxx.xxx:443/wsapis/v2.0.0/
alerts?start_time=2018-07-03T21:19:01:39:000%2b00:00&duration=2_hours
```

Request headers:

```
X-FeApi-Token: xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx
X-FeClient-Token: BigDataInc
```

Alert response

```
HTTP/1.1 [Response Code] [Response Message]
Date: [Date]
Content-Type: [Content-Type]
X-FeApi-Token: [API-Token]
X-FeClient-Token: [Client-Token]
```

Response fields

- Response Code—A standard HTML response code.
 - 200—Request successful.
 - 400—Request unsuccessful because the filter value was invalid.
- Response Message—A standard HTML response message.
 - OK—Request successful.
 - Bad Request—Request unsuccessful because the filter value was invalid.
- Date—Standard HTML date format.
- Content-Type—(Optional) You can request responses in one of two formats:
 - application/xml—(Default).

- `application/json`—Must be specified using the Accept header.
- `API-Token`—This token authenticates the session. By default, the session times out after 15 minutes of inactivity.
- `Client-Token`—(Optional) This client token is provided by Trellix. For more information about the client token, contact your sales representative.

Example response—Central Management System

```
HTTP/1.1 200 OK
Date: Fri, 19 Oct 2018 09:00:00 GMT
```

Body:

Line breaks have been added for readability.

```
{
  "alert": [
    {
      "explanation": {
        "malwareDetected": {
          "malware": [
            {
              "md5Sum": "fe4d8f227520e2468dd1019496ef0604",
              "sha256": "b71e3012e93f11a7b0b179ea54eeb0e787d02acc48705833e
414a5e57a6a2032",
              "name": "Malware.Binary.FEC2",
              "originalInfectionId": 3181,
              "originalInfectionType": "MALWARE_OBJECT",
              "originalInfectionUrl": "https://10.11.113.143/botnets/events_for_bot?ma_id=3181"
            },
            {
              "md5Sum": "fe4d8f227520e2468dd1019496ef0604",
              "sha256": "b71e3012e93f11a7b0b179ea54eeb0e787d02acc48705833e
414a5e57a6a2032",
              "application": "application:57",
              "httpHeader": "GET http://getapac.com/75.html HTTP/1.1\r\nUser-Agent: Mozilla/4.0 (Windows XP
5.1) Java/1.6.0_16\r\nHost: getapac.com\r\nAccept: text/html, image/gif, image/jpeg, *; q=.2, */*; q=.2\r\n
nProxy-Connection: keep-alive\r\n\r\n HTTP/1.0 200 OK\r\nDate: Tue, 16 Apr 2013 23:53:28 GMT\r\nServer:
Apache\r\nExpires: Mon, 20 Aug 2002 02:00:00 GMT\r\nPragma: no-cache\r\nCache-Control: no-cache\r\nContent-
Transfer-Encoding: binary\r\nContent-Disposition: inline; filename=setup.exe\r\nContent-Length: 39296\r\n
Content-Type: application/octet-stream\r\nX-Cache: MISS from localhost\r\nX-Cache-Lookup: MISS from
localhost:80\r\nVia: 1.0 localhost (squid/3.1.19)\r\nConnection: keep-alive\r\n\r\n",
              "original": "setup.exe",
              "name": "Malware.Binary.FEC2",
              "originalInfectionId": 3181,
              "originalInfectionType": "MALWARE_OBJECT",
              "originalInfectionUrl": "https://10.11.113.143/botnets/events_for_bot?ma_id=3181",
              "sid": "0",
              "type": "exe",
              "stype": "avs"
            },
            {
              "md5Sum": "fe4d8f227520e2468dd1019496ef0604",
              "sha256": "b71e3012e93f11a7b0b179ea54eeb0e787d02acc48705833e
414a5e57a6a2032",
              "application": "application:57",
```

```

        "httpHeader": "GET http://getapac.com/75.html HTTP/1.1\r\nUser-Agent: Mozilla/4.0 (Windows XP
5.1) Java/1.6.0_16\r\nHost: getapac.com\r\nAccept: text/html, image/gif, image/jpeg, *; q=.2, */*; q=.2\r\n
nProxy-Connection: keep-alive\r\n\r\n HTTP/1.0 200 OK\r\nDate: Tue, 16 Apr 2013 23:53:28 GMT\r\nServer:
Apache\r\nExpires: Mon, 20 Aug 2002 02:00:00 GMT\r\nPragma: no-cache\r\nCache-Control: no-cache\r\nContent-
Transfer-Encoding: binary\r\nContent-Disposition: inline; filename=setup.exe\r\nContent-Length: 39296\r\n
nContent-Type: application/octet-stream\r\nX-Cache: MISS from localhost\r\nX-Cache-Lookup: MISS from
localhost:80\r\nVia: 1.0 localhost (squid/3.1.19)\r\nConnection: keep-alive\r\n\r\n",
        "original": "setup.exe",
        "name": "JavaExploit.EncryptedPayload",
        "originalInfectionId": 3181,
        "originalInfectionType": "MALWARE_OBJECT",
        "originalInfectionUrl": "https://10.11.113.143/botnets/events_for_bot?ma_id=3181",
        "type": "exe"
    }
}
},
"osChanges": [
{
    "application": {"app-name": "Windows Explorer"},
    "os": {
        "name": "windows",
        "arch": "x64",
        "version": "6.1.7601",
        "sp": 1
    },
    "file_informational": [
        {
            "mode": "close",
            "fid": {
                "ads": "",
                "content": 3377699720613027
            },
            "sha1sum": "ba5a1564d46348272f970f3c836a9f038528017d",
            "md5sum": "8f66978e66faf1262eca66984f9ee056",
            "processinfo": {
                "imagepath": "C:\\Windows\\System32\\taskhost.exe",
                "md5sum": "639774c9acd063f028f6084abf5593ad",
                "pid": 3020
            },
            "sha256sum": "3169bac13d2b500e9deb43c9cbcc27eadfba4d94870c
f7698cb58297d111212b",
            "ntstatus": "0x0",
            "filesize": 24576,
            "no_extend": true,
            "value": "C:\\Windows\\System32\\config\\RegBack\\SECURITY",
            "CreateOptions": "0x0",
            "timestamp": 2243
        },
        {
            "mode": "close",
            "fid": {
                "ads": "",
                "content": 1125899906949946
            },
            "processinfo": {
                "imagepath": "C:\\Windows\\System32\\taskhost.exe",
                "md5sum": "639774c9acd063f028f6084abf5593ad",
                "pid": 3020
            },
            "ntstatus": "0x0",
            "no_extend": true,
            "value": "C:\\Windows\\System32\\config\\RegBack\\SECURITY.
LOG1",
            "CreateOptions": "0x0",

```

```

        "timestamp":2300
    },
    {
        "mode":"close",
        "fid": {
            "ads":"",
            "content":1125899906949947
        },
        "processinfo": {
            "imagepath":"C:\\Windows\\System32\\taskhost.exe",
            "md5sum":"639774c9acd063f028f6084abf5593ad",
            "pid":3020
        },
        "ntstatus":"0x0",
        "no_extend":true,
        "value":"C:\\Windows\\System32\\config\\RegBack\\SECURITY
.LOG2",
        "CreateOptions":"0x0",
        "timestamp":2315
    },
    {
        "mode":"close",
        "fid": {
            "ads":"",
            "content":281474976922429
        },
        "sha1sum":"4e9c5284532d348c4845014c349aa88c231e96e4",
        "md5sum":"240fb08bc218a72a1bc6a245d52e7314",
        "processinfo": {
            "imagepath":"C:\\Program Files\\Windows Defender\\MpCmdRun.exe",
            "md5sum":"6bd4d7f68924301051c22e8a951aecba",
            "pid":3136
        },
        "sha256sum":"a31dcd30c693424b189878d5bd5201cd150578dd906b
547613a709dccce7978a",
        "ntstatus":"0x0",
        "filesize":6662,
        "no_extend":true,
        "value":"C:\\Windows\\Temp\\MpCmdRun.log",
        "CreateOptions":"0x0",
        "timestamp":10183
    },
    {
        "mode":"close",
        "fid": {
            "ads":"",
            "content":4222124650748166
        },
        "sha1sum":"af9075a443b76bbe741eceb4188847ac93ff6d6b",
        "md5sum":"f857040c35dc58409500336994a0ef2a",
        "processinfo": {
            "imagepath":"N/A",
            "pid":4
        },
        "sha256sum":"97cc6174ef09d68f1693e2821a5e71a24578a86f64c
662a030da93509e483066",
        "ntstatus":"0x0",
        "filesize":196608,
        "no_extend":true,
        "value":"C:\\Windows\\Logs\\SystemRestore\\PropertyPage
.0.etl",
        "CreateOptions":"0x0",
        "timestamp":11184
    },

```

```

    {
      "mode": "close",
      "fid": {
        "ads": "",
        "content": 3659174697325736
      },
      "sha1sum": "15e828174e57fd35b4675d6e06c9c1c01830d2ca",
      "md5sum": "e1ac844fc640df3517f42b32c31b3c05",
      "processinfo": {
        "imagepath": "C:\\Windows\\System32\\taskhost.exe",
        "md5sum": "639774c9acd063f028f6084abf5593ad",
        "pid": 3020
      },
      "sha256sum": "d0af7af8ff3c3ba6bbb4289dc4e5b2ea1410d72e8615
3d747473e9faead853b1",
      "ntstatus": "0x0",
      "filesize": 62521344,
      "no_extend": true,
      "value": "C:\\Windows\\System32\\config\\RegBack
\\SOFTWARE",
      "CreateOptions": "0x0",
      "timestamp": 11467
    },
    {
      "mode": "close",
      "fid": {
        "ads": "",
        "content": 1125899906949948
      },
      "processinfo": {
        "imagepath": "C:\\Windows\\System32\\taskhost.exe",
        "md5sum": "639774c9acd063f028f6084abf5593ad",
        "pid": 3020
      },
      "ntstatus": "0x0",
      "no_extend": true,
      "value": "C:\\Windows\\System32\\config\\RegBack
\\SOFTWARE.LOG1",
      "CreateOptions": "0x0",
      "timestamp": 12375
    },
    {
      "mode": "close",
      "fid": {
        "ads": "",
        "content": 1125899906949949
      },
      "processinfo": {
        "imagepath": "C:\\Windows\\System32\\taskhost.exe",
        "md5sum": "639774c9acd063f028f6084abf5593ad",
        "pid": 3020
      },
      "ntstatus": "0x0",
      "no_extend": true,
      "value": "C:\\Windows\\System32\\config\\RegBack
\\SOFTWARE.LOG2",
      "CreateOptions": "0x0",
      "timestamp": 12381
    }
  ],
  "uac": [
    {
      "mode": "service",
      "buffered": true,

```

```

        "no_extend":true,
        "value":"Volume Shadow Copy",
        "timestamp":10905,
        "status":"running"
    },
    {
        "mode":"service",
        "buffered":true,
        "no_extend":true,
        "value":"Microsoft Software Shadow Copy Provider",
        "timestamp":12887,
        "status":"running"
    }
],
"end-of-report":"","
"process_informational": [
    {
        "fid":{
            "ads":"",
            "content":281474976725189
        },
        "parentname":"C:\\Program Files\\Windows Defender
\\MpCmdRun.exe",
        "sha256sum":"9afd12eede0db98a35aba52f53041efa4a2f2a0367
3672c7ac530830b7152392",
        "pid":2192,
        "filesize":190976,
        "ppid":3136,
        "mode":"started",
        "cmdline":"\"c:\\program files\\windows defender\\
MpCmdRun.exe\" Scan -ScheduleJob -WinTask -RestrictPrivilegesScan -Reinvoke",
        "sha1sum":"2ae2a6b863616b61ccb550fc1a145ae025896de1",
        "md5sum":"6bd4d7f68924301051c22e8a951aecba",
        "no_extend":true,
        "value":"C:\\Program Files\\Windows Defender\\MpCmdRun.exe",
        "timestamp":10153
    },
    {
        "fid": {
            "ads":"",
            "content":281474976780111
        },
        "parentname":"C:\\Windows\\System32\\services.exe",
        "sha256sum":"N/A",
        "pid":1492,
        "filesize":1600512,
        "ppid":480,
        "mode":"started",
        "cmdline":"C:\\Windows\\system32\\vssvc.exe",
        "sha1sum":"1d6f5a5de7154b75144c6a033c36fd86ff2bbe9b",
        "md5sum":"b60ba0bc31b0cb414593e169f6f21cc2",
        "no_extend":true,
        "value":"C:\\Windows\\System32\\VSSVC.exe",
        "timestamp":10547
    },
    {
        "fid": {
            "ads":"",
            "content":281474976737050
        },
        "parentname":"C:\\Windows\\System32\\services.exe",
        "sha256sum":"N/A",
        "pid":3632,
        "filesize":27136,

```



```

        "ppid":480,
        "mode":"started",
        "cmdline":"C:\\Windows\\System32\\svchost.exe -k swprv",
        "sha1sum":"619652b42afe5fb0e3719d7aeda7a5494ab193e8",
        "md5sum":"c78655bc80301d76ed4fef1c1ea40a7d",
        "no_extend":true,
        "value":"C:\\Windows\\System32\\svchost.exe",
        "timestamp":10836
    }
],
"os_monitor": {
    "date":"Sep 19 2018",
    "build":795854,
    "time":"12:59:48",
    "version":"17R1.7"
},
"malicious-alert": [
    {
        "classtype":"static_log",
        "display-msg":"Static Analysis Malware.Binary.FEC2"
    },
    {
        "classtype":"Static-Analysis",
        "display-msg":"Static Analysis Malware.Binary.FEC2"
    },
    {
        "classtype":"static_log",
        "display-msg":"Static Analysis JavaExploit.EncryptedPayload"
    },
    {
        "classtype":"Static-Analysis",
        "display-msg":"Static Analysis JavaExploit.EncryptedPayload"
    },
    {
        "classtype":"sa_only",
        "display-msg":"Heuristic"
    }
],
"analysis": {
    "mode":"malware",
    "product":"MPS",
    "ftype":"exe",
    "version":1.3977
}
},
{
    "process": {
        "mode":"started",
        "fid": {
            "ads": "",
            "content":1688849860268247
        },
        "parentname":"C:\\WINDOWS\\explorer.exe",
        "cmdline":"\"C:\\WINDOWS\\system32\\ntvdm.exe\" -f -i1",
        "sha1sum":"df36cf59f700fc0b3b60c009b8b877d6233fdd72",
        "md5sum":"681b807e53bdada337735c28c0e48a1b",
        "sha256sum":"a0be52e7d076ed8e33a4b5ab309cd23ad0272570c7e87
fe6e3444712ad467d62",
        "pid":3456,
        "filesize":420864,
        "value":"C:\\WINDOWS\\system32\\ntvdm.exe",
        "timestamp":3478,
        "ppid": 1864
    },

```

```

"application": {"app-name": "Windows Explorer"},
"os": {
  "name": "windows",
  "arch": "x86",
  "version": "5.1.2600",
  "sp": 3
},
"file_informational": [
  {
    "mode": "close",
    "fid": {
      "ads": "",
      "content": "844424930200765"
    },
    "sha1sum": "863bbf5f7f4114a1307c6bad5dd89224d511fed5",
    "md5sum": "4a587187d760161311010b03417b3c3f",
    "processinfo": {
      "imagepath": "C:\\WINDOWS\\system32\\ntvdm.exe",
      "md5sum": "681b807e53bdada337735c28c0e48a1b",
      "pid": 3456
    },
    "sha256sum": "b7792de7a6d7abb649a8a22e9048d0468b604ca98b8978bdd1171356af6d5f49",
    "ntstatus": "0x0",
    "filesize": 2686,
    "no_extend": true,
    "value": "C:\\WINDOWS\\Temp\\scs14.tmp",
    "CreateOptions": "0x0",
    "timestamp": 3614
  },
  {
    "mode": "close",
    "fid": {
      "ads": "",
      "content": "562949953490275"
    },
    "sha1sum": "8565ed558ad273232104e0b10cd87cff723a1eca",
    "md5sum": "71f4b39c5eb73df738ad3e0dacd89057",
    "processinfo": {
      "imagepath": "C:\\WINDOWS\\system32\\ntvdm.exe",
      "md5sum": "681b807e53bdada337735c28c0e48a1b",
      "pid": 3456
    },
    "sha256sum": "d504b1c272cd0c92c4a365086cf884a4889653c89d5602b6dadeffb33b83951d",
    "ntstatus": "0x0",
    "filesize": 1670,
    "no_extend": true,
    "value": "C:\\WINDOWS\\Temp\\scs15.tmp",
    "CreateOptions": "0x0",
    "timestamp": 3943
  }
],
"end-of-report": "",
"os_monitor": {
  "date": "Sep 19 2018",
  "build": 795854,
  "time": "12:59:48",
  "version": "17R1.7"
},
"malicious-alert": [
  {
    "classtype": "static_log",
    "display-msg": "Static Analysis Malware.Binary.FEC2"
  }
]

```

```

    },
    {
      "classtype": "Static-Analysis",
      "display-msg": "Static Analysis JavaExploit.EncryptedPayload"
    },
    {
      "classtype": "static_log",
      "display-msg": "Static Analysis JavaExploit.EncryptedPayload"
    },
    {
      "classtype": "Static-Analysis",
      "display-msg": "Static Analysis Malware.Binary.FEC2"
    },
    {
      "classtype": "NTVDM-Process-Launch-Activity",
      "display-msg": "Startup behavior anomalies observed"
    },
    {
      "classtype": "sa_only",
      "display-msg": "Heuristic"
    }
  ],
  "analysis": {
    "mode": "malware",
    "product": "MPS",
    "ftype": "exe",
    "version": "1.3977"
  }
}
]
},
"src": {
  "ip": "157.204.181.231",
  "mac": "00:20:18:11:ff:45",
  "port": 0
},
"alertUrl": "https://qa-cm7500-4-9-20/event_stream/events_for_bot?ma_id=261146",
"action": "notified",
"occurred": "2018-10-18 16:46:41 +0000",
"dst": {
  "mac": "02:14:17:da:c9:2f",
  "port": 0,
  "ip": "249.207.161.251"
},
"applianceId": "000BABCD66F2",
"id": 261146,
"rootInfection": 3181,
"sensorIp": "10.11.113.155",
"name": "MALWARE_OBJECT",
"severity": "MAJR",
"uuid": "c9391258-1a79-4b54-be8e-144ddb5f118f",
"ack": "yes",
"product": "WEB_MPS",
"sensor": "cms-nx2500-3",
"vlan": 0,
"malicious": "yes"
}
],
"appliance": "CMS",
"version": "CMS (CMS) 8.4.0.805144",
"msg": "normal",
>alertsCount": 1
}

```

 Note

The "uuid" and "ack" fields are only supported in v2.0.0.

cURL code sample: alerts

The following code sample can be copied and executed from any command-line interface that includes the cURL library. This sample builds on the authentication cURL code sample.

 Note

In this sample, line breaks are added for readability. Remove these line breaks before you paste the code sample into your command-line tool.

```
curl -qgsSkH --no-progress-bar
--header "X-FeApi-Token: xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx"
https://xxx.xxx.xxx.xxx:443/wsapis/v2.0.0/alerts
```

This cURL sample includes the following options:

- `-q`—This option specifies that the `curlrc` config file is not read or used. Although this is an optional setting, Trellix recommends that you include this option.
- `-g`—This option turns off the URL globbing parser. Although this is an optional setting, Trellix recommends that you include this option.
- `-s`—This option turns off the progress meter and error message. Although this is an optional setting, Trellix recommends that you include this option.
- `-S`—When used with the `-s` option, this option shows error messages if your cURL switch fails. Although this is an optional setting, Trellix recommends that you include this option.
- `-k`—This option explicitly allows cURL to perform insecure SSL connections and transfers. This allows you to test your SSL connection without installing a CA certificate.
- `-H`—This option allows you to specify a custom header with the `--header` switch.
- `--no-progress-bar`—This option suppresses the cURL download progress bar, which can interfere with the request.
- `--header "X-FeApi-Token: xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx"`—This custom header provides the API-Token that was returned during the authentication request. In the authentication cURL code sample, this token was included in the `auth.txt` file. Replace the token value in the code sample with the token value received in the response to your authentication request.



By default, the X-FeApi-Token times out after 15 minutes of inactivity.

- `https://xxx.xxx.xxx.xxx:443/wsapis/v2.0.0/alerts`—The alert request URL. Replace the IP address `xxx.xxx.xxx.xxx` with the IP address of your appliance.

Results

This code sample returns XML-formatted alert data from your appliance. If you do not receive any alert data and you did not encounter an error message, check your appliance to see whether any alert data is available.

Alert details request

Gets details for a single alert.

```
GET https://<address>/wsapis/[v1.2.0|v2.0.0]/alerts/alert/<alert_id>
```

Availability

This command is available on the following appliances:

- Central Management System
- Malware Analysis
- Email Security — Server
- File Protect
- Network Security

Required headers:

```
X-FeApi-Token: [API-Token]  
X-FeClient-Token: [Client-Token]  
Accept: application/xml
```

Parameters

- `address`—The IP address of the appliance running the Web Services API.
- `alert_ID`—The infection ID. You must also specify the Alert-Type.
- `API-Token`—This token authenticates the session. By default, the session times out after 15 minutes of inactivity.

- Client-Token—(Optional) This client token is provided by Trellix. For more information about the client token, contact your sales representative.

Example request

```
GET https://xxx.xxx.xxx.xxx:443/wsapis/v1.2.0/alerts/alert/4790
```

Request headers:

```
X-FeApi-Token: xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx
X-FeClient-Token: BigDataInc
Accept: application/json
```

Alert details response

```
HTTP/1.1 [Response Code] [Response Message]
Date: [Date]
HTTP/1.1 200 OK
Date: Tue, 14 May 2019 22:17:56 GMT
Content-Type: application/xml

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<alerts appliance="eMPS" version="eMPS (eMPS) 8.3.0.852440" msg="concise" xmlns="http://www.fireeye.com/alert/2014/AlertSchema">
  <ns2:alert appliance-id="002590867AAA" id="4790" name="malware-object" severity="majr"
  uuid="b435583b-1c23-4a80-b893-203245073ed4" ack="no" product="Email MPS" vlan="0" malicious="yes" sc-
  version="866.106">
    <ns2:explanation>
      <ns2:malware-detected>
        <ns2:malware name="Malware.Binary">
          <ns2:md5sum>5e747bddd6a759b0a591ab4bb3b5254b</ns2:md5sum>
          <ns2:sha256>cfb1006d9e6c2660b4876fecef9789c1a3ac0c807181277a2778c59d9b8675f</ns2:sha256>
        </ns2:malware>
      </ns2:malware-detected>
    </ns2:explanation>
    <ns2:src>
      <ns2:smtp-mail-from>testuser1@aedev.com</ns2:smtp-mail-from>
    </ns2:src>
    <ns2:alert-url>https://camelback-sunil-ex.eng.fireeye.com/emps/
    eanalysis?e_id=5116&type=attch</ns2:alert-url>
    <ns2:action>blocked</ns2:action>
    <ns2:occurred>2019-05-14T20:53:44.722Z</ns2:occurred>
    <ns2:dst>
      <ns2:smtp-to>testuser2@aedev.com</ns2:smtp-to>
    </ns2:dst>
    <ns2:smtp-message>
      <ns2:subject>Test Email</ns2:subject>
    </ns2:smtp-message>
  </ns2:alert>
</alerts>
```

Response fields

- Response Code—A standard HTML response code.
 - 200—Request successful.
 - 4xx—Request unsuccessful because unknown or invalid fields were included in the input.
 - 5xx—Request unsuccessful because the server encountered a problem.
- Response Message—A standard HTML response message.
 - Empty—Request successful.
 - Invalid Client Request—Request unsuccessful because unknown or invalid fields were included in the input.
 - Server encountered a problem...retry later—Request unsuccessful because the server encountered a problem.
- Date—Standard HTML date format.
- alert fields—The fields returned vary depending on the alert. See the *Alert Notifications* reference guide for descriptions of available fields.

Example response

```
HTTP/1.1 200 OK
Date: Tue, 14 May 2019 22:17:56 GMT
Content-Type: application/xml

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<alerts appliance="eMPS" version="eMPS (eMPS) 8.3.0.852440" msg="concise" xmlns="http://www.fireeye.com/alert/2014/AlertSchema">
  <ns2:alert appliance-id="002590867AAA" id="4790" name="malware-object" severity="majr"
  uuid="b435583b-1c23-4a80-b893-203245073ed4" ack="no" product="Email MPS" vlan="0" malicious="yes" sc-
  version="866.106">
    <ns2:explanation>
      <ns2:malware-detected>
        <ns2:malware name="Malware.Binary">
          <ns2:md5sum>5e747bddd6a759b0a591ab4bb3b5254b</ns2:md5sum>
          <ns2:sha256>cfbb1006d9e6c2660b4876fecef9789c1a3ac0c807181277a2778c59d9b8675f</ns2:sha256>
        </ns2:malware>
      </ns2:malware-detected>
    </ns2:explanation>
    <ns2:src>
      <ns2:smtp-mail-from>testuser1@aedev.com</ns2:smtp-mail-from>
    </ns2:src>
    <ns2:alert-url>https://test39-ex.eng.fireeye.com/emps/eanalysis?e_id=5116&type=attch</ns2:alert-url>
    <ns2:action>blocked</ns2:action>
    <ns2:occurred>2019-05-14T20:53:44.722Z</ns2:occurred>
    <ns2:dst>
      <ns2:smtp-to>testuser2@aedev.com</ns2:smtp-to>
    </ns2:dst>
    <ns2:smtp-message>
```

```
<ns2:subject>Test Email</ns2:subject>
</ns2:smtp-message>
</ns2:alert>
</alerts>
```

cURL code sample: alert details

The following code sample can be copied and executed from any command-line interface that includes the cURL library. This sample builds on the authentication cURL code sample.



In this sample, line breaks are added for readability. Remove these line breaks before you paste the code sample into your command-line tool.

[illegible]

This cURL sample includes the following options:

- -q—This option specifies that the curlrc config file is not read or used. Although this is an optional setting, Trellix recommends that you include this option.
- -g—This option turns off the URL globbing parser. Although this is an optional setting, Trellix recommends that you include this option.
- -s—This option turns off the progress meter and error message. Although this is an optional setting, Trellix recommends that you include this option.
- -S—When used with the -s option, this option shows error messages if your cURL switch fails. Although this is an optional setting, Trellix recommends that you include this option.
- -k—This option explicitly allows cURL to perform insecure SSL connections and transfers. This allows you to test your SSL connection without installing a CA certificate.
- -H—This option allows you to specify a custom header with the --header switch.
- --no-progress-bar—This option suppresses the cURL download progress bar, which can interfere with the request.
- https://xxx.xxx.xxx.xxx:443/wsapis/v1.2.0/alerts/alert/4790—The alert acknowledgment request URL. Replace the IP address xxx.xxx.xxx.xxx with the IP address of your appliance. Replace 4790 with the infection ID or alert UUID of interest.
- -X 'GET'—This option specifies using the GET method.
- --header "X-FeApi-Token: xxx"—This custom header provides the API-Token that was returned during the authentication request. In the authentication cURL code sample, this token was

included in the `auth.txt` file. Replace the token value in the code sample with the token value received in the response to your authentication request.

 Note

By default, the `X-FeApi-Token` times out after 15 minutes of inactivity.

- `-H 'Accept: application/xml'`—This header specifies that the server's response body is expected to be in XML format.
- `-i`—This option returns the HTTP header in the response.

Results

This code sample returns the details of alert 4790. The response is in XML.

Alert acknowledgment request

You can use the alert acknowledgment request to confirm that you have reviewed the alert so that it is no longer listed in the Web UI. To acknowledge a single alert, send the following HTTP POST request URL, headers, and body:

```
POST https://<cm_address>/wsapis/v1.2.0/alerts/alert/ [<alert_ID> | <UUID>]
```

```
POST https://<cm_address>/wsapis/v2.0.0/alerts/alert/<UUID>
```

Availability

This command is available on the following appliances:

- Central Management System

Required headers:

```
X-FeApi-Token: [API-Token]
X-FeClient-Token: [Client-Token]
Accept: application/json
Content-Type: application/json
```

Body:

```
annotation: [Annotation]
alertType: [Alert-Type]
```

Parameters

- `cm_address`—The IP address of the Central Management System appliance running the Web Services API.
- `alert_ID`—(v1.2.0 only) The infection ID. You must also specify the Alert-Type.
- `UUID`—The universally unique identifier (UUID) for the alert.
- `schema_compatibility`—(v2.0.0 only) Produce XML and JSON content compatible with the upgraded schema. `true` is the only accepted value. Omit this option if you are using an older schema and do not want schema compatibility. If using this option, you must use UUID for the alert.
- `API-Token`—This token authenticates the session. By default, the session times out after 15 minutes of inactivity.
- `Client-Token`—(Optional) This client token is provided by Trellix. For more information about the client token, contact your sales representative.

Example request using the infection ID

```
POST https://xxx.xxx.xxx.xxx:443/wsapis/v1.2.0/alerts/alert/1234
```

Request headers:

```
X-FeApi-Token: xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx
X-FeClient-Token: BigDataInc
Accept: application/json
Content-Type: application/json
```

Body:

```
{
  "annotation" : "<string>"
  "alertType" : "<string>"
}
```

Request body fields:

- `annotation`—You must specify a comment, such as "Discovered on December 1".
- `alertType`—If you use the infection ID for the `alert_ID`, you must specify the type of alert, such as "Malware Object".

Example request using the alert UUID

```
POST https://xxx.xxx.xxx.xxx:443/wsapis/v2.0.0/alerts/alert/
7d9e9883-37e4-4802-a364-08e3fd6efb6a?schema_compatibility=true
```

Request headers:

```
X-FeApi-Token: xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx
X-FeClient-Token: BigDataInc
```

Body:

```
{
  "annotation" : "Discovered by John Doe"
}
```

Alert acknowledgment response

After the alert acknowledgment request is received, your appliance validates the API token and sends a response code and message.

```
HTTP/1.1 [Response Code] [Response Message]
Date: [Date]
```


Response fields

- Response Code—A standard HTML response code.
 - 200—Request successful.
 - 4xx—Request unsuccessful because unknown or invalid fields were included in the input.
 - 5xx—Request unsuccessful because the server encountered a problem.
- Response Message—A standard HTML response message.
 - Empty—Request successful.
 - Invalid Client Request—Request unsuccessful because unknown or invalid fields were included in the input.
 - Server encountered a problem...retry later—Request unsuccessful because the server encountered a problem.
- Date—Standard HTML date format.

Example response

```
HTTP/1.1 200 OK
Date: Thu, 23 Nov 2017 13:39:42 GMT
```

The following code sample can be copied and executed from any command-line interface that includes the cURL library. This sample builds on the authentication cURL code sample.



This cURL sample includes the following options:

- 28 Trellix API Reference Release 2025.1

API-Token that was returned during the authentication request. In the authentication cURL code sample, this token was included in the `auth.txt` file. Replace the token value in the code sample with the token value received in the response to your authentication request.

 Note

By default, the `X-FeApi-Token` times out after 15 minutes of inactivity.

- `-H 'Accept: application/json'`—This header specifies that the server's response body is expected to be in JSON format.
- `-H 'Content-Type: application/json'`—This header specifies that the request body is in JSON format.
- `-i`—This option returns the HTTP header in the response.

Results

This code sample returns a response code and message to indicate if your request was successful.

Fetch Triage bundle API requests

You can use the triage bundle requests to initiate the creation of a triage package for a specific alert, check its status, and download the package from the respective product bundle.

 Note

These requests requires the alert UUID. These APIs are supported for the following products from version 11.0.0 and later.

- Central Management System
- Malware Analysis
- Email Security — Server
- File Protect
- Network Security

You can perform the following actions:

- [Initiate triage bundle creation.](#)
- [Check the status of the bundle creation.](#)

- [Retrieve the created bundle.](#)

Error handling

If the API is executed with an invalid alert UUID, a 400 error message is returned.

Example request

```
curl -qgsSk --no-progress-bar \  
--header "X-FeApi-Token: <token>" \  
-XPOST \  
"https://<cms_ip>/wsapis/v2.0.0/alerts/alert/486b2853-5727-4a72-ba8a-312863e42/triage_pkg"
```

Example error response

```
{  
  "status_code": 400,  
  "message": "Invalid Alert Uuid"  
}
```

Initiate triage bundle creation API

Initiates the creation of a triage bundle for a specific alert using an HTTP POST request.

```
POST https://<address>/wsapis/v2.0.0/alerts/alert/<UUID>/triage_pkg
```

Required headers:

```
X-FeApi-Token: [API-Token]
```

Parameters

- address—The IP address of the appliance running the Web Services API.
- UUID—The universally unique identifier (UUID) for the alert.
- API-Token—This token authenticates the session.
- Client-Token—(Optional) This client token is provided by Trellix. For more information about the client token, contact your sales representative.

Response

After the request is received, the appliance validates the token and initiates the package creation.

Example response:

```
{
  "status_code": "TRG_PKG_INIT",
  "message": "Triage package creation initiated"
}
```

cURL code sample:

```
curl -XPOST -kg -H "$c" "https://<cms ip>/wsapis/v2.0.0/alerts/alert/5e7fa099-e9eb-4241-b704-9d5243ddcbe8/triage_pkg"
```

Check triage bundle download status API

Checks the status of the triage bundle generation using an HTTP GET request.

```
GET https://<address>/wsapis/v2.0.0/alerts/alert/<UUID>/triage_pkg/status
```

Required headers:

```
X-FeApi-Token: [API-Token]
```

Response

Returns the current status code of the package generation.

Example response:

```
{
  "status_code": "TRG_PKG_READY",
  "message": "Package is ready"
}
```

cURL code sample:

```
curl -kg -H "$c" "https://<cms ip>/wsapis/v2.0.0/alerts/alert/5e7fa099-e9eb-4241-b704-9d5243ddcbe8/triage_pkg/status"
```

Retrieve the created bundle package API

Downloads the generated triage bundle zip file using an HTTP GET request.

```
GET https://<address>/wsapis/v2.0.0/alerts/alert/<UUID>/triage_pkg
```

Required headers:

```
X-FeApi-Token: [API-Token]
```

Response

This API does not return any response. Only the ZIP file is fetched from CMS and saved at the local directory on the API client.

cURL code sample:

```
curl -kg -H "$c" "https://<cms ip>/wsapis/v2.0.0/alerts/alert/5e7fa099-e9eb-4241-b704-9d5243ddcbe8/triage_pkg" -o tgg.zip
```

Alert notification settings

Use the following APIs to configure appliance notifications from Helix Enterprise:

- [Enable email notifications](#)

```
https://<host>/wsapis/v2.0.0/devicemgmt/notification/email/enabled
```

- [Enable email notification flags](#)

```
https://<host>/wsapis/v2.0.0/devicemgmt/notification/email/flags
```

- [Email notification properties](#)

```
https://<host>/wsapis/v2.0.0/devicemgmt/notification/email/properties
```

- [Email notification recipient management](#)

```
https://<host>/wsapis/v2.0.0/devicemgmt/notification/email/recipients
```

- [Enable HTTP notifications](#)

```
https://<host>/wsapis/v2.0.0/devicemgmt/notification/http/enabled
```

- [Enable HTTP notification flags](#)

<https://<host>/wsapis/v2.0.0/devicemgmt/notification/http/flags>

- [HTTP protocol properties](#)

<https://<host>/wsapis/v2.0.0/devicemgmt/notification/http/properties>

- [HTTP notification consumer management](#)

<https://<host>/wsapis/v2.0.0/devicemgmt/notification/email/consumers>

- [Enable Rsyslog notification](#)

<https://<host>/wsapis/v2.0.0/devicemgmt/notification/rsyslog/enabled>

- [Enable Rsyslog notification flags](#)

<https://<host>/wsapis/v2.0.0/devicemgmt/notification/rsyslog/flags>

- [Rsyslog protocol properties](#)

<https://<host>/wsapis/v2.0.0/devicemgmt/notification/rsyslog/properties>

- [Rsyslog notification Consumer Management](#)

<https://<host>/wsapis/v2.0.0/devicemgmt/notification/rsyslog/consumers>

- [Enable SNMP log notifications](#)

<https://<host>/wsapis/v2.0.0/devicemgmt/notification/snmp/enabled>

- [Enable SNMP notification flags](#)

<https://<host>/wsapis/v2.0.0/devicemgmt/notification/snmp/flags>

- [SNMP protocol properties](#)

<https://<host>/wsapis/v2.0.0/devicemgmt/notification/snmp/properties>

- [SNMP notification Consumer Management](#)

<https://<host>/wsapis/v2.0.0/devicemgmt/notification/rsyslog/consumers>

- [Daily digest configurations](#)

https://<host>/wsapis/v2.0.0/devicemgmt/notification/daily_digest

- [Enable alert types globally](#)

https://<host>/wsapis/v2.0.0/devicemgmt/notification/global_events

- [Disable alert types globally](#)

`https://<host>/wsapis/v2.0.0/devicemgmt/notification/global_events`

Enable email notifications

Enables email notifications from Helix Enterprise.

API URL

GET `https://<host>/wsapis/v2.0.0/devicemgmt/notification/email/enabled`

SET `https://<host>/wsapis/v2.0.0/devicemgmt/notification/email/enabled -d <payload>`

Payload

JSON containing `enabled` flag.

Example: `{"enabled": "true"}`

Sample curl requests

```
curl -skH "$Token" "SET https://10.128.43.157/wsapis/v2.0.0/devicemgmt/notification/email/enabled"
```

```
curl -skH "$Token" "SET https://10.128.43.157/wsapis/v2.0.0/devicemgmt/notification/email/enabled" -d '{"enabled": true}'
```

Availability

This command is available on the following appliances:

- Network Security
- Email Security — Server
- File Protect
- Malware Analysis

Authentication

Standard WSAPI authentication

Response mime type

application/json

Enable email notification flags

Enables email notification flags from Helix Enterprise.

API URL

GET https://<host>/wsapis/v2.0.0/devicemgmt/notification/email/flags

SET https://<host>/wsapis/v2.0.0/devicemgmt/notification/email/flags -d <payload>

Payload

JSON containing flags for alert types, such as domain_match and infection_match.

Example: {"malware_object": "true"}

Sample curl requests

```
curl -skH "$Token" "SET https://10.128.43.157/wsapis/v2.0.0/devicemgmt/notification/email/flags"
```

```
curl -skH "$Token" "SET https://10.128.43.157/wsapis/v2.0.0/devicemgmt/notification/email/flags" -d
'{"malware_object": false, "infection_match": false, "ips_event": false, "web_infection": false,
"malware_callback": false, "riskware_infection": false, "domain_match": false, "riskware_object": false,
"riskware_callback": false}'
```

Availability

This command is available on the following appliances:

- Network Security
- Email Security — Server
- File Protect
- Malware Analysis

Authentication

Standard WSAPI authentication

Response mime Type

application/json

Email notification properties

Gets and sets email notification properties.

API URL

GET https://<host>/wsapis/v2.0.0/devicemgmt/notification/email/properties

SET https://<host>/wsapis/v2.0.0/devicemgmt/notification/email/properties -d <payload>

Payload

JSON containing variables listed in the API response.

Sample curl requests

```
curl -skH "$Token" "SET https://10.128.43.157/wsapis/v2.0.0/devicemgmt/notification/email/properties"
```

```
curl -skH "$Token" "SET https://10.128.43.157/wsapis/v2.0.0/devicemgmt/notification/email/properties/  
return_address" -d '{"return_address": "xyzyy@fireeye.com"}'
```

Availability

This command is available on the following appliances:

- Network Security
- Email Security — Server
- File Protect
- Malware Analysis

Authentication

Standard WSAPI authentication

Response mime type

application/json

Email notification recipient management

Adds, updates, deletes, and enables email notification recipients.

API URL

GET https://<host>/wsapis/v2.0.0/devicemgmt/notification/email/recipients

SET https://<host>/wsapis/v2.0.0/devicemgmt/notification/email/recipients -d <payload>

Payload

JSON containing notification, email_address, enable, name, and alerts_update.

Sample curl requests

GET - curl -skH "\$Token" "https://10.128.43.157/wsapis/v2.0.0/devicemgmt/notification/email/recipients"

CREATE and update - curl -skH "\$Token" "https://10.2.140.114/wsapis/v2.0.0/devicemgmt/notification/email/recipients?operation=create" -d '{"name": "xyz", "notification": "all-events", "email_address": "abc@fireeye.com", "enable": true, "alerts_update": "true"}'

DELETE - curl -skH "\$Token" "https://10.2.140.114/wsapis/v2.0.0/devicemgmt/notification/email/recipients?operation=delete" -d '["xyz"]'

Availability

This command is available on the following appliances:

- Network Security
- Email Security — Server

- File Protect
- Malware Analysis

Authentication

Standard WSAPI authentication

Response mime type

application/json

Enable HTTP notifications

Enables HTTP notifications.

API URL

GET https://<host>/wsapis/v2.0.0/devicemgmt/notification/http/enabled

SET https://<host>/wsapis/v2.0.0/devicemgmt/notification/http/enabled -d <payload>

Payload

JSON containing enabled flag.

Example: {"enabled":"true"}

Sample curl requests

```
curl -skH "$Token" "SET https://10.128.43.157/wsapis/v2.0.0/devicemgmt/notification/http/enabled"
```

Availability

This command is available on the following appliances:

- Network Security
- Email Security — Server

- File Protect
- Malware Analysis

Authentication

Standard WSAPI authentication

Enable HTTP notification flags

Enables HTTP notification flags.

API URL

GET `https://<host>/wsapis/v2.0.0/devicemgmt/notification/http/flags`

SET `https://<host>/wsapis/v2.0.0/devicemgmt/notification/http/flags -d <payload>`

Payload

JSON containing flags for alert types, such as `domain_match` and `infection_match`.

Example: `{"malware_callback":"true"}`

Sample curl requests

```
curl -skH "$Token" "SET https://10.128.43.157/wsapis/v2.0.0/devicemgmt/notification/http/flags"
```

Availability

This command is available on the following appliances:

- Network Security
- Email Security — Server
- File Protect
- Malware Analysis

Authentication

Standard WSAPI authentication

HTTP protocol properties

Enables HTTP notification flags.

API URL

GET `https://<host>/wsapis/v2.0.0/devicemgmt/notification/http/properties`

SET `https://<host>/wsapis/v2.0.0/devicemgmt/notification/http/properties -d <payload>`

Payload

JSON containing `provider_generic_message_format`, `default_delivery`, and `default_provider`.

Sample curl requests

```
curl -sKH "$Token" "SET https://10.128.43.157/wsapis/v2.0.0/devicemgmt/notification/http/properties"
```

Availability

This command is available on the following appliances:

- Network Security
- Email Security — Server
- File Protect
- Malware Analysis

Authentication

Standard WSAPI authentication

HTTP notification consumer management

Adds, updates, deletes, and enables HTTP notification consumers.

API URL

GET `https://<host>/wsapis/v2.0.0/devicemgmt/notification/http/consumers`

SET `https://<host>/wsapis/v2.0.0/devicemgmt/notification/http/consumers -d <payload>`

Payload

JSON containing variables listed in API response.

Sample curl requests

GET - `curl -skH "$Token" "https://10.128.43.157/wsapis/v2.0.0/devicemgmt/notification/http/consumers"`

```
CREATE/UPDATE - curl -skH "$Token" "https://10.2.140.114/wsapis/v2.0.0/devicemgmt/notification/http/consumers?operation=create" -d '{"name": "apihttp2", "auth_enable": "false", "delivery": "daily-digest", "ssl_verify": "false", "ssl_enable": "false", "alerts_update": "true", "is_enabled": "true", "notification": "all-events", "provider": "generic", "enable": true, "server_url": "http://10.2.6.75/noti.php", "username": "fireeye", "password": "fireeye"}'
```

DELETE single - `curl -gsk -H "$c" https://10.128.59.86/wsapis/v2.0.0/devicemgmt/notification/http/consumer/aaaa?operation=delete -XPOST`

DELETE multiple - `curl -skH "$Token" "https://10.2.140.114/wsapis/v2.0.0/devicemgmt/notification/http/consumers?operation=delete" -d '["apihttp2"]'`

DELETE all - `curl -qgsSkH --no-progress-bar --header "$T" -H 'Accept: application/json' -H 'Content-Type: application/json' "https://10.18.59.86/wsapis/v2.0.0/devicemgmt/notification/http/recipients?operation=delete" -X POST`

Availability

This command is available on the following appliances:

- Network Security
- Email Security — Server
- File Protect

- Malware Analysis

Authentication

Standard WSAPI authentication

Enable Rsyslog notification

Enables Rsyslog notifications.

API URL

GET `https://<host>/wsapis/v2.0.0/devicemgmt/notification/rsyslog/enabled`

SET `https://<host>/wsapis/v2.0.0/devicemgmt/notification/rsyslog/enabled -d <payload>`

Payload

JSON containing enabled flag.

Example: `{"enabled":"true"}`

Sample curl requests

```
curl -skH "$Token" "SET https://10.128.43.157/wsapis/v2.0.0/devicemgmt/notification/rsyslog"
```

Availability

This command is available on the following appliances:

- Network Security
- Email Security — Server
- File Protect
- Malware Analysis

Authentication

Standard WSAPI authentication

Response mime type

application/json

Enable Rsyslog notification flags

Enables Rsyslog notification flags.

API URL

GET https://<host>/wsapis/v2.0.0/devicemgmt/notification/rsyslog/flags

SET https://<host>/wsapis/v2.0.0/devicemgmt/notification/rsyslog/flags -d <payload>

Payload

JSON containing flags for alert types, such as domain_match and infection_match.

Example: {"malware_object":"true"}

Sample curl requests

```
curl -skH "$Token" "SET https://10.128.43.157/wsapis/v2.0.0/devicemgmt/notification/rsyslog/flags"
```

Availability

This command is available on the following appliances:

- Network Security
- Email Security — Server
- File Protect
- Malware Analysis

Authentication

Standard WSAPI authentication

Response mime type

application/json

Rsyslog protocol properties

Sets the rsyslog protocol properties.

API URL

GET https://<host>/wsapis/v2.0.0/devicemgmt/notification/rsyslog/properties>

SET https://<host>/wsapis/v2.0.0/devicemgmt/notification/rsyslog/properties -d <payload>

Payload

JSON containing default_delivery, default_protocol, format, and default_send_as.

Sample curl requests

```
curl -skH "$Token" "SET https://10.128.43.157/wsapis/v2.0.0/devicemgmt/notification/rsyslog/properties"
```

Availability

This command is available on the following appliances:

- Network Security
- Email Security — Server
- File Protect
- Malware Analysis

Authentication

Standard WSAPI authentication

Response mime type

application/json

Rsyslog notification consumer management

Adds, updates, deletes, and enables rsyslog notification consumers.

API URL

GET https://<host>/wsapis/v2.0.0/devicemgmt/notification/rsyslog/consumers

SET https://<host>/wsapis/v2.0.0/devicemgmt/notification/rsyslog/consumers -d <payload>

Payload

JSON containing variables listed in the API response.

Sample curl requests

GET - curl -skH "\$Token" "https://10.128.43.157/wsapis/v2.0.0/devicemgmt/notification/rsyslog/consumers"

CREATE/UPDATE - curl -skH "\$Token" "https://10.2.140.114/wsapis/v2.0.0/devicemgmt/notification/rsyslog/consumers?operation=create" -d '{"notification": "all-events", "protocol": "tcp", "address": "10.2.6.77", "enable": false, "name": "apirsys1"}'

DELETE single - curl -gsk -H "\$c" https://10.128.59.86/wsapis/v2.0.0/devicemgmt/notification/rsyslog/consumer/aaaa?operation=delete -XPOST

DELETE multiple - curl -skH "\$Token" "https://10.2.140.114/wsapis/v2.0.0/devicemgmt/notification/rsyslog/consumers?operation=delete" -d '["apirsys1"]'

DELETE all - curl -qgsSkH --no-progress-bar --header "\$T" -H 'Accept: application/json' -H 'Content-Type: application/json' "https://10.18.59.86/wsapis/v2.0.0/devicemgmt/notification/rsyslog/recipients?operation=delete" -X POST

Availability

This command is available on the following appliances:

- Network Security
- Email Security — Server
- File Protect
- Malware Analysis

Authentication

Standard WSAPI authentication

Response mime type

`application/json`

Enable SNMP log notifications

Enables SNMP log notifications.

API URL

GET `https://<host>/wsapis/v2.0.0/devicemgmt/notification/snmp/enabled`

SET `https://<host>/wsapis/v2.0.0/devicemgmt/notification/snmp/enabled -d <payload>`

Payload

JSON containing enabled flag.

Example: `{"malware_object": "true"}`

Sample curl requests

```
curl -skH "$Token" "SET https://10.128.43.157/wsapis/v2.0.0/devicemgmt/notification/snmp/enabled"
```

Availability

This command is available on the following appliances:

- Network Security
- Email Security — Server
- File Protect
- Malware Analysis

Authentication

Standard WSAPI authentication

Response mime type

`application/json`

Enable SNMP notification flags

Enables SNMP notification flags.

API URL

GET `https://<host>/wsapis/v2.0.0/devicemgmt/notification/snmp/enabled`

SET `https://<host>/wsapis/v2.0.0/devicemgmt/notification/snmp/enabled -d <payload>`

Payload

JSON containing flags for alert types, such as `domain_match` and `infection_match`.

Example: `{"malware_callback":"true"}`

Sample curl requests

```
curl -skH "$Token" "SET https://10.128.43.157/wsapis/v2.0.0/devicemgmt/notification/snmp/flags"
```

Availability

This command is available on the following appliances:

- Network Security
- Email Security — Server
- File Protect
- Malware Analysis

Authentication

Standard WSAPI authentication

Response mime type

`application/json`

SNMP protocol properties

Sets SNMP protocol properties.

API URL

GET `https://<host>/wsapis/v2.0.0/devicemgmt/notification/snmp/properties`

SET `https://<host>/wsapis/v2.0.0/devicemgmt/notification/snmp/properties -d <payload>`

Payload

JSON containing `default_delivery` and `default_version`.

Sample curl requests

```
curl -skH "$Token" "SET https://10.128.43.157/wsapis/v2.0.0/devicemgmt/notification/snmp/properties"
```

Availability

This command is available on the following appliances:

- Network Security
- Email Security — Server
- File Protect
- Malware Analysis

Authentication

Standard WSAPI authentication

Response mime type

application/json

SNMP notification consumer management

Adds, updates, deletes, and enables SNMP notification consumers.

API URL

GET `https://<host>/wsapis/v2.0.0/devicemgmt/notification/snmp/consumers`

SET `https://<host>/wsapis/v2.0.0/devicemgmt/notification/snmp/consumers -d <payload>`

Payload

JSON containing variables listed in API response.

Example: `{"enabled": "true"}`

Sample curl requests

GET - `curl -skH "$Token" "https://10.128.43.157/wsapis/v2.0.0/devicemgmt/notification/snmp/consumers"`

CREATE/UPDATE - `curl -skH "$Token" "https://10.2.140.114/wsapis/v2.0.0/devicemgmt/notification/snmp/consumers?operation=create" -d '{"name": "snmp_sink1", "notification": "all-events", "address": "10.2.6.77",`

```
"enable": false, "community": "fireeye"}'
```

```
DELETE single - curl -gsk -H "$c" https://10.128.59.86/wsapis/v2.0.0/devicemgmt/notification/snmp/consumer/
aaaa?operation=delete -XPOST
```

```
DELETE multiple - curl -skH "$Token" "https://10.2.140.114/wsapis/v2.0.0/devicemgmt/notification/snmp/
consumers?operation=delete" -d '["snmp_sink1"]'
```

```
DELETE all - curl -qgsSkH --no-progress-bar --header "$T" -H 'Accept: application/json' -H 'Content-Type:
application/json' "https://10.18.59.86/wsapis/v2.0.0/devicemgmt/notification/snmp/recipients?operation=delete"
-X POST
```

Availability

This command is available on the following appliances:

- Network Security
- Email Security — Server
- File Protect
- Malware Analysis

Authentication

Standard WSAPI authentication

Response mime type

application/json

Daily digest configurations

Sets the daily digest configurations.

API URL

```
GET https://<host>/wsapis/v2.0.0/devicemgmt/notification/daily_digest
```

```
SET https://<host>/wsapis/v2.0.0/devicemgmt/notification/daily_digest -d <payload>
```

Payload

JSON containing enabled flag and digest time.

Sample curl requests

```
curl -skH "$Token" "SET https://10.128.43.157/wsapis/v2.0.0/devicemgmt/notification/daily_digest"
```

Availability

This command is available on the following appliances:

- Network Security
- Email Security — Server
- File Protect
- Malware Analysis

Authentication

Standard WSAPI authentication

Response mime type

application/json

Enable alert type notifications globally

Enables global alert types.

API URL

```
GET https://<host>/wsapis/v2.0.0/devicemgmt/notification/global_events
```

```
SET https://<host>/wsapis/v2.0.0/devicemgmt/notification/global_events -d <payload>
```

Payload

JSON containing flags for alert types, such as `domain_match` and `infection_match`.

Example: `{"malware_object":"true"}`

Sample curl requests

```
curl -qgsSkH --no-progress-bar --header "$T" -H 'Accept: application/json' -H 'Content-Type: application/json'
"SET https://10.128.59.86/wsapis/v2.0.0/devicemgmt/notification/global_events"
```

Availability

This command is available on the following appliances:

- Network Security
- Email Security — Server
- File Protect
- Malware Analysis

Authentication

Standard WSAPI authentication

Response mime type

`application/json`

Disable alert type notifications globally

Disables global alert types.

API URL

GET `https://<host>/wsapis/v2.0.0/devicemgmt/notification/global_events`

SET `https://<host>/wsapis/v2.0.0/devicemgmt/notification/global_events -d <payload>`

Payload

JSON containing flags for alert types, such as `domain_match` and `infection_match`.

Example: `{"malware_object":true}`

Sample curl requests

```
curl -qgsSkH --no-progress-bar --header "$T" -H 'Accept: application/json' -H 'Content-Type: application/json'
"SET https://10.128.59.86/wsapis/v2.0.0/devicemgmt/notification/global_events" } -d ' {"ips_event":true} '
```

```
curl -qgsSkH --no-progress-bar --header "$T" -H 'Accept: application/json' -H 'Content-Type: application/json'
"GET https://10.128.59.86/wsapis/v2.0.0/devicemgmt/notification/global_events" }
```

Availability

This command is available on the following appliances:

- Network Security
- Email Security — Server
- File Protect
- Malware Analysis

Authentication

Standard WSAPI authentication

Response mime type

`application/json`

COPYRIGHT

Copyright © 2026 Musarubra US LLC.

Trellix and FireEye are the trademarks or registered trademarks of Musarubra US LLC, FireEye Security Holdings US LLC, and their affiliates in the US and /or other countries. Other names and brands are the property of these companies or may be claimed as the property of others.

