


Trellix API Reference Release 2025.1

Last Updated: May 19, 2026

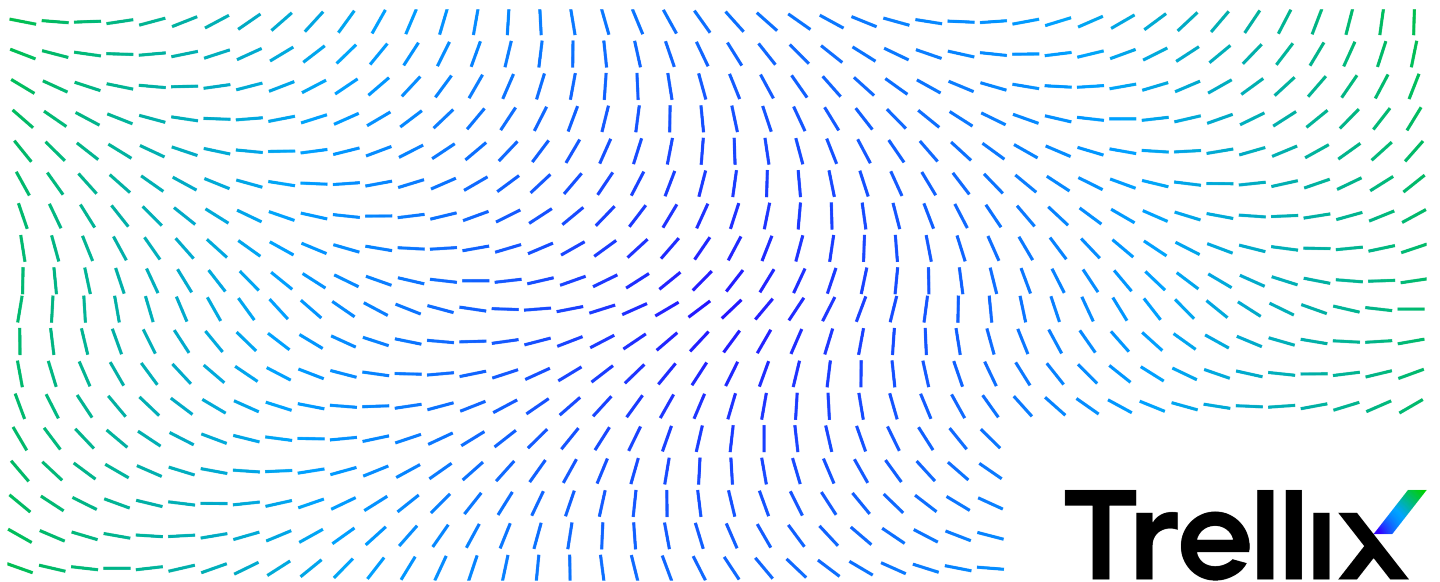

Contents

- Email quarantine management..... 3
 - List quarantined emails 3
 - Rescan a specific email..... 5
 - Release quarantined emails 7
 - Delete quarantined emails..... 10
 - Download quarantined email 12

Email quarantine management

Use the following APIs to search and download quarantined emails:

- [List quarantined emails](#)

```
GET https://<address>/wsapis/v2.0.0/emailmgmt/quarantine
```

- [Release quarantined emails](#)

```
POST https://<address>/wsapis/v2.0.0/emailmgmt/quarantine/release
```

- [Delete quarantined emails](#)

```
POST https://<address>/wsapis/v2.0.0/emailmgmt/quarantine/delete
```

- [Download quarantined email](#)

```
GET https://<address>/wsapis/v2.0.0/emailmgmt/quarantine/<queue_id>
```

List quarantined emails

Lists quarantined emails.

```
GET https://<address>/wsapis/v2.0.0/emailmgmt/quarantine
```

Availability

This command is available on the following appliances:

- Central Management System
- Email Security — Server

Required header:

```
X-FeApi-Token: [API-Token]
```

Options

- address—This is the IP address of the appliance running the Web Services API.
- API-Token—This token authenticates the session. By default, the session times out after 15 minutes of inactivity.

Parameters

- `start_time`—(YYYY-MM-DD'T'HH:MM:SS.SSS-HHMM)
`end_time`—(YYYY-MM-DD'T'HH:MM:SS.SSS-HHMM). These filters are optional, but if used, they must be passed as a pair.
Default: `now()` - 24 hours.
- `from:<string>`—The email sender. Optional.
- `subject:<string>`—The email subject. Must be URL encoded. Optional.
- `limit`—Number of records to return (default: 10000). Optional.
- `appliance_id`—Optional.

Example request

```
GET https://<address>/wsapis/v2.0.0/emailmgmt/quarantine
```

List quarantined emails response

- Response Code—A standard HTML response code.
 - 200—Request successful.

Email Security — Server:

```
[
  {
    "email_uuid" : "69a7e8f2-4bdd-460a-be8f-891ece18a10f",
    "queue_id"   : "AAABBBCCDD",
    "message_id" : "XXXYYZZZPPP",
    "timestamp"  : "2019-07-04T00:00:00.000-00:00",
    "from"       : "user@domain.com",
    "subject"    : "send me all your money"
  }
]
```

Central Management System:

```
[
  {
    "email_uuid": "eb306a5a-e84d-4f39-b166-8f2c687efcdd",
    "queue_id": "45T1YF48LBz16vPQ",
    "message_id": "retroactive_detection_E-74805_vgtnl@automation.com",
    "completed_at": "2019-06-18T21:35:18",
    "from": "test@testretro.com",
    "subject": "E-74805 - Test mail",
  }
]
```

```
"appliance_id": "00259085F550"
}
```

cURL code sample: list quarantined emails

The following code sample can be copied and executed from any command-line interface that includes the cURL library.

Note

In this sample, line breaks are added for readability. Remove these line breaks before you paste the code sample into your command-line tool.

```
curl -qgsSk --header "X-FeApi-Token: IHAT75KulvFZ2fz7NqMJRIRRCmNYQFuXXX=" "https://xxx.xxx.xxx.xxx/wsapis/
v2.0.0/emailmgmt/quarantine"
```

This cURL sample includes the following options:

- `-q`—This option specifies that the `curlrc` config file is not read or used. Although this is an optional setting, Trellix recommends that you include this option.
- `-g`—This option turns off the URL globbing parser. Although this is an optional setting, Trellix recommends that you include this option.
- `-s`—This option turns off the progress meter and error message. Although this is an optional setting, Trellix recommends that you include this option.
- `-S`—When used with the `-s` option, this option shows error messages if your cURL switch fails. Although this is an optional setting, Trellix recommends that you include this option.
- `-k`—This option explicitly allows cURL to perform insecure SSL connections and transfers. This allows you to test your SSL connection without installing a CA certificate.
- `https://xxx.xxx.xxx.xxx/wsapis/v2.0.0/emailmgmt/quarantine`—The quarantine request URL. Replace the IP address `xxx.xxx.xxx.xxx` with the IP address of your appliance.

Results

This example returns a JSON array of email quarantine objects.

Rescan a specific email

Rescans a specific email.

```
GET https://<address>/wsapis/v2.0.0/emailmgmt/quarantine/rescan/4ZHBnw17XxzYkhtml
```

Availability

This command is available on the following appliances:

- Central Management System
- Email Security — Server

Required header:

```
X-FeApi-Token: [API-Token]
```

Options

- address—This is the IP address of the appliance running the Web Services API.
- API-Token—This token authenticates the session. By default, the session times out after 15 minutes of inactivity.

Parameters

- email_uuid (string, path parameter) - The UUID of the email to rescan.
- Request Body (JSON)
 - rescan_properties (object, required)
 - pwd_list (array of strings, optional) - A list of passwords to use for decryption during the rescan.

Example request

```
GET https://<address>/wsapis/v2.0.0/emailmgmt/quarantine/rescan/4ZHBnw17XxzYkhtml
```

Rescan a specific email response

- Response Code—A standard HTML response code.
 - 200—Request successful.
 - Other codes may indicate errors. (The document does not provide specific error codes)

cURL code sample: rescan a specific email

The following code sample can be copied and executed from any command-line interface that includes the cURL library.

Note

In this sample, line breaks are added for readability. Remove these line breaks before you paste the code sample into your command-line tool.

```
curl -v -k -X POST -H "X-FeApi-Token: <API-Token>" -H "Accept: application/json" -H "Content-Type: application/json" -d '{"rescan_properties":{"pwd_list":["testpwd","AaDdMmIiNn_112233"],"infected"}}' "https://<address>/wsapis/v2.0.0/emailmgmt/quarantine/rescan/4ZHBnw17XxzYkhmL"
```

This cURL sample includes the following options:

- `-v`— Verbose mode. Show more details about what curl is doing.
- `-k`— This option explicitly allows cURL to perform "insecure" SSL connections and transfers. This allows you to test your SSL connection without installing a CA certificate.
- `-x post`—Specifies a custom request method to use when communicating with the HTTP server. In this case, it's using the POST method.
- `-H "X-FeApi-Token: <API-Token>"`—An extra header to include in the request when sending HTTP to a server.
- `-H "Accept: application/json"`—An extra header to include in the request. It tells the server that the client can accept responses in JSON format.
- `-H "Content-Type: application/json"`—An extra header to include in the request. It tells the server that the request body is in JSON format.
- `-d '{"rescan_properties":{"pwd_list":["testpwd","AaDdMmIiNn_112233"],"infected"}}'`—Sends the specified data in a POST request to the server.

Results

This example returns a successful rescan operation.

Release quarantined emails

Releases and deletes quarantined emails.

```
POST https://<address>/wsapis/v2.0.0/emailmgmt/quarantine/release
```

Availability

This command is available on the following appliances:

- Central Management System
- Email Security — Server

Required header:

```
X-FeApi-Token: [API-Token]
```

Request content-type:

application/json

Options

- address—This is the IP address of the appliance running the Web Services API.
- API-Token—This token authenticates the session. By default, the session times out after 15 minutes of inactivity.

Parameters

sensorName—(Central Management System only) The sensor display name.

Request body:

```
{
  "queue_ids" : ["<qid1>", "<qid4>", "<qid3>", "<qid1>"]
  ,
  "uuids" : ["<uuid1>", "<uuid2>", "<uuid3>", "<uuid4>"]  <-- optional, not supported for now
}
```

A maximum of 100 entries is supported.

Example request

Email Security — Server:

```
POST https://<address>/wsapis/v2.0.0/emailmgmt/quarantine/release
```

Central Management System:

```
POST https://<address>/wsapis/v2.0.0/emailmgmt/quarantine/release?sensorName=blade1-vex3
```


Release quarantined emails response

- Response Code—200
 - Request successful if all queue IDs were successfully released. If partial failure occurs, 200 OK is returned with details of the failure.
- Response Message—Empty body on success.

cURL code sample: release quarantined emails

The following code sample can be copied and executed from any command-line interface that includes the cURL library.

Note

In this sample, line breaks are added for readability. Remove these line breaks before you paste the code sample into your command-line tool.

```
curl -qgsSk -X POST --header "X-FeApi-Token: IHAT75KuLvFZ2fz7NqMJRIRRCmNYQFuXXX=" --header "Accept:application/json" "https://xxx.xxx.xxx.xxx/wsapis/v2.0.0/emailmgmt/quarantine/release" --data '{"queue_ids":["463jzF5N0hzShwd"]}'
```

This cURL sample includes the following options:

- `-q`—This option specifies that the `curlrc` config file is not read or used. Although this is an optional setting, Trellix recommends that you include this option.
- `-g`—This option turns off the URL globbing parser. Although this is an optional setting, Trellix recommends that you include this option.
- `-s`—This option turns off the progress meter and error message. Although this is an optional setting, Trellix recommends that you include this option.
- `-S`—When used with the `-s` option, this option shows error messages if your cURL switch fails. Although this is an optional setting, Trellix recommends that you include this option.
- `-k`—This option explicitly allows cURL to perform insecure SSL connections and transfers. This allows you to test your SSL connection without installing a CA certificate.
- `-X POST`—This option specifies using the POST method.
- `https://xxx.xxx.xxx.xxx/wsapis/v2.0.0/emailmgmt/quarantine/release`—The quarantine release request URL. Replace the IP address `xxx.xxx.xxx.xxx` with the IP address of your appliance.

- `--data '{"queue_ids": ["463jzF5N0hzShwd"]}'`—Specifies the emails to be released and deleted.

Results

This example releases and deletes the specified email quarantine objects.

Delete quarantined emails

Deletes quarantined emails.

```
POST https://<address>/wsapis/v2.0.0/emailmgmt/quarantine/delete
```

Availability

This command is available on the following appliances:

- Central Management System
- Email Security — Server

Required Header:

```
X-FeApi-Token: [API-Token]
```

Request Content-type:

application/json

Options

- `address`—This is the IP address of the appliance running the Web Services API.
- `API-Token`—This token authenticates the session. By default, the session times out after 15 minutes of inactivity.

Parameters

- `sensorName`—(Central Management System only) The sensor from which to delete email.

Request body:

```
{
  "queue_ids" : ["<qid1>", "<qid4>", "<qid3>", "<qid1>"]
}
```

```
{  
  ,  
  "uuids" : ["<uuid1>", "<uuid2>", "<uuid3>", "<uuid4>"]  <-- optional, not supported for now  
}
```

A maximum of 100 entries is supported.

Example request

Email Security — Server:

```
POST https://<address>/wsapis/v2.0.0/emailmgmt/quarantine/delete
```

Central Management System:

```
POST https://<address>/wsapis/v2.0.0/emailmgmt/quarantine/delete?sensorName=blade1-vex3
```

Delete quarantined emails response

- Response Code—200
 - Request successful if all queue IDs were successfully deleted. If partial failure occurs, 200 OK is returned with details of the failure.
- Response Message—Empty body on success.

cURL code sample: delete quarantined emails

The following code sample can be copied and executed from any command-line interface that includes the cURL library.

Note

In this sample, line breaks are added for readability. Remove these line breaks before you paste the code sample into your command-line tool.

```
curl -qgsSk -X POST --header "X-FeApi-Token: IHAT75KulvFZ2fz7NqMJRIRRCmNYQFuXXX=" --header "Accept:application/  
json" "https://xxx.xxx.xxx.xxx/wsapis/v2.0.0/emailmgmt/quarantine/delete " --data '{"queue_ids":  
["463jzF5N0hzShwd"]}'
```

This cURL sample includes the following options:

- -q—This option specifies that the `curlrc` config file is not read or used. Although this is an optional setting, Trellix

recommends that you include this option.

- `-g`—This option turns off the URL globbing parser. Although this is an optional setting, Trellix recommends that you include this option.
- `-s`—This option turns off the progress meter and error message. Although this is an optional setting, Trellix recommends that you include this option.
- `-s`—When used with the `-s` option, this option shows error messages if your cURL switch fails. Although this is an optional setting, Trellix recommends that you include this option.
- `-k`—This option explicitly allows cURL to perform insecure SSL connections and transfers. This allows you to test your SSL connection without installing a CA certificate.
- `-X POST`—This option specifies using the POST method.
- `https://xxx.xxx.xxx.xxx/wsapis/v2.0.0/emailmgmt/quarantine/delete`—The quarantine delete request URL. Replace the IP address `xxx.xxx.xxx.xxx` with the IP address of your appliance.
- `--data '{"queue_ids": ["463jzF5N0hzShwd"]}'`—Specifies the emails to be deleted.

Results

This example deletes the specified email quarantine objects.

Download quarantined email

Downloads a quarantined email as a zip file.

```
GET https://<address>/wsapis/v2.0.0/emailmgmt/quarantine/<queue_id>
```

Availability

This command is available on the following appliances:

- Central Management System
- Email Security — Server

Required header:

```
X-FeApi-Token: [API-Token]
```

Request content-type:

`application/octet-stream`

Options

- address—This is the IP address of the appliance running the Web Services API.
- API-Token—This token authenticates the session. By default, the session times out after 15 minutes of inactivity.

Parameters

- queue_id—The ID of the quarantined email.
- sensorName—(Central Management System only) The sensor display name.

Example request

Email Security — Server:

```
GET https://<address>/wsapis/v2.0.0/emailmgmt/quarantine/45vCN64lN0z2m2QB
```

Central Management System:

```
GET https://<address>/wsapis/v2.0.0/emailmgmt/quarantine/45vCN64lN0z2m2QB?sensorName=blade1-vex3
```

Download quarantined email response

- Response Code—A standard HTML response code.
 - 200—Request successful.
- Response Message—A standard HTML response message.
 - OK—Request successful.

cURL code sample: download quarantined email

The following code sample can be copied and executed from any command-line interface that includes the cURL library.

Note

In this sample, line breaks are added for readability. Remove these line breaks before you paste the code sample into your command-line tool.

```
curl -qgsSk --header "X-FeApi-Token: IHAT75KulvFZ2fz7NqMJRIRRCmNYQFuXXX=" --header "Accept:application/octet-stream" "https://xxx.xxx.xxx.xxx/wsapis/v2.0.0/emailmgmt/quarantine/45vCN64lN0z2m2QB"
```

This cURL sample includes the following options:

- `-q`—This option specifies that the `curlrc` config file is not read or used. Although this is an optional setting, Trellix recommends that you include this option.
- `-g`—This option turns off the URL globbing parser. Although this is an optional setting, Trellix recommends that you include this option.
- `-s`—This option turns off the progress meter and error message. Although this is an optional setting, Trellix recommends that you include this option.
- `-S`—When used with the `-s` option, this option shows error messages if your cURL switch fails. Although this is an optional setting, Trellix recommends that you include this option.
- `-k`—This option explicitly allows cURL to perform insecure SSL connections and transfers. This allows you to test your SSL connection without installing a CA certificate.
- `https://xxx.xxx.xxx.xxx/wsapis/v2.0.0/emailmgmt/quarantine/45vCN64lN0z2m2QB`—The quarantine download URL. Replace the IP address `xxx.xxx.xxx.xxx` with the IP address of your appliance, and `45vCN64lN0z2m2QB` with the ID of the quarantined email that you wish to download.

Results

This example downloads a zip file of the specified email quarantine object.

COPYRIGHT

Copyright © 2026 Musarubra US LLC.

Trellix and FireEye are the trademarks or registered trademarks of Musarubra US LLC, FireEye Security Holdings US LLC, and their affiliates in the US and /or other countries. Other names and brands are the property of these companies or may be claimed as the property of others.

