


Trellix API Reference Release 2025.1

Last Updated: May 19, 2026

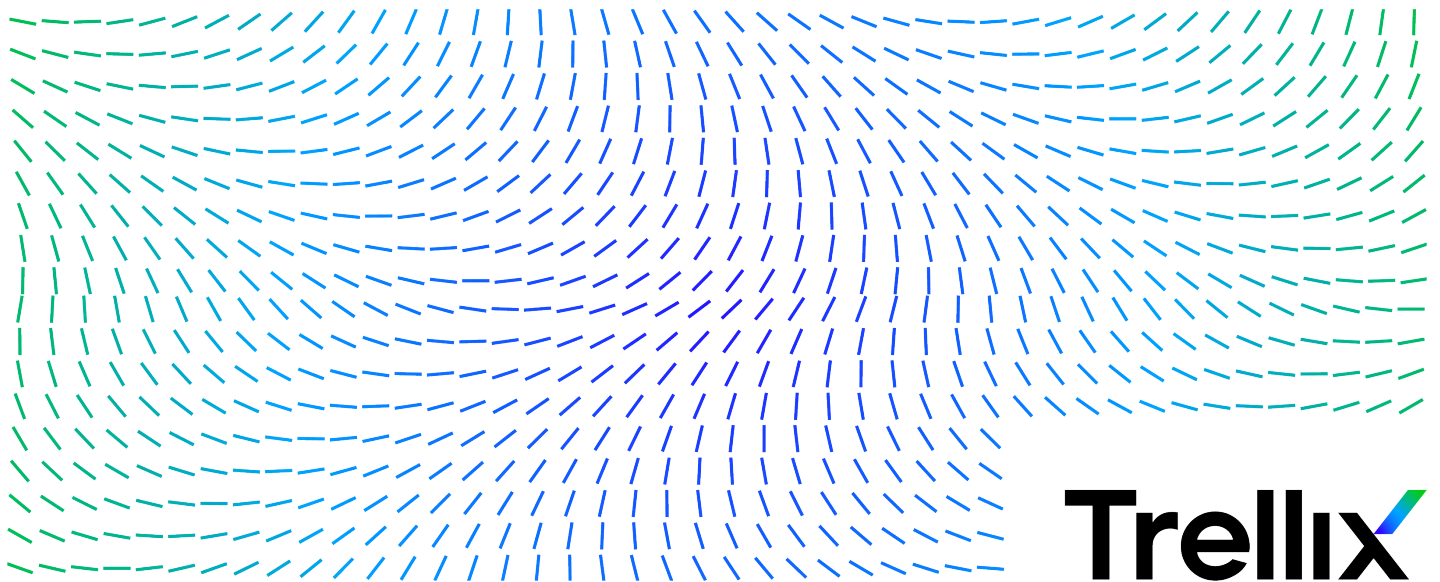

Contents

- Authentication 3
 - Authentication request..... 3
 - Authentication response 4
 - cURL code sample: authentication..... 5

Authentication


The Web Services API uses an HTTP Basic authentication scheme to manage authentication between the remote server and your appliance. You need a valid user account on your appliance with the API Analyst or API Monitor profile. You provide the user name and password in an HTTP POST authentication request to your appliance. If the user is authenticated, your appliance provides a session token that maintains authentication for the duration of the current session.

Note

The user account must be established on the appliance you are using to run the Web Services API before you can establish a session between the remote server and your appliance. For more information about setting up user accounts on your appliance, see the *System Administration Guide* for your appliance.

Note

If your account requires the password to be changed when you run the authentication request, an error is returned, and you must change your password to continue using the API. To avoid an interruption in service, Trellix recommends changing passwords before they expire.

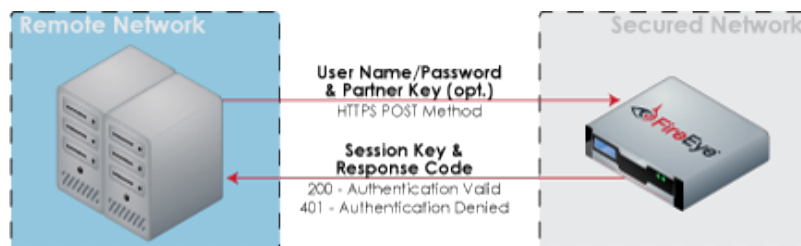

Note

The request must be made using the HTTP POST method.

Authentication request

To log in to your appliance from a remote server using the Web Services API, send the following HTTP POST request URL and headers:

```
POST https://<address>/wsapis/[v1.2.0|v2.0.0]/auth/login?
```

This command is available on the following appliances:

- Central Management System

- Malware Analysis
- Email Security — Server
- File Protect
- Network Security

Required headers:

```
Authorization: Basic [Base64 (Username:Password)]
X-FeClient-Token: [Client-Token]
```

Parameters

- address—The IP address of the appliance running the Web Services API.
- Base64 (Username: Password)—The base64-encrypted user name and password supplied by the appliance's administrator.
- Client-Token—(Optional) This client token is provided by Trellix. For more information about the client token, contact your sales representative.

Example

The following is an example of a valid authentication request:

```
POST https://xxx.xxx.xxx.xxx:443/wsapis/v2.0.0/auth/login
```

Request headers:

```
Authorization: Basic dGVzdDp0ZXN0
X-FeClient-Token: BigDataInc
```

Authentication response

After it receives the authentication request, your appliance authenticates the user account and responds with either an authentication confirmation code, along with an API-Token used to maintain the authenticated session, or an authentication invalid code.

```
HTTP/1.1 [Response Code] [Response Message]
```

```
Date: [Date]
```

```
X-FeApi-Token: [API-Token]
```

```
X-FeClient-Token: [Client-Token]
```

Response fields

- Response Code—A standard HTML response code.
 - 200—Authentication Success
 - 401—Authentication Refused
 - 503—Web Services API server disabled
- Response Message—A standard HTML response message.
 - OK—Authentication Success
 - Unauthorized—Authentication Refused
 - Not available—Web Services API server disabled
- Date—Standard HTML date format
- API-Token—This token authenticates the session. By default, the session times out after 15 minutes of inactivity.
- Client-Token—(Optional) This client token is provided by Trellix. For more information about the client token, contact your sales representative.

Example

The following is an example of a valid response received from an appliance.

```
HTTP/1.1 [Response Code] [Response Message]
Date: Fri, 20 Oct 2017 08:00:00
X-FeApi-Token: xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx
X-FeClient-Token: BigDataInc
```

cURL code sample: authentication

The following code sample can be copied and executed from any command-line interface that includes the cURL library.

Note

In this sample, line breaks are added for readability. Remove these line breaks before you paste the code sample into your command-line tool.

COPYRIGHT

Copyright © 2026 Musarubra US LLC.

Trellix and FireEye are the trademarks or registered trademarks of Musarubra US LLC, FireEye Security Holdings US LLC, and their affiliates in the US and /or other countries. Other names and brands are the property of these companies or may be claimed as the property of others.

