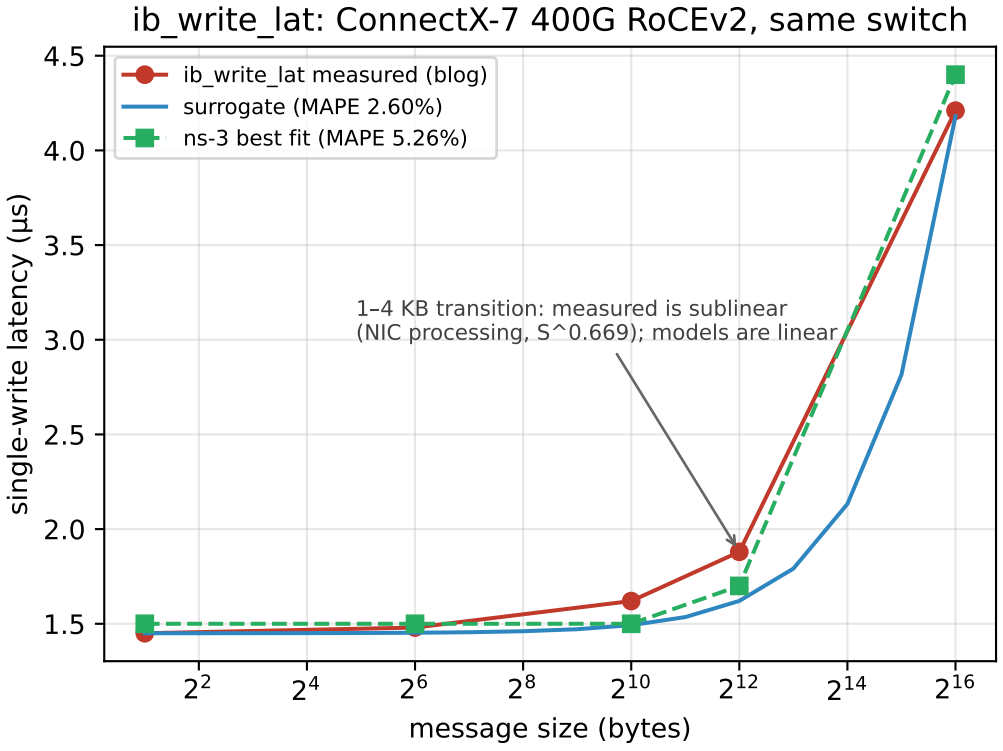
ib_write_lat: ConnectX-7 400G RoCEv2, same switch
ib_write_lat measured (blog)
surrogate (MAPE 2.60%)
ns-3 best fit (MAPE 5.26%)
1–4 KB transition: measured is sublinear
(NIC processing, S^0.669); models are linear
single-write latency (µs)
message size (bytes)

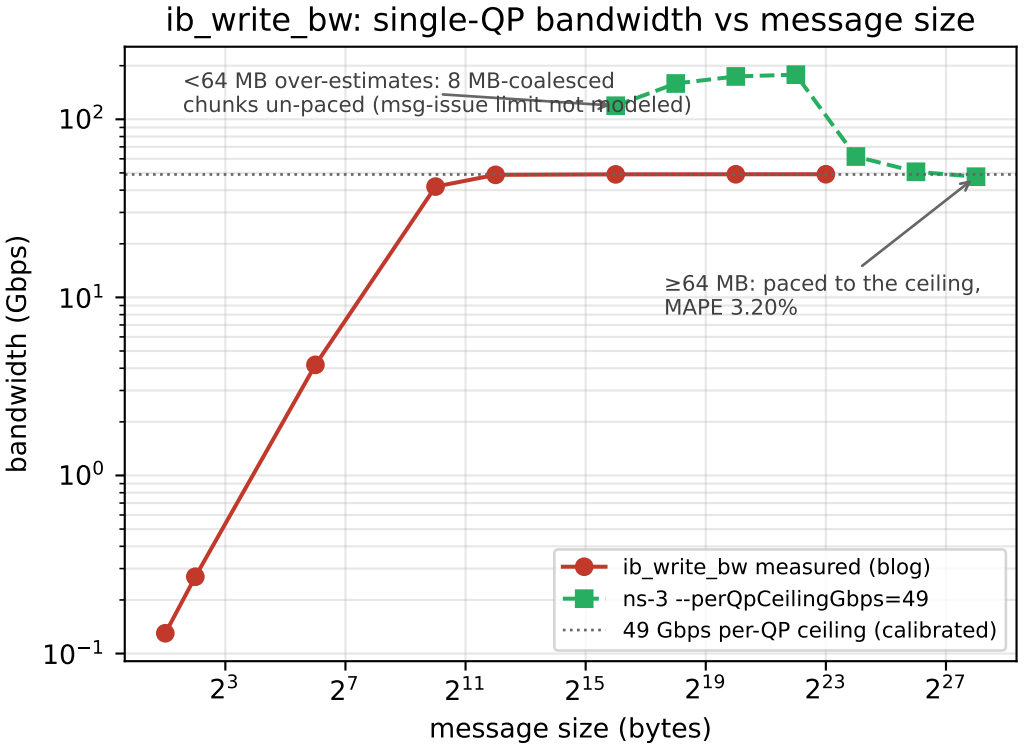
ib_write_bw: single-QP bandwidth vs message size
<64 MB over-estimates: 8 MB-coalesced
chunks un-paced (msg-issue limit not modeled)
≥64 MB: paced to the ceiling,
MAPE 3.20%
ib_write_bw measured (blog)
ns-3 --perQpCeilingGbps=49
49 Gbps per-QP ceiling (calibrated)
bandwidth (Gbps)
message size (bytes)