

 **PDF**
Complete

*Your complimentary
use period has ended.
Thank you for using
PDF Complete.*

[Click Here to upgrade to
Unlimited Pages and Expanded Features](#)

se Registries (CCR) Version 1.5



Technical Manual / Security Guide

Documentation Revised September 2011
For Patch ROR*1.5*15

**Department of Veterans Affairs
Office of Enterprise Development
Health Data Systems – Registries**



PDF
Complete

*Your complimentary
use period has ended.
Thank you for using
PDF Complete.*

[Click Here to upgrade to
Unlimited Pages and Expanded Features](#)

Date	Description	Author	Role
September, 2011	Final release for Patch ROR*1.5*15. See Table 14 for Details.	John Sanders Connie Ray Linda Berry Edward Micyus Dan Zaudtke	Project Manager M Developer Software Quality Assurance Analyst Delphi Developer Tech Writer
March 2011	Patch ROR*1.5*14. See Table 13 for details.	Vida Dunie Angela Saunders Linda Berry Ed Micyus	Tech Writer M Developer Software Quality Assurance Analyst Delphi Developer
December, 2010	Final release for Patch ROR*1.5*13. See Table 12 for details.	Kenneth Rikard Edward Micyus Angela Saunders Linda Berry VJ McDonald	Project Manager Developer Developer Software Quality Assurance Analyst Technical Writer
July, 2009	Technical Writer/SQA review and matchup with CCR User Manual for Patch ROR*1.5*8	Kenneth Rikard VJ McDonald Linda Berry	Project Manager Technical Writer Software Quality Assurance Analyst
October, 2008	With patch ROR*1.5*3, the possible values of the parameter were updated to include the “M” flag.	A. Scott T. Dawson	Project Manager Technical Writer
February, 2006	Completely updated for version 1.5	Sergey Gavrilov	Developer



PDF
Complete

*Your complimentary
use period has ended.
Thank you for using
PDF Complete.*

[Click Here to upgrade to
Unlimited Pages and Expanded Features](#)

THIS PAGE INTENTIONALLY LEFT BLANK

Table of Contents

Revision History.....	v
Table of Contents.....	vii
List of Tables.....	viii
List of Figures	x
1. Preface.....	2
1.1. Typographical Conventions Used in the Manual.....	2
1.2. Navigating Hyperlinks.....	3
1.3. Screen Displays and Text Notes.....	3
1.4. Clinical Case Registries Software Application.....	3
1.5. Purpose of the Manual	4
1.6. Recommended Users.....	4
1.7. Related Documents	4
2. Introduction.....	5
2.1. Overview	5
2.2. Software Features and Functions.....	5
2.3. About Clinical Case Registries 1.5.....	6
2.3.1. Decommissioned Software	6
2.3.2. CCR Patches ROR*1.5*X.....	7
2.4. Obtaining Software and Documentation	16
2.5. VistA Documentation on the Intranet	17
2.6. Accessibility Features in Clinical Case Registries 1.5.....	17
3. Implementation and Maintenance	19
3.1. Implementation.....	19
3.2. Maintenance.....	19
3.2.1. Re-index the ACL cross-reference.....	19
3.2.2. Edit Lab Search Criteria.....	20
3.2.3. Edit Registry Parameters.....	21
3.2.4. Historical Data Extraction	23
3.2.5. Print Log Files	24
3.2.6. Pending Patients	24
3.3. Manual Historical Data Extraction.....	25
3.3.1. Overview	25
3.3.2. Historical Data Extraction Menu.....	26
3.3.3. Data Extraction Instructions.....	27
3.3.4. Data Transmission Instructions.....	34
4. CCR Structure and Process Overview	37
5. CCR Files.....	41
5.1. Files and Globals List	41
5.2. File Diagrams (Pointers).....	44
6. Globals.....	48
6.1. Upgrade Installation.....	48
6.2. Initial Installation.....	48
6.3. Temporary Globals.....	48
7. Routines	49
7.1. Routine List for CCR 1.5.....	49

8. Exported Options.....	56
9. Archiving and Purging	57
9.1. Archiving	58
9.2. Purging.....	61
10. Protocols	61
10.1. HL7 Protocols.....	62
10.2. Event Protocols	62
11. Application Program Interfaces.....	64
12. External Interfaces.....	66
13. External Relations.....	67
13.1. Required Patches.....	67
13.2. Database Integration Agreements (DBIAs)	68
14. Internal Relations.....	75
15. Package-wide Variables	76
16. Software Product Security	77
16.1. Alerts.....	77
16.2. Remote Systems	77
16.3. Contingency Planning.....	77
16.4. Interfacing	77
16.5. Electronic Signatures.....	77
16.6. Security Keys	78
Index	204

List of Tables

Table 1 . Typographical Conventions	2
Table 2 . Graphical Conventions	2
Table 3 . Patch ROR*1.5*1 Description.....	7
Table 4 . Patch ROR*1.5*2 Description.....	8
Table 5 . Patch ROR*1.5*3 Description.....	8
Table 6 . Patch ROR*1.5*4 Description.....	8
Table 7 . Patch ROR*1.5*5 Description.....	9
Table 8 . Patch ROR*1.5*6 Description.....	9
Table 9 . Patch ROR*1.5*7 Description.....	9
Table 10 . Patch ROR*1.5*8 Description.....	9
Table 11 . Patch ROR*1.5*10 Description.....	10
Table 12 . Patch ROR*1.5*13 Description.....	12

Description.....	14
Description.....	15
Table 15 . Software and Documentation Sources	16
Table 16 . Files Included in Distribution.....	17
Table 17 . CCR Menu Options	19
Table 18 . Task Information.....	30
Table 19 . Status Values	30
Table 20 . Files and Globals Exported with CCR	41
Table 21 . CCR 1.5 Routine List.....	49
Table 22 . Routine Sub-Namespaces.....	56
Table 23 . Exported Options.....	58
Table 24 . Event Protocols	62
Table 25 . Application Program Interfaces	64
Table 26 . Prerequisite Patches	68
Table 27 . Database Integration Agreements.....	68
Table 28 . Typographic Conventions (Segment Definitions)	91
Table 29 . HL7 Abbreviated Column Headings	92
Table 30 . HL7 Data Types	92
Table 31 . Diagnostic Service Section ID (HL7 Table 0074)	92
Table 32 . Segment Definition Examples	94
Table 33 . Batch Header Segments	94
Table 34 . BHS-9 Batch Name/ID/Type.....	96
Table 35 . Batch Trailer Segment.....	97
Table 36 . Clinical Study Phase Segment	98
Table 37 . Clinical Study Registration Segment	99
Table 38 . Message Acknowledgment Segment	104
Table 39 . Message Header Segment.....	104
Table 40 . Observation Request.....	107
Table 41 . Observation/Result Segment.....	122
Table 42 . Common Order Segment	137
Table 43 . Patient ID Segment	141

	148
..... coded Order Segment	155
Table 46 . Rated Disabilities Segment	164
Table 47 . Service Period Segment.....	166
Table 48 . Inpatient Segment	168
Table 49 . Outpatient Segment	173
Table 50 . Drug Segment	176
Table 51 . HL-7 Tables.....	178

List of Figures

Figure 1 . Re-index the ACL Cross-reference	19
Figure 2 . Edit Lab Search Criteria	20
Figure 3 . Edit Registry Parameters	21
Figure 4 . Historical Data Extraction	23
Figure 5 . Print Log Files	24
Figure 6 . Pending Patients	25
Figure 7 . Historical Data Extraction Menu	26
Figure 8 . Create the Output Directory	27
Figure 9 . Define Output Directory Name in Data Extraction Parameters.....	28
Figure 10 - Create Data Extraction Task.....	28
Figure 11 . Start Data Extraction Task	28
Figure 12 . Display Extraction Status	30
Figure 13 . Stop a Task.....	31
Figure 14 . Display Task Log.....	32
Figure 15 . Start a Task.....	33
Figure 16 . Create Extraction Tasks	34
Figure 17 . Typical VMS FTP Session.....	36
Figure 18 . Pointer Matrix Legend	44
Figure 19 . File Pointers	44
Figure 20 . File Pointers	45



PDF
Complete

*Your complimentary
use period has ended.
Thank you for using
PDF Complete.*

[Click Here to upgrade to
Unlimited Pages and Expanded Features](#)

.....	47
PI01 Routine)	65
Figure 23 - Sample Output (RORAPI01 Routine).....	65



PDF
Complete

*Your complimentary
use period has ended.
Thank you for using
PDF Complete.*

[*Click Here to upgrade to
Unlimited Pages and Expanded Features*](#)



PDF
Complete

*Your complimentary
use period has ended.
Thank you for using
PDF Complete.*

[Click Here to upgrade to
Unlimited Pages and Expanded Features](#)

INTENTIONALLY LEFT BLANK



1.1. Typographical Conventions Used in the Manual


Fonts and other conventions shown in [Table 1](#) are used throughout this document. Conventions for the use of graphic icons and other symbols are shown in [Table 2](#).

Table 1 . Typographical Conventions


Font	Used for...	Examples:
Blue text, underlined	Hyperlink to another document or URL	ftp.fo-slc.med.va.gov
Green text, dashed underlining	Hyperlink to a place in this document	“CCR accesses several other Veterans Health Information Systems and Technology Architecture (VistA) filesí ö
Courier New	Patch names	ROR*1.5*2, XYZ file #798.1
	VistA menu options	ACL – Re-index the ACL cross-reference
	VistA filenames	Xxx
	VistA field names	Xxx
Franklin Gothic Demi	Keyboard keys	< F1 >, < Alt >, < L >, [Enter]
Microsoft Sans Serif	Software Application names	Clinical Case Registries (CCR)
	Registry names	CCR:HIV
	GUI database field names	Comment field
	GUI report names	Procedures report
Microsoft Sans Serif bold	GUI panel, pane, tab, button and command icon names	Other Registries panel [Delete] button
Times New Roman	Normal text	“... designed for use by designated Registry Coordinators, Managers, and Cliniciansí ö
Times New Roman Italic	Text emphasis	öIt is <i>very</i> importantí ö
	National and International Standard names	<i>International Statistical Classification of Diseases and Related Health Problems</i>
	Document names	<i>Clinical Case Registries User Manual</i>

Table 2 . Graphical Conventions

Graphic	Used for...
	Information of particular interest regarding the current subject matter
	A tip or additional information that may be helpful to the user

	rent subject matter
	Information about the history of a function or operation; provided for reference only.

1.2. Navigating Hyperlinks

Throughout this document, you will find hyperlinks of various types like those indicated in [Table 1](#), above. Some will be to other places in this document, while others will take you to websites or other documents stored online. If the hyperlink is to another place in this document, use the web toolbar *öbackö* button () to return to the point in the document where you clicked the link. If the link is external and takes you to a website, use the back button in your browser to return.

If you do not see the back button in the program you are using to read this document, use your program's View menu to turn on the Web toolbar. For example, in Microsoft® Word® 2003, first click **View**, then **Toolbars**; make sure the Web toolbar is selected.

1.3. Screen Displays and Text Notes

In this manual, the VistA user's response is shown in **bold type**, but it does not appear on the screen as bold. The bold part of the entry is the letter, or letters, that you must type so that the computer can identify the response. In most cases, you only have to enter the first few letters. This increases speed and accuracy.

Every response you type must be followed by pressing the **[Return]** key (or **[Enter]** for some keyboards). In VistA screen shots, whenever the Return or Enter key should be pressed, you will see the symbol **<RET>**. This symbol is not shown but is implied if there is bold input.

Within the *örollnöscrollö* part of the system, Help frames may be accessed from most prompts by entering one, two, or three question marks (**?**, **??**, or **???**).

Within the examples of actual terminal dialogues, additional information about the dialogue may be shown. This information is enclosed in brackets, for example, *{type ward name here}*, and it does not appear on the screen.

1.4. Clinical Case Registries Software Application

The Clinical Case Registries (CCR) software application supports the maintenance of local and national registries for clinical and resource tracking of care for patients with certain clinical conditions. Registries for [Hepatitis C](#) (CCR:HEPC) and [Human Immunodeficiency Virus](#) (CCR:HIV) are available. This application allows access to important demographic and clinical data on all VHA patients with these conditions, and provides many capabilities to VA facilities that provide care and treatment to patients with these conditions, including clinical categorization

of data to the VA's [National Case Registry](#). It also
ports for local medical center use.

CCR accesses several other [Veterans Health Information Systems and Technology Architecture](#) (VistA) files that contain information regarding other diagnoses, prescriptions, surgical procedures, laboratory tests, radiology exams, patient demographics, hospital admissions, and clinical visits. This access allows identified clinical staff to take advantage of the wealth of data supported through VistA.

1.5. Purpose of the Manual

The *Clinical Case Registries User Manual* provides detailed instructions for using the CCR software and its [graphical user interface](#) (GUI). This document, the *CCR Technical Manual / Security Guide*, provides more technical information about the CCR application.

Throughout this document, the acronym CCR always refers to the application and its features, not to the individual registries. The HIV and Hepatitis C registries are referred to as CCR:HIV and CCR:HEPC, respectively: see [Appendix A](#) and [Appendix B](#) for registry-specific information.

1.6. Recommended Users

The Information Resource Management (IRM) staff is required for installation and support of the CCR v1.5.

1.7. Related Documents

These related documents are available at <http://www.va.gov/vdl/application.asp?appid=126>.



- *Clinical Case Registries 1.5 Installation & Implementation Guide*
- *Clinical Case Registries 1.5 Release Notes*
- *Clinical Case Registries 1.5 User Manual*

The Clinical Case Registries (CCR)) software application collects data on the population of veterans with certain clinical conditions, namely [Hepatitis C](#) and [Human Immunodeficiency Virus](#) (HIV) infections.

2.1. Overview

The Clinical Case Registries (CCR) software uses pre-defined selection rules that identify patients with possible Hepatitis C and/or HIV (such as a disease related [ICD-9](#) code or a positive result on an antibody test) and adds them to the registry in a pending state. Pending patients are reviewed by the local registry coordinator and if the data confirm the diagnosis, the local registry coordinator confirms the patient in the registry.

A nightly background process transmits a set of predefined data via [HL7](#) to the national CCR database at [Corporate Data Center Operations](#) (CDCO).¹ Data from both registries is aggregated in the same message. The CCR software creates a limited set of database elements to be stored locally in the VistA system, and focuses on assuring that the local listing is complete and accurate, that the desired data elements are extracted, and that data elements are appropriately transmitted to the national database.

 **Note:** Effective with Patch ROR*1.5*14, the extract code pulls Purchased Care Data. New ZIN/ZSV/ZRX segments were added to the HL7 message for this purpose (see updated tables starting on page [166](#)). This change is transparent and seamless to users; no changes in process or method were made. 

If there is more new data than is allowed by the registry parameter for a single CCR HL7 batch message (currently, five megabytes), the software will send several messages during a single night.

Data from the registries is used for both clinical and administrative reporting on both a local and national level. Each facility can produce local reports (information related to patients seen in their system.). Reports from the national database are used to monitor clinical and administrative trends, including issues related to patient safety, quality of care and disease evolution across the national population of patients.

2.2. Software Features and Functions

CCR provides these key features:

¹ CDCO was formerly known as the Austin Automation Center (AAC). CDCO is managed by the VHA Center for Quality Management in Public Health (CQMPH).

of the data files via the GUI.

- Semi-automatic sign-on to the VISTA databases via the web-based GUI; a separate VISTA log-in is not required, nor is emulation software such as !KEA or Attachmate Reflection.
- Automated development of local lists of patients with evidence of HIV or Hepatitis C infection.
- Automatic transmission of patient data from the local registry lists to a national database.
- Robust reporting capabilities.

CCR also provides the following functions:

- Tracking of patient outcomes relating to treatment.
- Identification and tracking of important trends in treatment response, adverse events, and time on therapy.
- Monitoring quality of care using both process and patient outcome measures.

2.3. About Clinical Case Registries 1.5

Version 1.5 of the CCR software (published via Patch ROR*1.5*1) introduced a single software package to support both the CCR:HEPC Registry and the CCR:HIV Registry (also called the Immunology Case Registry (ICR)). CCR provides access to both CCR:HIV and CCR:HEPC from a single interface; previously, these two registries were created and maintained through two separate software packages. Since the functional requirements for these registries were substantially the same, they were combined.

CCR 1.5 has also been enhanced by automation of the data collection system and transformed from an administrative database into a clinically relevant tool for patient management.

Each patch released since the original iteration of CCR 1.5 has added improvements and fixes; see [CCR Patches ROR*1.5*X](#) for details.

2.3.1. Decommissioned Software

2.3.1.1. Immunology Case Registry v2.1

Patients from ICR version 2.1 were migrated to CCR:HIV during the installation of patch ROR*1*5 (March 2004). After a transitional period when the two packages were used concurrently, ICR 2.1 was removed from service by patch IMR*2.1*21 (October 2005).

2.3.1.2. Hepatitis C Case Registry v1.0

Hepatitis C Case Registry (HCCR) v1.0 was removed from service with the release of CCR 1.5. Historical patient data from the previous Hepatitis C Registry was migrated to CCR:HEPC.

*X

R*1.5 series are shown in the following tables. Under **Type**, E indicates an enhancement, F indicates a fix, and M denotes a modification (as to data). To jump to a particular patch, click (or <Ctrl>+<Click>) a green link below.

Patch ROR*1.5*1	Patch ROR*1.5*2	Patch ROR*1.5*3	Patch ROR*1.5*4	Patch ROR*1.5*5	Patch ROR*1.5*6	Patch ROR*1.5*7
Patch ROR*1.5*8	(Patch ROR*1.5*9: maintenance patch; not documented herein)		Patch ROR*1.5*10	Patch ROR*1.5*13	Patch ROR*1.5*14	Patch ROR*1.5*15

2.3.2.1. Patch ROR*1.5*1

Table 3 . Patch ROR*1.5*1 Description

Patch Number	#	Description	Type
ROR*1.5*1	1	Selected (Date) and Selection Rule columns added to the patient list on the Registry tab.	E
	2	When a report is opened, the Task Manager tab is activated.	E
	3	The Mode field is added to the Local Fields and Other Registries panels of the Report parameters to provide patient include and exclude filters.	E
	4	A Delete button is added to the Patient Data Editor dialog box.	E
	5	A Patients panel is added to the Procedures report to use selected procedures performed and selected procedures not performed within a date range.	E
	6	A Procedures panel is added to the Procedures report to indicate whether a procedure is an inpatient or outpatient one	E
	7	The ICD-9 panel of the Diagnoses report is modified to be able to define groups and add ICD-9 codes to the groups.	E
	8	The %Check if patient ever had an AIDS-OI+checkbox is automatically selected and the %Date of AIDS-OI+field is populated if an indicator disease Def box is selected in Section VIII of the CDC form in the Clinical Status section.	E
	9	A new patient search parameter is added for the Registry tab: # followed by the patient's 11-digit coded SSN.	E
	10	The output format of the Combined Meds and Labs report is modified.	E
	11	The Patient Medication History report is modified with the addition of two radio buttons, Consider All and Selected Only to the Select Patient panel.	E

			Type
	12	Fixed Microsoft® Windows Server 2003® issue.	F
	13	Fixed missing CDC bitmap error.	F
	14	Fixed incorrect printing of the CDC form.	F

2.3.2.2. Patch ROR*1.5*2

Table 4 . Patch ROR*1.5*2 Description

Patch Number	#	Description	Type
ROR*1.5*2	1	Fixed RPC Broker timeout issue.	F
	2	Fixed issues with duplicates in patient list.	F
	3	Fixed issues with lower-case characters in lab tests and medications data.	F
	4	Fixed issue with Reporting date entry not accepting %T.+	F
	5	Fixed issue with un-checking of local fields in the Patient Data Editor not being saved.	F
	6	Fixed issues with run-time errors using \$QUERY on non-Caché platforms.	F
	7	Fixed issues with non-SSN patient identifier appearing on reports at non-VA sites.	F

2.3.2.3. Patch ROR*1.5*3

Table 5 . Patch ROR*1.5*3 Description

Patch Number	#	Description	Type
ROR*1.5*3	1	Accommodated Patch RA*5*75 (Radiology), which introduced a Reason for Study data field.	E
	2	Addition of Task Control flag (%M+) which signals the system to disable HL7 messaging.	E

2.3.2.4. Patch ROR*1.5*4

Table 6 . Patch ROR*1.5*4 Description

Patch Number	#	Description	Type
ROR*1.5*4	1	Added two additional ICD-9 codes needed for the nightly ROR registry update and data extraction.	E

Table 7 . Patch ROR*1.5*5 Description

Patch Number	#	Description	Type
ROR*1.5*5	1	Fixed issue with Procedures without a Provider not being sent to AAC.	F
	2	Added drug identified as needed for nightly ROR registry update and data extraction.	E

2.3.2.6. Patch ROR*1.5*6

Table 8 . Patch ROR*1.5*6 Description

Patch Number	#	Description	Type
ROR*1.5*6	1	Added generic drug RALTEGRAVIR to VA GENERIC file #50.6.	E

2.3.2.7. Patch ROR*1.5*7

Table 9 . Patch ROR*1.5*7 Description

Patch Number	#	Description	Type
ROR*1.5*7	1	Added generic drug ETRAVIRINE to VA GENERIC file #50.6.	E

2.3.2.8. Patch ROR*1.5*8

Table 10 . Patch ROR*1.5*8 Description

Patch Number	#	Description	Type
ROR*1.5*8	1	Fixes the %access violation+seen when selecting Diagnoses Report (Remedy Tickets HD0000000262208 and HD0000000262209).	F
	2	Inserts a Comment Field in the Pending Patient File necessary for tracking special conditions for a patient (see <i>CCR User Manual</i> , Pending Comment).	E
	3	Adds the Comments panel to the Patient Data Editor screen (see 2 above).	E
	4	Adds the Comment field to Processing Pending Patient screen (see 2 above).	E

			Type
	5	Refreshes the Processing Pending Patient screen when comment is added or deleted (see 2 above).	E
	6	Adds radio buttons %Include, +%Exclude, +or %Ignore+ to provide a filter limiting reports to patients who have diagnoses based on International Classification of Diseases, 9th edition (ICD-9) codes in Common Templates or Your Templates. This filter applies to all reports except the Diagnoses Report.	E
	7	Modifies the Combined Meds and Labs report to require the user to assign a group name.	E
	8	Modifies the Combined Meds and Labs report to provide the option to limit lab results to most recent.	F
	9	Modifies the Combined Meds and Labs report to "Include All" or "Selected Only" for lab results (Remedy Ticket HD0000000232223).	E
	10	Modifies the Combined Meds and Labs report, Pharmacy Prescription Utilization report, and the Patient Medication History report to include a new method of handling Investigational Drugs and Registry Medications on the Medications panel drop-down list.	E

2.3.2.9. Patch ROR*1.5*10

Table 11 . Patch ROR*1.5*10 Description

#	Description			Type
1	Adds new ICD-9 diagnosis groups to the Common Templates:			M
	HCC	155.0	MAL NEO LIVER, PRIMARY	
	Esophageal Varices	456.0	ESOPHAG VARICES W BLEED	
		456.1	ESOPH VARICES W/O BLEED	
		456.20	BLEED ESOPH VAR OTH DIS	
		456.21	ESOPH VARICE OTH DIS NOS	
2a	Adds LOINC codes to CCR:HIV Patient ID:			M
	LOINC_NUM	SHORTNAME	LONG_COMMON_NAME	
	34591-8	HIV1 Ab Fld Q1 EIA	HIV 1 Ab [Presence] in Body fluid by Immunoassay	
	34592-6	HIV1 Ab Fld Q1 IB	HIV 1 Ab [Presence] in Body fluid by Immunoblot (IB)	
	43009-0	HIV1+2 IgG Ser Q1	HIV 1+2 IgG Ab [Presence] in Serum	
	43010-8	HIV1+2 Ab XXX Q1	HIV 1+2 Ab [Presence] in Unspecified specimen	
	43185-8	HIV 1 & 2 Ab Patrnr Ser IB-Imp	HIV 1 & 2 Ab band pattern [interpretation] in Serum by Immunoblot (IB)	
	43599-0	HIV1 Ab Ser IF-aCnc	HIV 1 Ab [Units/volume] in Serum by Immunofluorescence	
	44533-8	HIV1+2 Ab Ser Donr Q1	HIV 1+2 Ab [Presence] in Serum from donor	
	44607-0	HIV1 Ser EIA-Imp	HIV 1 [interpretation] in Serum by Immunoassay	



				Type
			HIV 1+2 Ab [Presence] in Serum by Immunoblot (IB)	
	49580-4	HIV1+2 Ab XXX Q1 Rapid	HIV 1+2 Ab [Presence] in Unspecified specimen by Rapid test	
	49905-3	HIV1 Ab XXX Q1 Rapid	HIV 1 Ab [Presence] in Unspecified specimen by Rapid test	
	5221-7	HIV1 Ab Ser Q1 IB	HIV 1 Ab [Presence] in Serum by Immunoblot (IB)	
	53379-4	HIV1 Ab XXX Q1	HIV 1 Ab [Presence] in Unspecified specimen	
	54086-4	HIV1+2 IgG Bld.Dot Q1	HIV 1+2 IgG Ab [Presence] in Blood dot (filter paper)	
2b	Adds LOINC Codes to CCR:HEPC Patient ID:			M
	LOINC_NUM	SHORTNAME	LONG_COMMON_NAME	
	47365-2	HCV Ab Ser Donr Q1 EIA	Hepatitis C virus Ab [Presence] in Serum from donor by Immunoassay	
	47441-1	HCV Ab Ser Donr Q1	Hepatitis C virus Ab [Presence] in Serum from donor	
	48576-3	HCV RNA XXX Q1 bDNA	Hepatitis C virus RNA [Presence] in Unspecified specimen by Probe & signal amplification method	
	51655-9	HCV RNA Fld Q1 PCR	Hepatitis C virus RNA [Presence] in Body fluid by Probe & target amplification method	
	51657-5	HCV Ab Fld Q1	Hepatitis C virus Ab [Presence] in Body fluid	
3	Updates (by changing date selection criteria) the Microbiology data extraction code to capture missing Microbiology data. Extract now uses 'completion date' and/or 'date collected'.			E
	<p><i>Prior to this patch, the Microbiology data extraction was pulling data based on the 'completion date' (DATE REPORT COMPLETED, #.03 in the MICROBIOLOGY sub-file #63.05 of the LAB DATA file #63) alone. It was found that many sites do not populate that field, causing microbiology data to be omitted from the nightly extract to the central registry. The extract will now pull data based on the 'date collected' (DATE/TIMESPECIMEN TAKEN, #.01) if the 'completion date' is null.</i></p>			
4	Corrects Problem List Extraction by using DATE RESOLVED versus DATE RECORDED .			F
	<p><i>Previously, the Problem List Extraction was pulling data from the wrong field (DATE RECORDED, #1.09) to populate the 'date resolved' field in the extract. Data is now correctly pulled from the DATE RESOLVED field (#1.07) of the PROBLEM file (#9000011).</i></p>			
5	Adds new OBR and OBX segments to the nightly extract to pull Immunization data and Skin Test data for Registry patients (see <i>CCR Technical Manual</i>).			E
	<p><i>The nightly and historical extracts have been enhanced to include OBR and OBX segments for Immunization data and Skin Test data for registry patients. Immunization data and Skin Test data will be pulled if the DATE LAST MODIFIED (#.13 in the VISIT file (#9000010) is within the extract range. For details of the data included in the segments, please refer to the CCR Technical Manual.</i></p>			
6	Changes nightly data extract to include patients on the Pending list.			E
	<p><i>The CCR data extract (both nightly and historical) previously included data for 'confirmed' patients only. It will now include data for 'pending' patients as well. Previously, the DON'T SEND field (#11) in the ROR REGISTRY RECORD file (#798) was set to 'true' when a pending patient was added to the registry. With patch 10, the DON'T SEND field will be set to 'true' for test patients only.</i></p>			
7	Adds three new reports:			E
	Model for End-Stage Liver Disease (MELD) Score by Range			
	Body Mass Index (BMI) by Range			



		Type
	<i>These reports can be executed from the GUI application. See the User Manual for additional report information.</i>	
8	Modifies existing report headers to reflect the Other Diagnosis filter (added by ROR*1.5*8)	E
9	Adds ALL REGISTRY MEDICATIONS to the Medications Selection panel via a new [All Registry Meds] button. This is included in the Combined Meds and Labs, Patient Medication History, and Pharmacy Prescription Utilization reports.	E
10	Adds new checkbox to display Pending Comments on the List of Registry Patients report. <i>The "List of Registry Patients" report has been enhanced to include a "Pending Comments" column added to the Report Options. If this option is checked, an additional column called Pending Comments will be added as the right-most column of the report. If the Registry Status' Pending check box is not checked, the Pending Comments option will be disabled.</i>	E
11	Replaces Direct global and FileMan reads to the International Classification of Diseases, 9th Revision, Clinical Modification (ICD-9-CM) files with calls using supported Application Program Interfaces (APIs). <i>To support encapsulation of data in the ICD-9-CM package, direct global and FileMan reads previously used in the ROR namespace were replaced with calls using supported ICD-9-CM APIs. These supported APIs retrieve Diagnosis information needed by the CCR application for the extracts and reports.</i>	E
12	Modifies Other Diagnosis filter to allow the user to remove group header from the "selected" box when the user removes a group from the "selected" panel. <i>If the user highlights the header and presses the delete key, the header will be deleted. In addition, if the user highlights the header and hits the left arrow, the header will be deleted. Previously, the header was not being removed from the selected box.</i> <i>Reports with the 'Other Diagnoses' filter have been modified to display the selected diagnoses in the report header. One of the three formats shown below will be displayed on the report, depending on what the user selected.</i> <i>Diagnoses: All</i> <i>Diagnoses: Include abc, def, etc.</i> <i>Diagnoses: Exclude abc, def, etc.</i>	M
13	Modifies the "Help About" popup to conform to VA standards, including hyperlinks to reference documents.	E
14	Modifies the online help file to make it <u>context-sensitive</u> .	E
15	Updates the GUI application to work toward adherence to the <u>Section 508</u> standards.	M
16	Reports XML code have been updated to address a bug introduced in Internet Explorer 7 that was causing page breaks to not work correctly.	F

2.3.2.10. Patch ROR*1.5*13

Table 12 . Patch ROR*1.5*13 Description

#	Description	Type
---	-------------	------

		Type
	VA HEPC entry of the Lab Search criteria in the ROR LAB SEARCH file (#798.9), sub-file LAB TEST (#2).	M
2	Enhances the nightly and historical HL7 extracts to include ORC and RXE segments for Non-VA medications for registry patients. Non-VA medication data will be pulled if the DOCUMENTED DATE (#11) or the DISCONTINUED DATE (#6) in the NON-VA MEDS sub-file (#52.2) of the PHARMACY PATIENT file (#55) is within the extract range.	E
3	Enhances the Patient Medication History report to allow users to select the most recent fill only, or all fills. The report output has been enhanced to include a column displaying the number of fills remaining.	E
4	Reports BMI by Range, MELD Score by Range, and Renal Function by Range have been enhanced to allow users to sort the report output by the calculations. The BMI by Range report can be sorted by the BMI score. The MELD Score by Range report can be sorted by the MELD or the MELD-Na score. The Renal Function by Range report can be sorted by the CrCL or the eGFR score.	E
5	All reports (except Outpatient Utilization, Inpatient Utilization, List of Registry Patients, and Current Inpatient List) will allow users to select specific clinics or divisions. All reports (except List of Registry Patients and Current Inpatient List) will allow users to select specific patients.	E
6	When users want to select specific medications in the Combined Meds And Labs report or the Patient Medication History report, the text in the search box will automatically convert to uppercase.	E
7	The CCR GUI application will now check VistA for the CCR server version, and it will display a message if the CCR GUI and the CCR server version are out of sync with each other.	E
8	The CCR GUI was updated to work towards becoming fully compliant with the Section 508 standards.	
9	An historical data extraction for Non-VA meds is added to the ROR HISTORICAL DATA EXTRACTION file (#799.6). It will automatically execute during the next nightly extract, and there is no manual intervention required by the sites. The extraction date range for this historical data extraction is 1/1/1985 through current date (installation date).	E

Table 13 . Patch ROR*1.5*14 Description

#		Type
1	The 13 risk factors for the HIV registry have been changed from mandatory to optional.	E
2	Currently, within the Patient Data Editor in the HIV registry, the user is prompted to click a checkbox if the patient "ever had an AIDS OI." This prompt and checkbox has been replaced with the question "Did the patient ever have an AIDS OI?" and the option to select either Yes, No, or Unknown has been added to the checkbox.	E
3	The following mandatory question has been added to the Patient Data Editor: "Was your VHA facility/station the first health care setting (VA or non-VA) to diagnose HIV?" along with a checkbox to select either Yes, No or Unknown .	E
4	A new column has been added to the List of Registry Patients Report that allows the user to select "Diagnosed at this facility." This column indicates whether this facility was the first health care setting (VA or Non-VA) to diagnose HIV.	E
5	The nightly extract has been enhanced to include Purchased Care data for registry patients.	E
6	The "MELD Score by Range" report has been renamed to "Liver Score By Range".	E
7	The "Liver Score by Range" report now includes the list of LOINC codes used in the report.	E
8	The "Renal Score by Range" report now includes the list of LOINC codes used in the report.	E
9	The "Liver Score by Range" report now includes APRI and FIB-4 calculations.	E
10	Patients will be automatically confirmed into the HEPC Registry if they have a positive Hepatitis C Virus (HCV) viral load test result.	E
11	This patch brings the Clinical Case Registries (CCR) application into 508 compliance in many areas.	E
12	A historical data extraction for Purchased Care is added to the ROR HISTORICAL DATA EXTRACTION file (#799.6) for automatic execution during the next nightly extract.	E

#	Description	Type
1	Three new HCV generic Drugs, Telaprevir, Boceprevir and Rilpivirine were approved by the FDA in May, 2011. These three medications have been added to the ROR GENERIC DRUG (#799.51) file and can now be selected on reports to provide information about the patients who are taking the new medications.	E
2	The Renal Function by Range Report has been enhanced to include a new option for calculating the eGFR called the CKD-EPI equation. The CKD-EPI GFR is an estimate of glomerular filtration (GFR) using serum creatinine and demographic factors. It is a relatively new equation that is believed to be superior to the MDRD GFR equation. If selected, the CKD-EPI scores are summarized on the report by chronic kidney disease stage	E
3	The result ranges panel on the Renal Function by Range report will include a note that reads, "Lab tests used to calculate renal function are identified by LOINC code. Your local lab ADPAC should be contacted regarding errors in LOINC codes."	M
4	The header on the Renal Function by Range report currently reads, "Lab tests used to calculate Cockcroft-Gault and/or eGFR by MDRD scores are identified by LOINC code." This text will be updated to read, "Lab tests used in calculations are identified by LOINC code."	M
5	The cover sheet text of the Renal Function by Range report will be amended to include the list of LOINC codes that are used. The new text on the Renal Function by Range report will read, "Lab tests used to calculate scores are identified by LOINC code. Your local lab ADPAC should be contacted regarding errors in LOINC codes."	E
6	The Liver Score by Range report has been modified to display only those tests used in the calculation of the liver scores selected by the user. If the user selects the APRI and/or FIB4 tests, then the Bili, Cr, INR, and Na rows should not appear on the report. If the user selects the MELD and/or MELDNA tests, then the AST, Platelet, and ALT rows should not appear on the report.	M
7	The result ranges panel on the Liver Score by Range report will include a note that reads, "Lab tests used in calculations are identified by LOINC code. Your local lab ADPAC should be contacted regarding errors in LOINC codes."	M
8	Users may now use Diagnosed at this VA as a local field. This is a CCR:HIV only option.	E
9	Users may now type ?? or click the All Divisions button to display all Divisions in the left-hand pick box.	E

		Type
	to correct the transposition of check box values	F
	for the Bisexual male and Intravenous/injection drug user questions.	
11	The CDC Form has been modified to check the appropriate checkbox if the user selects 'yes' to the question Received Clotting Factor for Hemophilia/Coagulation disorder.	F
12	An invalid date check and error message have been added for the question, Received transfusion of blood/blood components (other than clotting factor) on the Risk Factors tab in the Patient Editor.	E
13	A future date check and error message have been added for the question, Received transfusion of blood/blood components (other than clotting factor) on the Risk Factors tab in the Patient Editor.	E
14	A future date check and error message have been added for the question, Did the patient ever have an AIDS OI? on the Clinical Status in the Patient Editor.	E
15	An historical data extraction for Non-VA Meds has been added to the ROR HISTORICAL DATA EXTRACTION file (#799.6) for automatic execution during the next nightly extract.	E
16	The Date Range panels (Date Range, Medications Date Range, Lab Tests Date Range and Utilization Date Range) were re-designed for easier use with Assistive Technology.	M

2.4. Obtaining Software and Documentation

The CCR software (ROR 1_5) and documentation files are available for downloading from the following Office of Information Field Offices (OIFO) ANONYMOUS SOFTWARE directories.

The preferred method of obtaining the files is to use [File Transfer Protocol](ftp://download.vista.med.va.gov/) (FTP) from <ftp://download.vista.med.va.gov/>.

This transmits the file from the first available FTP server. Sites may also elect to retrieve software directly from a specific server as shown in [Table 15](#).

Table 15 . Software and Documentation Sources

OIFO	FTP Address	Directory
Albany	ftp.fo-albany.med.va.gov	ANONYMOUS . SOFTWARE
Hines	ftp.fo-hines.med.va.gov	ANONYMOUS . SOFTWARE
Salt Lake City	ftp.fo-slc.med.va.gov	ANONYMOUS . SOFTWARE

The CCR software and accompanying guides and manuals are distributed as the following set of files:

		Retrieval Format
ROR1_5.KID	CCR Initial version 1.5 build (usually needed only for initial build, as at a new site)	ASCII
ROR1_5P15GUI.ZIP	Zipped GUI distributive CCRSETUP.EXE	BINARY
ROR1_5P15DOC1.ZIP	Zipped DOC distributive, which includes both .PDF and .DOC formats: User Manual (ROR1_5_15UM)	BINARY
ROR1_5P15DOC2.ZIP	Installation and Implementation Guide (ROR1_5_15IG) Technical Manual / Security Guide (ROR1_5_15TM) Release Notes (ROR1_5_15RN)	BINARY

2.5. VistA Documentation on the Intranet

Documentation for this product, including all of the software manuals, is available in the VistA Document Library (VDL). The Clinical Case Registries documentation may be found at <http://www.va.gov/vdl/application.asp?appid=126>.

For additional information about the CCR, access the CCR Home Page at the following address: <http://VistA.med.va.gov/ClinicalSpecialties/CCR/>.

Training links and information are also available at <http://vaww.VistAu.med.va.gov/VistAu/CCR/>.

2.6. Accessibility Features in Clinical Case Registries 1.5

Keyboard shortcuts make the CCR GUI accessible to a wide range of users, including those with limited dexterity, low vision, or other disabilities. See the *Clinical Case Registries User Manual* (available at <http://www.va.gov/vdl/application.asp?appid=126>) for a complete list of keyboard shortcuts.²

² Patch ROR*1.5*1 October 2006 added accessibility information for Section 508 compliance.



PDF
Complete

*Your complimentary
use period has ended.
Thank you for using
PDF Complete.*

[Click Here to upgrade to
Unlimited Pages and Expanded Features](#)

Maintenance

3.1. Implementation

Not applicable.

3.2. Maintenance

The Clinical Case Registries Maintenance menu [RORMNT MAIN] has the following options which sites can use to customize and maintain their use of the software:

Table 17 . CCR Menu Options

Option	Description
ACL	Re-index the ACL cross-reference
ELS	Edit Lab Search Criteria
ERP	Edit Registry Parameters
HDE	Historical Data Extraction
PLF	Print Log Files
PP	Pending Patients

3.2.1. Re-index the ACL cross-reference

The ACL cross-reference of the ROR REGISTRY PARAMETERS file (#798.1) should be rebuilt after changes in the allocation of the security keys associated with any registry. Usually, this is done by the nightly task (the Registry Update & Data Extraction [ROR TASK] option). However, if you want the changes to take effect immediately, you can rebuild this cross-reference manually:

Figure 1 . Re-index the ACL Cross-reference

ACL	Re-index the ACL cross-reference
ELS	Edit Lab Search Criteria
ERP	Edit Registry Parameters
HDE	Historical Data Extraction ...
PLF	Print Log Files
PP	Pending Patients ...
Select Clinical Case Registries Maintenance Option: ACL	

3.2.2. Edit Lab Search Criteria

This option allows you to enter the Lab Search criteria used by the registry update process. The criteria are updated via CCR patches and should not be edited without approval from the [Center for Quality Management in Public Health](#) (CQM) and Product Support (PS).

Figure 2 . Edit Lab Search Criteria

```

ACL      Re-index the ACL cross-reference
ELS      Edit Lab Search Criteria
ERP      Edit Registry Parameters
HDE      Historical Data Extraction ...
PLF      Print Log Files
PP       Pending Patients ...

Select Clinical Case Registries Maintenance Option: ELS  Edit Lab Search
Criteria

Select ROR LAB SEARCH NAME: VA HIV
Select LOINC CODE: 33807
  Are you adding '33807' as a new LOINC CODE (the 35TH for this ROR LAB
SEARCH)?
  No// Y  (Yes)
  INDICATOR: P  Positive Result
INDICATED VALUE: <RET>
Select LOINC CODE: <RET>
STATUS: <RET>

```

Each criterion includes one or more *triads* that consist of LOINC CODE, INDICATOR, and an optional INDICATED VALUE. The indicator defines the comparison operation applied to the Lab result. The Lab result is compared to the value of the INDICATED VALUE parameter. For example, if the internal value of this field is equal to 3 (öGreater Thanö) and the value of the INDICATED VALUE field is 5, then this indicator will be evaluated as True for all numeric Lab results values greater than 5.

The only exceptions are the Use Reference Range and Positive Result indicators; they ignore the value.

The Use Reference Range indicator checks to see if the result value is outside of the reference range defined for the Lab test.

The Positive Result indicator selects a test result if the valueí

- contains POS, DETEC or REA *and* does not contain NEG, NO or IND.

For example, the POSITIVE, POS, REACT, and DETECTABLE values will be picked up. At the same time, the NON-REACT, INDETERMINATE, and NEG values will be skipped.



Note: All string comparisons are case-insensitive.

The STATUS field allows users to temporarily inactivate the whole lab search criterion.

3.2.3. Edit Registry Parameters

This option allows you to review/edit the registry parameters. These values can alter the way the system works on a site-by-site basis.

Figure 3 . Edit Registry Parameters

```

ACL      Re-index the ACL cross-reference
ELS      Edit Lab Search Criteria
ERP      Edit Registry Parameters
HDE      Historical Data Extraction ...
PLF      Print Log Files
PP       Pending Patients ...

Select Clinical Case Registries Maintenance Option: ERP Edit Registry Parameters

Select ROR REGISTRY PARAMETERS REGISTRY NAME: VA HEP Hepatitis C Registry
REGISTRY UPDATED UNTIL: DEC 18,2005// <RET>
DATA EXTRACTED UNTIL: DEC 18,2005// <RET>
EXTRACT PERIOD FOR NEW PATIENT: 7300// <RET>
ENABLE LOG: YES// <RET>
Select LOG EVENT: <RET>
REGISTRY STATUS: <RET>
Select NOTIFICATION: CCRUSER,TWO
Are you adding 'CCRUSER,TWO' as a new NOTIFICATION (the 2ND for this ROR REGISTRY
PARAMETERS)? No// Y (Yes)
Select NOTIFICATION: <RET>
LAG DAYS: 7// <RET>
ALERT FREQUENCY: 2/ <RET>/
ENABLE PROTOCOLS: YES// <RET>
MAXIMUM MESSAGE SIZE: 5// <RET>

```

This option is typically run during the implementation phase to enter Notifications and Log Event Types. All other parameters are set during the package installation and should not be edited without approval from PS or package developers.

UNTIL and DATA EXTRACTED UNTIL parameters are installed; they will be subsequently updated by the nightly task. These fields should only be edited in situations such as a system failure.

- The EXTRACT PERIOD FOR NEW PATIENT parameter defines the number of days subtracted from the date a new patient first selection rule was passed that the extract process uses when extracting data. The value of this parameter for national registries cannot be changed by the users.
- The ENABLE LOG field allows you to turn the CCR log on or off. The log stores messages generated by different CCR processes (mostly, by the nightly task).
- The LOG EVENT multiple allows the system to monitor the registry on various levels. If this field is left empty (default), all events except debug messages are recorded in the log file. If the multiple contains one or more records, only events specified by these records and error messages will be recorded. Possible event types are:
 - Debug
 - Information
 - Data Quality
 - Warning
 - Database Error
 - Error

Debug messages are intended for registry troubleshooting. These messages are exclusions from the above rule; they are not logged if ENABLE LOG is set to 'Yes' and the LOG EVENT multiple is empty. Their recording can only be explicitly enabled.

Information messages can be used as formatting elements (headers, trailers, separators, etc.) and as a source of additional information that may be helpful in the troubleshooting process.

Data Quality messages indicate possible issues with the data in the FileMan files, such as missing or invalid values, ambiguous data, etc.

Database Error messages most of these error messages are generated by the FileMan DBS calls. Usually, these messages indicate serious problems with the database. Database errors are recorded regardless of content of the LOG EVENT multiple.

Error messages indicate fatal problems during the execution. Usually, processing of the patient data (or even the registry as a whole) stops after these errors. Errors are recorded regardless of content of the LOG EVENT multiple.

You may enter a new LOG EVENT, if you wish select the type of event and if you want to enable recording of these events. If the list is empty, recording of all events is enabled. Otherwise, only events from the list and error messages will be recorded.

If you need to temporarily exclude the registry from the registry updates and data extractions, set the REGISTRY STATUS parameter to INACTIVE (1).

CATION multiple receive VistA alerts about problems with transmission problems).

- Value of the `LAG_DAYS` parameter defines an overlap of the data searches during the registry updates and a data extraction delay during the regular data extractions. See the Technical Description of the field in the data dictionary for more information.
- Value of the `ALERT_FREQUENCY` parameter determines how often e-mail notifications and VistA alerts are sent to the CDCO and local staff in case of problems with the site's CCR software (data extraction problems, unsent HL7 messages, etc.). For example, if the nightly task runs every night and the `ALERT_FREQUENCY` is 2, then alerts and notifications will be sent every other night.
- If the `ENABLE_PROTOCOLS` parameter is set to `Yes` (default), event protocols will be used by the package to speed up the registry processing. The protocols create references to the patient events in the `ROR_PATIENT_EVENTS` file (#798.3) . Only those patients that have new references will be processed by the next registry update.



Note: If several registries are updated at the same time and at least one of them has this field set to `Yes`, all these registries will be processed using event references.

- The `MAXIMUM_MESSAGE_SIZE` parameter defines the maximum size (in megabytes) of a batch HL7 message that can be sent to the CDCO. If this field is empty or contains 0, the size is not limited.



Note: You must coordinate your intentions with CDCO support personnel if you are going to edit this field.

3.2.4. Historical Data Extraction

This option displays the `Historical Data Extraction` menu. See the [Manual Historical Data Extraction](#) section below for details.

Figure 4 . Historical Data Extraction

DS

Display Extraction Status

ED

Edit ...

ST

Start a Task

TT

Stop a Task

DL

Display Task Log

Select Historical Data Extraction Option:

log files. It provides a history of all events that have occurred within the provided time frame.

Figure 5 . Print Log Files

```

ACL   Re-index the ACL cross-reference
ELS   Edit Lab Search Criteria
ERP   Edit Registry Parameters
HDE   Historical Data Extraction ...
PLF   Print Log Files
PP    Pending Patients ...

Select Clinical Case Registries Maintenance Option: PLF Print Log Files
START WITH START DATE/TIME: // T-1 (FEB 08, 2006)
GO TO START DATE/TIME: LAST// <RET>

DEVICE: HOME// <RET>

CLINICAL REGISTRIES LOG FILE(S)                FEB  9,2006  15:02    PAGE 1
DATE/TIME                TYPE                PATIENT NAME (DFN)
MESSAGE
ADDITIONAL INFO
-----
                LOG DATE/TIME: FEB  8,2006  08:34

FEB  8,2006  08:34      Information
ROR 1.5 PRE-INSTALL STARTED
VA HEPC
VA HIV

FEB  8,2006  08:34      Information
Removing old selection rule references...

FEB  8,2006  08:34      Information
The references have been removed.

FEB  8,2006  08:34      Information
Clearing the ROR TASK file...

...

```



Note: Logs that are older than 31 days are automatically purged by the nightly task.



3.2.6. Pending Patients

When you select this option, you are offered the `List of Pending Errors` option. This option lists all patients whose data caused errors during the Registry Update process.

t of patients referenced by the ERROR multiples of the ROR
e list is sorted by the value of the COUNTER field. This
field indicates how many times an error was recorded for the patient.

Figure 6 . Pending Patients

ACL	Re-index the ACL cross-reference
ELS	Edit Lab Search Criteria
ERP	Edit Registry Parameters
HDE	Historical Data Extraction ...
PLF	Print Log Files
PP	Pending Patients ...
Select Clinical Case Registries Maintenance Option: PP Pending Patients	
LPE	List of Pending Errors
Select Pending Patients Option: LPE List of Pending Errors	
DEVICE: HOME// <RET>	
LIST OF PENDING PATIENT ERRORS	
PATIENT NAME	DFN
	REGISTRY

COUNTER: 14	
CCRPATIENT,ONE	19937
CCRPATIENT,TWO	11866
	VA HEPC
	VA HEPC
COUNTER: 5	
CCRPATIENT,THREE	10075623
	VA HIV
...	

This report can be used to find patients ignored by the registry update (until someone fixes the error(s) and resets value of the COUNTER field to 1).

3.3. Manual Historical Data Extraction

3.3.1. Overview

If it is necessary to re-extract a large amount of registry data in the specified date range due to new data elements, problems in the data extraction code, etc., then the manual historical data extraction should be used.

runs independent of the nightly task. It gathers historical data and uploads it to the host operating system files in HL7 format. Several menu options are provided to initiate and control the process.

Any data errors found will be reported on a log file, and the job will continue on to the next patient on the registry to get historical data. You can check the status of the run using the user interface. The user interface shows when the job is completed and indicates if any data errors were found.

After errors are fixed, the job can be re-run. This second run goes through all patients having errors during the first run and automatically creates an additional file. This process continues until the interface indicates that all patients are processed. After all patients have data extracted successfully, you can transmit all files created by this process to the national database using FTP or any other means.

3.3.2. Historical Data Extraction Menu

Manual historical data extraction menu options are accessible from the Historical Data Extraction [RORHDT MAIN] menu:

Figure 7 . Historical Data Extraction Menu

Select OPTION NAME: **RORHDT MAIN**

DS

Display Extraction Status

ED

Edit ...

ST

Start a Task

TT

Stop a Task

DL

Display Task Log

Select Historical Data Extraction Option: **ED**

CT

Create Extraction Tasks

EE

Edit data extraction

Select Edit Option:

DS - Display Extraction Status

This option displays the status of a selected data extraction. The historical data extraction start and end dates, the output directory name, processed registries, and task table are displayed.

ED - Edit ...

This option offers two more edit options when selected:

CT - Create Extraction Tasks

processing over several tasks in order to speed up the

EE - Edit Data Extraction

This option allows users to edit parameters of a manual historical data extraction in the ROR HISTORICAL DATA EXTRACTION file (#799.6).

ST - Start a Task

This option starts a data extraction task that was created with the Create Extraction Tasks option.

TT - Stop a Task

This option allows you to stop a running task and de-queue a scheduled task. The task can be restarted later. In that case, it will try to re-extract data that was not extracted during the previous runs due to errors. Then it will continue the extraction from the first unprocessed record from the group of patients defined for the task.

DL - Display Task Log

This option lets users see a log of any running/finished data extraction task. If any errors have been found, they will be logged here. Any errors should be fixed and then the task re-started.

3.3.3. Data Extraction Instructions

Follow the steps below to perform the historical data extraction:

1. Create the output directory.

Historical data extraction tasks create files containing historical data for registry patients. The host file system directory for these files must be created and defined in the parameters of the historical data extraction before the extraction tasks are run.

In VMS, create the directory as follows:

Figure 8 . Create the Output Directory

```
$ CREATE/DIR/PROT=(OWNER:RWD) VA2$$:[RORHDT]
$ SET SECUR /ACL=(IDENTIFIER={Vista},ACCESS=READ+WRITE) VA2$:[000000]RORHDT.DIR
```

Replace the {Vista} in the SET command with the VMS username (or UIC) associated with the VistA TaskMan processes.



Note: See Appendix A for instructions on creating the output directory in a Windows environment.

2. Define the name of the output directory in the data extraction parameters.

Use the Edit data extraction [RORHDT EDIT EXTRACTION] option to populate the historical data extraction parameters with the name of the output directory:

one in Data Extraction Parameters

```

CT      Create Extraction Tasks
EE      Edit data extraction

Select Edit Option: EE  Edit data extraction

Select a Data Extraction: ROR-TEST

OUTPUT DIRECTORY: // VA2$:[RORHDT]
```

3. Create the data extraction task(s).

Use the Create Extraction Tasks [RORHDT CREATE] option to define the data extraction tasks:

Figure 10 - Create Data Extraction Task

```

CT      Create Extraction Tasks
EE      Edit data extraction

Select Edit Option: CT  Create Extraction Tasks

Select a Data Extraction: ROR-TEST

Name:      ROR-TEST
Registries: VA HEPC
Date Range: JAN 01, 1980 -- JAN 25, 2006
Output Dir: VA2$:[RORHDT]

      No tasks have been defined
Number of unique patients:      3385
Maximum number of patients per batch: 750
Number of data extraction tasks: 5

Create the new task table? NO// YES

New task table has been created.
```

4. Start the data extraction task(s).

Use the Start a Task [RORHDT START] option to start the data extraction task(s). The user can select a task using a value from the öIDö column:

Figure 11 . Start Data Extraction Task

```

DS      Display Extraction Status
ED      Edit ...
```

Select Historical Data Extraction Option: ST Start a Task

Select a Data Extraction: ROR-TEST

Name: ROR-TEST
Registries: VA HEPC
Date Range: JAN 01, 1980 -- JAN 25, 2006
Output Dir: VA2\$:[RORHDT]

ID	File Name	Task	Status
1	ROR-605-01.HDT		
2	ROR-605-02.HDT		
3	ROR-605-03.HDT		
4	ROR-605-04.HDT		
5	ROR-605-05.HDT		

Task ID: (1-5): 1
Task #85179 has been scheduled.

It is not necessary to wait until the previous task finishes before scheduling the next one. You can schedule several tasks at the same time. Make sure that the system has enough resources for this and there will be no negative impact on the response time during business hours.

5. Wait for task(s) completion.

The person who schedules the data extraction tasks will receive VistA alerts when they are complete (one alert per task).

Meanwhile, you can use the Display Task Log [RORHDT LOG] option to display the data extraction status of a selected registry. The task log includes historical data extraction start and end dates, the output directory name, affected registries, and the task table.

played for each task in the table:

Table 18 . Task Information

Task	Description
ID	Internal Entry Number of the task (IEN).
File Name	A unique name based on site name and sequential number of the task. This file will contain the extracted results when the task has run; it will reside in the designated output directory.
Task	Task number assigned by TaskMan to the data extraction task
Status	Status of the data extraction task

The eight Status values are shown in [Table 19](#).

Table 19 . Status Values

Status	Meaning
Active: Pending	Task is scheduled but is not currently running
Active: Running	Task is currently running
Active: Stopping	Task was requested to stop but has not responded yet
Inactive: Finished	Task has finished successfully
Inactive: Available	Task was created without being scheduled or was edited without being rescheduled
Inactive: Interrupted	Task was stopped by a user
Inactive: Crashed	Task has stopped running due to a crash
Inactive: Errors	Task has completed but some patient data was not processed completely due to errors

In the example below, one of the tasks has the status of Inactive: Errors.

Figure 12 . Display Extraction Status

DS	Display Extraction Status
ED	Edit ...
ST	Start a Task
TT	Stop a Task
DL	Display task log
Select Historical Data Extraction Option: DS Display Extraction Status	
Select a Data Extraction: ROR-TEST	


```

JAN 25, 2006
Output Dir: VA2$:[RORHDT]

  ID  File Name                      Task      Status
  --  -
  1   ROR-605-01.HDT                85179     Inactive: Errors
  2   ROR-605-02.HDT
  3   ROR-605-03.HDT
  4   ROR-605-04.HDT
  5   ROR-605-05.HDT

Enter RETURN to continue or '^' to exit:

```

If you need to stop a task (e.g. due to a slow system response), use the Stop a Task [RORHDT STOP] option. You will be prompted to select a data extraction, and then the task table and task selection prompt will display.

The system displays the De-queue the task? prompt (if the task is already running, the Stop the task? prompt displays instead). If NO is entered, no changes are made to the selected task. If YES is selected, the task is de-queued (or stopped).

Figure 13 . Stop a Task

```

DS      Display Extraction Status
ED      Edit ...
ST      Start a Task
TT      Stop a Task
DL      Display Task Log

Select Historical Data Extraction Option: TT  Stop a Task

Select a Data Extraction: ROR-TEST

Name:      ROR-TEST
Registries: VA HEPC
Date Range: JAN 01, 1980 -- JAN 25, 2006
Output Dir: VA2$:[RORHDT]

  ID  File Name                      Task      Status
  --  -
  1   ROR-605-01.HDT                85179     Inactive: Errors
  2   ROR-605-02.HDT                85180     Active: Running
  3   ROR-605-03.HDT
  4   ROR-605-04.HDT
  5   ROR-605-05.HDT

Task ID:  (1-5): 2
Stop the task #85180? NO// YES
The task #85180 has been stopped/unscheduled.
The task #85180 has not responded to the stop request yet.

```

6. Examine the task log(s).

If one or more data extraction tasks with problems are identified at the previous step, use the Display Task Log [RORHDT LOG] menu option to examine the logs of those tasks. You are prompted to select a data extraction, and then the task table and task selection prompt displays.

Figure 14 . Display Task Log

```
DS      Display Extraction Status
ED      Edit ...
ST      Start a Task
TT      Stop a Task
DL      Display Task Log

Select Historical Data Extraction Option: DL  Display Task Log

Select a Data Extraction: ROR-TEST

Name:      ROR-TEST
Registries: VA HEPC
Date Range: JAN 01, 1980 -- JAN 25, 2006
Output Dir: VA2$: [RORHDT]

  ID  File Name                Task      Status
  ---  ---
  1  ROR-605-01.HDT            85179     Inactive: Errors
  2  ROR-605-02.HDT            85180     Inactive: Interrupted
  3  ROR-605-03.HDT
  4  ROR-605-04.HDT
  5  ROR-605-05.HDT

Task ID:   (1-5): 1

DEVICE: HOME// <RET>

TASK LOG FILE                                JAN 27,2006  13:25    PAGE 1
DATE/TIME          TYPE          PATIENT (DFN)
MESSAGE
ADDITIONAL INFO
-----
JAN 27,2006  13:20      Information
HISTORICAL DATA EXTRACTION STARTED
VA ICR

JAN 27,2006  13:29      Database Error  CCRPATIENT,TEN (7145502)
Cannot obtain results of the Lab tests
Invalid patient identifier passed
No patient found with requested identifier
```

RORUTL02
Information
HISTORICAL DATA EXTRACTION FINISHED
Patients: 1020
Errors: 1
Time (sec): 9
Patients/sec: 0.66

In addition to the warnings and error messages, a task log also shows the date and time that the task was started and when it finished, how many patients were processed, the amount of errors that were encountered, the time (in seconds) that the task took to complete, and the average processing rate (patients per second).

7. If there are errors, fix them and restart the tasks with errors.

After fixing the errors, restart the task(s) that had errors using the Start a Task [RORHDT START] option. This creates new files containing only the data for those patients who had errors during the previous run.

As shown in the example below, the rescheduling dialog is slightly different from that described in step 4:

Figure 15 . Start a Task

```

DS      Display Extraction Status
ED      Edit ...
ST      Start a Task
TT      Stop a Task
DL      Display Task Log

Select Historical Data Extraction Option: ST Start a Task

Select a Data Extraction: ROR-TEST

Name:      ROR-TEST
Registries: VA HEPC
Date Range: JAN 01, 1980 -- JAN 25, 2006
Output Dir: VA2$:[RORHDT]

  ID  File Name                      Task      Status

  1   ROR-605-01.HDT                 85179     Inactive: Errors
  2   ROR-605-02.HDT                 85180     Inactive: Interrupted
  3   ROR-605-03.HDT
  4   ROR-605-04.HDT
  5   ROR-605-05.HDT

Task ID:  (1-5): 1
Data will be written to the 'ROR-605-01-01.HDT' file.
Task #85182 has been scheduled.

```

If you decide to begin the historical data extraction process from scratch, first delete all historical data files from the output directory, then recreate the task table as shown below, and then return to step 4.

Figure 16 . Create Extraction Tasks

CT

Create Extraction Tasks

EE

Edit data extraction

Select Edit Option: CT Create Extraction Tasks

Select a Data Extraction: ROR-TEST

Name:

ROR-TEST

Registries:

VA HEPC

Date Range:

JAN 01, 1980 -- JAN 25, 2006

Output Dir:

VA2\$:[RORHDT]

ID	File Name	Task	Status
1	ROR-605-01-01.HDT	85179	Inactive: Errors
2	ROR-605-02.HDT	85180	Inactive: Interrupted
3	ROR-605-03.HDT		
4	ROR-605-04.HDT		
5	ROR-605-05.HDT		

Overwrite the existing task table? NO// YES

Number of unique patients:

3385

Maximum number of patients per batch:

750

Number of data extraction tasks:

5

Create the new task table? NO// YES

New task table has been created.

The only difference from the step 3 is the additional **Overwrite the existing task table?** prompt. Answer **YES** to that question.

3.3.4. Data Transmission Instructions

3.3.4.1. Background Information

You should transfer the historical data files to the national database via FTP. If the files were created in VMS, you can use the VMS FTP client. If you are using a Windows server, use either a command line or GUI client.

must be transmitted in binary mode.

3.3.4.2. Data Transmission Instruction

Follow the steps below to transmit the data using the VMS FTP (see the VMS documentation and/or online help for more details):

1. Obtain the IP address, user name, and password for the FTP account.
2. Enter the **FTP** command with the IP address as a parameter.
3. Wait for the òName (í):ö prompt and enter your user name.
4. Wait for the òPassword:ö prompt, and then enter your password (the characters of the password do not display on the screen).
5. Change the transfer mode to binary using the **SET TYPE IMAGE** command.
6. Send the historical data files (*.HDT) from the output directory using the **PUT** command:
FTP> **PUT {disk and directory name}*.HDT**
7. Wait until the transfer is complete, and then verify that all files have uploaded successfully.
8. Disconnect and exit the FTP client using the **EXIT** command.

al VMS FTP session:

```
$ FTP 10.168.97.208
220 Palo Alto CQM0 Server
Connected to 10.168.97.208.
Name (10.168.97.208): stn499
331 Please specify the password.
Password:
230 Login successful.
FTP> SET TYPE IMAGE
200 Switching to Binary mode.
FTP> PUT VA2$:[RORHDT]*.HDT
200 PORT command successful. Consider using PASV.
150 Ok to send data.
226 File receive OK.
local: VA2$:[RORHDT]ROR-605-01.HDT;1 remote: ror-605-01.hdt
93003 bytes sent in 00:00:00.69 seconds (130.31 Kbytes/s)
200 PORT command successful. Consider using PASV.
150 Ok to send data.
226 File receive OK.
local: VA2$:[RORHDT]ROR-605-02.HDT;1 remote: ror-605-02.hdt
91391 bytes sent in 00:00:00.51 seconds (174.31 Kbytes/s)
FTP> EXIT
221 Goodbye.
```





Note: For information on using the Windows FTP client, see [Appendix B](#).

Process Overview

CCR consists of several parts:

- Data stored in VistA database files
- M Programs in the ROR namespace
- Data Dictionaries necessary to achieve the specified requirements
- A Delphi-based graphical user interface (GUI) öfront-endö application
- Relevant Remote Procedure Call (RPC) protocols

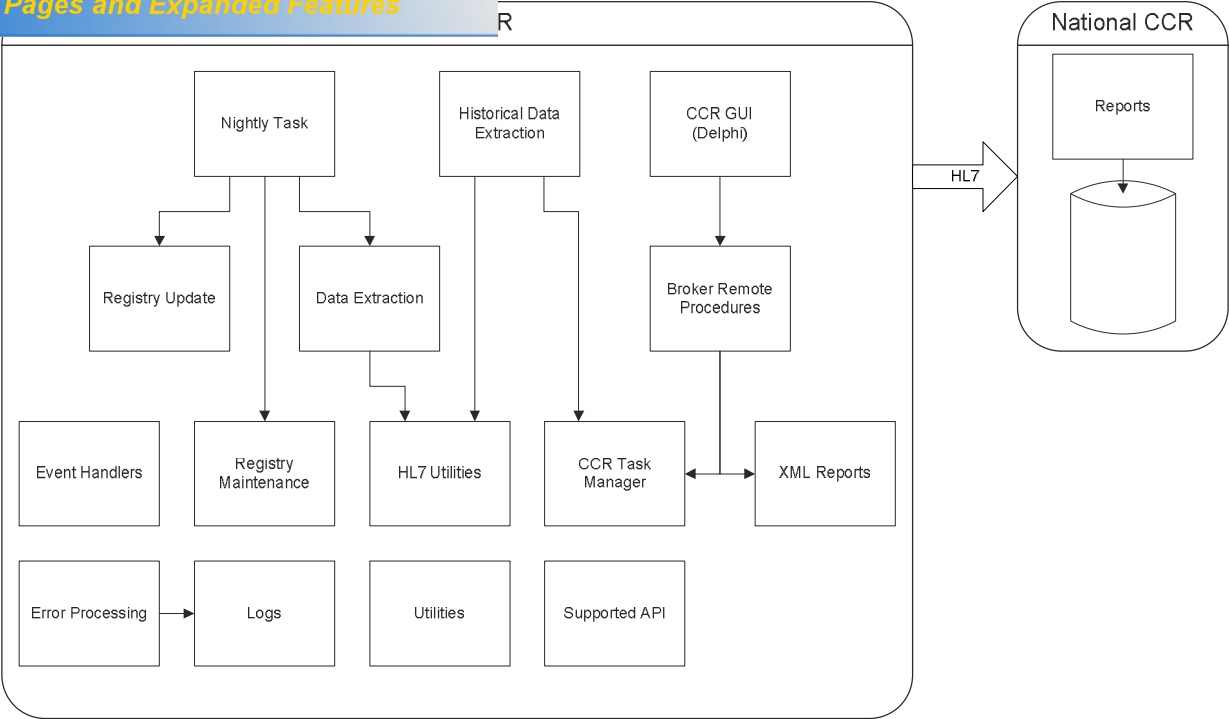

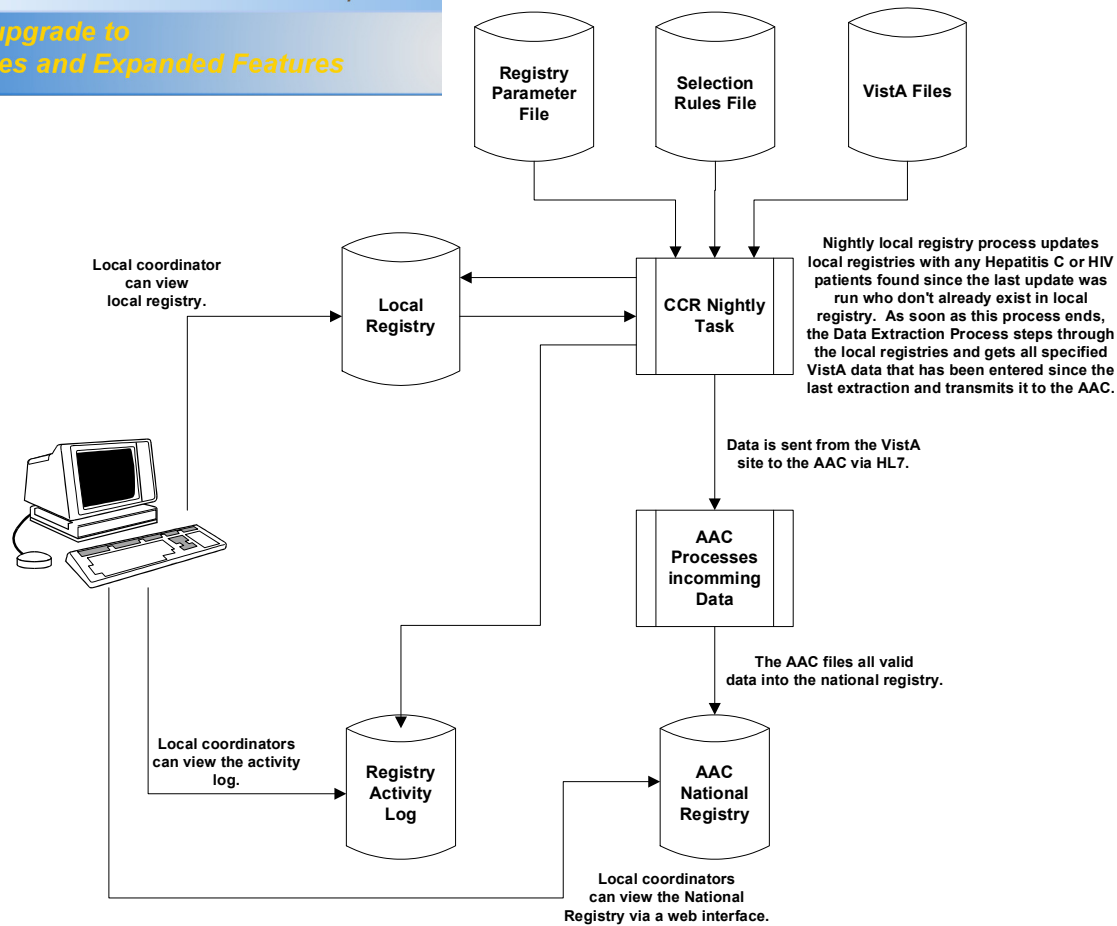



PDF
Complete

*Your complimentary
use period has ended.
Thank you for using
PDF Complete.*

[Click Here to upgrade to
Unlimited Pages and Expanded Features](#)

INTENTIONALLY LEFT BLANK

5.1. Files and Globals List

The following files and globals are exported with the CCR software:

Table 20 . Files and Globals Exported with CCR

File Number	File Name	Global Name	Description
798	ROR REGISTRY RECORD	^RORDATA (798 ,	The ROR REGISTRY RECORD file contains records of local registries. Each record associates a patient with a registry and contains registry-specific and additional service information.
798.1	ROR REGISTRY PARAMETERS	^ROR (798.1 ,	Records of the ROR REGISTRY PARAMETERS file contain various registry parameters and the data that indicates current registry state. Every registry must have a record in this file.
798.2	ROR SELECTION RULE	^ROR (798.2 ,	The ROR SELECTION RULE file contains definitions of the selection rules that are used to screen patients for addition to the registries.
798.3	ROR PATIENT EVENTS	^RORDATA (798.3 ,	<p>The ROR PATIENT EVENTS file is used to store references to those patients that were processed with errors and were not added to the registry, even if they potentially should have been added (see the ERROR multiple).</p> <p>Moreover, the data references generated by the event protocols are stored in this file (see the EVENT multiple). These references are used to speed up the regular registry updates.</p>



			Global Name	Description
			RORDATA (798.4 ,	<p>The ROR PATIENT file contains patient information that is common for all local registries (mostly, demographic information).</p> <p>Demographic data from this file is compared to that from the PATIENT file (#2) to determine if it has been changed since the last registry data extraction. These fields are updated with the values from the PATIENT file and the UPDATE DEMOGRAPHICS flag is set to %es+ in all active registry records of the patient.</p>
798.6	ROR PHARMACY CODE		^ROR (798.6 ,	<p>This file contains a list of pointers to the VA DRUG CLASS file (#50.605). Within the Pharmacy package each class is linked to a group of medications. Each class on this file has an associated registry; the %AC+cross-reference groups all entries by registry.</p>
798.7	ROR LOG		^RORDATA (798.7 ,	<p>The ROR LOG file is used for recording different kinds of events (errors, debug messages, etc.) that are generated by the CCR software.</p>
798.8	ROR TASK		^RORDATA (798.8 ,	<p>The ROR TASK file enhances the functionality of TaskMan and supports the package APIs used by the GUI to schedule and control the tasks, and view and print the reports.</p>
798.9	ROR LAB SEARCH		^ROR (798.9 ,	<p>Lab search criteria are stored in this file. These criteria are referenced by the selection rules and used in the search for Lab results.</p> <p><i>Update by (11): LOINC value 57006 is added to the VA HEPC Lab Search criteria in sub-file LAB TEST (#2).</i></p>



		Global Name	Description
	ITEM	ROR (799.1 ,	This file contains code sets used within different registries.
799.2	ROR METADATA	^ROR (799.2 ,	The ROR METADATA file contains descriptors of the files, data elements and APIs used by the registry update subsystem (search engine). These descriptors define relationships between files (%file-processing tree-) used by the search engine, data elements, and APIs.
799.31	ROR XML ITEM	^ROR (799.31 ,	The ROR XML ITEM file contains a list of XML tags and attributes that can be used in the reports.
799.33	ROR DATA AREA	^ROR (799.33 ,	The ROR DATA AREA stores codes and names of the data areas referenced by the DATA AREA (the ROR HISTORICAL DATA EXTRACTION file) and the EVENT (the ROR PATIENT EVENTS file) multiples.
799.34	ROR REPORT PARAMETERS	^ROR (799.34 ,	The ROR REPORT PARAMETERS file stores the report definitions that are used by the ROR REPORT SCHEDULE remote procedure to schedule the reports.
799.4	ROR HIV RECORD	^RORDATA (799.4 ,	The ROR HIV RECORD file stores the patients' data specific to the Human Immunodeficiency Virus Registry (CCR:HIV).
799.49	ROR AIDS INDICATOR DISEASE	^ROR (799.49 ,	The ROR AIDS INDICATOR DISEASE file contains definitions of the AIDS indicator diseases referenced by Part VIII of the HIV CDC form.
799.51	ROR GENERIC DRUG	^ROR (799.51 ,	This file contains a list of registry specific generic drugs.
799.53	ROR LOCAL FIELD	^ROR (799.53 ,	The ROR LOCAL FIELD file stores definitions of local registry-specific fields created at the site.

Global Name		Description
	HISTORICAL DATA EXTRACTION	Records of this file store parameters of the historical data extractions (backpulls) performed on the registries and reflect status of these data extractions.

5.2. File Diagrams (Pointers)

Figure 18 . Pointer Matrix Legend

Pointer Matrix Legend			
Type	Pointer Description	Field	Field Modifier
L	LAYGO (learn as you go)	*	Name/description truncated
S	File not in set	m	Indicates multiple
N	Normal reference	v	Variable pointer
C	Cross-reference (Xref)		

Figure 19 . File Pointers

File Name (File #) Pointer Field	Type*	File Name (File #) Pointer Field	File Pointed To
ROR HIV RECORD (#799.4) REGISTRY RECORD.....	(N C) →	(798) ROR REGISTRY * PATIENT NAME REGISTRY CONFIRMED BY DELETED BY m SELECTI:SELECTI* SELECTI:LOCATION* m LOCAL F:LOCAL F*	→ ROR PATIENT → ROR REGISTRY PARAM* → NEW PERSON → NEW PERSON → ROR SELECTION RULE → INSTITUTION → ROR LOCAL FIELD
ROR REGISTRY RECORD (#798) REGISTRY.....	(N C) →	(798.1) ROR REGISTR*	
ROR REGISTRY RECORD (#798.31) ERROR:REGISTRY.....	(N) →	PROTOCOL	→ PROTOCOL
ROR PHARMACY CODE (#798.6) REGISTRY.....	(N C) →	AUTOMATIC BACKPU*	→ ROR HISTORICAL DAT*
ROR LOG (#798.73) REGISTRY	(N) →	m NOTIFIC:NOTIFIC*	→ NEW PERSON
ROR TASK (#798.8) REGISTRY	(N C) →	m REPORT :REPORT *	→ ROR REPORT PARAMET*
ROR LIST ITEM (#799.1) REGISTRY	(N) →	m LOCAL T:LOCAL T*	→ LABORATORY TEST
ROR GENERIC DRUG (#799.51) REGISTRY	(N) →	LOCAL T:LAB GRO*	→ ROR LIST ITEM
ROR LOCAL FIELD (#799.53) REGISTRY	(N) →	M LOCAL D:LOCAL D* LOCAL D:DRUG GR*	→ DRUG → ROR LIST ITEM
ROR REGISTRY RECORD (#798.01)			


) →	798.2 ROR SELECTI*	
			798.3 ROR PATIENT* PATIENT NAME m ERROR:REGISTRY EVENT:DATA AREA	→ PATIENT → RCR REGISTRY PARAM* → ROR DATA AREA
ROR REGISTRY RECORD (#798) PATIENT NAME (N C L) → ROR HISTORICAL DATA (#799.641) TASK:ERROR (N C L) →) →	798.4 ROR PATIENT	
			PATIENT NAME PERIOD OF SERVICE	→ PATIENT → PERIOD OF SERVICE
) →	798.6 ROR PHARMAC* DRUG CLASS REGISTRY	→ VA DRUG CLASS → RCR REGISTRY PARAM*
ROR TASK (#798.8) LOG (N C) →) →	798.7 ROR LOG USER m REGISTRY:REGISTRY MESSAGE:PATIENT	NEW PERSON ROR REGISTRY PARAM* PATIENT

Figure 20 . File Pointers

File Name (File #) Pointer Field	Type*	File Name (File #) Pointer Field	File Pointed To
ROR HIV RECORD (#799.4) REGISTRY RECORD (N C) →		798 ROR REGISTRY * PATIENT NAME REGISTRY CONFIRMED BY DELETED BY m SELECTI:SELECTI* m SELECTI:LOCATIO* LOCAL F:LOCAL F*	ROR PATIENT ROR REGISTRY PARAM* NEW PERSON NEW PERSON ROR SELECTION RULE INSTITUTION ROR LOCAL FIELD
ROR REGISTRY RECORD (#798) REGISTRY (N C) → ROR PATIENT EVENTS (#798.31) ERROR:REGISTRY (N) → ROR PHARMACY CODE (#798.6) REGISTRY (N C) →		798.1 ROR REGISTR* PROTOCOL AUTOMATIC BACKPU	→ PROTOCOL → ROR HISTORICAL DAT*
ROR LOG (#798.73) REGISTRY (N) → ROR TASK (#798.8) REGISTRY (N C) → ROR LIST ITEM (#799.1) REGISTRY (N) → ROR GENERIC DRUG (#799.51) REGISTRY (N) → ROR LOCAL FIELD (#799.53) REGISTRY (N) →		m NOTIFIC:NOTIFIC* m REPORT :REPORT * m LOCAL T:LOCAL T* LOCAL T:LAB GRO* m LOCAL D:LOCAL D* LOCAL D:DRUG GR*	→ NEW PERSON → ROR REPORT PARAMET* → LABORATORY TEST → ROR LIST ITEM → DRUG ROR LIST ITEM
ROR REGISTRY RECORD (#798.01) SELECTION RULE (N) →		798.2 ROR SELECT* 798.3 ROR PATIENT* m PATIENT NAME ERROR:REGISTRY EVENT:DATA AREA	→ PATIENT → ROR REGISTRY PARAM* → ROR DATA AREA
ROR REGISTRY RECORD (#798) PATIENT NAME (N C L) → ROR HISTORICAL DATA (#799.641) TASK:ERROR (N C L) →		798.4 ROR PATIENT PATIENT NAME PERIOD OF SERVICE 798.6 ROR PHARMAC* DRUG CLASS REGISTRY	→ PATIENT → PERIOD OF SERVICE → VA DRUG CLASS → ROR REGISTRY PARAM*
ROR TASK (#798.8)			



					File Name (File #) Pointer Field	File Pointed To
)	→			798.7 ROR LOG	
					USER	→ NEW PERSON
			m		REGISTRY:REGISTRY MESSAGE:PATIENT	→ ROR REGISTRY PARAM* → PATIENT
					798.8 ROR TASK REGISTRY REPORT USER LOG	→ ROR REGISTRY PARAM* → ROR REPORT PARAMET* → NEW PERSON
			m		REPORT :REPORT *	→ ROR LOG
			m		REPO:ATTR:ATTR*	→ ROR XML ITEM → ROR XML ITEM
ROR REGISTRY PARAMET (#798.128)						
LOCAL TEST NAME:LAB GROUP .	(N)	→		799.1 ROR LIST IT* REGISTRY	→ ROR REGISTRY PARAM*
LOCAL DRUG NAME:DRUG GROUP	(N)	→			
ROR GENERIC DRUG 9#799.51)						
DRUG GROUP	(N)	→			
ROR METADATA (#799.2)						
PARENT	(N)	→		799.2 ROR METADATA PARENT	→ ROR METADATA
ROR TASK (#798.87)						
REPORT ELEMENT	(N)	→		799.31 ROR XML IT*	
REPORT ELEMENT:ATTRIBUTE ..	(N C)	→			
ROR PATIENT EVENTS (#798.32)						
EVENT:DATA AREA	(N)	→		799.33 ROR DATA A*	
ROR HISTORICAL DATA (#799.61)						
DATA AREA	(N)	→		799.34 ROR REPORT*	
ROR REGISTRY PARAMET (#798.12)						
REPORT STATS	(N)	→			
ROR TASK (#798.8)						
REPORT	(N)	→			
					799.4 ROR HIV REC* REGISTRY RECORD STATION CDC FORM COMPLET* ONSET OF ILLNESS* AIDS DX - STATE AIDS IN:AIDS IN*	→ ROR REGISTRY RECORD → INSTITUTION → NEW PERSON → STATE → STATE → ROR AIDS INDICATOR*
ROR HIV RECORD (#799.41)						
AIDS INDICATOR DISEASE	(N)	→		799.49 ROR AIDS I*	
					799.51 ROR GENERI* REGISTRY DRUG GROUP VA GENERIC	→ ROR REGISTRY PARAM* → ROR LIST ITEM → VA GENERIC
ROR REGISTRY RECORD (#798.02)						
LOCAL FIELD	(N C)	→		799.53 ROR LOCAL * REGISTRY	→ ROR REGISTRY PARAM*
ROR REGISTRY PARAMET (#798.1)						
AUTOMATIC BACKPULL	(N)	→		799.6 ROR HISTORI DATA AR:DATA AR* TASK:ERROR:ERROR	ROR DATA AREA ROR PATIENT

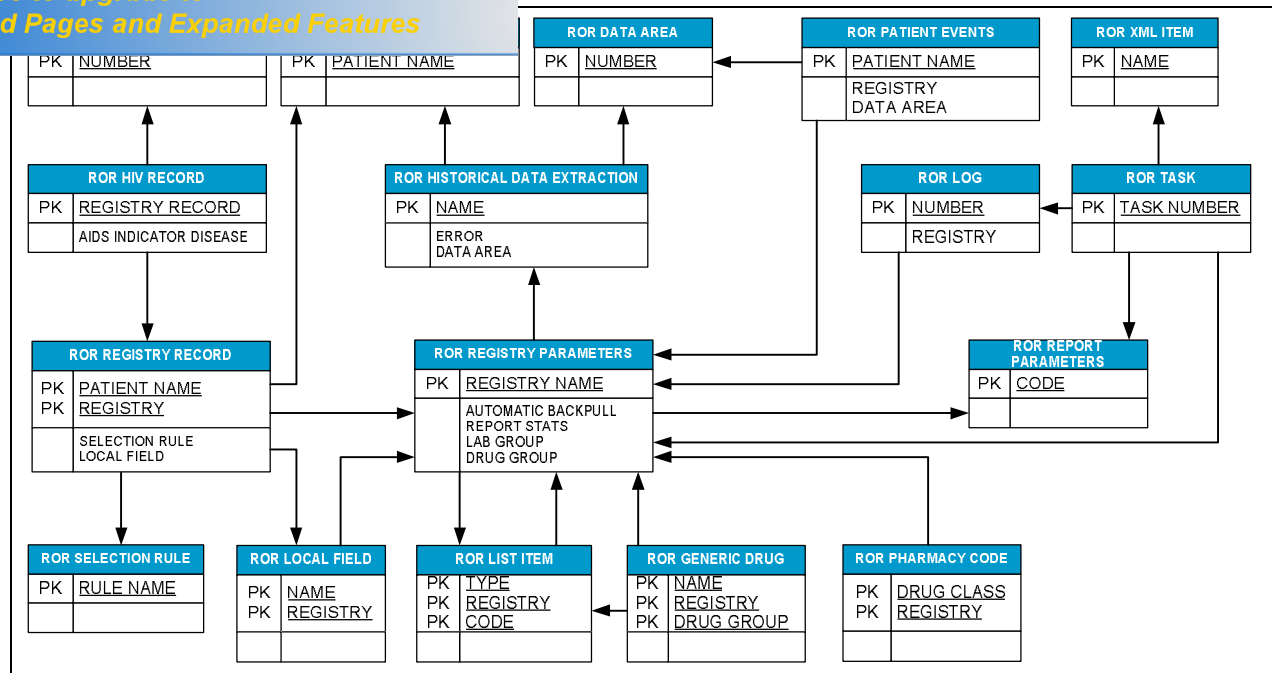

6.1. Upgrade Installation

No new globals are exported/allocated by the ROR 1.5 build if you install it an account that already has CCR v1.0 installed.

6.2. Initial Installation

Two new globals are created during an initial installation of the KIDS build ROR 1.5: ^ROR and ^RORDATA.

The ^ROR global is quite small and mostly static. It contains the registry parameters, selection rules, Lab search definitions, etc.

The ^RORDATA global is a dynamic global and under most circumstances will be large. It will contain the registries, error logs, list of the event references, reports, etc. The sustained growth of ^RORDATA depends on the number of new patients in the registries (about 200 bytes per patient).

In the first couple of weeks, however, the global will grow faster because of the error logs (the ROR LOG file) and event references (the EVENT multiple of the ROR PATIENT EVENTS file). Both files are self-maintained and the nightly task (the Registry Update & Data Extraction [ROR TASK] option) purges the old records from these files automatically. The initial growth of these files depends on activity level (number of events) and quality of the data (number of error messages stored in the logs) at your site.

6.3. Temporary Globals

The CCR package uses the ^TMP and ^XTMP globals quite intensively, especially during the initial registry population. Please make sure that these globals are allocated in the database with enough free space.

7.1. Routine List for CCR 1.5

The M routines listed in [Table 21](#) are included in KIDS build ROR 1.5. The second line of each of these routines now looks like:

```
;;1.5;CLINICAL CASE REGISTRIES;**[Patch List]**;Feb 17,
2006;Build [nn]
```

The following M routines are included in CCR 1.5. Entries shaded in **yellow** were created/changed by Patch ROR*1.5*15.

Note: Effective with Patch ROR*1.5*14, file checksums are no longer included in this manual. They are always included with the patch description, and can be checked with CHECK1^XTSUMBLD.

Table 21 . CCR 1.5 Routine List

Routine	Short Description
ROR	CLINICAL CASE REGISTRIES
ROR01	CLINICAL CASE REGISTRIES
ROR02	CLINICAL CASE REGISTRIES
ROR10	NIGHTLY TASK UTILITIES
ROR11	NIGHTLY TASK UTILITIES
RORAPI01	CLINICAL REGISTRIES API
RORBIN	BINARY OPERATIONS
RORDD	DATA DICTIONARY UTILITIES
RORDD01	DATA DICTIONARY UTILITIES
RORERR	ERROR PROCESSING
RORERR20	LIST OF ERROR MESSAGES
ROREVT01	EVENT PROTOCOLS
ROREXP	PREPARATION FOR DATA EXTRACTION
ROREXT	DATA EXTRACTION & TRANSMISSION
ROREXT01	EXTRACTION & TRANSMISSION PROCESS



ROREXT02	DEFAULT MESSAGE BUILDER
ROREXT03	REGISTRY DATA EXTRACTION (OVERFLOW)
ROREXTUT	DATA EXTRACT UTILITIES
RORHDT	HISTORICAL DATA EXTRACTION
RORHDT01	HISTORICAL DATA EXTRACTION STATUS
RORHDT02	CREATE EXTRACTION TASK RECORDS
RORHDT03	MANIPULATIONS WITH EXTRACTION TASKS
RORHDT04	HISTORICAL DATA EXTRACTION PROCESS
RORHDT05	HISTORICAL DATA EXTRACTION FUNCTIONS
RORHDT06	HISTORICAL DATA EXTRACTION PARAMETERS
RORHDTAC	DATA EXTRACTION ACTION CONFIRMATIONS
RORHDTUT	HISTORICAL DATA EXTRACTION UTILITIES
RORHIV03	CONVERSION OF THE FILE #158
RORHIVUT	HIV UTILITIES
RORHL01	HL7 PATIENT DATA: PID,ZSP,ZRD
RORHL02	HL7 REGISTRY DATA: CSP,CSR,CSS
RORHL03	HL7 PHARMACY: ORC,RXE
RORHL031	HL7 PHARMACY: UTILITIES
RORHL04	HL7 RADIOLOGY: OBR,OBX
RORHL05	HL7 AUTOPSY: OBR
RORHL06	HL7 LIVER BIOPSY: OBR,OBX
RORHL07	HL7 INPATIENT PHARMACY: ORC,RXE
RORHL071	HL7 IV PHARMACY: ORC,RXE
RORHL08	HL7 INPATIENT DATA: PV1,OBR
RORHL081	HL7 INPATIENT DATA: OBX
RORHL09	HL7 OUTPATIENT DATA: PV1,OBR,OBX
RORHL10	HL7 SURGICAL PATHOLOGY DATA: OBR,OBX
RORHL11	HL7 CYTOPATHOLOGY DATA: OBR,OBX
RORHL12	HL7 MICROBIOLOGY DATA: OBR
RORHL121	HL7 MICROBIOLOGY DATA: OBX
RORHL13	HL7 MEDICAL PROCEDURES (EKG): OBR,OBX



RORHL14	HL7 ALLERGY DATA: OBR,OBX
RORHL15	HL7 IV DATA: OBR, OBX
RORHL16	HL7 VITALS DATA: OBR,OBX
RORHL17	HL7 PROBLEM LIST: OBR,OBX
RORHL18	HL7 IMMUNIZATION: OBR, OBX
RORHL19	HL7 SKIN TEST: OBR, OBX
RORHL20	HL7 NON-VA MEDS: ORC, RXE
RORHL21	HL7 PURCHASED CARE : ZIN, ZSV, ZRX
RORHL7	HL7 UTILITIES
RORHL7A	HL7 UTILITIES
RORHLUT1	HL7 UTILITIES (HIGH LEVEL)
RORKIDS	INSTALL UTILITIES (LOW-LEVEL)
RORLOCK	LOCKS AND TYRANSACTIONS
RORLOG	LOG FILE MANAGEMENT
RORLOG01	LOG FILE MANAGEMENT (UTILITIES)
RORNTEG	KERNEL - Package checksum checker
RORNTEG0	KERNEL - Package checksum checker
RORP000	CCR V1.5 INSTALLATION ROUTINE
RORP000A	CCR V1.5 PRE-INSTALL CODE
RORP000B	CCR V1.5 POST-INSTALL CODE
RORP011	CCR POST-INIT PATCH 13
RORP015	CCR PRE/POST-INIT PATCH
RORPUT01	EDIT LOINC AND DRUG CODE MULTIPLES
RORPUT02	DATA TRANSPORT FOR KIDS
RORREP01	REGISTRY COMPARISON REPORT
RORREP02	VERSION COMPARISON REPORT (ICR)
RORRP007	RPC: LOGS & MESSAGES
RORRP010	RPC: TASK MANAGER
RORRP011	RPC: TASK MANAGER (REPORTS)
RORRP012	RPC: MISCELLANEOUS
RORRP013	RPC: ACCESS & SECURITY



RORRP014	RPC: REGISTRY INFO & PARAMETERS
RORRP015	RPC: DIVISIONS AND HOSPITAL LOCATIONS
RORRP016	RPC: ICD-9 CODES
RORRP017	RPC: DRUGS AND CLASSES
RORRP018	RPC: LIST OF LAB TESTS
RORRP019	RPC: LIST OF PATIENTS
RORRP020	RPC: PATIENT DATA UTILITIES
RORRP021	RPC: PATIENT DATA
RORRP022	RPC: SELECTION RULES
RORRP023	RPC: REGISTRY COORDINATORS
RORRP024	RPC: VISTA USERS
RORRP025	RPC: RORICR CDC LOAD
RORRP026	RPC: CDC UTILITIES
RORRP027	RPC: RORICR CDC SAVE
RORRP029	RPC: ADDRESS UTILITIES
RORRP030	RPC: PATIENT DELETE
RORRP031	RPC: LOCAL LAB TEST NAMES
RORRP032	RPC: LOCAL DRUG NAMES
RORRP033	RPC: HIV PATIENT LOAD
RORRP034	RPC: HIV PATIENT SAVE/CANCEL
RORRP035	RPC: GENERIC DRUG NAMES
RORRP036	RPC: HEPC PATIENT LOAD
RORRP037	RPC: HEPC PATIENT SAVE/CANCEL
RORRP038	RPC: USER AND PACKAGE PARAMETERS
RORRP040	RPC: LOCAL REGISTRY FIELDS
RORRP041	RPC: REGISTRY-SPECIFIC LAB RESULTS
RORRP042	RPC: CPT CODES
RORSET01	REGISTRY SETUP ROUTINE
RORSETU1	SETUP UTILITIES (USER INTERFACE)
RORSETU2	SETUP UTILITIES (REGISTRY)
RORTSITE	PREPARE TEST SITES FOR GOING LIVE



RORTMP	TEMPORARY GLOBAL STORAGE
RORTSK	TASK MANAGER
RORTSK01	(SUB)TASK UTILITIES
RORTSK02	TASK MANAGER UTILITIES
RORTSK03	TASK MANAGER OVERFLOW CODE
RORTSK10	REPORT RETRIEVING UTILITIES
RORTSK11	REPORT CREATION UTILITIES
RORTSK12	REPORT STATS UTILITIES
RORTSK13	PARSER FOR REPORT PARAMETERS
RORTSK14	PARSER FOR REPORT PARAMETERS (TOOLS)
RORTXT	TEXT RESOURCE UTILITIES
RORUPD	REGISTRY UPDATE
RORUPD01	PROCESSING OF THE FILES
RORUPD04	PROCESSING OF THE LAB DATA
RORUPD05	REGISTRY UPDATE (MULTITASK)
RORUPD06	REGISTRY UPDATE (MISCELLANEOUS)
RORUPD07	PROCESSING OF THE 'PROBLEM' FILE
RORUPD08	PROCESSING OF 'VISIT' & 'V POV' FILES
RORUPD09	PROCESSING OF THE 'PTF' FILE
RORUPD50	UPDATE THE PATIENT IN THE REGISTRIES
RORUPD51	UPDATE PATIENT'S DEMOGRAPHIC DATA (1)
RORUPD52	UPDATE PATIENT'S DEMOGRAPHIC DATA (2)
RORUPD62	HIV-SPECIFIC REGISTRY UPDATE CODE
RORUPDUT	REGISTRY UPDATE UTILITIES
RORUPEX	SELECTION RULE EXPRESSION PARSER
RORUPP01	PATIENT EVENTS (ERRORS)
RORUPP02	PATIENT EVENTS (EVENTS)
RORUPR	SELECTION RULES PREPARATION
RORUPR1	SELECTION RULES PREPARATION
RORUTL01	UTILITIES
RORUTL02	UTILITIES



RORUTL03	ENCRYPTION/DECRYPTION
RORUTL04	REGISTRY STAT REPORT
RORUTL05	MISCELLANEOUS UTILITIES
RORUTL06	DEVELOPER ENTRY POINTS
RORUTL07	TEST ENTRY POINTS
RORUTL08	REPORT PARAMETERS UTILITIES
RORUTL09	LIST ITEM UTILITIES
RORUTL10	LAB DATA SEARCH
RORUTL11	ACCESS AND SECURITY UTILITIES
RORUTL14	PHARMACY DATA SEARCH
RORUTL15	PHARMACY DATA SEARCH (TOOLS)
RORUTL16	PHARMACY DATA SEARCH (UTILITIES)
RORUTL17	REGISTRY INFORMATION UTILITIES
RORUTL18	MISCELLANEOUS UTILITIES
RORUTL19	PATIENT DATA UTILITIES
RORVM001	MAINTENANCE OPTIONS
RORX000	DUMMY REPORT
RORX001	LIST OF REGISTRY PATIENTS
RORX002	CURRENT INPATIENT LIST
RORX003	GENERAL UTILIZATION AND DEMOGRAPHICS
RORX003A	GENERAL UTILIZATION AND DEMOGRAPHICS
RORX004	CLINIC FOLLOW UP
RORX005	INPATIENT UTILIZATION
RORX005A	INPATIENT UTILIZATION (QUERY)
RORX005B	INPATIENT UTILIZATION (SORT)
RORX005C	INPATIENT UTILIZATION (STORE)
RORX006	LAB UTILIZATION
RORX006A	LAB UTILIZATION (QUERY & SORT)
RORX006C	LAB UTILIZATION (STORE)
RORX007	RADIOLOGY UTILIZATION
RORX007A	RADIOLOGY UTILIZATION (OVERFLOW)



RORX008	VERA REIMBURSEMENT REPORT
RORX008A	VERA REIMBURSEMENT REPORT
RORX009	PHARMACY PRESCRIPTION UTILIZATION
RORX009A	PRESCRIPTION UTILIZ. (QUERY & SORT)
RORX009C	PRESCRIPTION UTILIZ. (STORE)
RORX010	LAB TESTS BY RANGE REPORT
RORX011	PATIENT MEDICATION HISTORY
RORX012	COMBINED MEDS AND LABS REPORT
RORX012A	COMBINED MEDS AND LABS (QUERY & STORE)
RORX013	DIAGNOSIS CODES REPORT
RORX013A	DIAGNOSIS CODES (QUERY & SORT)
RORX013C	DIAGNOSIS CODES (STORE)
RORX014	REGISTRY MEDICATIONS REPORT
RORX014A	REGISTRY MEDS REPORT (QUERY & SORT)
RORX015	PROCEDURES (CPT) REPORT
RORX015A	PROCEDURES (QUERY & SORT)
RORX015C	PROCEDURES (STORE)
RORX016	OUTPATIENT UTILIZATION
RORX016A	OUTPATIENT UTILIZATION (QUERY)
RORX016B	OUTPATIENT UTILIZATION (SORT)
RORX016C	OUTPATIENT UTILIZATION (STORE)
RORX018	BMI BY RANGE REPORT
RORX019	LIVER SCORE BY RANGE REPORT
RORX019A	LIVER SCORE BY RANGE REPORT
RORX020	RENAL FUNCTION BY RANGE REPORT
RORX020A	RENAL FUNCTION BY RANGE REPORT
RORX020B	RENAL FUNCTION BY RANGE REPORT
RORXU001	REPORT UTILITIES
RORXU002	REPORT BUILDER UTILITIES
RORXU003	REPORT BUILDER UTILITIES
RORXU004	REPORT UTILITIES (STATISTICS)

RORXU005	REPORT BUILDER UTILITIES
RORXU006	REPORT PARAMETERS
RORXU007	PHARMACY-RELATED REPORT PARAMETERS
RORXU009	REPORT MODIFICATION UTILITY
RORXU010	REPORT MODIFICATION UTILITY

7.2. Routine Sub-Namespace

Table 22 . Routine Sub-Namespace

Namespace	Description
RORAPI*	Supported APIs
RORDD*	Routines used by the Data Dictionary
RORERR*	Error processing
ROREVT*	Event protocols
ROREX*	Regular data extraction & transmission
RORHDT*	Historical data extraction
RORHIV*	HIV Registry-specific routines
RORHL*	HL7 utilities
RORKIDS*	Low-level installation utilities (KIDS)
RORLOCK*	Locks and transactions
RORLOG*	Error recording
RORPnnn*	Patch installation routines (KIDS) (nnn = patch number)
RORPUT*	High-level installation utilities
RORREP*	Roll-and-scroll reports
RORRP*	Remote procedures
RORSET*	Registry setup routines
RORTXT*	Text resource routines
RORUP*	Registry update
RORUTL*	Utilities

enu options

RORXnnn*	XML reports (nnn = report code)
RORXU*	Utilities for XML reports

7.3. XINDEX

XINDEX is a routine that produces a report called the VA Cross-Reference. This report is a cross-reference listing of one routine or a group of routines. XINDEX provides a summary of errors and warnings for routines that do not comply with VA programming standards and conventions, a list of local and global variables and what routines they are referenced in, and a listing of internal and external routine calls.

XINDEX is invoked from programmer mode: **D ^XINDEX.**

When selecting routines, select **ROR***.

The menus and options exported by the build ROR 1.5 are all located in the ROR namespace. Individual options can be viewed by using the Option Function Inquiry [XUINQUIRE] option. This option can be found on the Menu Management [XUMAINT] menu, which is a sub-menu of the Systems Manager Menu [EVE] menu.

A diagram of the structure of the CCR menu and its options can be produced by using the Diagram Menus [XUUSERACC] option. Choosing XUUSERACC permits you to further select Menu Diagrams (with Entry/Exit Actions) [XUUSERACC1] or Abbreviated Menu Diagrams [XUUSERACC2] options.

Table 23 . Exported Options

Option Name	Description
Broker Context [ROR GUI]	This option holds the references to the package RPC Broker Calls used by the GUI to create an application context (for security purposes).
Registry Setup [ROR SETUP]	This option allows the user to enter parameters of the registry setup process, and to schedule the task that will populate the registry.
Registry Update & Data Extraction [ROR TASK]	<p>This option starts the registry update and data extraction task that processes registries defined by the <code>TASK PARAMETERS</code> field. The field must contain a list of registry names separated by commas.</p> <p>The following task parameters are optional. They can be defined on the second page of the option scheduling form (as the pairs of the variable names and values).</p> <p>RORFLCLR (Default: %) and RORFLSET (Default: EX)</p> <p>These two parameters override the values of the flags that control the processing. Add the flags to the RORFLCLR variable to clear them and to the RORFLSET variable to set them. Below are the possible values of the parameters (can be combined):</p> <ul style="list-style-type: none"> D . Run the task(s) in Debug Mode E . Use the event references (file #798.3) S . Run the data extraction in single-task mode X . Suspend the data extraction task in the same way as the registry update M . Disable the HL7 messaging for local (user defined) registries. <p>When the M flag is set, HL7 messages will not be transmitted to Austin.</p> <p>RORMNTSK (Default: 2-3-AUTO)</p>



	<p>number of the registry update subtasks. If this parameter is less than 2, all patients will be processed by the single main task. Otherwise, all patients can be distributed among several subtasks.</p> <p>If N-M-AUTO is passed as the value of this parameter and difference between the end and start dates of the registry update is more than M days then N subtasks will be started. Otherwise, the single task will run.</p> <p>RORSUSP (Default: %) Suspension parameters of the registry update and data extraction subtasks. The subtasks are not suspended by default. Parameter should contain start and end times of the suspension (in external format) separated by the %%. For example, the 7:00-18:00 value will suspend the subtasks from 7am until 6pm each day except weekends and holidays.</p>
Create Extraction Tasks [RORHDT CREATE]	This option spreads historical data processing over several tasks in order to speed up the process.
Edit [RORHDT EDIT]	This option displays a submenu when selected. The submenu contains options that are used to create and edit the parameters of the historical data extraction.
Edit data extraction [RORHDT EDIT EXTRACTION]	This option allows users to edit parameters of manual historical data extraction in the ROR HISTORICAL DATA EXTRACTION file (#799.6).
Edit Task Descriptor [RORHDT EDIT TASK]	This option allows users to edit parameters of historical data extraction tasks in the ROR HISTORICAL DATA EXTRACTION file (#799.6).
Display Task Log [RORHDT LOG]	The Display Task Log option lets users see a log of any running or finished data extraction task. If any errors have been found, they will be logged here. Any errors should be fixed and then the task re-started.
Historical Data Extraction [RORHDT MAIN]	This is a top level management option for the historical data extraction that gathers historical data for each registry patient that exists on the ROR REGISTRY RECORD file (#798) and creates flat text files that can be sent by FTP to a pre-defined area at the AAC. This is done independently of daily updates and extracts and requires some intervention of an IRM.
Start a Task [RORHDT START]	This option starts a data extraction task that was created with the Create Extraction Tasks option.
Display Extraction Status [RORHDT STATUS]	This option displays the status of a selected data extraction. The historical data extraction start and end dates, the output directory name, processed registries, and task table are displayed.
Stop a Task	This option allows users to stop a running task or de-queue a task



cheduled to run in the future.

ICR Version Comparison Report [RORICR VERSION COMPARISON]	Provides a detailed comparison between the CCR:HIV and Immunology Case Registry v2.1. The ICR was officially retired on October 27, 2005 (patch IMR*2.1*21) and replaced by CCR:HIV. This option is left for compatibility. If ICR v2.1 is not installed in the account, then the option will display an error message and quit.
Re-index the ACL cross-reference [RORMNT ACL REINDEX]	This option lets users re-index the ACL cross-reference of the ROR REGISTRY PARAMETERS file (#798.1). This cross-reference should be rebuilt after changes in the allocation of the security keys associated with any registry.
Edit Lab Search Criteria [RORMNT EDIT LAB SEARCH]	This option is used to edit the Lab search criteria (stored in the ROR LAB SEARCH file (#798.9)) that are used by the registry update process to find patients with positive registry-specific Lab results.
Edit Registry Parameters [RORMNT EDIT REG PARAMS]	This option can be used to edit registry parameters in the ROR REGISTRY PARAMETERS file (#798.1).
Clinical Case Registries Maintenance [RORMNT MAIN]	This menu contains miscellaneous maintenance options for the CCR package. Usually, they should be used only for troubleshooting.
List of Pending Errors [RORMNT PENDING ERRORS LIST]	The option prints a report containing list of patients (referenced by the ERROR multiples of the ROR PATIENT EVENTS file (#798.3)) having erroneous data. The list is sorted by value of the COUNTER field (number of times that an error was recorded for a patient). This report can be used to find patients ignored by the registry update (until someone fixes the error(s) and resets value of the COUNTER field to 1).
Pending Patients [RORMNT PENDING PATIENTS]	This menu groups the options used for maintenance of the ROR PATIENT EVENTS file (#798.3) containing event and error references.
Print Log Files [RORMNT PRINT LOGS]	This option can be used to print messages recorded by the CCR software.

9.1. Archiving

No archiving functions are necessary with the CCR software.

9.2. Purging

Old event references are automatically purged by the nightly task (the [ROR TASK] option) from the EVENT multiple (2) of the ROR PATIENT EVENTS file (#798.3) no later than 60 days after they were entered there by the event protocols.

ROR LOG file (#798.7) entries are automatically purged 31 days after they are entered into this file.

Old tasks are automatically purged from the ROR TASK file (#798.8) 14 days after they are completed (the creation date is used for incomplete tasks).

The following [protocols](#) are exported with the KIDS build ROR 1.5.

10.1. HL7 Protocols

- ROR-SITE-DRIVER
- ROR-SITE-SUBSCRIBER

10.2. Event Protocols

Three event protocols are used by CCR, as outlined in [Table 24](#).

Table 24 . Event Protocols

Protocol	Description
ROR EVENT LAB	<p>This protocol is used by the CCR package to maintain references to patients who have new lab results. The protocol should be subscribed to the LR70 ALL EVSEND RESULTS protocol (this is done by the KIDS during the installation).</p> <p>If at least one of the defined registries enables event protocols, this protocol will process the Lab events and create references in the ROR PATIENT EVENTS file (#798.3).</p> <p>Otherwise, the protocol will be executed (if it is not disabled or unsubscribed manually) but will not call the processing routine (LAB^ROREVT01).</p>
ROR EVENT PTF	<p>This protocol is used by the CCR package to maintain references to patients who have new admissions.). The protocol should be subscribed to the DGPM MOVEMENT EVENT protocol (this is done by the KIDS during the installation).</p> <p>If at least one of the defined registries enables event protocols, this protocol will process the movement events and create references in the ROR PATIENT EVENTS file (#798.3). Otherwise, the protocol will be executed (if it is not disabled or unsubscribed manually) but will not call the processing routine (PTF^ROREVT01).</p>
ROR EVENT VISIT	<p>This protocol is used by the CCR package to maintain references to patients who have new data in the V-files (VISIT, V POV, etc). The protocol should be subscribed to the P XK VISIT DATA EVENT protocol (this is done by the KIDS during the installation).</p> <p>If at least one of the defined registries enables event protocols, this protocol will process the Lab events and create references in the ROR</p>



PDF
Complete

*Your complimentary
use period has ended.
Thank you for using
PDF Complete.*

[Click Here to upgrade to
Unlimited Pages and Expanded Features](#)

	ENTS file (#798.3). Otherwise, the protocol will be executed (if it is not disabled or unsubscribed manually) but will not call the processing routine (VISIT^ROREVT01).
--	--

Interfaces

The Data Base Agreement (DBIA) #4166 defines two controlled-subscription [Application Program Interfaces](#) (APIs) that are supplied by CCR. The first of these APIs enumerates patients of the given registry (CCR:HEPC or CCR:HIV), and the other API enumerates registries within which the patient exists.

Table 25 . Application Program Interfaces

API	Description	
\$PATITER^RORAPI01 (IDESC, REGNAME, MODE)	Creates an iterator of patients in the registry, whereí	
	IDESC	Refers to a local variable where the iterator descriptor will be created
	REGNAME	Is the Registry name
	[MODE]	Is a bit flag which defines the iteration mode (default = 3)
		1 Active patients (confirmed and not deleted)
		2 (reserved)
Return Values	<0	Error code
	0	OK
\$NEXTPAT^RORAPI01 (IDESC)	Returns the next patient in the registry, whereí	
	IDESC	Refers to the iterator descriptor created by \$PATITER^RORAPI01.
	Return Values	<0 Error code
		00 No more patients in the registry
		>0 Patient IEN (DFN)
\$REGITER^RORAPI01 (IDESC, PATIEN, MODE)	Creates an iterator of patient registries, whereí	
	IDESC	Refers to a local variable where the iterator descriptor will be created
	PATIEN	Is the Patient IEN (DFN)
	[MODE]	Is a bit flag which defines the iteration mode (default = 3)
		1 Registries where the patient is active (confirmed and not deleted)
		2 (reserved)

Description			
	Return Values	<0	Error code
		0	OK
\$NEXTREG^RORAPI01 (IDESC)	Returns the next patient in the registry, whereí		
	IDESC	Refers to the iterator descriptor created by \$\$REGITER^RORAPI01.	
	Return Values	<0	Error code
		õõ	No more patients in the registry
		>0	Registry IEN

Below is a usage example for these APIs taken from the source code of the **RORAPI01** routine:

Figure 22 . Sample Usage (RORAPI01 Routine)

```

N BUF,IPD,IRD,PATIENT,RC,REGIEN
W !,"    Patient Registries"
W !,"    -----"
;--- Initialize the patient iterator
S RC=$$PATITER^RORAPI01(.IPD,"VA HEPC")
I RC<0 W "RC= ",RC,! Q
;--- Browse through the registry patients
F S PATIENT=$$NEXTPAT^RORAPI01(.IPD)  Q:PATIENT'>0  D
. W !,$J(PATIENT,10)," "
. ;--- Initialize the registry iterator
. S RC=$$REGITER^RORAPI01(.IRD,PATIENT)
. I RC<0 W "RC= ",RC Q
. ;--- Browse through the patient's registry records
. S BUF=""
. F S REGIEN=$$NEXTREG^RORAPI01(.IRD)  Q:REGIEN'>0  D
. . S BUF=BUF "," REGIEN
. W $P(BUF,"",2,999)
;---
W !
Q

```

The following screenshot illustrates the output of the sample code:

Figure 23 - Sample Output (RORAPI01 Routine)

```

>D ^RORAPI01

Patient  Registries
-----
      40  1
       4  1
      13  1
      90  1
      14  1
      43  1
       5  1
      37  2,1
      38  1,2

```



PDF
Complete

*Your complimentary
use period has ended.
Thank you for using
PDF Complete.*

[Click Here to upgrade to
Unlimited Pages and Expanded Features](#)

The National Database has an HL7 interface. This interface receives all data transmissions sent from all sites nationally, converts the data, and enters it into an SQL-enabled database.

Before the KIDS build ROR 1.5 can be installed, the following software applications and patches must be installed and *fully* patched in your accounts:

Application Name	Minimum Version
Automated Information Collection System (AICS)	V 3.0
Adverse Reaction Tracking (ART)	V 4.0
Authorization/Subscription Utility (ASU)	V 1.0
Consult/Request Tracking	V 3.0
Gen. Med. Rec.-Vitals	V 4.0
Health Summary	V 2.7
HL7	V 1.6
Inpatient Medications (IM)	V 5.0
Kernel	V 8.0
Laboratory	V 5.2
Lexicon Utility	V 2.0
National Drug File (NDF)	V 4.0
Order Entry/Results Reporting (OE/RR)	V 3.0
Outpatient Pharmacy	V 7.0
Patient Care Encounter (PCE)	V 1.0
Pharmacy Data Management (PDM)	V 1.0
Problem List	V 2.0
Radiology/Nuclear Medicine	V 5.0
RPC Broker	V 1.1
Registration	V 5.3
Scheduling	V 5.3
Text Integration Utilities (TIU)	V 1.0
ToolKit	V. 7.3
VA FileMan	V 22.0
Visit Tracking	V 2.0

13.1. Required Patches

Before the installation of the build ROR 1.5, the following patches **must** be installed:

	Patches
Health Level Seven	HL*1.6*57
Registration	DG*5.3*471, DG*5.3*415, DG*5.3*631
Automated Lab Instruments	LA*5.2*69, LA*5.2*68
Lab Service	LR*5.2*222, LR*5.2*232
Medicine or Clinical Procedures	MC*2.3*34 or MD*1.0*1
National Drug File	PSN*4.0*53, PSN*4*79, PSN*4.0*104
Pharmacy Data Management	PSS*1.0*101, PSS*1.0*105, PSS*1.0*97
Clinical Case Registries	ROR*1*8 (this patch is not required for initial installation)
Scheduling	SD*5.3*254, SD*5.3*131

13.2. Database Integration Agreements (DBIAs)

The list of approved DBIAs for CCR 1.5 (including 1.5.10) is shown in [Table 26](#).

In the Comments column: C = Controlled; P = Private; S = Supported ↴

Table 27 . Database Integration Agreements

File Name	File Number	Access	DBIA #	Comment*
PATIENT	2	Browse IENs .02, .03, .06, .09, .351, 63	10035	S
		6^VADPT (.1112, .301, .302, .323)	10061	S
		\$\$GETICN^MPIF001 (991.01)	2701	S
		-9 node	2762	P
		.3721 (multiple)	174	C
		63	998	C
		EN^VAFHLPID	263	S
CLINIC STOP	40.7	^DIC(40.7,D0,0) .01, 1, 2 ^DIC(40.7,'C',X,D0)	93-C	C
	40.7	Read access to the file #40.7	557	C
MEDICAL CENTER DIVISION	40.8	.01, 1 öBö, öCö	417	C



			DBIA #	Comment*
		DIC (42.4, D0, 0) .01	997	C
CLINIC STOP	44	^SC (D0, 0) 8	93-A	C
		3.5	10040	S
PTF	45	RPC^DGPTFAPI	3157	S
		80 ^DGPT ('AAD',	3545	P
		Access to multiple fields	92	C
PTF CLOSE OUT	45.84	.01 ðACö	994	C
PHARMACY PATIENT	55	^PS (55, 'AUDS', X, D0, D1) ^PS (55, D0, 5, .01, .5, 3, 1, 68 ^PS (55, D0, 5, D1, 2) 9, 10, 26, 34 ^PS (55, D0, 5, D1, 1, D2, 0) .01, .02, .03 ^PS (55, D0, 5, D1, 11, D2, 0) .01, .02, .05, .03, .04, .06, .07, .08 ^PS (55, D0, 'IV', .01, .02, .03, .04, 108, .06, .08, .08, 104, 106, 132, .22 ^PS (55, D0, 'IV', D1, AD, D2, 0) .01, .02 ^PS (55, D0, 'IV', D1, SOL, D2, 0) .01, 1 ^PS (55, D0, 'IV', D1, LAB, D2, 0) 1, 2, 4, 6	2497	C
		^PS (55, D0, 5, D1, 0) .01, 3, 4, 7, .25, 12, 39 ^PS (55, D0, 5, D1, 2) 26, 10, 34 ^PS (55, D0, 5, D1, 1, D2, 0) .01, .02 ^PS (55, DFN, 5, 'AUS',	117	C
		^PS (55, D0, 'P', D1, 0) .01 ^PS (55, DFN, 'P', 'A', DATE,	90-B	C
		OCL^PSOORRL, OEL^PSOORRL	2400	C
OUTPATIENT SITE	59	^PS (59, D0, 0) .01, .06 ^PS (59, D0, INI) 100	1876	C
LAB	60	^LAB (60, D0, 0)	91-A	C



			DBIA #	Comment*
		.01, 1, 4, 5 ^LAB (60, 'B', ^LAB (60, 'C', ^LAB (60, D0, 2)		
		ATESTS^ORWLRR	2947	C
COLLECTION SAMPLE	62	^LAB (62, 0) .01	2210	P
LAB DATA	63		67-C	Surgical pathology for liver biopsy
			2503	C
			91-B	C
		Autopsy node	3465	P
		\$\$GCPR^LA7QRY	3556	C
		SPATH^LA7UTL03	4343	C
		CPATH^LA7UTL03	4344	C
		GETDATA^LA7UTL1A	4335	C
LABORATORY SITE	69.9	.01, 95.3	3557	P Environment check routine
RAD/NUC MED PATIENT	70	^RADPT (D0, 0) .01 ^RADPT (D0, 'DT', D1, 0) .01, 2, 3, 4 ^RADPT (D0, 'DT', D1, 'P', D2, 0) 2, 3 6, 7, 8, 13, 14 ^RADPT (D0, 'DT', D1, 'P', D2, 'M', D3, 0) .01 ^RADPT (D0, 'DT', D1, 'P', D2, 'CMOD', D3, 0) 135 ^RADPT (D0, 'DT', D1, 'P', D2, 'H', .01	65	C
RAD/NUC MED PROCEDURES	71	^RAMIS (71, D0, 0) .01, 9, 10 ^RAMIS (71, 'D', X, DA) 9	118-B	C
EXAMINATION STATUS	72	^RA (72, D0, 0) .01 ^RA (72, 'B', X, DA) .01 ^RA (72, 'AA',	118-D	C



			DBIA #	Comment*
LAB/ROC TEST REPORTS		5 ^RARPT(D0,'R', .01 ^RARPT(D0,'I', .01 ^RARPT(D0,'H', .01	15-C	P
LAB LOINC	95.3	.01, 95.3	3557	P
PROTOCOL	101	.01, 4	872	C Direct read in the screen; pointed to.
GMRV VITAL MEASUREMENT	120.5	EN1^GMRVUTO ^PXRMINDEX(120.5,"PI"	1446 4290	C C
PATIENT ALLERGIES	120.8	^GMR(120.8,D0,10,D1,0) REACTION (10,.01) OTHER REACTION (10,1)	190-B	C
FEE BASIS PAYMENT	162, sub-file 162.02	.01, 1.5	5107	C
FEE BASIS PAYMENT	162, sub-file 162.03	.01, 5, 16, 28, 30	5107	C
FEE BASIS PHARMACY INVOICE	162.1 sub-file 162.11	.01, 1, 2, 9, 1.5, 1.6, 15	5409	C
VA FORM 10-7078	162.4	3.5, 4.5	5104	C
FEE BASIS INVOICE	162.5	4, 5, 6, 6.5, 6.6, 8, 19, 24, 30, 31, 32, 33, 34, 40, 41, 42, 43, 44, 54	not yet available	P
PATIENT MOVEMENT	405	.01, .03, .06, .17 ^DGPM('AMV1', ^DGPM('ATT1',	1480	C
ELECTROCARDIOGRAM (EKG)	691.5	GET^MCARAPI	3780	P
		GET^MDAPI1	3854	P
HL7 ERROR MESSAGE FILE	771.7	.01	4493	P
VISIT	9000010		1905	C
		SELECTED^VSIT (returns selected visits)	1900-F	C



			DBIA #	Comment*
		\$\$BOOKOF^VSIT (looks up a visit and returns its information)	1900-G	C
			1906	C
		ENCEVENT^PXKENC	1889-F	C
		Access to the 'AA' x-ref	2309	C
V POV	9000010. 07	POV^PXAPIIB	1554	P
V IMMUNIZATION	9000010. 11	C x-ref, .01, .03, .06, .07, 1201, 1202, 81101	5521	P
V SKIN	9000010. 12	C x-ref, .01, .03, .04, .05, .06, 1201, 1202, 81101	5520	P
PROBLEM	9000011	ACTIVE^GMPLUTL	928	C
		\$\$MOD^GMPLUTL3	2644	C
		FileMan captioned output of entire PROBLEM record.	2308	C
		GETFLDS^GMPLED3	2977	C
		Subscription to the DGPM MOVEMENT EVENTS protocol	1181	C
		GET^GMPLWP	4743	C
	9000010. 18 9000010. 23 9000010. 11 9000010. 16 9000010. 07 9000010. 06 9000010. 12 9000010. 15 9000010 9000010. 13 9000010	Subscription to the PXK VISIT DATA EVENT protocol	1298	C
		Subscription to the LR70 ALL EVSEND RESULTS	3565	C
		BHS^HLFNC3	4481	P



[Click Here to upgrade to
Unlimited Pages and Expanded Features](#)

			DBIA #	Comment*
		\$\$EMPL^DGSEC4	3646	C
		BLDPID^VAFQCQRY	3630	C
		EN^VAFHLZRD	4535	P
		\$\$EN^VAFHLZSP	4536	P
		ZERO^PSS50, NDF^PSS50, DATA^PSS50	4533	S
		ZERO^PSN50P6	4540	S
		C^PSN50P65, IEN^PSN50P65	4543	S
		LIST^DIC	2051	S
		GET1^DIQ, GETS^DIQ	2056	S
		FILE^DIC	2053	S
		\$\$CODEN^ICPTCOD	1995	S
		\$\$CODEN^ICDCODE	3990	S
		EN^MXMLPRSE	4149	S
		LIST^DIC	2051	S
		GET1^DIQ, GETS^DIQ	2056	S
		FMADD^XLFDT, FMDIFF^XLFDT, FMTE^XLFDT	10103	S
		GET1^DIQ	2056	S
		FMADD^XLFDT, FMDIFF^XLFDT	10103	S
		GET1^DIQ	2056	S
		EN1^RAO7PC1	2043	S
		FMADD^XLFDT	10103	S
		GETS^DIQ	2056	S
		FMADD^XLFDT	10103	S
		DT^XLFDT, FMADD^XLFDT	10103	S
		FMADD^XLFDT	10103	S
		\$\$CODEN^ICPTCOD and \$\$CPT^ICPTCOD	1995	S



			DBIA #	Comment*
		ROOT^DILFD	2055	S
		GETS^DIQ	2056	S
		GETCPT^SDOE	2546	S
		Multiple APIs in SDQ routine	2548	S
		\$\$CODEN^ICDCODE and \$\$ICDOP^ICDCODE	3990	S
		FMADD^XLFDT	10103	S
		APIs in routine SDQ: ACRP Interface Toolkit	2548	S
		FMADD^XLFDT	10103	S
		ADM^VADPT2	325	C
		GET1^DIQ, GETS^DIQ	2056	S
		APIs in routine SDQ	2548	S
		DT^XLFDT, FMADD^XLFDT	10103	S
		^ICD9 (5388	S
		ZERO^PSS50, NDF^PSS50, DATA^PSS50	4533	S
		ZERO^PSN50P6	4540	S
		C^PSN50P65, IEN^PSN50P65	4543	S
		LIST^DIC	2051	S
		GET1^DIQ, GETS^DIQ	2056	S
		EN^GMVPXRM	3647	C
		GETIEN^GMVGETVT	5047	S
		LN^XLFMTH	10105	S
		DEM^VADPT	10061	S
		PWR^XLFMTH	10105	S
		HL7TFM^XLFDT	10103	S
* Comments: C = Controlled; P = Private; S = Supported				



PDF
Complete

*Your complimentary
use period has ended.
Thank you for using
PDF Complete.*

[Click Here to upgrade to
Unlimited Pages and Expanded Features](#)

There are no internal relations with this software.



PDF
Complete

*Your complimentary
use period has ended.
Thank you for using
PDF Complete.*

[Click Here to upgrade to
Unlimited Pages and Expanded Features](#)

bles

There are no package-wide variables in this software

Security

Only users with CCR [security keys](#) have access to the registries.

CCR transmits data to the national database through the VA network. This network has security protection in place.

All patients' Social Security Numbers (SSNs) are encrypted before transmission to an agreed-upon standard. The fields sent to CDCO become readable upon receipt of the data; however, only high-level users have access to the unencrypted fields when viewing the national database.

16.1. Alerts

The system produces the following VA Alerts:

Alert	Addressee
When an access violation occurs	Coordinators
When the first update is completed (an e-mail is also sent to the mail group)	Initiator of the setup
When a report (or a generic task) is ready	Initiator of the report (generic task)
Unsent HL7 message (an e-mail is also sent to the mail group)	Coordinators
Problems with the nightly task	Coordinators
Historical data extraction task finished	Initiator of the task
Error during the pre- or post-install (if scheduled)	Initiator of the build installation

16.2. Remote Systems

Data will be transmitted to the National CCR Registry via the [VistA HL7](#) system.

16.3. Contingency Planning

Sites utilizing CCR should develop a local contingency plan to be used in the event of product problems in a live environment. The facility contingency plan must identify the procedure for maintaining functionality provided by this package in the event of system outage. Field station Information Security Officers (ISOs) may obtain assistance from their Regional Information Officer (RISO).

16.4. Interfacing

No interfacing is used in the CCR software.


16.5. Electronic Signatures

No electronic signatures are used in the CCR software.

and must be assigned at least one of the following Vista security keys:


- ROR VA HIV USER or ROR VA HIV ADMIN
- ROR VA HEPC USER or ROR VA HEPC ADMIN
- ROR VA IRM

Users with the ROR VA HIV/HEPC USER key will be displayed on the Show Registry Users window as öUser.ö


 *Users* will have full GUI access that will enable them to run reports, create local fields, and edit, confirm and delete patient records.

Users with this security key will be able to run reports.

Users with the ROR VA HIV/HEPC ADMIN key will be displayed on the Show Registry Users window as öAdministrator.ö


 *Administrators* will have full GUI access that will enable them to run reports, create local fields, and edit, confirm and delete patient records.

Users with the ROR VA IRM key will be displayed on the Show Registry Users window as öIRM.ö

 *IRM Users* will have full GUI access that will enable them to run reports, create local fields, and edit, confirm and delete patient records.

Users with this security key will have access to all CCR files in VistA but no access to the GUI. This key should be assigned to the IRM personnel authorized to maintain and troubleshoot the CCR package.

If any unauthorized users access this system, a VA alert will be sent to persons identified to receive registry notifications stating the date and time of the violation, the name of the user who attempted to access the system, and a record of the access violation will be written to the Access Violations folder of the Technical Log.

 **Note:** Only users having these keys can access the records of the ROR REGISTRY RECORD (#798), ROR REGISTRY PARAMETERS (#798.1), ROR PATIENT (#798.4), ROR LOG (#798.7), ROR TASK (#798.8), and ROR HIV RECORD (#799.4) files via FileMan.


an Output Directory in Windows

A.1 Graphical User Interface

1. Double-click the My Computer icon on the desktop.
2. Choose a drive, then right-click the drive icon and select Properties from the pop-up menu.
3. Make sure that the drive has enough free space for the new directory (about 500Mb), then click Cancel to close the Properties window.
4. Double-click the drive icon.
5. From the File menu, select New | Folder, then type **RORHDT** over the New Folder name.
6. Press < Enter >.
7. Close the window.


A.2 Command Prompt

1. From the Start menu, select Run . The Run dialog box appears.

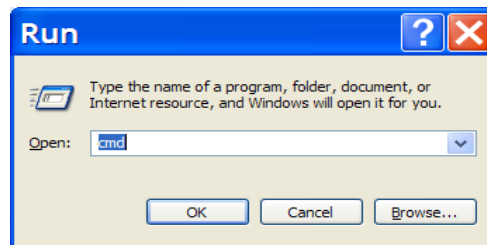


2. In the Open: field, enter **CMD** and click < OK >.

opens:

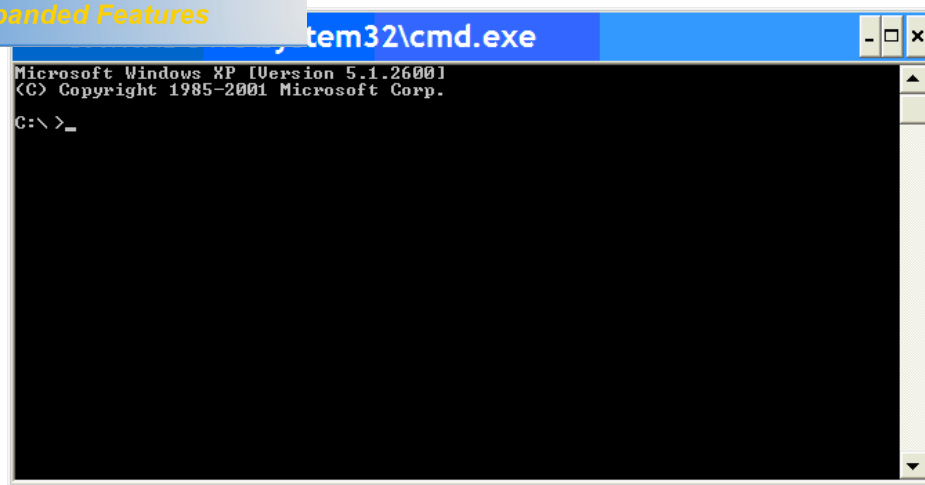

In most cases, the current drive will be C: and you will see the **C:\>** prompt. To create the directory on a different drive, type the letter of the drive followed by a colon (e.g., **ÖD:ö**), and then press **< Enter >**.

3. At the command prompt, type the **DIR** command followed by **< Enter >** to make sure that the drive has enough free space (about 500Mb). Look for a message like this at the end of the output: **ÖN Dir(s) nn,nnn,nnn bytes free.ö**

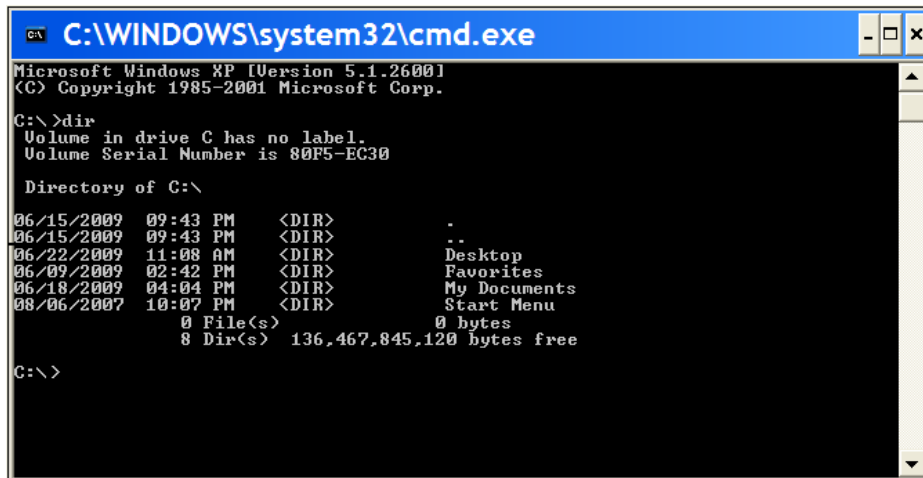

4. Type **MKDIR** followed by a space and the name of directory **\RORHDT** and press **< Enter >**.
5. Type **DIR \RORHDT** and press **< Enter >** to make sure that the directory has been created.

```
C:\>D:
D:\>DIR
Volume in drive D is DATA
```

```
12/18/2001  10:48a      <DIR>          CacheSys
08/30/2001  01:37p      <DIR>          VISTA
                2 Dir(s)  16,823,896,064 bytes free

D:\>MKDIR \RORHDT

D:\>DIR \RORHDT
Volume in drive D is DATA
Volume Serial Number is 924D-6524

Directory of D:\RORHDT

05/08/2002  09:32a      <DIR>          .
05/08/2002  09:32a      <DIR>          ..
                0 File(s)          0 bytes
                2 Dir(s)  16,823,896,064 bytes free

D:\>
```

6. Type **EXIT** and press **< Enter >** to close the command prompt window.



PDF
Complete

*Your complimentary
use period has ended.
Thank you for using
PDF Complete.*

[**Click Here to upgrade to
Unlimited Pages and Expanded Features**](#)


Windows FTP Client

B.1 Transmit Using FTP Client

Use these steps to transmit the data using the Windows NT/2000/XP FTP client (see Windows documentation and/or online help for more details):

1. From the Start menu, select Run.
2. In the Open: field, enter **FTP** and click **< OK >**.

The FTP client window opens and the **ftp>** prompt is displayed.

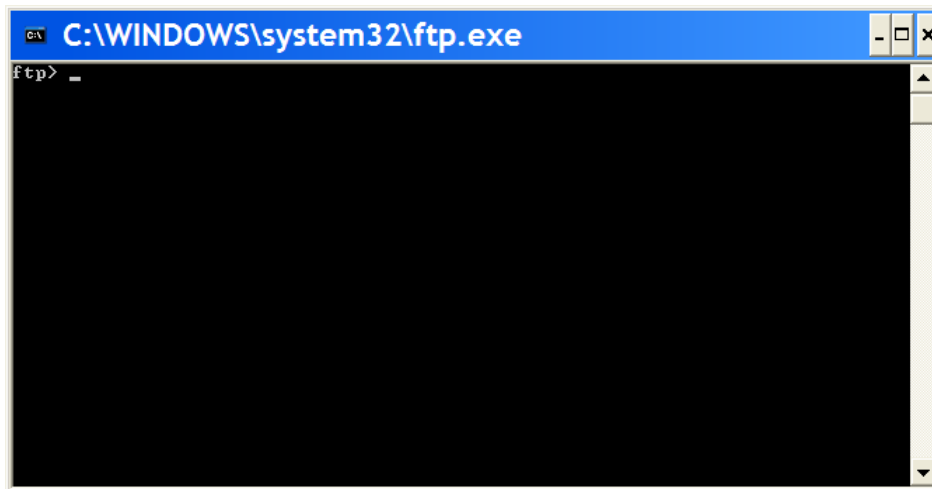

3. Enter the **OPEN** command with the IP address **10.168.97.208** as a parameter;
4. At the **Name (...):** prompt, enter your user name.
5. At the **Password:** prompt, enter your password. The characters of the password will not be displayed on the screen.
6. Use the **BIN** command to change the transfer mode to binary, then initiate transfer of historical data files (*.HDT) from the output directory using the **MPUT** command:
FTP> MPUT {disk and directory name}*.HDT
7. Confirm transmission of each file by pressing **< Enter >**.
8. Use the **QUIT** command to disconnect and exit the FTP client.

The following screen capture shows a typical Windows FTP session:

```
ftp> OPEN 10.168.97.208
Connected to 10.168.97.208.
220 Palo Alto CQM0 Server
User (10.168.97.208): {your username}
331 Please specify the password.
```



```
200 Switching to Binary mode.
ftp> MPUT D:\RORHDT\*.HDT
mput d:\rorhdt\ROR-605-01.HDT? <RET>
200 PORT command successful. Consider using PASV.
150 Ok to send data.
226 File receive OK.
ftp: 93003 bytes sent in 0.84Seconds 110.59Kbytes/sec.
mput d:\rorhdt\ROR-605-02.HDT? <RET>
200 PORT command successful. Consider using PASV.
150 Ok to send data.
226 File receive OK.
ftp: 91391 bytes sent in 0.98Seconds 93.25Kbytes/sec.
ftp> QUIT
```

Note: If you need to transmit or retransmit a single file, use the PUT command:

ftp> **PUT** {disk and directory name}\{file name}

Example:

```
ftp> PUT D:\RORHDT\ ROR-605-01.HDT
```

Message Definitions

The CCR package sends patient data to the national registry as [HL7](#) batch messages of CSU type. Each patient will be transmitted as an individual CSU message within the batch message.

C.1 Typographic Conventions

The following conventions are specific to *this appendix only*. See [paragraph 1.1 above](#) for other typographic conventions.

- The HL7 segments in the table are color-coded according to their purpose:
 - HL7 structure segments are highlighted in 15% gray (BHS, MSH, and BTS).
 - Patient demographic data segments are highlighted in light green (PID, ZSP, and ZRD).
 - Patient's clinical data (registry-independent) segments are highlighted in turquoise (OBR, OBX, ORC, and RXE).
 - Patient's registry-specific data segments are highlighted in ivory (CSP, CSS, OBR, and OBX).
- Square brackets [] denote optional segments (groups of segments).
- Curly brackets { } denote repeatable segments (groups of segments).

C.2 CSU . Clinical Trials Message (Event type C09)

The function of this message is to pass information relating to patients on the locally identified registries to a centralized database. The message includes patient demographics; registry information; and relevant clinical data.

C.2.1 Normalized Structure of the CSU Message

Segment ID	Description	Comments
BHS {	Batch Header	
MSH {	Message Header	
PID	Patient Identification	Patient Demographics
[ZSP]	Service Period	
[{ ZRD }]	Rated Disabilities	
[{ PV1 }]	Patient visit	Admissions/Outpatient data

		Clinical Case Registry data
{	CSP Clinical Study Phase	
[{		
OBR	Observation Request	Inpatient/Outpatient, Radiology, Autopsy, Surgical Pathology, Cytopathology, Microbiology, Medical Procedures (EKG), Allergy, Immunization, IV, Skin Test, Vitals, Problem List, and Laboratory data
{ OBX }	Observation/Result	
}]		
[{		
ORC	Common Order	Pharmacy/Drug data
{ RXE }	Pharmacy/Treatment Encoded Order	
}]		
[
{ ZIN }	Inpatient	Purchased Care data
{ ZSV }	Outpatient	
{ ZRX }	Pharmacy	
]		
}		
}]		
}		
} BTS		Batch Trailer

C.2.2 Expanded Structure of the CSU Message

Segment ID	Description	Comments
BHS	Batch Header	



		der	
	PID	Pseudo-patient Identification	Registry State This group of segments is sent for each registry included in the data transmission.
	CSR	Clinical Study Registration	
	}		
	[{		
	MSH	Message Header	
	[
	PID	Patient Identification	Patient's Demographic and Clinical Data This group of segments is sent only if the corresponding data has been modified/added since the last data transmission.
	[ZSP]	Service Period	
	[{ ZRD }]	Rated Disabilities	
	[{ PV1 }]	Patient visit	
	CSR	Clinical Study Registration	
	[{		
	OBR	Observation Request	
	{ OBX }	Observation/Result	
	}}		
	[{		
	ORC	Common Order	
	{ RXE }	Pharmacy/Treatment Encoded Order	
	}}		
]		
	[{		
	PID	Patient Identification	Patient's Registry Data This group of segments contains the patient's registry data. It is sent for each registry included in the transmission if the patient belongs to that registry.
	CSR	Clinical Study Registration	
	{ CSP }	Clinical Study Phase	
	}}		
	}}	Batch Trailer	
	BTS		



```

BHS|^~\&|ROR SITE|640 PALO-ALTO.MED.VA.GOV^DNS|ROR AAC|
|20050303020252-0800||^P^CSU~C09^2.4^AL^NE||64038648827|

MSH|^~\&|ROR SITE|||||CSU^C09^CSU_C09|640105760888-1
|P|2.4|||AL|NE|USA
PID|1||0^^^U||PSEUDO^PATIENT
CSR|VA HEPC^1.5||640^PALO ALTO HCS^99VA4|0^^^U^3^20
PID|1||0^^^U||PSEUDO^PATIENT
CSR|VA HIV^1.5||640^PALO ALTO HCS^99VA4|0^^^U^0^101

MSH|^~\&|ROR SITE|||||CSU^C09^CSU_C09|640105760888-2
|P|2.4|||AL|NE|US
PID|1||1243567890V123456^^^USVHA&&0363^NI^VA FACILITY
ID&640&L~325500^^^USVHA&&0363^PI^VA FACILITY
ID&640&L|||19630408|M||2106-3-SLF^WHITE^0005^2106-
3^WHITE^CDC|^^^95123|||00007600044| ||2186-5-SLF^NOT
HISPANIC OR LATINO^0189^2186-5^NOT HISPANIC OR
LATINO^CDC|||""
ZSP|1|1|30|8|""|0|0|19700325
ZRD|1|7709^HODGKINS DISEASE|100|1
PV1|1|O|640^^^^408|P||10935^^^^^^^PHYSICIAN|||||
|8710273|||||200403020815-0800|||||0
CSR|CCR^1.5||640^PALO ALTO HCS^99VA4|325500^^^USVHA^PI
OBR|1||45353453|OP^Outpatient^C4|||1997040593-000600|||||
||||PHY|||||499^HINES OIFO^99VA4
OBR|2||110120021658|93000^ELECTROCARDIOGRAM^C4||199504151100-
0600|199505161100-0600|||||EC|F|||||
|612GF^MARTINEZ OPC/CREC^99VA4
OBX|1|FT|INT^Interpretation^VA080|CHANGES OR SERIAL|RECOMMEND
CLINICAL CORRELATION|||||F
OBX|2|FT|AUTO^Auto Instrument^VA080||This is the Auto-Instrument
Diagnosis, which is a free text word processing field
OBR|3||2050600309|81129.0000^Hepatic Function Panel^99VA64||
|20050301101656-0800|||A|^||20050301101656-
0800|SER&SER/PLAS&HL7&SER/PLAS&SER/PLAS&LN|30890|||87712\S\CH\S
\6949697.898344||20050301111748-0800||LAB|
OBX|3||777-3^PLATELETS:NCNC:PT:BLD:QN:AUTOMATED COUNT^LN
^85570.0000^Platelet Count Whole Blood^99VA64||3.6|g/dL|3.3-
4.8|||F||2|20020129082501-0700|612GF^MARTINEZ O PC/CREC^99VA4
|617-VA612GF^
OBX|4||LABC|LCOMM|Lab Comments go here|||||F
ZIN|36520|20040408|20040409|1|9153.70|6445.16|20040817|DRG202|20
040408|20040409|1|571.2|456.20|456.8|305.1|303.90|42.33|44.43ZSV
|2943-169-1-1|20000908||76091|OPT SERVICES/TREATMENT FOR NSC

```

```

PATIENT HOSPITAL (22) ZRX|8344-
X|PODOFILOX 0.5% TOP SOLN|0.5%|1
PID|2||1243367890V123436^USVHA&&0363^NI^VA FACILITY
ID&640&L~325500^^^USVHA&&0363^PI^VA FACILITY
ID&640&L||||19630408|M||2106-3-SLF^WHITE^0005^2106-
3^WHITE^CDC|^^^95123||||||00007600044| ||2186-5-SLF^NOT
HISPANIC OR LATINO^0189^2186-5^NOT HISPANIC OR
LATINO^CDC||||||""
CSR|VA HEPC^1.5||640^PALO ALTO HCS^99VA4
|325500^^^USVHA^PI||20040328|||7^Automatically Added -
ICD9^99VA799_1||0^NO~1^YES~1^YES~0^NO~0^NO~0^NO~0
^NO~0^NO~0^NO~0^NO~0^NO~9^UNKNOWN
CSP|0^UPDATE|20050225020252-0800|20050226020252-0800
CSP|1^SELECT|200502241415-0800

BTS|2

```

C.3 ACK . Commit Acknowledgement Message

The CCR uses original HL7 acknowledgment rules. The responding application is required to send only a commit acknowledgment when the message is received and safely stored.

C.3.1 Structure of the Message

Segment ID	Description	OPT	RP	Comments
BHS	Batch Header	R		
MSA	Message Acknowledgment	R		
BTS	Batch Trailer	R		

C.3.2 Sample ACK Message

```

BHS|^~\&|ROR AAC||ROR SITE||20050303020500||^ACK^2.4
|CA|23423423423|64038648827
MSA|CA|64038648827
BTS|1

```



PDF
Complete

*Your complimentary
use period has ended.
Thank you for using
PDF Complete.*

[Click Here to upgrade to
Unlimited Pages and Expanded Features](#)

INTENTIONALLY LEFT BLANK

Segment Definitions

D.1 Typographic Conventions

The following conventions are specific *to this appendix only*. See [paragraph 1.1 above](#) for other typographic conventions.

Table 28 . Typographic Conventions (Segment Definitions)

Notation	Description	Example
Bold	Literal	DNS
<õ >	Name that represents the corresponding value	<Race Code>
[õ]	Optional element(s)	[ss]
	Or	+ -
DD	Day (1-31)	05
MM	Month (1-12)	10
N	Digit (0-9)	
YY	2-digit year	05
YYYY	4-digit year	2005
Hh	Hours (0-23)	15
Mm	Minutes (0-59)	05
Ss	Seconds (0-59)	43
Zzzz	Time zone	0600
Blue	Hyperlink. You can click on it to open the corresponding section in this document, external document, or website.	See Notes
N/A	Field, component, or sub-component is not used by the package. Usually, it is empty but might have a value, which will be ignored.	
Example vs. Value	Description of an element contains either the Example or the Value row. In the latter case, the element always has the provided value.	

D.2 HL7 Segment Table Definitions

ts contained in the segment are described in table format sections. The abbreviated column headings contained in the tables and associated HL7 data types are also defined.

Table 29 . HL7 Abbreviated Column Headings

Column Heading	Definition
SEQ	Sequence of data element in segment
LEN	Maximum length of data element
DT	Data Type
OPT	Required/Optional (R=Required, O=Optional)
RP/ #	Repeats/Maximum number of repetitions (Y for repeats)
TBL#	Number of corresponding HL7 user defined/supported table
ELEMENT NAME	HL7 Element Name with VistA file and field location

Table 30 . HL7 Data Types

Column Heading	Definition
CE	Coded Element
ID	Coded values for HL7 tables
SI	Sequence ID
TS	Date/Time Stamp
XCN	Extended Composite ID number for name and persons

Table 31 . Diagnostic Service Section ID (HL7 Table 0074)

Value	Description
AU	Audiology
BG	Blood gases
BLB	Blood bank
CUS	Cardiac Ultrasound
CTH	Cardiac catheterization
CT	CAT scan
CH	Chemistry
CP	Cytopathology
EC	Electrocardiac (e.g., EKG, EEC, Holter)
EN	Electroneuro (EEG, EMG,EP,PSG)



ICU	Bedside ICU Monitoring
IMG	Diagnostic Imaging
IMM	Immunology
LAB	Laboratory
MB	Microbiology
MCB	Mycobacteriology
MYC	Mycology
NMS	Nuclear medicine scan
NMR	Nuclear magnetic resonance
NRS	Nursing service measures
OUS	OB Ultrasound
OT	Occupational Therapy
OTH	Other
OSL	Outside Lab
PAR	Parasitology
PAT	Pathology (gross and histopathology, not surgical)
PHR	Pharmacy
PT	Physical Therapy
PHY	Physician (Hx. Dx, admission note, etc.)
PF	Pulmonary function
RAD	Radiology
RX	Radiograph
RUS	Radiology ultrasound
RC	Respiratory Care (therapy)
RT	Radiation therapy
SR	Serology
SP	Surgical Pathology
TX	Toxicology
URN	Urinalysis
VUS	Vascular Ultrasound
VR	Virology
XRC	Cineradiograph

Within the segment information are references to tables (TBL#), when applicable.

Table 32 . Segment Definition Examples

Format	Valid Values
<Station Number>^<Station Name>^DNS	640^PALO-ALTO.MED.VA.GOV^DNS
YYYYMMDD[hmm[ss]] [+ -zzzz]	20050303020252-0800 20050303020252 200503030202+0600 200503030202 20050303

D.3 BHS . Batch Header Segment

Table 33 . Batch Header Segments

SEQ	LEN	DT	OPT	RP/#	TBL#	Field Name	CCR
1	1	ST	R			Batch Field Separator	See Notes
2	4	ST	R			Batch Encoding Characters	See Notes
3	15	ST	R			Batch Sending Application	See Notes
4	72	ST	R			Batch Sending Facility	See Notes
5	15	ST	R			Batch Receiving Application	See Notes
6	20	ST	O			Batch Receiving Facility	N/A
7	26	TS	R			Batch Creation Date/Time	See Notes
8	40	ST	O			Batch Security	N/A
9	23	ST	R			Batch Name/ID/Type	See Notes
10	80	ST	C			Batch Comment	See Notes
11	20	ST	R			Batch Control ID	See Notes
12	20	ST	C			Reference Batch Control ID	See Notes

D.3.1 Field Definitions

D.3.1.1 BHS-1 Batch Field Separator

separator between the segment ID and the first real field, **BHS-2**. As such it serves as the separator and defines the character to be used as a separator for the rest of the message.

Value:	(ASCII 124)
---------------	-------------

D.3.1.2 BHS-2 Batch Encoding Characters

Definition:	This field contains four characters in the following order: the component separator; repetition separator; escape character; and subcomponent separator.
Value:	^~\& (ASCII 94, 126, 92, and 38, respectively)

D.3.1.3 BHS-3 Batch Sending Application

Definition:	This field uniquely identifies the sending application among all other applications within the network enterprise. The network enterprise consists of all those applications that participate in the exchange of HL7 messages within the enterprise. Entirely site-defined.
Value:	<ul style="list-style-type: none"> • ACK: ROR AAC • CSU: ROR SITE

D.3.1.4 BHS-4 Batch Sending Facility

SEQ	DT	TBL#	Component Name	CCR
1	IS	0362	Namespace ID	Station Number
2	ST		Universal ID	Station Domain Name
3	ID	0301	Universal ID Type	DNS
Definition:		This field contains the address of one of several occurrences of the same application within the sending system. Entirely site-defined.		
Value:		640^PALO-ALTO.MED.VA.GOV^DNS		

D.3.1.5 BHS-5 Batch Receiving Application

Definition:	This field uniquely identifies the receiving application among all other applications within the network enterprise. The network enterprise consists of all those applications that participate in the exchange of HL7 messages within the enterprise. Entirely site-defined.
Value:	<ul style="list-style-type: none"> • ACK: ROR SITE • CSU: ROR AAC

D.3.1.6 BHS-7 Batch Creation Date/Time

time that the sending system created the message. If the time
passed throughout the message as the default time zone.

Value:	YYYYMMDD[h:mm:ss] [+ -zzzz]
Example:	20050303020252-0800

D.3.1.7 BHS-9 Batch Name/ID/Type

Table 34 . BHS-9 Batch Name/ID/Type

SEQ	DT	TBL#	Component Name	CCR
1	ID			N/A
2	ID	0103	Processing ID	
3	ID		<Message Type>~<Trigger Event>	
4	ID	0104	Version ID	2.4
5	ID	0155	Accept ACK Type	
6	ID	0155	Application ACK Type	
Definition:		This field contains the <i>Processing ID</i> , <i>Message Type</i> , <i>Trigger Event</i> , and several other characteristics of the message. The CCR package sends a CSU message type with the trigger event C09. The CCR package always requests the commit acknowledgement but it does not require the application acknowledgement.		
Example:		<ul style="list-style-type: none"> ACK: ^P^ACK^2.4 CSU: ^P^CSU~C09^2.4^AL^NE 		

D.3.1.8 BHS-10 Batch Comment

Definition:	This field is a comment field that is not further defined in the HL7 protocol.
Example:	<ul style="list-style-type: none"> ACK: CA Historical CSU: HISTORICAL DATA Nightly CSU: N/A

D.3.1.9 BHS-11 Batch Control ID

Definition:	This field is used to uniquely identify a particular batch. It is echoed back in the <i>BHS-12 Reference Batch Control ID</i> field of the commit acknowledgement.
Example:	64038648827

Batch Control ID

	of BHS-11 Batch Control ID when this batch was originally transmitted.
Value:	CSU: N/A ACK: Value of BHS-11 Batch Control ID from the original CSU batch.
Example:	64038648827

D.3.2 Sample BHS Segments

D.3.2.1 ACK

BHS | ^~\& | ROR AAC | | ROR SITE | | 20050303020500 | | ^^ACK^2.4
| CA | 23423423423 | 64040054123

D.3.2.2 CSU

BHS | ^~\& | ROR SITE | 640^PALO-ALTO.MED.VA.GOV^DNS | ROR AAC |
| 20050303020252-0800 | | ^P^CSU~C09^2.4^AL^NE | | 64038648827 |

D.4 BTS . Batch Trailer Segment

Table 35 . Batch Trailer Segment

SEQ	LEN	DT	OPT	RP/#	TBL#	Field Name	CCR
1	10	ST	R			Batch Message Count	See Notes
2	80	ST	O			Batch Comment	N/A
3	100	NM	O	Y		Batch Totals	N/A

D.4.1 Field Definitions

D.4.1.1 BTS-1 Batch Message Count

Definition:	This field stores the count of individual messages contained within the batch.
Example:	235

D.4.2 Sample BTS Segment

BTS | 235

D.5 CSP . Clinical Study Phase Segment

ent

L#	Field Name	CCR
1	30 CE R	Study Phase Identifier See Notes
2	26 TS R	Date/time Study Phase Began See Notes
3	26 TS C	Date/time Study Phase Ended See Notes
4	250 CE C	Study Phase Evaluability N/A

The CSP segments represent different registry-specific events, store the corresponding dates, and/or group the subsequent segments.

If a segment with a particular value of the *CSP-1 Study Phase ID* field is not present in the message, then the corresponding values in the national database should not be changed.

D.5.1 Field Definitions

D.5.1.1 CSP-1 Study Phase ID

SEQ	DT	TBL#	Component Name	CCR
1	ST		Identifier	Registry Event Code
2	ST		Text	Registry Event Name
3	ST		Name of Coding System	N/A
4	ST		Alternate Identifier	N/A
5	ST		Alternate Text	N/A
6	ST		Name of Alternate Coding System	N/A

Definition:	This field indicates type of the registry-specific event represented by the CSP segment.	
Tables:	Identifier	Text
	0	UPDATE
	1	SELECT
	2	ADD
	3	CONFIRM
	4	DELETE
	5	CDC
Example:	0^UPDATE	

D.5.1.2 CSP-2 Date/time Study Phase Began

Meaning of this field depends on the value of the <i>CSP-1 Study Phase ID</i> field:		
End date/time of the data extraction		
	SELECT	Date/time of the earliest selection rule
	ADD	Date/time when the patient was added to the registry (in pending state)
	CONFIRM	Date/time when the patient was confirmed in the registry
	DELETE	Date/time when the patient was deleted from the registry
	CDC	Date/time of CDC data modification
Format:	YYYYMMDD [hhmm [ss]] [+ -zzzz]	
Example:	200502100920-0800	

D.5.1.3 CSP-3 Date/time Study Phase Ended

Definition:	Meaning of this field depends on the value of the <i>CSP-1 Study Phase ID</i> field:	
Value:	UPDATE :	End date/time of the data extraction
	Otherwise:	N/A
Format:	YYYYMMDD [hhmm [ss]] [+ -zzzz]	
Example:	200502101015-0800	

D.5.2 Sample CSP segment

CSP | 0^UPDATE | 20010806010000-0600 | 20010806015030-0600

D.6 CSR . Clinical Study Registration Segment

Table 37 . Clinical Study Registration Segment

SEQ	LEN	DT	OPT	RP/#	TBL#	Field Name	CCR
1	60	EI	R			Sponsor Study ID	See Notes
2	60	EI	O			Alternate Study ID	N/A
3	250	CE	R			Institution Registering the Patient	See Notes
4	30	CX	R			Sponsor Patient ID	See Notes
5	30	CX	O			Alternate Patient ID - CSR	N/A
6	26	TS	C			Date/Time Of Patient Study Registration	See Notes
7	250	XCN	O	Y		Person Performing Study Registration	N/A
8	250	XCN	C	Y		Study Authorizing Provider	N/A

L#	Field Name	CCR
	Date/time Patient Study Consent Signed	See Notes
10	250 CE C	See Notes
11	26 TS O Y/3	N/A
12	250 CE C Y	See Notes
13	250 CE O Y/3	N/A
14	250 CE C	N/A
15	26 TS C	N/A
16	250 CE C	N/A

D.6.1 Field Definitions

D.6.1.1 CSR-1 Sponsor Study ID

SEQ	DT	TBL#	Component Name	CCR
1	ST		Entity Identifier	Registry Name
2	IS		Namespace ID	Software Version Information
3	ST		Universal ID	N/A
4	ID		Universal ID Type	N/A

Definition:	<p>This field holds the internal registry name, the version number, and the build number of the CCR software:</p> <p>Clinical Data: <code>CCR^<Version Major>.<Version Minor>[.<Latest Patch Number>[.<Build Number>]]</code></p> <p>Otherwise: <code><Registry Name>^<Version Major>.<Version Minor>[.<Latest Patch Number>[.<Build Number>]]</code></p>
Examples:	<p>Clinical Data: CCR^1.5.2.1</p> <p>Otherwise: VA HIV^1.5.2.1</p>

D.6.1.2 CSR-3 Institution Registering the Patient

SEQ	DT	TBL#	Component Name	CCR
1	ST	0005	Identifier	Station Number (without suffix)
2	ST		Text	Institution Name
3	ST		Name of Coding System	99VA4

			Identifier	N/A
			Alternate Text	N/A
6	ST		Name of Alternate Coding System	N/A

Definition:	This field distinguishes the station where the local registry is held.
Example:	640^PALO ALTO HCS^99VA4

D.6.1.3 CSR-4 Sponsor Patient ID

SEQ	DT	TBL#	Component Name	CCR
1	ST		ID	Patient IEN (DFN)
2	ST		Check Digit	
3	ID	0061	Code of the Check Digit Scheme	
4	HD	0363	Assigning Authority	
5	ID	0203	Identifier Type Code	
6	HD		Assigning Facility	Number of pending patients
7	DT		Effective Date	Number of reports that have been run since the last transmission
8	DT		Expiration Date	N/A

Definition:	<p>Clinical Data: Both patients clinical and patients registry CSR segments contain the Internal Entry Number (DFN) of the patients record at the sending facility in this field: <DFN>^^^USVHA^PI</p> <p>Registry See Clinical Data Data:</p> <p>Registry CSR segments in the Registry State section of the batch utilize the State: following format of this field: 0^^^^U^<Number of Pending Patients>^<Number of Reports></p>
Examples:	<p>15^^^USVHA^PI</p> <p>0^^^^U^3^20</p>

D.6.1.4 CSR-6 Date/time of Patient Study Registration

[Click Here to upgrade to
Unlimited Pages and Expanded Features](#)

	the patient was added to the registry (in pending state)
	Data: Registry N/A State:
Format:	YYYYMMDD
Examples:	20050210

D.6.1.5 CSR-9 Date/time Patient Study Consent Signed

Definition:	Clinical Data: N/A Registry Date of the AIDS OI (Clinical AIDS) is sent in this field if the corresponding Data: check-box is selected on the Patient Edit dialog box. Registry N/A State:
Format:	YYYYMMDD
Examples:	20050210

D.6.1.6 CSR-10 Patient Study Eligibility Status

SEQ	DT	TBL#	Component Name	CCR
1	ST	0005	Identifier	Code
2	ST		Text	Description
3	ST		Name of Coding System	99VA799_1
4	ST		Alternate Identifier	N/A
5	ST		Alternate Text	N/A
6	ST		Name of Alternate Coding System	N/A

Definition:	Clinical Data:	N/A
	Registry Data:	Reason for addition of the patient to the registry
	Registry State:	N/A
Tables:	Code	Description
	7	Automatically Added - ICD9

ly Added - ICD9 and Lab

D.6.1.7 CSR-12 Randomized Study Arm

SEQ	DT	TBL#	Component Name	CCR
1	ST	0005	Identifier	Code
2	ST		Text	Description
3	ST		Name of Coding System	N/A
4	ST		Alternate Identifier	N/A
5	ST		Alternate Text	N/A
6	ST		Name of Alternate Coding System	N/A

Definition:	Clinical Data:	N/A
	Registry Data:	Risk factors. 14 th component indicates whether this site was the first site (VA or Non-VA) to diagnose HIV in the patient. Number of repetitions is registry-specific.
	Registry State:	N/A
Tables:	Code	Description
	0	NO
	1	YES
	9	UNKNOWN
Example:	<ul style="list-style-type: none"> 0^NO~1^YES~1^YES~0^NO~0^NO~0^NO~0^NO~0^NO~0^NO~0^NO~0^NO~0^NO~1^YES 0^NO~9^UNKNOWN ~~~~~9^UNKNOWN 	

D.6.2 Sample CSR segment

```
CSR|VA HEPC^1.5||640^PALO ALTO HCS^99VA4|325500^^^USVHA^PI|
|20040328|||20050210|7^Automatically Added - ICD9^99VA7991|
|0^NO~1^YES~1^YES~0^NO~0^NO~0^NO~0^NO~0^NO~0^NO~0^NO~0^NO~9
^UNKNOWN~1^YES
```

Acknowledgment Segment

Table 38 . Message Acknowledgment Segment

SEQ	LEN	DT	OPT	RP/#	TBL#	Field Name	CCR
1	2	ID	R		0008	Acknowledgment Code	See Notes
2	20	ST	R			Message Control ID	See Notes
3	80	ST	O			Text Message	See Notes
4	15	NM	O			Expected Sequence Number	N/A
5	1	ID	B		0102	Delayed Acknowledgment Type	N/A
6	250	CE	O		0357	Error Condition	N/A

D.7.1 Field Definitions

D.7.1.1 MSA-1 Acknowledgment Code

Definition:	This field holds the acknowledgment code, which defines whether the message was accepted or rejected.
Example:	CA

D.7.1.2 MSA-2 Message Control ID

Definition:	This field contains the message control ID of the message sent by the sending system. This allows the sending system to associate the response with the original message.
Example:	64038648827

D.7.1.3 MSA-3 Text Message

Definition:	This field will describe an error condition in the event of an AE or AR being returned.
--------------------	---

D.7.2 Sample MSA Segment

MSA | CA | 64038648827

D.8 MSH . Message Header Segment

Table 39 . Message Header Segment

SEQ	LEN	DT	OPT	RP/#	TBL#	Field Name	CCR
-----	-----	----	-----	------	------	------------	-----

						L#	Field Name	CCR
							Field Separator	See Notes
2	4	ST	R				Encoding Characters	See Notes
3	180	HD	O		0361		Sending Application	See Notes
4	180	HD	O		0362		Sending Facility	N/A
5	180	HD	O		0361		Receiving Application	N/A
6	180	HD	O		0362		Receiving Facility	N/A
7	26	TS	R				Date/Time Of Message	N/A
8	40	ST	O				Security	N/A
9	15	CM	R		0076/ 0003		Message Type	See Notes
10	20	ST	R				Message Control ID	See Notes
11	3	PT	R				Processing ID	See Notes
12	60	VID	R		0104		Version ID	See Notes
13	15	NM	O				Sequence Number	N/A
14	180	ST	O				Continuation Pointer	N/A
15	2	ID	O		0155		Accept Acknowledgment Type	See Notes
16	2	ID	O		0155		Application Acknowledgment Type	See Notes
17	3	ID	O		0399		Country Code	See Notes
18	16	ID	O	Y	0211		Character Set	N/A
19	250	CE	O				Principal Language Of Message	N/A
20	20	ID	O		0356		Alternate Character Set Handling Scheme	N/A
21	10	ID	O	Y	0449		Conformance Statement ID	N/A

D.8.1 Field Definitions

D.8.1.1 MSH-1 Field Separator

Definition:	This field contains the separator between the segment ID and the first real field, <i>MSH-2 Encoding Characters</i> . As such it serves as the separator and defines the character to be used as a separator for the rest of the message.
Example:	(ASCII 124)

characters

	characters in the following order: the component separator; repetition separator; escape character; and subcomponent separator.
Example:	<code>^~\&</code> (ASCII 94, 126, 92, and 38, respectively)

D.8.1.3 MSH-3 Sending Application

Definition:	This field uniquely identifies the sending application among all other applications within the network enterprise. The network enterprise consists of all those applications that participate in the exchange of HL7 messages within the enterprise. Entirely site defined.
Example:	ROR SITE

D.8.1.4 MSH-9 Message Type

SEQ	DT	TBL#	Component Name	CCR
1	ID	0076	Message Type	CSU
2	ID	0003	Trigger Event	C09
3	ID	0354	Message Structure	CSU_C09

Definition:	This field contains the message type and trigger event for the message. The CCR package sends a CSU message type with the trigger event C09.
Example:	CSU^C09^CSU_C09

D.8.1.5 MSH-10 Message Control ID

Definition:	This field contains a number or other identifier that uniquely identifies the message. The receiving system echoes this ID back to the sending system in the Message Acknowledgment segment (MSA).
Example:	640105354833-1

D.8.1.6 MSH-11 Processing ID

SEQ	DT	TBL#	Component Name	CCR
1	ID	0103	Processing ID	
2	ID	0207	Processing Mode	N/A

Definition:	This field identifies the current status of the interface, the component is used to indicate if the area and circumstances of the transmission.
--------------------	---

D.8.1.7 MSH-12 Version ID

Definition:	This field is matched by the receiving system to its own HL7 version to be sure the message will be interpreted correctly.
Example:	2.4

D.8.1.8 MSH-15 Accept Acknowledgment Type

Definition:	This field defines whether the sending system requires an acknowledgment from the receiving system when a message is accepted. The CCCR package always requests the accept (commit) acknowledgment.
Example:	AL

D.8.1.9 MSH-16 Application Acknowledgment Type

Definition:	This field defines whether the sending system requires an acknowledgment from the receiving system when a message has been validated by the application. The CCR package does not use application acknowledgments.
Example:	NE

D.8.1.10 MSH-17 Country Code

Definition:	This field contains the country of origin for the message.
Example:	USA

D.8.2 Sample MSH Segment

```
MSH|^~\&|ROR SITE|||CSU^C09^CSU_C09|640105760888-2|P|2.4||
|AL|NE|USA
```

D.9 OBR . Observation Request

Table 40 . Observation Request

SEQ	LEN	DT	OPT	RP/#	TBL#	Field Name	CCR
1	4	SI	O			Set ID - OBR	See Notes

L#						Field Name	CCR
						Placer Order Number	N/A
3	22	EI	C			Filler Order Number	See Notes
4	250	CE	R			Universal Service Identifier	See Notes
5	2	ID	X			Priority - OBR	N/A
6	26	TS	X			Requested Date/Time	See Notes
7	26	TS	C			Observation Date/Time	See Notes
8	26	TS	O			Observation End Date/Time	See Notes
9	20	CQ	O			Collection Volume	N/A
10	250	XCN	O	Y		Collector Identifier	N/A
11	1	ID	O		0065	Specimen Action Code	See Notes
12	250	CE	O			Danger Code	See Notes
13	300	ST	O			Relevant Clinical Info.	See Notes
14	26	TS	C			Specimen Received Date/Time	See Notes
15	300	CM	O		0070	Specimen Source	See Notes
16	250	XCN	O	Y		Ordering Provider	See Notes
17	250	XTN	O	Y/2		Order Callback Phone Number	N/A
18	60	ST	O			Placer Field 1	See Notes
19	60	ST	O			Placer Field 2	N/A
20	60	ST	O			Filler Field 1	See Notes
21	60	ST	O			Filler Field 2	See Notes
22	26	TS	C			Results Rpt/Status Chng - Date/Time	See Notes
23	40	CM	O			Charge to Practice	N/A
24	10	ID	O		0074	Diagnostic Serv Sect ID	See Notes
25	1	ID	C		0123	Result Status	See Notes
26	400	CM	O			Parent Result	See Notes
27	200	TQ	O	Y		Quantity/Timing	N/A
28	250	XCN	O	Y/5		Result Copies To	N/A
29	200	CM	O			Parent	See Notes
30	20	ID	O		0124	Transportation Mode	N/A

L#						Field Name	CCR
						Reason for Study	N/A
32	200	CM	O			Principal Result Interpreter	N/A
33	200	CM	O	Y		Assistant Result Interpreter	N/A
34	200	CM	O	Y		Technician	N/A
35	200	CM	O	Y		Transcriptionist	N/A
36	26	TS	O			Scheduled Date/Time	N/A
37	4	NM	O			Number of Sample Containers	N/A
38	250	CE	O	Y		Transport Logistics of Collected Sample	N/A
39	250	CE	O	Y		Collector's Comment	N/A
40	250	CE	O			Transport Arrangement Responsibility	See Notes
41	30	ID	O		0224	Transport Arranged	N/A
42	1	ID	O		0225	Escort Required	N/A
43	250	CE	O	Y		Planned Patient Transport Comment	N/A
44	250	CE	O		0088	Procedure Code	See Notes
45	250	CE	O	Y	0340	Procedure Code Modifier	N/A
46	250	CE	O	Y	0411	Placer Supplemental Service Information	See Notes
47	250	CE	O	Y	0411	Filler Supplemental Service Information	N/A

D.9.1 Field Definitions

D.9.1.1 OBR-1 Set ID . OBR

Definition:	This field contains the number that identifies this transaction. For the first occurrence of the segment, the sequence number shall be one, for the second occurrence, the sequence number shall be two, etc.
Example:	2

D.9.1.2 OBR-3 Filler Order Number



			Name	CCR
			er	
2	IS		Namespace ID	
3	ST		Universal ID	
4	ID		Universal ID Type	
Definition:			Allergy:	IEN in the PATIENT ALLERGIES file (#120.8)
			Autopsy:	Accession Number
			Cytopathology:	Accession Number
			Immunization:	IEN in the IMMUNIZATION file (#9000010.11, #.01)
			Inpatient:	IEN in the PTF file (#45)
			IV:	Order Number
			Laboratory data:	Accession Number (Host UID)
			Med. Proc. (EKG):	IEN in the ELECTROCARDIOGRAM (EKG) file (#691.5)
			Microbiology:	Accession Number
			Outpatient:	IEN in the VISIT file (#9000010)
			Problem list:	IEN in the INSTITUTION file (#4) concatenated with the Problem Number (values of the .06 and .07 fields of the PROBLEM file (# 9000011) accordingly). The number can have decimal places.
			Radiology:	Case Number
			Skin Test:	IEN in the SKIN TEST file (#9000010.12, #.01)
			Surgical Pathology:	Accession Number
Example:			Allergy:	123
			Autopsy:	AU 02 462820
			Cytopathology:	CY 02 345
			Immunization:	123
			Inpatient:	2495
			Outpatient:	904726
			IV:	123431345
			Laboratory data:	CH 02 1234
			Med. Proc. (EKG):	110120021658
			Microbiology:	324MI33221
			Problem list:	24452.11
			Radiology:	6989273.8975-1^072601-1445
			Skin Test:	123
			Surgical	SP 95 345

Name	CCR

D.9.1.3 OBR-4 Universal Service ID

SEQ	DT	TBL#	Component Name	CCR
1	ST	0005	Identifier	
2	ST		Text	
3	ST		Name of Coding System	
4	ST		Alternate Identifier	
5	ST		Alternate Text	
6	ST		Name of Alternate Coding System	
Definition:		This field contains the identifier code for the requested observation/test.		
		Allergy:	Generic Hard-coded CPT-4 Code	
		Autopsy:	Generic Hard-coded CPT-4 Code	
		Cytopathology:	Generic Hard-coded CPT-4 Code	
		Immunization:	Generic Hard-coded CPT-4 Code	
		Inpatient:	Generic Hard-coded CPT-4 Code	
		IV:	Generic Hard-coded CPT-4 Code	
		Laboratory data:	NLT Code and Test Name	
		Med. Proc. (EKG):	Generic Hard-coded CPT-4 Code	
		Microbiology:	Generic Hard-coded CPT-4 Code	
		Outpatient:	Generic Hard-coded CPT-4 Code	
		Problem list:	Generic Hard-coded CPT-4 Code	
		Radiology:	The Procedure Name will appear in the text part of this segment and the identifier will be the CPT code that relates to the procedure name.	
		Skin Test:	Generic Hard-coded CPT-4 Code	
		Surgical Pathology:	Generic Hard-coded CPT-4 Code	
		Vitals:	Generic Hard-coded CPT-4 Code	
		Distinguishing between records for Allergy, IV, Medical Procedures, Lab, Radiology, Autopsy, Surgical and Cytopathology results can be done by a combination of OBR-4 and OBR-24.		
Example:		Laboratory data:	83020.0000^Hemoglobin^99VA64	
		Radiology:	71020^CHEST X-RAY^C4^58^CHEST PA\T\LAT^99RAP	
Value:		Allergy:	95000^ALLERGY^C4	
		Autopsy:	88099^UNLISTED NECROPSY PROC^C4	
		Cytopathology:	88108^CYTOPATHOLOGY, CONCENT^C4	
		Immunization:	90749^IMMUNIZATION^C4	
		Inpatient:	IP^Inpatient^C4	

	0780^IV^C4
	3000^ELECTROCARDIOGRAM^C4
Microbiology:	87999^MICROBIOLOGY^C4
Outpatient:	OP^Outpatient^C4
Problem list:	90125^HOSPITAL CARE,NEW, INTERMED.^C4
Skin Test:	86486^SKIN TEST^C4
Surgical Pathology:	88300^LEVEL I - SURGICAL PAT^C4
Vitals:	94150^VITAL CAPACITY TEST^C4

D.9.1.4 OBR-6 Requested Date/Time

Definition:	This field contains the number that identifies this transaction. For the first occurrence of the segment, the sequence number shall be one, for the second occurrence, the sequence number shall be two, etc.	
	Med. Proc. (EKG):	Date/Time of the EKG
	Problem list:	Date/Time when the problem was entered into the PROBLEM file (#9000011)
Format:	YYYYMMDD [hhmm[ss]] [+ -zzzz]	
Example:	200502101015-0800	

D.9.1.5 OBR-7 Observation Date/Time

Definition:	This field contains the identifier code for the requested observation/test:	
	Allergy:	Origination Date
	Autopsy:	Autopsy Date
	Cytopathology:	Exam Date
	Inpatient:	Admission Date/Time
	IV:	Start Time
	Laboratory data:	Date/Time when the specimen was taken
	Med. Proc. (EKG):	Date/Time of the last successful transfer through the automated interface (populated only if received from an instrument)
	Microbiology:	Accession Date
	Outpatient:	Visit Date/Time
	Problem list:	Approximate date when the problem appeared
	Radiology:	Exam Date/Time
	Skin Test:	Date Read
	Surgical Pathology:	Date/Time when the specimen was taken
	Vitals:	N/A
Distinguishing between records for Allergy, IV, Medical Procedures, Lab, Radiology, Autopsy, Surgical and Cytopathology results can be done by a combination of OBR-4 and OBR-24.		
Format:	YYYYMMDD [hhmm[ss]] [+ -zzzz]	
Example:	200502101015-0800	

Date/Time

	Only in the following segments:	
	Autopsy:	Date of the final autopsy diagnoses
	IV:	Stop Date
	Problem List:	Date/Time when the problem was resolved or inactivated
	Surgical Pathology:	Date/Time when the report was completed
Format:	YYYYMMDD [hhmm[ss]] [+ -zzzz]	
Example:	200502101015-0800	

D.9.1.7 OBR-11 Specimen Action Code

Definition:	This field is populated only in the following segments:	
	Laboratory:	Specimen Action Code
	Microbiology:	Indicates whether the urine screen is positive or negative.
Tables:	Value	Urine Screen
	N	Negative
	P	Positive
Example:	P	

D.9.1.8 OBR-12 Danger Code

SEQ	DT	TBL#	Component Name	CCR
1	ST	0005	Identifier	N/A
2	ST		Text	
3	ST		Name of Coding System	N/A
4	ST		Alternate Identifier	N/A
5	ST		Alternate Text	N/A
6	ST		Name of Alternate Coding System	N/A
Definition: This field is populated only in the following segments:				
			Laboratory Data:	Infection Warning (value of the PAT. INFO. field (#.091) of the LAB DATA file (#63))
Format:			Free Text	

al Info.

only in the following segments:

	Autopsy:	Reactant
	Immunization:	Comments
	IV:	Schedule
	Microbiology:	Site Specimen
	Problem List:	Diagnosis Code (ICD-9)
	Skin Test:	Comments
Example:	Autopsy:	ONION
	Immunization:	HISTORY OF ALLERGY
	IV:	ONCE
	Microbiology:	PERITONEAL
	Problem List:	097.1
	Skin Test:	positive 9.9cm

D.9.1.10 OBR-14 Specimen Received Date/Time

Definition:	This field is populated only in the following segments:	
	Laboratory Data:	Collection Date/Time
	Problem List:	Date when the problem was resolved or inactivated
Format:	YYYYMMDD [hhmm[ss]] [+ -zzzz]	
Example:	200502101015-0800	

D.9.1.11 OBR-15 Specimen Source

SEQ	DT	TBL#	Component Name	CCR
1	CE		Specimen Source	LOINC
2	TX		Additives	N/A
3	TX		Free Text	N/A
4	CE		Body Site	N/A
5	CE		Site Modifier	N/A
6	CE		Collection Modifier	N/A
7	CE		Specimen Role	N/A

only in the following segment:

Specimen Source

Example: UR&Urine&HL70070&UR&Urine&LN

D.9.1.12 OBR-16 Ordering Provider

SEQ	DT	TBL#	Component Name	CCR
1	ST		ID Number	IEN of the user in the NEW PERSON file (#200)
2	FN		Family Name	N/A
3	ST		Given Name	N/A
4	ST		Second and further given names or initials thereof	N/A
5	ST		Suffix (e.g., JR or III)	N/A
6	ST		Prefix (e.g., DR)	N/A
7	IS	0360	Degree (e.g., MD)	N/A
8	IS	0297	Source Table	N/A
9	HD		Assigning Authority	N/A
10	ID	0200	Name Type Code	N/A
11	ST		Identifier Check Digit	N/A
12	ID	0061	Code identifying the check digit scheme employed	N/A
13	IS		Identifier Type Code	Provider Class Name
14	HD		Assigning Facility	N/A
15	ID	0465	Name Representation Code	N/A
16	CE	0448	Name Context	N/A
17	DR		Name Validity Range	N/A
18	ID	0444	Name Assembly Order	N/A

Definition:	This field identifies the individual who ordered the test. Provider name is not used to ensure the patient privacy protection.		
Format:	Allergy:	<Provider IEN>^^^^^^^^^^^^^^<Provider Class Name>	
	Autopsy:	<Provider IEN>	
	Cytopathology:	N/A	

[Click Here to upgrade to
Unlimited Pages and Expanded Features](#)

	Inpatient:	N/A
	IV:	N/A
	Laboratory Data:	<Provider IEN>
	Med. Proc. (EKG):	N/A
	Microbiology:	N/A
	Outpatient:	N/A
	Problem list:	<Provider IEN>^^^^^^^^^^^^<Provider Class Name>
	Radiology:	<Provider IEN>^^^^^^^^^^^^<Provider Class Name>
	Skin Test:	<Provider IEN>^^^^^^^^^^^^<Provider Class Name>
	Surgical Pathology:	<Surgeon/Physician IEN>
	Vitals:	N/A
Example:	2177^^^^^^^^^^^^PHYSICIAN	

D.9.1.13 OBR-18 Placer Field 1

Definition:	This field is populated only in the following segment:	
	Laboratory Data:	Name of the Auto-instrument
Format:	<Name of Analyzer or Instrument>^<Card Address>	

D.9.1.14 OBR-20 Filler Field 1

Definition:	This field is populated only in the following segments:	
	Allergy:	Allergy type
	IV:	Infusion rate
	Laboratory Data:	Reference to the node in the LAB DATA file (#63)
	Microbiology:	Collection Sample
	Problem List:	Condition of the Record
Format:	Allergy:	Text
	IV:	Text
	Laboratory Data:	<LRDFN>\S\<Subscript>\S\<Inverted D/T> (\S\ - encoded ^ character)
	Microbiology:	<Name>
	Problem List:	<Code>
Tables:	Code	Condition of the Problem Record
	H	Hidden

Examples:	Allergy:	Permanent
	IV:	Transcribed
	Laboratory Data:	42058\S\CH\S\6949770.89857
	Microbiology:	FLD-PERITONEAL
	Problem List:	P

D.9.1.15 OBR-21 Filler Field 2

Definition:	This field is populated only in the following segment:	
	Microbiology:	Sputum Screen
Format:	Free Text	

D.9.1.16 OBR-22 Results Rpt/Status Chng - Date/Time

Definition:	This field is populated only in the following segment:	
	Autopsy:	Date/Time the report is released
	Laboratory Data:	Date/Time the report is released
	Problem List:	Date/Time Last Modified
Format:	YYYYMMDD [hhmm[ss]] [+ -zzzz]	
Example:	200502101015-0800	

D.9.1.17 OBR-24 Diagnostic Service Section ID

Definition:	This field is the section of the diagnostic service where the observation was performed.	
Value:	Allergy:	TX
	Autopsy:	SP
	Cytopathology:	CP
	Immunization:	OTH
	Inpatient:	PHY
	IV:	IMM
	Laboratory Data:	LAB
	Med. Proc. (EKG):	EC
	Microbiology:	MB

		PHY
		TX
	Radiology:	RAD
	Skin Test:	OTH
	Surgical Pathology:	SP
	Vitals:	EC

D.9.1.18 OBR-25 Result Status

Definition:	This field is the section of the diagnostic service where the observation was performed.				
Value:	Allergy:	Observed/Historical			
	Med. Proc. (EKG):	Confirmation Status			
	Microbiology:	Sterility Control			
	Problem list:	Status of the Problem			
Tables:	Value	Allergy	Med Proc (EKG)	Microbiology	Problem Status
	F	Observed	Confirmed	Positive	Active
	R	Historical	Unconfirmed	Negative	Inactive
Example:	F				

D.9.1.19 OBR-26 Parent Result

SEQ	DT	TBL#	Component Name	CCR
1	CE		OBX-3 observation identifier of parent result	
2	ST		OBX-4 sub-ID of parent result	
3	TX		Part of OBX-5 observation result from parent	
Definition: This field is populated only in the following segment:				
Laboratory Data:			The PARENT RESULT uniquely identifies the parent result of the OBX segment related to this order.	

D.9.1.20 OBR-29 Parent

SEQ	DT	TBL#	Component Name	CCR
1	EI		Parent's Placer Order Number	
2	EI		Parent's Filler Order Number	
Definition: This field is populated only in the following segment:				

This field relates a child to its parent when a parent-child relationship exists.

D.9.1.21 OBR-40 Transport Arrangement Responsibility

SEQ	DT	TBL#	Component Name	CCR
1	ST	0005	Identifier	
2	ST		Text	
3	ST		Name of Coding System	VA
4	ST		Alternate Identifier	N/A
5	ST		Alternate Text	N/A
6	ST		Name of Alternate Coding System	N/A
Definition:		This field is populated in the following segments only:		
		IV:	Type	
Tables:		Value	IV Type Text	
		A	Admixture	
		C	Chemotherapy	
		H	Hyperal	
		P	Piggyback	
		S	Syringe	
Example:		IV: P^Piggyback^VA		

D.9.1.22 OBR-44 Procedure Code

SEQ	DT	TBL#	Component Name	CCR
1	ST	0005	Identifier	Station Number (without suffix)
2	ST		Text	Institution Name
3	ST		Name of Coding System	99VA4
4	ST		Alternate Identifier	N/A
5	ST		Alternate Text	N/A
6	ST		Name of Alternate Coding System	N/A

ation/division that placed the order. This field is empty in the
segments.

Example: **640^PALO ALTO HCS^99VA4**

D.9.1.23 OBR-46 Placer Supplemental Service Information

SEQ	DT	TBL#	Component Name	CCR
1	ST	0005	Identifier	
2	ST		Text	
3	ST		Name of Coding System	N/A
4	ST		Alternate Identifier	N/A
5	ST		Alternate Text	N/A
6	ST		Name of Alternate Coding System	N/A

Definition:	The OBR-46 contains supplemental service information sent from the placer system to the filler system for the universal procedure code reported in OBR-4, Universal Service ID. This field will be used to provide ordering information detail that is not available in other, specific fields in the OBR segment. Multiple supplemental service information elements may be reported. [Source: HL7 Standard v24, 4.5.3.46]		
	Autopsy:	Value of the SERVICE field (14.5) of the LAB DATA file (#63)	
Format:	<Service Code>^<Service Name>		
Example:	Autopsy: S^SURGERY		

D.9.2 Sample OBR Segments

D.9.2.1 Allergy

OBR|1||AL 99 5|95000^ALLERGY^C4|||1995051611-000600|||
|8491^STAFF PHYSICIAN||DF|||TX|R

D.9.2.2 Autopsy

OBR|2||AU 99 5|88099^UNLISTED NECROPSY PROC^C4|||199505161100-
0600|199505200900-
0600|||SP|||499^HINES
OIFO^99VA4||S^SURGERY

ATHOLOGY, CONCENT^C4|||199505161100-
 0600|||||CP|||||499^HINES OIFO^99VA4

D.9.2.4 Inpatient

OBR|4||23443|IP^Inpatient^C4|||1997040593-000600|||||
 |||||PHY|||||499^HINES OIFO^99VA4

D.9.2.5 Immunizations

OBR|2||24917|90749^IMMUNIZATION^C4|||||OTH

D.9.2.6 IV

OBR|5||IV 99 5|90780^IV^C4|||1995051611-000600
 |1996030312-000600|||Schedule goes here - free text|||
 |Infusion Rate|||IMM|||||P^Piggyback^VA^^^||
 |499^HINES OIFO^99VA4

D.9.2.7 Laboratory data

OBR|6||2050600309|81129.0000^Hepatic Function Panel^99VA64||
 |20050301101656-0800|||A|^|20050301101656-
 0800|SER&SER/PLAS&HL7&SER/PLAS&SER/PLAS&LN|30890|||87712\S\CH\S
 \6949697.898344|20050301111748-0800||LAB

D.9.2.8 Med. Proc. (EKG)

OBR|7||110120021658|93000^ELECTROCARDIOGRAM^C4||199504151100-
 0600|199505161100-0600|||||EC|F|||||
 |612GF^MARTINEZ OPC/CREC^99VA4

D.9.2.9 Microbiology

OBR|8||MI 99 5|87999^MICROBIOLOGY^C4|||1997040511-000600|||P
 ||BLOOD|||||Sample type - free text|Sputum Screen - free
 text||MB|F|||||499^HINES OIFO^99VA4

D.9.2.10 Outpatient

OBR|9||45353453|OP^Outpatient^C4|||1997040593-000600|||||
 ||||PHY|||||499^HINES OIFO^99VA4

D.9.2.11 Problem List

OBR|1||640.016|90125^HOSPITAL CARE, NEW,
 INTERMED.^C4||20100119|20091101|20100119|||070.0|20091201||352
 20^^^^^^^^^^STAFF

D.9.2.12 Radiology

OBR|2||6989798.8767-1^020101-1327^L|75736^ANGIO PELVIC SELECT OR
SUPRASELECT S&I^C4^288^ANGIO CAROTID CEREBRAL BILAT
S\T\I^99RAP|||200102011232-0600|||||||2177^^^^^^^^^^^STAFF
RADIOLOGIST|||||||RAD|||||||499^HINES OIFO^99VA4

D.9.2.13 Skin Test

OBR|1||2111|86486^SKIN TEST^C4|||20010523|||||||35220^^^^^^^^^^^STAFF
PHYSICIAN|||||||OTH

D.9.2.14 Surgical Pathology

OBR|3||SP 99 5|88300^ LEVEL I - SURGICAL PAT^C4|||19990316
|199508021100-0600|||||||329|||||||SP|||||||
|499^HINES OIFO^99VA4

D.9.2.15 Vitals

OBR|4|||94150^VITAL CAPACITY TEST^C4|||||||EC
|||||||499^HINES OIFO^99VA4

D.10 OBX . Observation/Result Segment

Table 41 . Observation/Result Segment

SEQ	LEN	DT	OPT	RP/#	TBL#	Field Name	CCR
1	4	SI	O			Set ID - OBX	See Notes
2	2	ID	C		0125	Value Type	See Notes
3	250	CE	R			Observation Identifier	See Notes
4	20	ST	C			Observation Sub-ID	See Notes
5	65536	*	C	Y		Observation Value	See Notes
6	250	CE	O			Units	See Notes
7	60	ST	O			Reference Ranges	See Notes
8	5	IS	O	Y/5	0078	Abnormal Flags	See Notes
9	5	NM	O			Probability	N/A
10	2	ID	O	Y	0080	Nature of Abnormal Test	N/A

						TBL#	Field Name	CCR
						0085	Observation Result Status	See Notes
12	26	TS	O				Date Last Observation Normal Value	See Notes
13	20	ST	O				User Defined Access Checks	See Notes
14	26	TS	O				Date/Time of the Observation	See Notes
15	250	CE	O				Producer's ID	See Notes
16	250	XCN	O	Y			Responsible Observer	See Notes
17	250	CE	O	Y			Observation Method	See Notes
18	22	EI	O	Y			Equipment Instance Identifier	N/A
19	26	TS	O				Date/Time of the Analysis	N/A

D.10.1 Field Definitions

D.10.1.1 OBX-1 Set ID . OBX

Definition:	This field contains the number that identifies this transaction. For the first occurrence of the segment, the sequence number will be one, for the second occurrence, the sequence number will be two, etc.
Example:	2

D.10.1.2 OBX-2 Value Type

Definition:	This field identifies the format of the observation value in OBX-5.	
Tables:	A subset of the HL7 Table 0125 . Value type is used.	
	Value	Description
	CE	Coded Entry
	FT	Formatted Text (Display)
	NM	Numeric
	ST	String Data
	TS	Time Stamp (Date & Time)
Example:	ST	

D.10.1.3 OBX-3 Observation Identifier

SEQ	DT	TBL#	Component Name	CCR
-----	----	------	----------------	-----

				CCR
2	ST		Text	
3	ST		Name of Coding System	
4	ST		Alternate Identifier	
5	ST		Alternate Text	
6	ST		Name of Alternate Coding System	
7	ST		Alternate Identifier 2	
8	ST		Alternate Text 2	
9	ST		Name of Alternate Coding System 2	

Definition:	This field identifies the segment.			
Format:	Allergy:	<ul style="list-style-type: none"> • CLAS^Drug Class^VA080 • INGR^Ingredients^VA080 • RCTS^Reactions^VA080 		
	Autopsy:	<ul style="list-style-type: none"> • AUCD^Clinical Diagnosis^VA080 • AUPD^Pathological Diagnosis^VA080 		
	Cytopathology:	<ul style="list-style-type: none"> • BCH^Brief Clinical History^VA080 • CDIAG^Cytopathology Diagnosis^VA080 • ICD9^ICD9^VA080 • MICRO^Microscopic Description^VA080 • OF^Operative Findings^VA080 • PDIAG^Preoperative Diagnosis^VA080 • POPDIAG^Postoperative Diagnosis^VA080 • SPEC^Specimen^VA080 		
	Inpatient:	<ul style="list-style-type: none"> • INAD^Admitting Diagnosis^VA080 • INBED^Bed-section Diagnosis^VA080 • INDIS^Discharge Diagnosis^VA080 • INOTR^Other Diagnosis^VA080 • INPRI^Primary Dis. Diagnosis^VA080 • INSURG^Surgical Procedures^VA080 		
	Immunization:	<ul style="list-style-type: none"> • ^Immunization Name 		
	IV:	<ul style="list-style-type: none"> • ADD^Additive^VA080 • OTPR^Other Print Info^VA080 • SOL^Solution^VA080 		



ne		CCR
		[<LOINC^Text>^LN^] [<NLT>^<Text>^99VA64^] <Local Test ID>^<Local Test Name>^99VA63 ▪ LABC^Lab Comment^VA080
	Med. Proc. (EKG):	<ul style="list-style-type: none"> • AUTO^Auto Instrument^VA080 • INT^Interpretation^VA080
	Microbiology:	<ul style="list-style-type: none"> • AFB-Bay Pines^TB Report^VA080 • BACT^Bact^VA080 • BACT-Bay Pines^Bact Smear/Prep^VA080 • COMP^Specimen Comment^VA080 • FUNG^Fungus-Yeast^VA080 <ul style="list-style-type: none"> ▪ FUNGC^F-Y Comment^VA080 • GRAM^Gram Stain^VA080 • MYCO^Mycobacterium^VA080 <ul style="list-style-type: none"> ▪ MYCOAF^Myco Anti-F^VA080 ▪ MYCOAO^Myco Anti-O^VA080 ▪ MYCOC^Myco Comment^VA080 • MYCO-Bay Pines^Mycology Smear/Prep^VA080 • ORG^Organism^VA080 <ul style="list-style-type: none"> ▪ ORGA^Org Antibiotic^VA080 ▪ ORGAF^Org Antibiotic-F^VA080 ▪ ORGAO^Org Antibiotic-O^VA080 ▪ ORGC^Org Comment^VA080 • PAR^Parasite^VA080 <ul style="list-style-type: none"> ▪ PARQ^Stage^VA080 <ul style="list-style-type: none"> ▪ PARC^Comment^VA080 • PARA-Bay Pines^Para Smear/Prep^VA080 • PARP^Parasite Remark^VA080 • VIRUS^Virus^VA080 • VIRUSR^Virology RPT^VA080
	Outpatient:	<ul style="list-style-type: none"> • OCPT^Procedures^VA080 • OICD9^Diagnosis^VA080
	Problem List:	<ul style="list-style-type: none"> • EXPR^Expression^VA080 • NOTE^Note Narrative^VA080 • PRVN^Provider Narrative^VA080
	Radiology:	<ul style="list-style-type: none"> • CH^Clinical History^VA080 • IT^Impression Text^VA080 • RT^Report Text^VA080
	Skin Test:	<ul style="list-style-type: none"> • ^Skin Test name
	Surgical Pathology:	<ul style="list-style-type: none"> • BCH^Brief Clinical History^VA080

		CCR
		GDESC^Gross Description^VA080 <ul style="list-style-type: none"> • ICD9^ICD-9 Code^VA080 • MDESC^Microscopic Description^VA080 • OF^Operative Findings^VA080 • PDIAG^Preoperative Diagnosis^VA080 • POPDIAG^Postoperative Diagnosis^VA080 • SPDIAG^Surgical Pathology Diagnosis^VA080 • SPEC^Specimen^VA080
	Vitals:	<ul style="list-style-type: none"> • Bay Pines^Blood Pressure^VA080 • HT^Height^VA080 • P^Pulse^VA080 • PN^Pain^VA080 • R^Respiration^VA080 • T^Temperature^VA080 • WT^Weight^VA080
Example:	Laboratory Data:	718-7^HEMOGLOBIN:MCNC:PT:BLD:QN^LN ^83020.0000^Hemoglobin^99VA64^CH386^HGB^99V A63

D.10.1.4 OBX-4 Observation Sub-ID

Definition:	This field contains the result observed by the observation producer. This field is populated in the following cases only:	
	Laboratory Data:	<ul style="list-style-type: none"> • If OBX-3 contains the LOINC code and this field is blank then this is the main lab OBX segment. • If OBX-3 contains öLABC^Lab Commentö and this field contains öLCOMMö, then the OBX-5 will contain the Lab Comment.
	Med. Proc. (EKG):	If OBX-3 contains öINT^Interpretationö, then this field may contain the Interpretation Code Modifier for Medical Procedure data.
	Microbiology:	If OBX-3 contains öMYCOAF^Myco Anti-Fö, öMYCOAO^Myco Anti-Oö, öORGAF^Org Antibiotic-Fö, or öORGAO^Org Antibiotic-Oö, then this field contains the microbiology field name.
	Vitals:	Unique identifier for the record.
Example:	Med. Proc. (EKG):	CHANGES OR SERIAL
	Laboratory Data:	LCOMM

STR

D.10.1.5 OBX-5 Observation Value

Definition:	<p>This field contains the result(s) observed by the observation producer. The format depends on the data type in OBX-2 and the content depends on OBX-3.</p> <p>Vitals: <Rate>^<Quality>^<Qualifiers> - these values are always separated by the ^ character (even if other component separator is used), then the whole string is encoded according to the HL7 standard.</p>	
	Vitals:	<Rate>^<Quality>^<Qualifiers> These values are always separated by the %% character (even if other component separator is used), then the whole string is encoded according to the HL7 standard.
Example:	<ul style="list-style-type: none"> Vitals: 34\S\Weak\S\QER Otherwise: 103.9 	
Notes:	<p>This field can be repeated in the following segments:</p>	
	Allergy:	<ul style="list-style-type: none"> CLAS^Drug Class^VA080
	Cytopathology:	<ul style="list-style-type: none"> ICD9^ICD9^VA080
	Immunization:	<ul style="list-style-type: none"> Reaction^Contraindicated
	Inpatient:	<ul style="list-style-type: none"> INBED^Bed-section Diagnosis^VA080 INDIS^Discharge Diagnosis^VA080 INOTR^Other Diagnosis^VA080 INSURG^Surgical Procedures^VA080
	Skin Test:	<ul style="list-style-type: none"> Results^Reading
	Surgical Pathology:	<ul style="list-style-type: none"> ICD9^ICD-9 Code^VA080
	<p>This field can contain multi-line text in the following segments (lines are separated by %b+enclosed in HL7 escape character):</p>	
	Autopsy:	<ul style="list-style-type: none"> AUCD^Clinical Diagnosis^VA080 AUPD^Pathological Diagnosis^VA080
	Cytopatholgy:	<ul style="list-style-type: none"> BCH^Brief Clinical History^VA080 CDIAG^Cytopathology Diagnosis^VA080 MICRO^Microscopic Description^VA080 OF^Operative Findings^VA080 PDIAG^Preoperative Diagnosis^VA080 POPDIAG^Postoperative Diagnosis^VA080
	Med. Proc. (EKG):	<ul style="list-style-type: none"> AUTO^Auto Instrument^VA080
	Problem List:	<ul style="list-style-type: none"> NOTE^Note Narrative^VA080
	Radiology:	<ul style="list-style-type: none"> CH^Clinical History^VA080

[Click Here to upgrade to
Unlimited Pages and Expanded Features](#)

	Surgical Pathology:	<ul style="list-style-type: none"> • IT^Impression Text^VA080 • RT^Report Text^VA080
		<ul style="list-style-type: none"> • BCH^Brief Clinical History^VA080 • GDESC^Gross Description^VA080 • MDESC^Microscopic Description^VA080 • OF^Operative Findings^VA080 • PDIAG^Preoperative Diagnosis^VA080 • POPDIAG^Postoperative Diagnosis^VA080 • SPEC^Specimen^VA080

D.10.1.6 OBX-6 Units

SEQ	DT	TBL#	Component Name	CCR
1	ST	0005	Identifier	
2	ST		Text	
3	ST		Name of Coding System	N/A
4	ST		Alternate Identifier	N/A
5	ST		Alternate Text	N/A
6	ST		Name of Alternate Coding System	N/A
Definition:		This field is populated in the following cases only:		
		Inpatient:	Bed Section, if OBX-3 contains ðINOTR^Other Diagnosisö or ðINBED^Bedsection Diagnosisö	
		Laboratory Data:	Unit of the observation value	
		Microbiology:	Quantity (free text), if OBX-3 contains any of these values: ðFUNG^Fungus-Yeastö ðMYCO^Mycobacteriumö ðPARQ^Stageö	
		Vitals:	Value in metric system	
Examples:		Inpatient:	94^INTERMEDIATE MEDICINE - LTC	
		Laboratory Data:	GM/DL	
		Microbiology:		
		Vitals:	182.88	

D.10.1.7 OBX-7 Reference Ranges

		the following cases only:
		<ul style="list-style-type: none"> Strength for additive, if OBX-3 contains öADD^Additiveö Volume for solution, if OBX-3 contains öSOL^Solutionö.
	Laboratory Data:	<Lower>-<Upper>
	Microbiology:	<ul style="list-style-type: none"> <MIC> - Minimum Inhibitory Concentration (LAB DATA file (#63) → MICROBIOLOGY multiple (5) → ORGANISM multiple (12) → ANTIBIOTIC multiple (200) → 'MIC(ug/ml)' field (1)), if OBX-3 contains öORGA^Org Antibioticö; Acid Fast Stain result, if OBX-3 contains öAFB-SP^TB Reportö (LAB DATA file (#63) → MICROBIOLOGY multiple (5) → ACID FAST STAIN (24)).
	Vitals:	Body Mass, if OBX-3 contains öWT^Weightö
	Vitals:	37 MG
Examples:	Laboratory Data:	3.4-5.0
	Microbiology:	23
	Vitals:	27
	Vitals:	27

D.10.1.8 OBX-8 Abnormal Flags

Definition:	This field is populated in the following segments only:	
	Laboratory Data:	Flag on Values for lab tests
Example:	Laboratory Data:	LL

D.10.1.9 OBX-11 Observation Result Status

Definition:	This field contains the observation result status.	
Tables:	A subset of the HL7 Table 0085 ö Observation result status codes interpretation is used.	
	Value	Description
	C	Record coming over is a correction and thus replaces a final result
	F	Final results; Can only be changed with a corrected result

Example: F	lab; results pending
	results

D.10.1.10 OBX-12 Date Last Observation Normal Value

Definition:	This field is populated in the following cases only:	
	Allergy:	Reactions Date/Time Entered
	Inpatient:	Bed-section End Date/Time, if OBX-3 contains öINBED^Bedsection Diagnosisö
Format:	YYYYMMDD [hhmm[ss]] [+ -zzzz]	
Example:	200502101015-0800	

D.10.1.11 OBX-13 User Defined Access Checks

Definition:	This field is populated in the following cases only:	
	Microbiology:	<MBC> - Minimum Bactericidal Concentration (LAB DATA file (#63) → MICROBIOLOGY multiple (5) → ORGANISM multiple (12) → ANTIBIOTIC multiple (200) → 'MBC(ug/ml)' field (2)), if OBX-3 contains öORGA^Org Antibioticö.
Example:	222	

D.10.1.12 OBX-14 Date/Time of the Observation

Definition:	This field is populated in the following cases only:	
	Immunization:	Event Date/Time
	Inpatient:	<ul style="list-style-type: none"> • Bed Section Start Date, if OBX-3 contains öINBED^Bedsection Diagnosisö; • Surgical Procedure Date, if OBX-3 contains öINSURG^Surgical Proceduresö; • Other Procedure Date, if OBX-3 contains öINOTR^Other Diagnosisö.
	Laboratory Data:	Collection Date/Time

Date/Time of the TB report approval, *if* OBX-3 contains
(AFB-SP^TB Reportö)

	Skin Tests:	Event Date/Time
	Vitals:	Date/Time of Measurement
Format:	YYYYMMDD [hhmm[ss]] [+ -zzzz]	
Example:	200502101015-0800	

D.10.1.13 OBX-15 Producer's ID

SEQ	DT	TBL#	Component Name	CCR
1	ST	0005	Identifier	Station Number
2	ST		Text	Institution Name
3	ST		Name of Coding System	99VA4
4	ST		Alternate Identifier	N/A
5	ST		Alternate Text	N/A
6	ST		Name of Alternate Coding System	N/A

Definition:	This field is populated in the following cases only:
	Laboratory Data
Example:	499^HINES OIFO^99VA4

D.10.1.14 OBX-16 Responsible Observer

SEQ	DT	TBL#	Component Name	CCR
1	ST		ID Number	IEN of the user in the NEW PERSON file (#200)
2	FN		Family Name	
3	ST		Given Name	
4	ST		Second and further given names or initials thereof	



			IR or III)	
			DR)	
7	IS	0360	Degree (e.g., MD)	N/A
8	IS	0297	Source Table	N/A
9	HD		Assigning Authority	N/A
10	ID	0200	Name Type Code	N/A
11	ST		Identifier Check Digit	N/A
12	ID	0061	Code identifying the check digit scheme employed	N/A
13	IS		Identifier Type Code	Provider Class Name
14	HD		Assigning Facility	N/A
15	ID	0465	Name Representation Code	N/A
16	CE	0448	Name Context	N/A
17	DR		Name Validity Range	N/A
18	ID	0444	Name Assembly Order	N/A

Definition:	This field identifies the provider. It is populated in the following cases only:	
	Laboratory Data:	Technician who performed the analysis: <User IEN>- <Station Number>^<Last Name>^<First Name>^...
	Outpatient:	Procedure Provider and the Provider's Class Name: <User IEN>^^^^^^^^^^^^^<Provider Class Name>
Example:	2177^^^^^^^^^^^^^PHYSICIAN	

D.10.1.15 OBX-17 Observation Method

SEQ	DT	TBL#	Component Name	CCR
-----	----	------	----------------	-----

3	ST		Name of Coding System	
4	ST		Alternate Identifier	N/A
5	ST		Alternate Text	N/A
6	ST		Name of Alternate Coding System	N/A

Definition:	This field is populated in the following cases only:	
	Laboratory Data:	Observation Method <Workload Suffix Code>^<Name>^99VA64_2
Example:	.3112^CHEM 1^99VA64_2	

D.10.1.16 OBX-19 Date/Time of the Analysis

SEQ	DT	TBL#	Component Name	CCR
1	ST	0005	Identifier	

Definition:	This field is populated in the following cases only:	
	Immunization:	Visit Date/Time
	Skin Test:	Visit Date/Time
Example:	200502101015-0800	

D.10.2 Sample OBX Segments

D.10.2.1 Allergy

```

VA080||Drug ingredients text|||||F
VA080||Drug Class Text|||||F
OBX|5|FT|RCIS^Reactions^VA080||Reactions Text|||||F|20021203

```

D.10.2.2 Autopsy

```

OBX|1|FT|AUCD^Clinical Diagnosis^VA080||Text Line #1\.\br\Text
Line #2|||||F
OBX|2|FT|AUPD^Pathological Diagnosis^VA080||Text|||||F

```

D.10.2.3 Cytopathology

```

OBX|1|FT|SPEC^Specimen^VA080||BLADDER WASH|||||F
OBX|2|FT|BCH^Brief clinical History^VA080||HX BLADDER CA|||||F
OBX|3|FT|MICRO^Microscopic Examination^VA080||CLASS I (Absence
of atypical cells.)|||||F

```

D.10.2.4 Inpatient

```

OBX|1|FT|INAD^Admitting Diagnosis^VA080||309.4|||||F
OBX|2|FT|INPRI^Primary Dis Diagnosis^VA080||204.9|||||F
OBX|3|FT|INDIS^Discharge Diagnosis^VA080||301.2|||||F
OBX|4|FT|INBED^Bedsection Diagnosis^VA080||301.3~303.2|Bed
Section|||||F|199504151100-0600||199404151100-0600
OBX|5|FT|INSURG^Surgical Procedures^VA080||84.3~34.3|||||F||
|199504151100-0600
OBX|6|FT|INOTR^Other Diagnosis^VA080||83.1~93.1|Bed
Section|||||F||199504151100-0600

```

D.10.2.5 Immunization

```

OBX|2||^TETANUS DIPHTHERIA (TD-
ADULT)||^0|||||||20000315|||||200003151100-0400

```

D.10.2.6 IV

```

OBX|1|FT|ADD^Additive^VA080||Additive text||300|||||F
OBX|2|FT|SOL^Solution^VA080||Solution text||300ml|||||F
OBX|3|FT|OTPR^Other Print info.^VA080||Other print text|||||F

```

D.10.2.7 Laboratory Data

```

OBX|1||777-3^PLATELETS:NCNC:PT:BLD:QN:AUTOMATED COUNT^LN
^85570.0000^Platelet Count Whole Blood^99VA64||3.6|g/dL|3.3-
4.8|||||F||2|20020129082501-0700|612GF^MARTINEZ O PC/CREC^99VA4

```


ents go here|||||F
OBX|5||7775 PLATELETS.NCNC:PT:BLD:QN:AUTOMATED COUNT^LN
^85570.0000^Platelet Count Whole Blood^99VA64|PRICE|300|||||F
|||200502281000-0800|640^PALO ALTO HEALTH CARE SYSTEM - PALO
ALTO DIVISION^99VA4|2785-640^DEVINZI^LARCY|.3112^CHEM 1^99VA64_2|

D.10.2.8 Med. Proc. (EKG)

OBX|1|FT|INT^Interpretation^VA080|CHANGES OR SERIAL|RECOMMEND
CLINICAL CORRELATION|||||F
OBX|2|FT|AUTO^Auto Instrument^VA080||This is the Auto-Instrument
Diagnosis, which is a free text word processing field|||||F

D.10.2.9 Microbiology

OBX|1|FT|BACT^Bact^VA080||Bact Remarks|||||F
OBX|2|FT|GRAM^Gram Stain^VA080||Gram Stain Text|||||F
OBX|3|FT|ORGC^Org Comment^VA080||Org Comment|||||F
OBX|4|FT|ORG^Organism^VA080||Organism Comment|||||F
OBX|5|FT|ORGQ^Quantity^VA080||Organism Quantity|||||F
OBX|6|FT|PAR^Parasite^VA080||Parasite Text|T|||||F
OBX|7|FT|PARQ^Quantity^VA080||Parasite Quantity Text|||||F
OBX|8|FT|PARC^Comment^VA080||Parasite Comment Text|||||F
OBX|9|FT|PARP^Parasite Remark^VA080||Parasite Remark|||||F
OBX|10|FT|COMP^Specimen Comment^VA080||Specimen Comment|||||F

D.10.2.10 Outpatient

OBX|1|FT|OCPT^Procedures^VA080||93455|||||F|||
|2177^^^^^^^^^^^^^PHYSICIAN
OBX|2|FT|OICD9^Diagnosis^VA080||309.2|||||F

D.10.2.11 Problem List

OBX|1|FT|PRVN^Provider Narrative^VA080||Mood Disorder in
conditions classified elsewhere (ICD-9-CM 293.83)|||||F
OBX|2|FT|EXPR^Expression^VA080||Unresolved|||||F
OBX|2|FT|NOTE^Note Narrative^VA080||Note goes here|||||F

D.10.2.12 Radiology

080||This is where the report test

OBX|2|FT|I|Impression text^VA080||This is where the impression
text goes|||||F
OBX|3|FT|ACH^Additional Clinical History^VA080||This is where
the additional clinical information goes|||||F

D.10.2.13 Skin Test

OBX|1|^PPD|^N^2|||||||20010518|||||200105181015-0400

D.10.2.14 Surgical Pathology

OBX|1|FT|SPEC^Specimen^VA080||This is the specimen text|||||F
OBX|2|FT|BCH^Brief clinical History^VA080||Clinical history
text|||||F
OBX|3|FT|PDIAG^Preoperative Diagnosis^VA080||Preoperative
diagnosis text|||||F
OBX|4|FT|OF^Operative Findings^VA080||Operative findings
text|||||F
OBX|5|FT|POPDIAG^Postoperative Diagnosis^VA080||Preoperative
text|||||F
OBX|6|FT|GDESC^Gross Description^VA080||Gross description
text|||||F
OBX|7|FT|MDESC^Microscopic Description^VA080||Microscopic
description text|||||F
OBX|8|FT|SPDIAG^Surgical Pathology Diagnosis^VA080||Surgical
pathology text|||||F
OBX|9|FT|ICD9^ICD9^VA080||304.6|||||F

D.10.2.15 Vitals

OBX|1|FT|BP^Blood Pressue^VA080|5853632|136/72\S\SITTING\S\L
ARM;SITTING;CUFF;ADULT|||||F|||20050228091501-0800
OBX|2|FT|T^Tempreture^VA080|5853636|98.2\S\S\ORAL|36.8|||||F
|||20050228091501-0800
OBX|3|FT|R^Respiration^VA080|5853635|13\S\S\SPONTANEOUS|||||F
|||200502280915-0800
OBX|4|FT|P^Pulse^VA080|5853634|76\S\S\RADIAL;PALPATED|||||F
|||20050228091501-0800
OBX|5|FT|PN^Pain^VA080|5853633|0\S\S\|||||F|||20050228091501-
0800
OBX|6|FT|WT^Weight^VA080|5844022|195.7\S\S\|88.95|27|||||F
|||200502281300-0800

Order Segment

Table 42 . Common Order Segment

SEQ	LEN	DT	OPT	RP/#	TBL#	Field Name	CCR
1	2	ID	R	N	0119	Order Control	See Notes
2	22	EI	C			Placer Order Number	See Notes
3	22	EI	C			Filler Order Number	N/A
4	22	EI	O			Placer Group Number	N/A
5	2	ID	O	N	0038	Order Status	See Notes
6	1	ID	O		0121	Response Flag	N/A
7	200	TQ	O	Y		Quantity/Timing	N/A
8	200	CM	O			Parent	N/A
9	26	TS	O			Date/Time of Transaction	See Notes
10	250	XCN	O	Y		Entered By	N/A
11	250	XCN	O	Y		Verified By	N/A
12	250	XCN	O	Y		Ordering Provider	See Notes
13	80	PL	O			Enterer's Location	N/A
14	250	XTN	O	Y/2		Call Back Phone Number	N/A
15	26	TS	O			Order Effective Date/Time	See Notes
16	250	CE	O			Order Control Code Reason	See Notes
17	250	CE	O			Entering Organization	See Notes
18	250	CE	O			Entering Device	N/A
19	250	XCN	O	Y		Action By	N/A
20	250	CE	O		0339	Advanced Beneficiary Notice Code	N/A
21	250	XON	O	Y		Ordering Facility Name	N/A
22	250	XAD	O	Y		Ordering Facility Address	N/A
23	XTN	O	Y		XTN	Ordering Facility Phone Number	N/A
24	XAD	O	Y		XAD	Ordering Provider Address	N/A
25	CWE	O	N		CWE	Order Status Modifier	N/A

D.11.1.1 ORC-1 Order Control

Definition:	This field determines the function of the order segment. For this interface the code will be set to indicate results follow.
Example:	NW

D.11.1.2 ORC-2 Placer Order Number

SEQ	DT	TBL#	Component Name	CCR
1	ST		Entity Identifier	Number
2	IS		Namespace ID	Type
3	ST		Universal ID	N/A
4	ID		Universal ID Type	N/A

Definition:	This field contains an order number associated with the pharmacy data to follow.	
	Inpatient:	<Order Number> ^IP
	Outpatient:	<Prescription Number> ^OP
	Non-VA Meds:	<52.2 IEN> ^NVA
Example:	1000000429^OP	

D.11.1.3 ORC-5 Order Status

Definition:	This field contains the status of the order.	
	Inpatient:	N/A
	Outpatient:	N/A
	Non-VA Meds:	[???] ^IP (Active) [???] ^DC (Discontinued)
Example:	[???] ^IP [???] ^DC	

Transaction

in the following cases only:

	Outpatient:	Release Date/Time
	Non-VA Meds:	Documented Date/Time
Format:	YYYYMMDD[hhmm[ss]] [+ -zzzz]	
Example:	20041006	

D.11.1.5 ORC-12 Ordering Provider

SEQ	DT	TBL#	Component Name	CCR
1	ST		ID Number	IEN of the user in the NEW PERSON file (#200)
2	FN		Family Name	N/A
3	ST		Given Name	N/A
4	ST		Second and further given names or initials thereof	N/A
5	ST		Suffix (e.g., JR or III)	N/A
6	ST		Prefix (e.g., DR)	N/A
7	IS	0360	Degree (e.g., MD)	N/A
8	IS	0297	Source Table	N/A
9	HD		Assigning Authority	N/A
10	ID	0200	Name Type Code	N/A
11	ST		Identifier Check Digit	N/A
12	ID	0061	Code identifying the check digit scheme employed	N/A
13	IS		Identifier Type Code	Provider Class Name
14	HD		Assigning Facility	N/A
15	ID	0465	Name Representation Code	N/A
16	CE	0448	Name Context	N/A
17	DR		Name Validity Range	N/A
18	ID	0444	Name Assembly Order	N/A

	individual responsible for the request. Names are not used to ensure data protection.
Format:	Documented By IEN^^^^^^^^^^^PROVIDER CLASS
Example:	2177^^^^^^^^^^^PHD

D.11.1.6 ORC-15 Order Effective Date/Time

Definition:	This field contains the order start date/time.
Format:	YYYYMMDD [hhmm[ss]] [+ -zzzz]
Example:	200503140944-0800

D.11.1.7 ORC-16 Order Control Code Reason

SEQ	DT	TBL#	Component Name	CCR
1	ST	0005	Identifier	N/A
2	ST		Text	N/A
3	ST		Name of Coding System	N/A
4	ST		Alternate Identifier	N/A
5	ST		Alternate Text	NEW
6	ST		Name of Alternate Coding System	N/A

Definition:	This field identifies the reason for the order. For this interface, it will be set to new.
Value:	^^^^ NEW

D.11.1.8 ORC-17 Entering Organization

SEQ	DT	TBL#	Component Name	CCR
-----	----	------	----------------	-----

			Station Number
			Institution Name
3	ST		Name of Coding System
4	ST		Alternate Identifier
5	ST		Alternate Text
6	ST		Name of Alternate Coding System

Definition:	This field distinguishes the station where the order was made.
Format:	Station Number^Station Name^99VA4
Value:	499^HINES OIFO^99VA4

D.11.2 Sample ORC Segments

D.11.2.1 Inpatient

ORC|NW|7338989V2726709^IP|||||43882^^^^^^^^^^RESIDENT||
|200503140944-0800|^^^^NEW|640^PALO ALTO HCS^99VA4

D.11.2.2 Outpatient

ORC|NW|5666184^OP|||||20040517||7114^^^^^^^^^^NURSE
PRACTITIONER||20040507|^^^^NEW|640^PALO ALTO HCS^99VA4

D.11.2.3 Non-VA Meds

ORC|NW|1^NVA|||IP|||20070210150448-
0500||2229^^^^^^^^^^PHYSICIAN|||^^^^NEW|442^CHEYENNE
VAMC^99VA4

D.12 PID . Patient ID Segment

Table 43 . Patient ID Segment

SEQ	LEN	DT	OPT	RP/#	TBL#	Field Name	CCR
1	4	SI	O			Set ID - PID	See Notes
2	20	CX	B			Patient ID	N/A
3	250	CX	R	Y		Patient Identifier List	See Notes



L#						Field Name	CCR
						Alternate Patient ID - PID	N/A
5	250	XPN	R	Y		Patient Name	See Notes
6	250	XPN	O	Y		Mother's Maiden Name	N/A
7	26	TS	O			Date/Time of Birth	See Notes
8	1	IS	O		0001	Sex	See Notes
9	250	XPN	O	Y		Patient Alias	N/A
10	250	CE	O	Y	0005	Race and Collection Method	See Notes
11	250	XAD	O	Y		Patient Address	See Notes
12	4	IS	B		0289	County Code	N/A
13	250	XTN	O	Y		Phone Number - Home	N/A
14	250	XTN	O	Y		Phone Number - Business	N/A
15	250	CE	O		0296	Primary Language	N/A
16	250	CE	O		0002	Marital Status	N/A
17	250	CE	O		0006	Religion	N/A
18	250	CX	O			Patient Account Number	N/A
19	16	ST	B			SSN Number - Patient	See Notes
20	25	DLN	O			Driver's License Number - Patient	N/A
21	250	CX	O	Y		Mother's Identifier	N/A
22	250	CE	O	Y	0189	Ethnic Group	See Notes
23	250	ST	O			Birth Place	N/A
24	1	ID	O		0136	Multiple Birth Indicator	N/A
25	2	NM	O			Birth Order	N/A
26	250	CE	O	Y	0171	Citizenship	N/A
27	250	CE	O		0172	Veterans Military Status	N/A
28	250	CE	O		0212	Nationality	N/A
29	26	TS	O			Patient Death Date and Time	See Notes
30	1	ID	O		0136	Patient Death Indicator	N/A
31	1	ID	O		0136	Identity Unknown Indicator	N/A
32	20	IS	O	Y	0445	Identity Reliability Code	N/A

TBL#						Field Name	CCR
						Last Update Date/Time	N/A
34	40	HD	O			Last Update Facility	N/A
35	250	CE	C		0446	Species Code	N/A
36	250	CE	C		0447	Breed Code	N/A
37	80	ST	O			Strain	N/A
38	250	CE	O	2	0429	Production Class Code	N/A

D.12.1 Field Definitions

D.12.1.1 PID-1 Set ID . PID

Definition:	This field contains the number that identifies this transaction. For the first occurrence of the segment, the sequence number shall be one, for the second occurrence, the sequence number shall be two, etc.
Value:	2

D.12.1.2 PID-3 Patient Identifier List

SEQ	DT	TBL#	Component Name	CCR
1	ST		ID	
2	ST		Check Digit	
3	ID	0061	Code of the Check Digit Scheme	
4	HD	0363	Assigning Authority	
5	ID	0203	Identifier Type Code	
6	HD		Assigning Facility	
7	DT		Effective Date	N/A
8	DT		Expiration Date	N/A

Definition:	<p>This field contains the list of identifiers (one or more) used by the healthcare facility to uniquely identify a patient (e.g., medical record number, billing number, birth registry, national unique individual identifier, etc.).</p> <p>Currently, the CCR package uses 2 identifiers: Patient IEN (DFN) and Integration Control Number (if available). Patient IEN is</p>
--------------------	---

station number by the receiver to create a unique	
ICN:	<ICN>^^^USVHA&&0363^NI^VA FACILITY ID&<Station Number>&L
Patient EIN:	<DFN>^^^USVHA&&0363^PI^VA FACILITY ID&<Station Number>&L
Registry State:	PID segments in the registry-wide section of the batch utilize the following format of this field: 0^^^^U
Example:	1243567890V123456^^^USVHA&&0363^NI^VA FACILITY ID&640&L ~325500^^^USVHA&&0363^PI^VA FACILITY ID&640&L

D.12.1.3 PID-5 Patient Name

Definition:	Clinical Data:	
	Registry Data:	Despite the fact that the <i>Patient Name</i> field is a required one, it is not populated in regular PID segments due to patient privacy and security reasons.
	Registry State:	PID segments in the registry-wide section of the batch have PSEUDO^PATIENT string in this field.
Example:	PSEUDO^PATIENT	

D.12.1.4 PID-7 Date/Time of Birth

Definition:	This field contains the patient's date of birth.
Format:	YYYYMMDD (either day or both month and day can be zeros)
Example:	19521027

D.12.1.5 PID-8 Sex

Definition:	This field contains the patient's sex.	
Tables:	A subset of the HL7 Table 0001 - Administrative sex is used:	
	Value	Description

		Female
		Male
	U	Other
	U	Unknown
Example:	F	

D.12.1.6 PID-10 Race and Collection Method

SEQ	DT	TBL#	Component Name	CCR
1	ST	0005	Identifier	
2	ST		Text	
3	ST		Name of Coding System	
4	ST		Alternate Identifier	
5	ST		Alternate Text	
6	ST		Name of Alternate Coding System	

Definition:	This field refers to the patient's race.	
Format:	The <i>Identifier</i> has the following format: <Race ID>-<Collection Method ID>.	
Tables:	ID	Race
	1002-5	AMERICAN INDIAN OR ALASKA NATIVE
	2028-9	ASIAN
	2054-5	BLACK OR AFRICAN MAERICAN
	2076-8	NATIVE HAWAIIAN OR OTHER PACIFIC ISLANDER
	2106-3	WHITE
	0000-0	DECLINED TO ANSWER
	9999-4	UNKNOWN BY PATIENT
	ID	Collection method
	SLF	SELF IDENTIFICATION
	PRX	PROXY
	OBS	OBSERVER
	UNK	UNKNOWN
Example:	2106-3-SLF^WHITE^0005^2106-3^WHITE^CDC	

D.12.1.7 PID-11 Patient address

[Click Here to upgrade to
Unlimited Pages and Expanded Features](#)

Name				CCR
SS				N/A
2	ST		Other Designation	N/A
3	ST		City	N/A
4	ST		State or Province	N/A
5	ST		ZIP or Postal Code	
6	ID	0399	Country	N/A
7	ID	0190	Address Type	N/A
8	ST		Other Geographic Designation	N/A
9	IS	0289	County/Parish Code	N/A
10	IS	0288	Census Tract	N/A
11	ID	0465	Address Representation Code	N/A
12	DR		Address Validity Range	N/A

Definition:	This field contains the mailing address of the patient. The CCR HL7 interface sends only the zip code.
Format:	NNNNN [-NNN]
Example:	^^^^60141-7008

PID-19 SSN Number - Patient

Definition:	This field contains the encoded social security number of the patient.
Format:	NNNNNNNNNNNN [P] (11 digits followed by optional indicator of a pseudo-SSN).
Example:	60129282062

D.12.1.8 PID-22 Ethnic Group

SEQ	DT	TBL#	Component Name	CCR
-----	----	------	----------------	-----

3	ST		Name of Coding System	
4	ST		Alternate Identifier	
5	ST		Alternate Text	
6	ST		Name of Alternate Coding System	

Definition:	This field refers to the patient's ethnicity.	
Format:	The <i>Identifier</i> has the following format: <Ethnicity ID>-<Collection Method ID>.	
Tables:	ID	Ethnicity
	2135-2	HISPANIC OR LATINO
	2165-5	NOT HISPANIC OR LATINO
	0000-0	DECLINED TO ANSWER
	9999-4	UNKNOWN BY PATIENT
	ID	Collection method
	SLF	SELF IDENTIFICATION
	PRX	PROXY
	OBS	OBSERVER
	UNK	UNKNOWN
Example:	2186-5-SLF^NOT HISPANIC OR LATINO^0189 ^2186-5^NOT HISPANIC OR LATINO^CDC	

D.12.1.9 PID-29 Patient Death Date and Time

Definition:	This field contains the date on which the patient death occurred.
Format:	YYYYMMDD[hhmm[ss]] [+ -zzzz]
Example:	195210271230

D.12.2 Sample PID Segment

USVHA&0363^NI^VA FACILITY
363^PI^VA FACILITY
ID&040&L|||19650400|M||2106-3-SLF^WHITE^0005^2106-
3^WHITE^CDC|^^^95123|||00007600044| ||2186-5-SLF^NOT
HISPANIC OR LATINO^0189^2186-5^NOT HISPANIC OR
LATINO^CDC|||""

D.13 PV1 . Patient Visit Segment

Table 44 . Patient Visit Segment

SEQ	LEN	DT	OPT	RP/#	TBL#	Field Name	CCR
1	4	SI	O			Set ID - PV1	See Notes
2	1	IS	R		0004	Patient Class	See Notes
3	80	PL	O			Assigned Patient Location	See Notes
4	2	IS	O		0007	Admission Type	See Notes
5	250	CX	O			Preadmit Number	N/A
6	80	PL	O			Prior Patient Location	See Notes
7	250	XCN	O	Y	0010	Attending Doctor	See Notes
8	250	XCN	O	Y	0010	Referring Doctor	N/A
9	250	XCN	B	Y	0010	Consulting Doctor	N/A
10	3	IS	O		0069	Hospital Service	N/A
11	80	PL	O			Temporary Location	N/A
12	2	IS	O		0087	Preadmit Test Indicator	N/A
13	2	IS	O		0092	Re-admission Indicator	N/A
14	6	IS	O		0023	Admit Source	N/A
15	2	IS	O	Y	0009	Ambulatory Status	N/A
16	2	IS	O		0099	VIP Indicator	N/A
17	250	XCN	O	Y	0010	Admitting Doctor	N/A
18	2	IS	O		0018	Patient Type	N/A
19	30	CX	O			Visit Number	See Notes
20	50	FC	O	Y	0064	Financial Class	N/A
21	2	IS	O		0032	Charge Price Indicator	N/A
22	2	IS	O		0045	Courtesy Code	N/A



						Field Name	CCR
					046	Credit Rating	N/A
24	2	IS	O	Y	0044	Contract Code	N/A
25	8	DT	O	Y		Contract Effective Date	N/A
26	12	NM	O	Y		Contract Amount	N/A
27	3	NM	O	Y		Contract Period	N/A
28	2	IS	O		0073	Interest Code	N/A
29	1	IS	O		0110	Transfer to Bad Debt Code	N/A
30	8	DT	O			Transfer to Bad Debt Date	N/A
31	10	IS	O		0021	Bad Debt Agency Code	N/A
32	12	NM	O			Bad Debt Transfer Amount	N/A
33	12	NM	O			Bad Debt Recovery Amount	N/A
34	1	IS	O		0111	Delete Account Indicator	N/A
35	8	DT	O			Delete Account Date	N/A
36	3	IS	O		0112	Discharge Disposition	See Notes
37	25	CM	O		0113	Discharged to Location	N/A
38	250	CE	O		0114	Diet Type	N/A
39	2	IS	O		0115	Servicing Facility	N/A
40	1	IS	B		0116	Bed Status	N/A
41	2	IS	O		0117	Account Status	N/A
42	80	PL	O			Pending Location	N/A
43	80	PL	O			Prior Temporary Location	N/A
44	26	TS	O			Admit Date/Time	See Notes
45	26	TS	O			Discharge Date/Time	See Notes
46	12	NM	O			Current Patient Balance	N/A
47	12	NM	O			Total Charges	N/A
48	12	NM	O			Total Adjustments	N/A
49	12	NM	O			Total Payments	N/A
50	250	CX	O		0203	Alternate Visit ID	N/A
51	1	IS	O		0326	Visit Indicator	See Notes
52	250	XCN	B	Y	0010	Other Healthcare Provider	N/A

D.13.1.1 PV1-1 Set ID . PV1

Definition:	This field contains the number that identifies this transaction. For the first occurrence of the segment, the sequence number shall be one, for the second occurrence, the sequence number shall be two, etc.
Example:	1

D.13.1.2 PV1-2 Patient Class

Definition:	This field is used to categorize patients by the type of admission.	
Tables:	Value	Description
	I	Inpatient
	O	Outpatient
Example:	I	

D.13.1.3 PV1-3 Assigned Patient Location

SEQ	DT	TBL#	Component Name	CCR
1	IS		Point of Care	Station Number
2	IS		Room	N/A
3	IS		Bed	N/A
4	HD		Facility	N/A
5	IS		Location Status	N/A
6	IS		Person Location Type	Clinic Stop Code (for outpatients)
7	IS		Building	N/A
8	IS		Floor	N/A
9	ST		Location Description	N/A

Definition:	This field identifies the station where the admission took place.	
	• Inpatient:	Station number for inpatient admissions is returned by the \$\$\$SITE^VASITE function and its suffix is removed.

[Click Here to upgrade to
Unlimited Pages and Expanded Features](#)

		<p>he station for outpatient visits is returned by the ENT^ P XKENC procedure. The station number is extracted from the corresponding record of the MEDICAL CENTER DIVISION file (#40.8) and stored ñas isö (potentially, with the suffix).</p> <p>Outpatient visits also have the <i>Person Location Type</i> component set to the clinic stop code.</p>
Format:	• Inpatient:	<Station Number (without suffix)>
	• Outpatient:	<Station Number>^^^^^<Clinic Stop Code>
Example:	• Inpatient:	499
	• Outpatient:	499UX^^^^^203

D.13.1.4 PV1-4 Admission Type

Definition:	• Inpatient:	N/A
	• Outpatient:	Admission Type
Tables:	Value	Description
	A	Ancillary
	C	Credit Stop
	P	Primary
	O	Occasion of Service
	S	Stop Code
Example:	P	

D.13.1.5 PV1-6 Prior Patient Location

SEQ	DT	TBL#	Component Name	CCR
1	IS		Point of Care	N/A
2	IS		Room	N/A
3	IS		Bed	IEN of the bed section (specialty) in the SPECIALTY file (#42.4)
4	HD		Facility	N/A
5	IS		Location Status	N/A
6	IS		Person Location Type	N/A

				N/A
				N/A
9	ST		Location Description	Name of the bed section (the .01 field of the file #42.4)

Definition:	• Inpatient:	Bed section at the time of discharge
	• Outpatient:	N/A
Example:	^^71^^^^^LONG TERM PSYCHIATRY(>45 DAYS)	

D.13.1.6 PV1-7 Attending Doctor

SEQ	DT	TBL#	Component Name	CCR
1	ST		ID Number	User IEN in the NEW PERSON file (#200)
2	FN		Family Name	N/A
3	ST		Given Name	N/A
4	ST		Second and further given names or initials thereof	N/A
5	ST		Suffix (e.g., JR or III)	N/A
6	ST		Prefix (e.g., DR)	N/A
7	IS	0360	Degree (e.g., MD)	N/A
8	IS	0297	Source Table	N/A
9	HD		Assigning Authority	N/A
10	ID	0200	Name Type Code	N/A
11	ST		Identifier Check Digit	N/A
12	ID	0061	Code identifying the check digit scheme employed	N/A
13	IS		Identifier Type Code	Provider Class Name
14	HD		Assigning Facility	N/A
15	ID	0465	Name Representation Code	N/A

[Click Here to upgrade to
Unlimited Pages and Expanded Features](#)

Name				CCR
xt				N/A
17	DR		Name Validity Range	N/A
18	ID	0444	Name Assembly Order	N/A

Definition:	• Inpatient:	N/A
	• Outpatient:	Attending Physician(s). Provider names are not used to ensure the patient privacy protection.
Example:	2177^^^^^^^^^^^^^PHYSICIAN	

D.13.1.7 PV1-19 Visit Number

SEQ	DT	TBL#	Component Name	CCR
1	ST		ID	IEN of the Visit
2	ST		Check Digit	N/A
3	ID	0061	Code identifying the check digit scheme employed	N/A
4	HD		Assigning Authority	N/A
5	ID	0203	Identifier Type Code	N/A
6	HD		Assigning Facility	N/A
7	DT		Effective Date	N/A
8	DT		Expiration Date	N/A

Definition:	This field contains the IEN of the visit and can be used to link up with the OBR segment for this visit.	
	• Inpatient:	IEN of the record of the PTF CLOSE OUT file (#45.84)
	• Outpatient:	IEN of the record of the VISIT file (#9000010)
Example:	8710273	

D.13.1.8 PV1-36 Discharge Disposition

		Disposition Code of the patient at time of discharge
• Outpatient:		N/A
Tables:	Value	Description
	1	REGULAR
	2	NBC OR WHILE ASIH
	3	EXPIRATION 6 MONTH LIMIT
	4	IRREGULAR
	5	TRANSFER
	6	DEATH WITH AUTOPSY
	7	DEATH WITHOUT AUTOPSY
Example:	4	

D.13.1.9 PV1-44 Admit Date/Time

Definition:	• Inpatient:	Admission Date/Time
	• Outpatient:	Visit Date/Time
Format:	YYYYMMDD [hhmm[ss]] [+ -zzzz]	
Example:	200403020815-0800	

D.13.1.10 PV1-45 Discharge Date/Time

Definition:	• Inpatient:	Discharge Date/Time
	• Outpatient:	N/A
Format:	YYYYMMDD [hhmm[ss]] [+ -zzzz]	
Example:	200403020815-0800	

D.13.1.11 PV1-51 Visit Indicator

Definition:	• Inpatient:	N/A
	• Outpatient:	Indicates if the visit has been deleted
Tables:	Value	Description
	0	Active
	1	Deleted

D.13.2 Sample PV1 Segment

PV1|1|O|640^^^^408|P||10935^^^^^^^^^PHYSICIAN|||
|8710273|||200403020815-0800|||0

D.14 RXE . Pharmacy/Treatment Encoded Order Segment

Table 45 . Pharmacy/Treatment Encoded Order Segment

SEQ	LEN	DT	OPT	RP/#	TBL#	Field Name	CCR
1	200	TQ	R			Quantity/Timing	See Notes
2	250	CE	R		0292	Give Code	See Notes
3	20	NM	R			Give Amount - Minimum	See Notes
4	20	NM	O			Give Amount - Maximum	See Notes
5	250	CE	R			Give Units	See Notes
6	250	CE	O			Give Dosage Form	See Notes
7	250	CE	O	Y		Provider's Administration Instructions	See Notes
8	200	CM	C			Deliver-to Location	N/A
9	1	ID	O		0167	Substitution Status	N/A
10	20	NM	C			Dispense Amount	See Notes
11	250	CE	C			Dispense Units	N/A
12	3	NM	O			Number of Refills	N/A
13	250	XCN	C	Y		Ordering Provider's DEA Number	N/A
14	250	XCN	O	Y		Pharmacist/Treatment Supplier's Verifier ID	N/A
15	20	ST	C			Prescription Number	See Notes
16	20	NM	C			Number of Refills Remaining	N/A
17	20	NM	C			Number of Refills/Doses Dispensed	See Notes

[Click Here to upgrade to
Unlimited Pages and Expanded Features](#)

TBL#						Field Name	CCR
						D/T of Most Recent Refill or Dose Dispensed	See Notes
19	10	CQ	C			Total Daily Dose	See Notes
20	1	ID	O		0136	Needs Human Review	See Notes
21	250	CE	O	Y		Pharmacy/Treatment Supplier's Special Dispensing Instructions	See Notes
22	20	ST	C			Give Per (Time Unit)	See Notes
23	6	ST	O			Give Rate Amount	See Notes
24	250	CE	O			Give Rate Units	See Notes
25	20	NM	O			Give Strength	N/A
26	250	CE	O			Give Strength Units	N/A
27	250	CE	O	Y		Give Indication	See Notes
28	20	NM	O			Dispense Package Size	N/A
29	250	CE	O			Dispense Package Size Unit	N/A
30	2	ID	O		0321	Dispense Package Method	See Notes
31	250	CE	O	Y		Supplementary Code	N/A

D.14.1 Field Definitions

D.14.1.1 RXE-1 Quantity/Timing

SEQ	DT	TBL#	Component Name	CCR
1	CQ		Quantity	N/A
2	CM		Interval	N/A
3	ST		Duration	N/A
4	TS		Start Date/Time	N/A
5	TS		End Date/Time	N/A
6	ST		Priority	N/A
7	ST		Condition	N/A
8	TX		Text	
9	ID	0472	Conjunction	N/A
10	CM		Order Sequencing	N/A

Name			CCR
Duration			N/A
12	NM	Total Occurrences	N/A

Definition:	This field is used by the pharmacy supplier to express the fully coded version of the drug or treatment timing.		
	• Inpatient:	Text element of this field contains the Schedule	
	• Outpatient:	""	
	• Non-VA Meds:	dosage^schedule^^start date^discontinued date^^medication route	
Example:	• Inpatient:	^^^^^^Comprehensive Met Panel results from HINES DEVELOPMENT	
	• Outpatient:	""	
	• Non-VA Meds:		

D.14.1.2 RXE-2 Give Code

SEQ	DT	TBL#	Component Name	CCR
1	ST		Identifier	NDC
2	ST		Text	VA Product name
3	ST		Name of Coding System	PSNDF
4	ST		Alternate Identifier	NDF IEN concatenated with the VA drug class code
5	ST		Alternate Text	Generic Name
6	ST		Name of Alternate Coding System	99PSD

Definition:	This field identifies the medical substance provided to the patient.		
Format:	• Non-VA Meds	NDC code^VA Product Name^PSNDF^NDF IEN concatenated with the VA drug class code^Generic name^99PSD	

	<ul style="list-style-type: none"> Other 	0002-1615-02^MAGNESIUM SULFATE 50% 1GM/2ML AMP^PSNDF^31-TN406^MAGNESIUM SO4 4MEQ/ML INJ^99PSD
Note:	<ul style="list-style-type: none"> Non-VA Meds 	If no IEN for the DRUG file (#50) exists for the Non-VA med drug, RXE-2 will contain data in RXE-2-5 only: the Orderable Item and Dose Form

D.14.1.3 RXE-3 Give Amount - Minimum

Definition:	This field contains the ordered amount. This field is required but it is not used by the Clinical Case Registries.
Example:	""

D.14.1.4 RXE-4 Give Amount - Maximum

Definition:	• Inpatient:	N/A
	• Outpatient:	Maximum Number of Refills
Example:	5	

D.14.1.5 RXE-5 Give Units

SEQ	DT	TBL#	Component Name	CCR
1	ST		Identifier	N/A
2	ST		Text	N/A
3	ST		Name of Coding System	N/A
4	ST		Alternate Identifier	Drug Unit IEN (IEN of the record of the DRUG UNITS file (#50.607)).
5	ST		Alternate Text	Drug Unit Name (value of the .01 field of the DRUG UNITS file (#50.607)).
6	ST		Name of Alternate Coding System	99PSU

units for the Give Amount field.

Example:	^^^130^MIC/1.5ML^99PSU
-----------------	------------------------

D.14.1.6 RXE-6 Give Dosage Form

Definition:	• Inpatient:	N/A
	• Outpatient:	Release Date/Time
Format:	YYYYMMDD [hhmm[ss]] [+ -zzzz]	
Example:	200403020815-0800	

D.14.1.7 RXE-7 Provider's Administration Instructions

SEQ	DT	TBL#	Component Name	CCR
1	ST		Identifier	N/A
2	ST		Text	SIG
3	ST		Name of Coding System	N/A
4	ST		Alternate Identifier	N/A
5	ST		Alternate Text	N/A
6	ST		Name of Alternate Coding System	N/A

Definition:	• Inpatient:	N/A
	• Outpatient:	Ordering provider's instructions to the person administering the drug. This field corresponds to the SIG, and it is free text.
	• Non-VA Meds:	
Format:	^Disclaimer text (Limited to 4000 characters)	
Example:	^APP 1 PATCH TO SKIN QAM AND REMOVE HS (TO REPLACE NITROGLYCERIN 6.5MG SA CAP)	

D.14.1.8 RXE-10 Dispense Amount

Definition:	• Inpatient:	N/A
	• Outpatient:	This field contains the amount dispensed. Valid entries are between 1 and 99999999 with up to 2 decimal places allowed.

D.14.1.9 RXE-15 Prescription Number

Definition:	• Inpatient:	N/A
	• Outpatient:	Refill Indicator
	• Non-VA Meds:	CPRS order number
Tables:	Value	Description
	1	Refill
	2	Partial
Example:	1	

D.14.1.10 RXE-17 Number of Refills/Doses Dispensed

Definition:	• Inpatient:	N/A
	• Outpatient:	Refill Number
Example:	3	

D.14.1.11 RXE-18 D/T of Most Recent Refill or Dose Dispensed

Definition:	• Inpatient:	Last date/time when the dose should be given (stop date/time)
	• Outpatient:	Date/time when the most recent fill/refill was dispensed (fill date/time)
Format:	YYYYMMDD [hhmm[ss]] [+ -zzzz]	
Example:	200403020815-0800	

D.14.1.12 RXE-19 Total Daily Dose

SEQ	DT	TBL#	Component Name	CCR
1	NM		Quantity	
2	CE		Units	N/A

	Component	Daily Dose. Valid entries range from 1 to 90.
Example:	15	

D.14.1.13 RXE-20 Needs Human Review

Definition:	• Inpatient:	N/A
	• Outpatient:	Indicator of whether the drug has been transmitted to CMOP
Example:	Y	

D.14.1.14 RXE-21 Pharmacy/Treatment Supplier's Special Dispensing Instructions

SEQ	DT	TBL#	Component Name	CCR
1	ST		Identifier	
2	ST		Text	N/A
3	ST		Name of Coding System	N/A
4	ST		Alternate Identifier	N/A
5	ST		Alternate Text	N/A
6	ST		Name of Alternate Coding System	N/A

Definition:	• Inpatient:	Medication Route
	• Outpatient:	Clinic Stop Code
	• Non-VA Meds:	Pharmacy/Treatment Supplier's Special Dispensing Instructions
Format:	• Non-VA Meds:	Clinic Stop Code^^^Clinic IEN & Clinic Name
Example:	• Inpatient:	Oral
	• Outpatient:	208
	• Non-VA Meds:	

D.14.1.15 RXE-22 Give Per (Time Unit)

Definition:	• Inpatient:	N/A
	• Outpatient:	Last Dispensed Date/Time

s]] [+ | - z z z z]

00

D.14.1.16 RXE-23 Give Rate Amount

Definition:	• Inpatient:	N/A
	• Outpatient:	Unit Cost
Example:	30 . 45	

D.14.1.17 RXE-24 Give Rate Units

SEQ	DT	TBL#	Component Name	CCR
1	ST		Identifier	
2	ST		Text	N/A
3	ST		Name of Coding System	N/A
4	ST		Alternate Identifier	N/A
5	ST		Alternate Text	N/A
6	ST		Name of Alternate Coding System	N/A

Definition:	• Inpatient:	Units per Dose. Valid entries range from 0 to 30, with up to 2 decimal places.
	• Outpatient:	N/A
Format:	NN [. N [N]]	
Example:	12 . 25	

D.14.1.18 RXE-27 Give Indication

SEQ	DT	TBL#	Component Name	CCR
1	ST		Identifier	
2	ST		Text	

Name				CCR
Coding System				N/A
4	ST		Alternate Identifier	N/A
5	ST		Alternate Text	N/A
6	ST		Name of Alternate Coding System	N/A

Definition:	• Inpatient:	N/A
	• Outpatient:	Patient Status
Example:	6^OTHER FEDERAL	

D.14.1.19 RXE-30 Dispense Package Method

Definition:	• Inpatient:	N/A
	• Outpatient:	Mail/Window
Tables:	Value	Description
	AD	Automatic Dispensing ó Mail
	TR	Traditional ó Window
Example:	TR	

D.14.2 Sample RXE Segments

D.14.2.1 Inpatient

```
RXE|^^^^^^^QID PRN|17478-0216-12^NAPHAZOLINE HCL 0.1%
SOLN,OPH^PSNDF^900-OP800^NAPHAZOLINE HCL 0.1% OPH
SOLN^99PSD|""|||200505301100-0800|||BOTH EYE|||1
```

D.14.2.2 Outpatient

```
RXE|""|00056-0510-30^EFAVIRENZ 600MG TAB^PSNDF^3528-AM800
^EFAVIRENZ 600MG TAB^99PSD|""|6|^20^MG^99PSU|20050302|^TAKE
ONE TABLET BY MOUTH EVERY DAY|||30|||1||4|20050228|30|Y|324
|200503021422-0800|8.0047|||3^SC LESS THAN 50%|||AD
```

D.14.2.3 Non-VA Meds

MAY AS NEEDED^^20070101^20070610083028-
 MILK OF MAGNESIA^PSNDF^2206-
 CALUS MILK OF MAGNESIA 501SD||||**IF NO IMPROVEMENT IN 12 HOURS
 CALL MD**|||||||3359826|||||323^^^1175&HBPC-PHARMACY

D.15 ZRD . Rated Disabilities Segment

Table 46 . Rated Disabilities Segment

SEQ	LEN	DT	OPT	RP/#	TBL#	Field Name	CCR
1	4	SI	R			Set ID . ZRD	See Notes
2	4	CE	R			Disability Condition	See Notes
3	3	NM	R			Disability %	See Notes
4	1	IS	O		VA001	Service Connected	See Notes
5	30	ST	O			Service Connected Conditions	N/A
6	3	NM	O			Percentage	N/A
7	1	IS	O		0136	Service Dental Injury	N/A
8	1	IS	O		0136	Service Teeth Extracted	N/A
9	8	DT	O			Date of Dental Treatment	N/A
10	100	ST	O			Condition	N/A
11	8	DT	O			Date Condition First Noted	N/A

D.15.1 ZRD-1 Set ID . ZRD

Definition:	This field contains the number that identifies this transaction. For the first occurrence of the segment, the sequence number shall be one, for the second occurrence, the sequence number shall be two, etc.
Example:	2

D.15.2 ZRD-2 Disability Condition

SEQ	DT	TBL#	Component Name	CCR
-----	----	------	----------------	-----

				DX Code
				Condition Name
3	ST		Name of Coding System	N/A
4	ST		Alternate Identifier	N/A
5	ST		Alternate Text	N/A
6	ST		Name of Alternate Coding System	N/A

Definition:	This field holds the disability condition for this patient.	
Code	See the DISABILITY CONDITION file (#31) for possible values of the <i>DX Code</i> and <i>Condition Name</i> . Some examples are provided below:	
	Code	Condition Name
	5000	OSTEOMYELITIS
	5001	BONE DISEASE
	5002	RHEUMATOID ARTHRITIS
	5003	DEGENERATIVE ARTHRITIS
	5004	ARTHRITIS
Example:	5002^RHEUMATOID ARTHRITIS	

D.15.3 ZRD-3 Disability %

Definition:	This field holds the percentage at which the VA rated this disability for this patient.
Format:	Values range from 0 to 100.
Example:	45

D.15.4 ZRD-4 Service Connected

Definition:	This field indicates if the disability is service connected.	
Code	Value	Description
	0	Not Service Connected
	1	Service Connected
Example:	1	

D.16 ZSP . Service Period Segment

Table 47 . Service Period Segment

SEQ	LEN	DT	OPT	RP/#	TBL#	Field Name	CCR
1	4	SI	R			Set ID . ZSP	See Notes
2	1	ID	R		VA001	Service Connected?	See Notes
3	3	NM	O			Service Connected Percentage	See Notes
4	2	IS	O		VA011	Period of Service	See Notes
5	1	ST	O			Vietnam Service Indicated	See Notes
6	1	ID	O		VA001	Permanent & Total Disability	See Notes
7	1	ID	O		VA001	Unemployable	See Notes
8	26	TS	O			SC Award Date	See Notes

D.16.1 Field Definitions

D.16.1.1 ZSP-1 Set ID . ZSP

Definition:	This field holds the Set ID. The set ID is 1 by default.
Example:	1

D.16.1.2 ZSP-2 Service Connected?

Definition:	This field indicates if the patient condition is service connected.	
Code	Value	Description
	0	Not Service Connected
	1	Service Connected
Example:	0	

D.16.1.3 ZSP-3 Service Connected Percentage

Definition:	This field holds the percentage of service connection.
--------------------	--

100.

Example: 60

D.16.1.4 ZSP-4 Period of Service

Definition:	This field holds the period of service that best describes the patient.	
Tables:	Value	Description
	0	KOREAN
	1	WORLD WAR I
	2	WORLD WAR II
	3	SPANISH AMERICAN
	4	PRE-KOREAN
	5	POST-KOREAN
	6	OPERATION DESERT SHIELD
	7	VIETNAM ERA
	8	POST-VIETNAM
	9	OTHER OR NONE
		...
	Y	CAV/NPS
	N	MERCHANT MARINE

Example: 9

D.16.1.5 ZSP-5 Vietnam Service Indicated

Definition:	This field indicates if the patient served in Vietnam.	
Tables:	Value	Description
	00	
	N	No
	U	Unknown
	Y	Yes
Example:	N	

D.16.1.6 ZSP-6 Permanent & Total Disability

Definition:	This field indicates if the patient is permanently and totally disabled due to a service-connected condition.	
Tables:	Value	Description

Not P&T Disabled

&T Disabled

Example: 0

D.16.1.7 ZSP-7 Unemployable

Definition:	This field indicates if the patient is unemployable due to a service connected condition.	
Tables:	Value	Description
	0	Employable
	1	Unemployable
Example:	1	

D.16.1.8 ZSP-8 SC Award Date

Definition:	This field contains the date on which the service connection is effective. If no date has been entered, the null string will be sent.
Format:	YYYYMMDD
Example:	19761205

D.16.2 Sample ZSP Segment

ZSP | 1 | 1 | 30 | 8 | "" | 0 | 0 | 19700325

D.17 ZIN . Purchased Care Inpatient Segment

Table 48 . Inpatient Segment

SEQ	LEN	DT	OPT	RP/#	TBL#	Field Name	CCR
1	10	NM	R			Key	See Notes
2	8	DT	O			Treatment %From+Date	See Notes
3	8	DT	O			Treatment %To+Date	See Notes
4	2	NM	O			Discharge Type Code	See Notes
5	9	ST	O			Billed Charges	See Notes

						Field Name	CCR
						Amount Paid	See Notes
7	8	DT	R			Date Finalized	See Notes
8	30	ST	O			Discharge DRG	See Notes
9	8	DT	O			Date of Admission	See Notes
10	8	DT	O			Date of Discharge	See Notes
11	5	NM	O			Covered Days	See Notes
12	7	ST	O			ICD 1	See Notes
13	7	ST	O			ICD 2	See Notes
14	7	ST	O			ICD 3	See Notes
15	7	ST	O			ICD 4	See Notes
16	7	ST	O			ICD 5	See Notes
17	6	ST	O			Procedure 1	See Notes
18	6	ST	O			Procedure 2	See Notes
19	6	ST	O			Procedure 3	See Notes
20	6	ST	O			Procedure 4	See Notes
21	6	ST				Procedure 5	See Notes

D.17.1 Field Definitions

D.17.1.1 ZIN-1 Key

Definition:	This is the IEN in the FEE BASIS INVOICE file (#162.5). This is a unique key representing the inpatient record for the patient.
Example:	1567

D.17.1.2 ZIN-2 Treatment From+Date

Definition:	This is the TREATMENT FROM DATE (#5) in the FEE BASIS INVOICE file (#162.5). This is the starting date for the invoice.
Example:	20110228

ate

	NT TO DATE (#6) in the FEE BASIS INVOICE file (#162.5). This is the ending date for the invoice.
Example:	20110228

D.17.1.4 ZIN-4 Discharge Type Code

Definition:	This is the DISCHARGE TYPE CODE (#6.5) in the FEE BASIS INVOICE file (#162.5). It is a pointer to the FEE BASIS DISPOSITION CODE file (#162.6). This is the type of discharge associated with the invoice.	
Code:	Value	Description
	1	TO HOME OR SELF CARE
	2	TO ANOTHER SHORT-TERM FACILITY
	3	TO SKILLED NURSING FACILITY
	4	TO INTERMEDIATE NURSING FACILITY
	5	TO ANOTHER TYPE OF FACILITY
	6	TO HOME FOR HOME HEALTH SERVICES
	7	LEFT AGAINST MEDICAL ADVICE
	8	DIED
	9	STILL A PATIENT
Example:	4	

D.17.1.5 ZIN-5 Billed Charges

Definition:	This is the BILLED CHARGES field (#6.6) in the FEE BASIS INVOICE file (#162.5). It is the amount that the VA was initially billed by the vendor for an inpatient stay.
Example:	1284 . 91

D.17.1.6 ZIN-6 Amount Paid

Definition:	This is the AMOUNT PAID field (#8) in the FEE BASIS INVOICE file (#162.5). It is the amount actually paid to the vendor for the service provided.
Example:	1284 . 91

	ALIZED field (#19) in the FEE BASIS INVOICE file (#162.5). It is the date the invoice was vouchered by Fiscal.
Example:	20110228

D.17.1.8 ZIN-8 Discharge DRG

Definition:	This is the external value of the DISCHARGE DRG field (#24) in the FEE BASIS INVOICE file (#162.5). It is the grouped DRG.
Example:	DRG202

D.17.1.9 ZIN-9 Date of Admission

Definition:	This is the DATE OF ADMISSION field (#3.5) in the VA FORM 10-7078 file (#162.4).
Example:	20110228

D.17.1.10 ZIN-10 Date of Discharge

Definition:	This is the DATE OF DISCHARGE field (#4.5) in the VA FORM 10-7078 file (#162.4).
Example:	20110228

D.17.1.11 ZIN-11 Covered Days

Definition:	This is the COVERED DAYS field (#54) in the FEE BASIS INVOICE file (#162.5). The number of inpatient days that will be paid.
Example:	1

D.17.1.12 ZIN-12 ICD 1

Definition:	This is the ICD1 field (#30) in the FEE BASIS INVOICE file (#162.5). The first valid ICD code associated with this payment.
Example:	303.00

Definition:	This is the ICD2 field (#31) in the FEE BASIS INVOICE file (#162.5). The second valid ICD code associated with this payment.
Example:	303.00

D.17.1.14 ZIN-14 ICD 3

Definition:	This is the ICD3 field (#32) in the FEE BASIS INVOICE file (#162.5). The third valid ICD code associated with this payment.
Example:	303.00

D.17.1.15 ZIN-15 ICD 4

Definition:	This is the ICD4 field (#33) in the FEE BASIS INVOICE file (#162.5). The fourth valid ICD code associated with this payment.
Example:	303.00

D.17.1.16 ZIN-16 ICD 5

Definition:	This is the ICD5 field (#34) in the FEE BASIS INVOICE file (#162.5). The fifth valid ICD code associated with this payment.
Example:	303.00

D.17.1.17 ZIN-17 Procedure 1

Definition:	This is the PROC1 field (#40) in the FEE BASIS INVOICE file (#162.5). The first valid procedure code associated with this payment.
Example:	94.68

D.17.1.18 ZIN-18 Procedure 2

Definition:	This is the PROC2 field (#41) in the FEE BASIS INVOICE file (#162.5). The second valid procedure code associated with this payment.
Example:	94.68

Definition:	This is the PROC3 field (#42) in the FEE BASIS INVOICE file (#162.5). The third valid procedure code associated with this payment.
Example:	94 . 68

D.17.1.20 ZIN-20 Procedure 4

Definition:	This is the PROC4 field (#43) in the FEE BASIS INVOICE file (#162.5). The fourth valid procedure code associated with this payment.
Example:	94 . 68

D.17.1.21 ZIN-21 Procedure 5

Definition:	This is the PROC5 field (#44) in the FEE BASIS INVOICE file (#162.5). The fifth valid procedure code associated with this payment.
Example:	94 . 68

D.17.2 Sample ZIN Segment

ZIN|36520|20040408|20040409|1|9153.70|6445.16|20040817|DRG202|20
040408|20040409|1|571.2|456.20|456.8|305.1|303.90|42.33|44.43

D.18 ZSV . Purchased Care Outpatient Segment

Table 49 . Outpatient Segment

SEQ	LEN	DT	OPT	RP/#	TBL#	Field Name	CCR
1	28	ST	R			Key	See Notes
2	8	DT	O			Date of Treatment	See Notes
3	2	NM	O			Fee Program Code	See Notes
4	5	ST	R			Service Provided (CPT code)	See Notes
5	200	ST	O			Purpose of Visit	See Notes
6	7	ST	O			Primary Diagnosis	See Notes

#	Field Name	CCR
	Place of Service	See Notes

D.18.1 Field Definitions

D.18.1.1 ZSV-1 Key

Definition:	This is a combination of 4 IENs: FEE BASIS PAYMENT file (#162), sub-file #162.01, sub-file #162.02, and #162.03. This is a unique key representing the outpatient record for the patient.
Example:	4561-1-2-1

D.18.1.2 ZSV-2 Date of Treatment

Definition:	This is the INITIAL TREATMENT DATE (#.01) in the FEE BASIS PAYMENT file (#162), sub-file #162.02. The date that the treatment/service took place.
Example:	20110228

D.18.1.3 ZSV-3 Fee Program Code

Definition:	This is the internal value of the *FEE PROGRAM field (#1.5) in the FEE BASIS PAYMENT file (#162). It is a pointer to the FEE BASIS PROGRAM file (#161.8). This is the Fee Basis program that this payment is related to.	
Code:	Value	Description
	2	OUTPATIENT
	3	PHARMACY
	4	COMP & PENSION
	5	DENTAL
	6	CIVIL HOSPITAL
	7	CONTRACT NURSING HOME
	8	CHAMPVA
	9	CONTRACT READJUSTMENT COUNSELING
	10	CONTRACT HALFWAY HOUSES
	11	HOME HEALTH SERVICES

OTHER INSTITUTIONAL SERVICES		
DIALYSIS		
	14	OXYGEN SERVICES
	15	STATE HOME
Example:	4	

D.18.1.4 ZSV-4 Service Provided (CPT code)

Definition:	This is the SERVICE PROVIDED field (#01) in the FEE BASIS PAYMENT file (#162), sub-file #162.03. It is a pointer to the CPT file (#81). It represents the outpatient and ancillary service provided to the Fee Basis patient.
Example:	74170

D.18.1.5 ZSV-5 Purpose of Visit

Definition:	This is the PURPOSE OF VISIT field (#16) in the FEE BASIS PAYMENT file (#162), sub-file #162.03. It is the purpose that the veteran received the service provided.
Example:	OPT SERVICES/TREATMENT FOR NSC DISABILITIES

D.18.1.6 ZSV-6 Primary Diagnosis

Definition:	This is the PRIMARY DIAGNOSIS field (#28) in the FEE BASIS PAYMENT file (#162), sub-file #162.03. It is the primary diagnosis of the patient.
Example:	592.0

D.18.1.7 ZSV-7 Place of Service

Definition:	This is the PLACE OF SERVICE field (#30) in the FEE BASIS PAYMENT file (#162), sub-file #162.03. It is where the service was administered to the veteran.
Example:	1284.91

D.18.2 Sample ZSV Segment

ZSV|2184-169-1-1|20040509||74170|OPT SERVICES/TREATMENT FOR NSC
DISABILITIES|592.0|OUTPATIENT HOSPITAL (22)

D.19 ZRX . Purchased Care Drug Segment

Table 50 . Drug Segment

SEQ	LEN	DT	OPT	RP/#	TBL#	Field Name	CCR
1	16	ST	R			Key	See Notes
2	8	ST	O			Prescription Number	See Notes
3	8	DT	O			Date Rx Filled	See Notes
4	45	ST	R			Drug Name	See Notes
5	40	ST	O			Generic Drug Name	See Notes
6	20	ST	O			Drug Strength	See Notes
7	15	ST	O			Drug Quantity	See Notes

D.19.1 Field Definitions

D.19.1.1 ZRX-1 Key

Definition:	This is a combination of 2 IENs: FEE BASIS PHARMACY INVOICE file (#162.1), and sub-file #162.11. This is a unique key representing the drug record for the patient.
Example:	6543-1

D.19.1.2 ZRX-2 Prescription Number

Definition:	This is the PRESCRIPTION NUMBER field (#.01) in the FEE BASIS PHARMACY INVOICE file (#162.1), sub-file #162.11.
--------------------	---

D.19.1.3 ZRX-3 Date Rx Filled

Definition:	This is the DATE PRESCRIPTION FILLED field (#2) in the FEE BASIS PHARMACY INVOICE file (#162.1), sub-file #162.11.
Example:	19931221

D.19.1.4 ZRX-4 Drug Name

Definition:	This is the DRUG NAME field (#1) in the FEE BASIS PHARMACY INVOICE file (#162.1), sub-file #162.11.
Example:	CONDYLOX

D.19.1.5 ZRX-5 Generic Drug Name

Definition:	This is the GENERIC DRUG field (#9) in the FEE BASIS PHARMACY INVOICE file (#162.1), sub-file #162.11.
Example:	PODOFILOX 0.5% TOP SOLN

D.19.1.6 ZRX-6 Drug Strength

Definition:	This is the STRENGTH field (#1.5) in the FEE BASIS PHARMACY INVOICE file (#162.1), sub-file #162.11.
Example:	0.5%

D.19.1.7 ZRX-7 Drug Quantity

Definition:	This is the QUANTITY field (#1.6) in the FEE BASIS PHARMACY INVOICE file (#162.1), sub-file #162.11.
Example:	30

D.20 HL7 Tables

Table 51 . HL-7 Tables

Table	Type	Name	Value	Description
0001	User	Administrative sex	A	Ambiguous
			F	Female
			M	Male
			N	Not applicable
			O	Other
			U	Unknown
0004	User	Patient class	B	Obstetrics
			C	Commercial Account
			E	Emergency
			I	Inpatient
			N	Not Applicable
			O	Outpatient
			P	Preadmit
			R	Recurring patient
			U	Unknown
0005	User	Race	1002-5	American Indian or Alaska Native
			2028-9	Asian
			2054-5	Black or African American
			2076-8	Native Hawaiian or Other Pacific Islander
			2106-3	White
			2131-1	Other Race
0008	HL7	Acknowledgment code	AA	Original mode: Application Accept - Enhanced mode: Application

			Value	Description
				acknowledgment: Accept
			AE	Original mode: Application Error - Enhanced mode: Application acknowledgment: Error
			AR	Original mode: Application Reject - Enhanced mode: Application acknowledgment: Reject
			CA	Enhanced mode: Accept acknowledgment: Commit Accept
			CE	Enhanced mode: Accept acknowledgment: Commit Error
			CR	Enhanced mode: Accept acknowledgment: Commit Reject
0061	HL7	Check digit scheme	ISO	ISO 7064: 1983
			M10	Mod 10 algorithm
			M11	Mod 11 algorithm
			NPI	Check digit algorithm in the US National Provider Identifier
0078	User	Abnormal Flags	<	Below absolute low-off instrument scale
			>	Above absolute high-off instrument scale
			A	Abnormal (applies to non-numeric results)
			AA	Very abnormal (applies to non-numeric units, analogous to panic limits for numeric units)
			B	Better--use when direction not relevant
			D	Significant change down
			H	Above high normal
			HH	Above upper panic limits
			I	Intermediate*
			L	Below low normal
			LL	Below lower panic limits

			Value	Description
			MS	Moderately susceptible*
			N	Normal (applies to non-numeric results)
			null	No range defined, or normal ranges don't apply
			R	Resistant*
			S	Susceptible*
			U	Significant change up
			VS	Very susceptible*
			W	Worse--use when direction not relevant
0085	HL7	Observation result status codes interpretation	C	Record coming over is a correction and thus replaces a final result
			D	Deletes the OBX record
			F	Final results; Can only be changed with a corrected result.
			I	Specimen in lab; results pending
			N	Not asked; used to affirmatively document that the observation identified in the OBX was not sought when the universal service ID in OBR-4 implies that it would be sought.
			O	Order detail description only (no result)
			P	Preliminary results
			R	Results entered -- not verified
			S	Partial results
			U	Results status change to final without retransmitting results already sent as preliminary+(e.g., radiology changes status from preliminary to final)
			W	Post original as wrong, e.g., transmitted for wrong patient
			X	Results cannot be obtained for this observation
0103	HL7	Processing ID	D	Debugging

			Value	Description
0125	HL7	Value type	P	Production
			T	Training
			AD	Address
			CE	Coded Entry
			CF	Coded Element With Formatted Values
			CK	Composite ID With Check Digit
			CN	Composite ID And Name
			CP	Composite Price
			CX	Extended Composite ID With Check Digit
			DT	Date
			ED	Encapsulated Data
			FT	Formatted Text (Display)
			MO	Money
			NM	Numeric
			PN	Person Name
			RP	Reference Pointer
			SN	Structured Numeric
			ST	String Data.
			TM	Time
			TN	Telephone Number
			TS	Time Stamp (Date & Time)
			TX	Text Data (Display)
			XAD	Extended Address
			XCN	Extended Composite Name And Number For Persons
			XON	Extended Composite Name And Number For Organizations
			XPN	Extended Person Name
			XTN	Extended Telecommunications Number

			Value	Description
0155	HL7	Accept/application acknowledgment conditions	N	No
			Y	Yes
			AL	Always
			ER	Error/reject conditions only
			NE	Never
0203	User	Identifier type	SU	Successful completion only
			AM	American Express
			AN	Account number
			BA	Bank Account Number
			BR	Birth registry number
			BRN	Breed Registry Number
			DI	Diner's Club card
			DL	Driver's license number
			DN	Doctor number
			DR	Donor Registration Number
			DS	Discover Card
			EI	Employee number
			EN	Employer number
			FI	Facility ID
			GI	Guarantor internal identifier
			GN	Guarantor external identifier
			HC	Health Card Number
			JHN	Jurisdictional health number (Canada)
			LN	License number
			LR	Local Registry ID
			MA	Medicaid number
			MC	Medicare number
			MCN	Microchip Number
			MR	Medical record number
			MS	MasterCard



			Value	Description
			NE	National employer identifier
			NH	National Health Plan Identifier
			NI	National unique individual identifier
			NNxxx	National Person Identifier where xxx is the ISO table 3166 3-character (alphabetic) country code
			NPI	National provider identifier
			PEN	Pension Number
			PI	Patient internal identifier
			PN	Person number
			PRN	Provider number
			PT	Patient external identifier
			RR	Railroad Retirement number
			RRI	Regional registry ID
			SL	State license
			SR	State registry ID
			SS	Social Security number
			U	Unspecified
			UPIN	Medicare/HCFA's Universal Physician Identification numbers
			VN	Visit number
			VS	VISA
			WC	WIC identifier
			WCN	Workers' Comp Number
			XX	Organization identifier

ere to upgrade to ed Pages and Expanded Features			Value	Description
			A	Archive
			I	Initial load
			R	Restore from archive
			T	Current processing, transmitted at intervals (scheduled or on demand). This is the default mode (if the value is omitted).
0301	HL7	Universal ID type	DNS	An Internet dotted name. Either in ASCII or as integers
			GUID	Same as UUID.
			HCD	The CEN Healthcare Coding Scheme Designator. (Identifiers used in DICOM follow this assignment scheme.)
			HL7	Reserved for future HL7 registration schemes
			ISO	An International Standards Organization Object Identifier
			L, M, N	These are reserved for locally defined coding schemes.
			Random	Usually a base64 encoded string of random bits. The uniqueness depends on the length of the bits. Mail systems often generate ASCII string %unique names,+from a combination of random bits and system names.
			UUID	The DCE Universal Unique Identifier
			x400	An X.400 MHS format identifier
			x500	An X.500 directory name
0362	User	Sending/receiving facility	NNN	Station number from the INSTITUTION file (#4) without suffix.
VA001	Local	Yes/No	0	No
			1	Yes

A	B	C	D	E	F	G	H	I		K	L	M
N	O	P		R	S	T	U	V		X		
0-9												

Control-click character to see entries; missing character means no entries for that character.

Term or Acronym	Description
0 - 9	
508	See Section 508

Term or Acronym	Description
A	
AAC	See Corporate Data Center Operations .
Access Code	With each sign-on to VistA , the user must enter two codes to be recognized and allowed to proceed: the Access Code and Verify Code. The Access Code is assigned by IRM Service and is used by the computer to recognize the user. Each user has a unique access code. The only way this code can be changed is for the IRM Service to edit it. When the code is established by IRM, it is encrypted; that is, it is "scrambled" according to a cipher. The code is stored in the computer only in this encrypted form. Thus, even if the access code is viewed, the viewer cannot determine what the user actually types to tell the computer this code. See also Verify Code .
Acquired Immunodeficiency Syndrome (AIDS)	AIDS is a disease of the human immune system caused by the human immunodeficiency virus (HIV). This condition progressively reduces the effectiveness of the immune system and leaves individuals susceptible to opportunistic infections and tumors.
ADPAC	See Automated Data Processing Application Coordinator .
AIDS	See Acquired Immunodeficiency Syndrome .
AITC	See Austin Information Technology Center
AMIS	See Automated Management Information System
Antiretroviral (medications)	Medications for the treatment of infection by retroviruses , primarily HIV . See also Highly Active Antiretroviral Therapy .

³ Document revision for Patch ROR*1.5*10, January 2010, added/expanded many definitions and much explanatory material.

Program Interface.

Application Program Interface (API)	<p>The interface (calling conventions) by which an application program accesses operating system and other services. An API is defined at source code level and provides a level of abstraction between the application and the kernel (or other privileged utilities) to ensure the portability of the code.</p> <p>An API can also provide an interface between a high level language and lower level utilities and services which were written without consideration for the calling conventions supported by compiled languages. In this case, the API's main task may be the translation of parameter lists from one format to another and the interpretation of call-by-value and call-by-reference arguments in one or both directions.</p> <p>See also 11, Application Program Interfaces.</p>
ARV	See Antiretroviral (medications).
Austin Automation Center (AAC)	See Corporate Data Center Operations
Austin Information Technology Center (AITC)	<p>AITC is a recognized, award-winning Federal data center within the Department of Veterans Affairs (VA). It provides a full complement of cost-efficient e-government solutions to support the information technology (IT) needs of customers within the Federal sector. AITC has also implemented a program of enterprise "best practice" initiatives with major vendor partners that ensures customers receive enhanced, value-added IT services through the implementation of new technologies at competitive costs.</p>
Automated Data Processing Application Coordinator (ADPAC)	<p>The ADPAC is the person responsible for planning and implementing new work methods and technology for employees throughout a medical center. ADPACs train employees and assist users when they [Run] into difficulties, and needs to know how all components of the system work. ADPACs maintain open communication with their supervisors and Service Chiefs, as well as their counterparts in Fiscal and Acquisitions and Materiel Management (A&MM), or Information Resource Management (IRM).</p>
Automated Management Information System (AMIS)	<p>The VHA Decision Support System (DSS) is a national automated management information system based on commercial software to integrate data from clinical and financial systems for both inpatient and outpatient care. The commercial software is utilized with interfaces developed to transport data into the system from the Veterans Health Information Systems and Technology Architecture (VistA), the National Patient Care Database (NPCD), the Patient Treatment File (PTF), and various VA financial information systems. The VHA began</p>

of DSS in 1994. Full implementation was completed in 1999 and DSS is now used throughout the VA healthcare system.

[BACK](#) to Glossary Contents

Term or Acronym	Description
B	
B-Type Option	In VistA , an option designed to be run only by the RPC Broker , and which cannot be run from the menu system.
Borland® Delphi®	See Delphi
BACK	to Glossary Contents

Term or Acronym	Description
C	
CCOW	See Clinical Context Object Workgroup
CCR	See Clinical Case Registries
CDC	See Centers for Disease Control and Prevention
CDCO	See Corporate Data Center Operations
Center for Quality Management in Public Health (CQM)	CQM, based in the VA Palo Alto Health Care System, functions as part of the VA Public Health Strategic Health Care Group at VA Central Office in Washington, DC. CQM was first established with a primary focus on HIV care; the mission expanded to include Hepatitis C issues in January 2001. In line with the mission of its organizational parent, the CQM mission further expanded to include work on various issues and conditions with public health significance, including operational support and management of data from the Clinical Case Registries (CCR) software.
Centers for Disease Control and Prevention (CDC)	The CDC is one of the major operating components of the United States Department of Health and Human Services. It includes a number of Coordinating Centers and Offices which specialize in various aspects of public health, as well as the National Institute for Occupational Safety and Health (NIOSH). See http://www.cdc.gov/about/organization/cio.htm
Center for Quality Management in Public Health (CQM)	CQM, based in the VA Palo Alto Health Care System, functions as part of the VA Public Health Strategic Health Care Group at VA Central Office in Washington, DC. CQM was first established with a primary focus on HIV care; the mission expanded to include Hepatitis C issues in January 2001. In line with the mission of its organizational parent, the CQM mission further expanded to include work on various issues and conditions with public

	, including operational support and management of data from the Clinical Case Registries (CCR) software.
Clinical Case Registries (CCR)	The Clinical Case Registries (CCR) application collects data on the population of veterans with certain clinical conditions, namely Hepatitis C and Human Immunodeficiency Virus (HIV) infections.
Clinical Context Object Workgroup (CCOW)	<p>CCOW is an HL7 standard protocol designed to enable disparate applications to synchronize in real-time, and at the user-interface level. It is vendor independent and allows applications to present information at the desktop and/or portal level in a unified way.</p> <p>CCOW is the primary standard protocol in healthcare to facilitate a process called "Context Management." Context Management is the process of using particular "subjects" of interest (e.g., user, patient, clinical encounter, charge item, etc.) to 'virtually' link disparate applications so that the end-user sees them operate in a unified, cohesive way.</p> <p>Context Management can be utilized for both CCOW and non-CCOW compliant applications. The CCOW standard exists to facilitate a more robust, and near "plug-and-play" interoperability across disparate applications.</p> <p>Context Management is often combined with Single Sign On applications in the healthcare environment, but the two are discrete functions. Single Sign On is the process that enables the secure access of disparate applications by a user through use of a single authenticated identifier and password.</p>
Comma-Delimited Values (CDV)	See Comma-Separated Values
Comma-Separated Values (CSV)	Comma-separated or delimited data files use specific characters (delimiters) to separate its values. Most database and spreadsheet programs are able to read or save data in a delimited format. The comma-separated values file format is a delimited data format that has fields separated by the comma character and records separated by newlines. Excel can import such a file and create a spreadsheet from it.
Computerized Patient Record System (CPRS)	A Computerized Patient Record (CPR) is a comprehensive database system used to store and access patients' healthcare information. CPRS is the Department of Veterans Affairs electronic health record software. The CPRS organizes and presents all relevant data on a patient in a way that directly supports clinical decision making. This data includes medical history and conditions, problems and diagnoses, diagnostic and therapeutic procedures and interventions. Both a graphic user interface version and a character-based interface version are available. CPRS provides a single interface for health care providers to review and update a patient's medical record, and to place orders, including medications, special procedures, x-

	nursing orders, diets, and laboratory tests. CPRS is flexible enough to be implemented in a wide variety of settings for a broad spectrum of health care workers, and provides a consistent, event-driven, Windows-style interface.
Contextor software	Sentillion <i>Contextor</i> can be embedded within an application to implement most of CCOW 's context participant behaviors. <i>Contextor</i> is compatible with any CCOW-compliant context manager and is designed to simplify writing applications that support the CCOW standard. It includes these development environment components: <ul style="list-style-type: none"> • CCOW-compliant code samples of Windows and Web applications • Development-only version of Sentillion Context Manager • Development tools for simulating and observing the behavior of a context-enabled desktop • Configuration and administration tool
Corporate Data Center Operations (CDCO)	Federal data center within the Department of Veterans Affairs (VA). As a franchise fund, or fee-for-service organization, CDCO-Austin provides cost-efficient IT enterprise solutions to support the information technology needs of customers within the Federal sector. <i>Formerly</i> the Austin Automation Center (AAC); <i>formerly</i> the Austin Information Technology Center (AITC). See http://www.aac.va.gov/index.php .
CPRS	See Computerized Patient Record System
CPT	See Current Procedural Terminology
CQM	See Center for Quality Management in Public Health
CSV	See Comma-Separated Values
Current Procedural Terminology (CPT)	CPT® is the most widely accepted medical nomenclature used to report medical procedures and services under public and private health insurance programs. CPT codes describe a procedure or service identified with a five-digit CPT code and descriptor nomenclature. The CPT code set accurately describes medical, surgical, and diagnostic services and is designed to communicate uniform information about medical services and procedures among physicians, coders, patients, accreditation organizations, and payers for administrative, financial, and analytical purposes. The current version is the CPT 2009. <i>Note:</i> CPT® is a registered trademark of the American Medical Association.

[BACK](#) to Glossary Contents

Term or Acronym	Description
D	
Database	M code is not ðcompiled and linked,ö so any code is open to anyone to call.



Agreement (DBIA)	for the data. This permits an incredible level of integration between applications, but it is ötoo openö for some software architects' liking. The VA has instituted Database Integration Agreements to enforce external policies and procedures to avoid unwanted dependencies.
Data Dictionary	A data structure that stores meta-data, i.e. data about data. The term ödata dictionaryö has several uses; most generally it is thought of as a set of data descriptions that can be shared by several applications. In practical terms, it usually means a table in a database that stores the names, field types, length, and other characteristics of the fields in the database tables.
DBIA	See Database Integration Agreement
Delphi	Delphi® is a software development package, formerly from Borland® and now developed by Embarcadero Technologies.® This is the software that was used to produce the CCR application. See also http://www.embarcadero.com/products/delphi
DFN	See File Number

[BACK](#) [to Glossary Contents](#)

Term or Acronym	Description
E	
Epoetin	Epoetin Alfa is used for treating anemia in certain patients with kidney failure, HIV, or cancer.
Extensible Markup Language (XML)	An initiative from the W3C defining an öextremely simpleö dialect of SGML suitable for use on the World-Wide Web.
Extract Data Definition	A set of file and field numbers which identify the data that should be retrieved during the extraction process.
Extract Process	This process is run after the update process . This function goes through patients on the local registry and, depending on their status, extracts all available data for the patient since the last extract was run. This process also updates any demographic data held in the local registry for all existing patients that have changed since the last extract. The extract transmits any collected data for the patient to the national database via HL7 .

[BACK](#) [to Glossary Contents](#)

Term or Acronym	Description
F	
FDA	See Food and Drug Administration

	facility patient record number (patient file internal entry number).
FileMan	FileMan is a set of M utilities written in the late 1970s and early 1980s which allow the definition of data structures, menus and security, reports, and forms. Its first use was in the development of medical applications for the Veterans Administration (now the Department of Veterans Affairs). Since it was a work created by the government, the source code cannot be copyrighted, placing that code in the public domain. For this reason, it has been used for rapid development of applications across a number of organizations, including commercial products.
File Transfer Protocol (FTP)	FTP is a client-server protocol which allows a user on one computer to transfer files to and from another computer over a network. It is defined in STD 9, RFC 959 .
Food and Drug Administration (FDA)	FDA is an agency of the United States Department of Health and Human Services and is responsible for regulating and supervising the safety of foods, dietary supplements, drugs, vaccines, biological medical products, blood products, medical devices, radiation-emitting devices, veterinary products, and cosmetics. The FDA also enforces section 361 of the Public Health Service Act and the associated regulations, including sanitation requirements on interstate travel as well as specific rules for control of disease on products ranging from pet turtles to semen donations for assisted reproductive medicine techniques.
FTP	See File Transfer Protocol
Function key	A key on a computer or terminal keyboard which can be programmed so as to cause an operating system command interpreter or application program to perform certain actions. On some keyboards/computers, function keys may have default actions, accessible on power-on. For example, <F1> is traditionally the function key used to activate a help system.

[BACK](#) to Glossary Contents

Term or Acronym	Description
G	
Globals	M uses globals, variables which are intrinsically stored in files and persist beyond the program or process completion. Globals appear as normal variables with the caret character in front of the name. For example, the M statement <pre>SET ^A("first_name")="Bob"</pre> í will result in a new record being created and inserted in the file structure, persistent just as a file persists in an operating system. Globals are stored,

	structured data files by the language and accessed only as M globais. Huge databases grow randomly rather than in a forced serial order, and the strength and efficiency of M is based on its ability to handle all this flawlessly and invisibly to the programmer. For all of these reasons, one of the most common M programs is a database management system. FileMan is one such example. M allows the programmer much wider control of the data; there is no requirement to fit the data into square boxes of rows and columns.
Graphical User Interface (GUI)	A graphical user interface (or GUI, often pronounced õgooeeyõ) is a graphical (rather than purely textual) user interface to a computer. A GUI is a particular case of user interface for interacting with a computer which employs graphical images and widgets in addition to text to represent the information and actions available to the user. Usually the actions are performed through direct manipulation of the graphical elements. A GUI takes advantage of the computer's graphics capabilities to make the program easier to use. <i>Sources:</i> http://en.wikipedia.org/wiki/GUI http://www.webopedia.com/TERM/G/Graphical_User_Interface_GUI.html See also User Interface
GUI	See: Graphical User Interface

[BACK](#) to Glossary Contents

Term or Acronym	Description
H	
HAART	See Highly Active Antiretroviral Treatment
Health Level 7 (HL7)	One of several American National Standards Institute (ANSI)õaccredited Standards Developing Organizations operating in the healthcare arena. "Level Seven" refers to the highest level of the International Standards Organization's (ISO) communications model for Open Systems Interconnection (OSI)õ the application level. The application level addresses definition of the data to be exchanged, the timing of the interchange, and the communication of certain errors to the application. The seventh level supports such functions as security checks, participant identification, availability checks, exchange mechanism negotiations and, most importantly, data exchange structuring. HL7 focuses on the interface requirements of the entire health care organization. Source: http://www.hl7.org/about/index.cfm .
Hep C; HEPC	Hepatitis C ; the Hepatitis C Registry

	<p>sed by the hepatitis C virus (HCV). HCV infection sometimes results in an acute illness, but most often becomes a chronic condition that can lead to cirrhosis of the liver and liver cancer.</p> <p>See http://www.cdc.gov/hepatitis/index.htm</p>
Highly Active Antiretroviral Treatment (HAART)	<p>Antiretroviral drugs are medications for the treatment of infection by retroviruses, primarily HIV. When several such drugs, typically three or four, are taken in combination, the approach is known as highly active antiretroviral therapy, or HAART. The American National Institutes of Health and other organizations recommend offering antiretroviral treatment to all patients with AIDS.</p>
HIV	<p>See Human Immunodeficiency Virus</p>
HL7	<p>See Health Level 7</p>
HTML	<p>See Hypertext Mark-up Language</p>
Human Immunodeficiency Virus (HIV)	<p>HIV is a lentivirus (a member of the retrovirus family) that can lead to acquired immunodeficiency syndrome (AIDS), a condition in humans in which the immune system begins to fail, leading to life-threatening opportunistic infections. HIV is different from most other viruses because it attacks the immune system. The immune system gives our bodies the ability to fight infections. HIV finds and destroys a type of white blood cell (T cells or CD4 cells) that the immune system must have to fight disease.</p> <p>See http://www.cdc.gov/hiv/topics/basic/index.htm.</p>
hypertext	<p>A term coined around 1965 for a collection of documents (or "nodes") containing cross-references or "links" which, with the aid of an interactive browser program, allow the reader to move easily from one document to another.</p>
Hypertext Mark-up Language (HTML)	<p>A hypertext document format used on the World-Wide Web. HTML is built on top of SGML. "Tags" are embedded in the text. A tag consists of a "<", a "directive" (in lower case), zero or more parameters and a ">". Matched pairs of directives, like "<title>" and "</title>" are used to delimit text which is to appear in a special place or style.</p>
BACK	<p>to Glossary Contents</p>

Term or Acronym	Description

Statistical Classification of Diseases and Related Health

	<p><i>Problems</i>, ninth edition (commonly abbreviated as ICD-9) provides numeric codes to classify diseases and a wide variety of signs, symptoms, abnormal findings, complaints, social circumstances and external causes of injury or disease. Every health condition can be assigned to a unique category and given a code, up to six characters long. Such categories can include a set of similar diseases. The ICD-9 refers to the ninth edition of these codes; the tenth edition has been published, but is not in widespread use at this time.</p> <p>See also Current Procedural Terminology</p>
ICN	See Integration Control Number
ICR	See Immunology Case Registry
IEN	See Internal Entry Number
Immunology Case Registry (ICR)	Former name for Clinical Case Registries HIV (CCR:HIV).
Information Resources Management (IRM)	The service which is involved in planning, budgeting, procurement and management-in-use of VA's information technology investments.
Integration Control Number (ICN)	The national VA patient record number.
Interface	An interface defines the communication boundary between two entities, such as a piece of software, a hardware device, or a user.
Internal Entry Number (IEN)	The number which uniquely identifies each item in the VistA database.
IRM, IRMS	See Information Resources Management
iterator	An object or routine for accessing items from a list, array or stream one at a time.
BACK	to Glossary Contents

Term or Acronym	Description
K	
!KEA	Terminal emulation software. No longer in use in VHA; replaced by <i>Reflection</i> .

	that enables VistA applications to coexist in a standard operating system independent computing environment.
Keys	See Security Keys
BACK	to Glossary Contents

Term or Acronym	Description
L	
Laboratory Information Manager (LIM)	Manager of the laboratory files in VistA. Additional duties include creation of new tests, interface set-up and maintenance of instruments, coordination with staff outside of lab to create quick orders, order sets and other Computerized Patient Record System functions.
Local Registry	The local file of patients that were grandfathered into the registry or have passed the selection rules and been added to the registry.
Local Registry Update	This process adds new patients (that have had data entered since the last update was run and pass the selection rules) to the local registry.
Logical Observation Identifiers Names and Codes (LOINC)	LOINC® is designed to facilitate the exchange and pooling of clinical results for clinical care, outcomes management, and research by providing a set of universal codes and names to identify laboratory and other clinical observations. The Regenstrief Institute, Inc., an internationally renowned healthcare and informatics research organization, maintains the LOINC database and supporting documentation. See http://loinc.org/
LOINC	See Logical Observation Identifiers Names and Codes
BACK	to Glossary Contents

Term or Acronym	Description
M	
M	M is a procedural, interpreted, multi-user, general-purpose programming language designed to build and control massive databases. It provides a simple abstraction that all data values are strings of characters, and that all data can be structured as multiple dimensional arrays. MUMPS data structures are sparse, using strings of characters as subscripts. M was formerly (and is still commonly) called MUMPS, for <i>Massachusetts General Hospital Utility Multiprogramming System</i> .
Massachusetts General Hospital Utility Multi-	See M .

System	
Message (HL7)	<p>An Individual message is, according to the HL7 standard, an "atomic unit of data transferred between systems." HL7 defines a series of electronic messages to support administrative, logistical, financial as well as clinical processes. Since 1987 the standard has been updated regularly. Structurally all individual message contains a header. Some contains body and others don't.</p> <p>All HL7 messages are made up of segments, composites and primitive data types.</p> <p>An HL7 message consists of the following data elements: Message type, Message event and Message structure.</p> <p>The standard also allows, however, the notion of a logical message, whose data is physically broken down to more than one individual messages and correlated together using a logical message id in message headers. The breakup of a message into individual messages is driven primarily by message length negotiated between parties engaging in message exchanges.</p> <p>Sources: http://publib.boulder.ibm.com/infocenter/wbihelp/v6rxmx/index.jsp?topic=/com.ibm.wbia_adapters.doc/doc/healthcare/hl7mst34.htm and http://www.hl-7.org/HL7-messages.asp.</p>
MDI	See Multiple Document Interface
Medical SAS Datasets	The VHA Medical SAS Datasets are national administrative data for VHA-provided health care utilized primarily by veterans, but also by some non-veterans (e.g., employees, research participants).
Message (HL7)	<p>A <i>message</i> is the atomic unit of data transferred between systems. It is comprised of a group of segments in a defined sequence. Each message has a message type that defines its purpose. For example, the ADT (admissions/discharge/transfer) Message type is used to transmit portions of a patient's ADT data from one system to another. A three character code contained within each message identifies its type.</p> <p>Source: Health Level Seven, Health Level Seven, Version 2.3.1, copyright 1999, p. E-18., quoted in http://www.va.gov/vdl/VistA_Lib/Infrastructure/Health_Level_7_(HL7)/hl71_6p93sp.doc.</p>
Middleware	In computing, middleware consists of software agents acting as an intermediary between different application components. It is used most often to support complex, distributed applications. The software agents involved may be one or many.
Multiple	MDI is a Windows function that allows an application to display and lets the user work with more than one document at the same time. This interface



[Click Here to upgrade to
Unlimited Pages and Expanded Features](#)

Interface (.MDI)	different documents, quickly copy data from one document to another and many other functions. These files have the .MDI filename extension.
MUMPS	See M
BACK	to Glossary Contents

Term or Acronym	Description
N	
Namespace	A logical partition on a physical device that contains all the artifacts for a complete M system, including globals , routines , and libraries. Each namespace is unique, but data can be shared between namespaces with proper addressing within the routines. In VistA, namespaces are usually dedicated to a particular function. The ROR namespace, for example, is designed for use by CCR .
National Case Registry (NCR)	All sites running the CCR software transmit their data to the central database for the registry.
National Patient Care Database (NPCD)	The NPCD is the source data for the VHA Medical SAS Datasets. NPCD is the VHA's centralized relational database (a data warehouse) that receives encounter data from VHA clinical information systems. It is updated daily. NPCD records include updated patient demographic information, the date and time of service, the practitioner(s) who provided the service, the location where the service was provided, diagnoses, and procedures. NPCD also holds information about patients' assigned Primary Care Provider and some patient status information such as exposure to Agent Orange, Ionizing Radiation or Environmental Contaminants, Military Sexual Trauma, and Global Assessment of Functioning.
NPCD	See National Patient Care Database

[BACK](#) [to Glossary Contents](#)

Term or Acronym	Description
O	
Office of Information and Technology Field Office (OI&TFO)	As directed by the Chief Information Officer (CIO), the Office of Information & Technology (OI&T) delivers available adaptable, secure and cost effective technology services to the Department of Veterans Affairs (VA) and acts as a steward for all VA's IT assets and resources. Field Offices are located at various sites around the nation.

OI&TFO	See Office of Information and Technology Field Office
BACK	to Glossary Contents

Term or Acronym	Description
P	
peginterferon	Peginterferon alfa-2b is made from human proteins that help the body fight viral infections. Peginterferon alfa-2b is used to treat chronic hepatitis C in adults, often in combination with another medication called ribavirin .
Protocol	A protocol is a convention or standard that controls or enables the connection, communication, and data transfer between two computing endpoints. In its simplest form, a protocol can be defined as the rules governing the syntax, semantics, and synchronization of communication. Protocols may be implemented by hardware, software, or a combination of the two.
BACK	to Glossary Contents

Term or Acronym	Description
R	
Reflection	Terminal emulation software used to connect personal computers to mainframe servers made by IBM, Hewlett Packard and other manufacturers running UNIX, VMS and other operating systems.
Registry	The VHA Registries Program supports the population-specific data needs of the enterprise including (but not limited to) the Clinical Case Registries , Oncology Tumor Registry, Traumatic Brain Injury Registry, Embedded Fragment Registry and Eye Trauma Registry.
Registry Medication	A defined list of medications used for a particular registry.
Remote Procedure Call (RPC)	A type of protocol that allows one program to request a service from a program located on another computer network. Using RPC, a system developer need not develop specific procedures for the server. The client program sends a message to the server with appropriate arguments and the server returns a message containing the results of the program executed. In this case, the GUI client uses an RPC to log the user on to VistA . And to call up, and make changes to, data that resides on a VistA server. <i>See also Remote Procedure Call (RPC) Broker</i>
Remote Procedure	A piece of middleware software that allows programmers to make program calls from one computer to another, via a network. The RPC Broker

	<p>common and consistent foundation for client/server applications being written under the VistA umbrella. The RPC Broker acts as a bridge connecting the client application front-end on the workstation (in this case, the Delphi Query Tool application) to the M óbased data and business rules on the server. It serves as the communications medium for messaging between VistA client/server applications. Upon receipt, the message is decoded, the requested remote procedure call is activated, and the results are returned to the calling application. Thus, the RPC Broker helps bridge the gap between the traditionally proprietary VA software and other types of software.</p> <p><i>See also Remote Procedure Call (RPC)</i></p>
Retrovirus	<p>Any of a family of single-stranded RNA viruses having a helical envelope and containing an enzyme that allows for a reversal of genetic transcription, from RNA to DNA rather than the usual DNA to RNA, the newly transcribed viral DNA being incorporated into the host cell's DNA strand for the production of new RNA retroviruses: the family includes the AIDS virus and certain oncogene-carrying viruses implicated in various cancers.</p>
ribavirin	<p>Ribavirin is an antiviral medication. Ribavirin must be used together with an interferon alfa product (such as Peginterferon) to treat chronic hepatitis C.</p>
Roll-and-scroll, roll-and-scroll	<p>õScrollingö is a display framing technique that allows the user to view a display as moving behind a fixed frame. The scrolling action typically causes the data displayed at one end of the screen to move across it, toward the opposite end. When the data reach the opposite edge of the screen they are removed (i.e., scroll off of the screen). Thus, old data are removed from one end while new data are added at the other. This creates the impression of the display page being on an unwinding scroll, with only a limited portion being visible at any time from the screen; i.e., the display screen is perceived as being stationary while the displayed material moves (scrolls) behind it. Displays may be scrolled in the top-bottom direction, the left-right direction, or both. Traditionally, VistA data displays have been referred to as õroll-and-scrollö for this reason.</p>
ROR	<p>The ROR namespace in M, used for the CCR application and related VistA data files.</p>
Routine	<p>A set of programming instructions designed to perform a specific limited task.</p>
RPC	<p><i>See Remote Procedure Call (RPC)</i></p>
RPC Broker	<p><i>See Remote Procedure Call Broker</i></p>

[BACK](#) to Glossary Contents

Term or Acronym	Description
-----------------	-------------

S

Section 508	Section 508 of the Rehabilitation Act as amended, 29 U.S.C. Section 794(d) , requires that when Federal agencies develop, procure, maintain, or use electronic and information technology, they shall ensure that this technology is accessible to people with disabilities. Agencies must ensure that this technology is accessible to employees and members of the public with disabilities to the extent it does not pose an "undue burden." Section 508 speaks to various means for disseminating information, including computers, software, and electronic office equipment. The Clinical Case Registry must be 508 compliant, able to extract data as needed including SNOMED codes.
Security Keys	Codes which define the characteristic(s), authorization(s), or privilege(s) of a specific user or a defined group of users. The VistA option file refers to the security key as a "lock." Only those individuals assigned that "lock" can use a particular VistA option or perform a specific task that is associated with that security key/lock.
Selection Rules	A pre-defined set of rules that define a registry patient.
Sensitive Information	Any information which requires a degree of protection and which should be made available only to authorized system users.
Server	In information technology, a server is a computer system that provides services to other computing systems called clients over a network. The server is where VistA M-based data and Business Rules reside, making these resources available to the requesting server.
SGML	See Standardized Generic Markup Language
Single Sign On (SSO)	Single Sign On is the process that enables the secure access of disparate applications by a user through use of a single authenticated identifier and password.
Site Configurable	A term used to refer to features in the system that can be modified to meet the needs of each local site.
SNOMED	See Systematized Nomenclature of Medicine
SQL	See Structured Query Language
Standardized Generic Markup Language (SGML)	A generic markup language for representing documents. SGML is an International Standard that describes the relationship between a document's content and its structure. SGML allows document-based information to be shared and re-used across applications and computer platforms in an open, vendor-neutral format.
Structured Query Language (SQL)	An industry-standard language for creating, updating and, querying relational database management systems. SQL was developed by IBM in the 1970s for use in System R. It is the de facto standard as well as being an ISO and ANSI standard. It is often embedded in general purpose programming languages.



[Click Here to upgrade to
Unlimited Pages and Expanded Features](#)

Nomenclature of
Medicine
(SNOMED)

terminology that originated as the systematized nomenclature of pathology (SNOP) in the early 1960s under the guidance of the College of American Pathologists. In the late 1970s, the concept was expanded to include most medical domains and renamed SNOMED. The core content includes text files such as the concepts, descriptions, relationships, ICD-9 mappings, and history tables. SNOMED represents a terminological resource that can be implemented in software applications to represent clinically relevant information comprehensive (>350,000 concepts) multi-disciplinary coverage but discipline neutral structured to support data entry, retrieval, maps etc.

[BACK](#)

[to Glossary Contents](#)

Term or Acronym	Description
T	
Technical Services Project Repository (TSPR)	The TSPR is the central data repository and database for VA Health IT (VHIT) project information. See http://tspr.VistA.med.va.gov/tspr/default.htm
Terminal emulation software	A program that allows a personal computer (PC) to act like a (particular brand of) terminal. The PC thus appears as a terminal to the host computer and accepts the same escape sequences for functions such as cursor positioning and clearing the screen. Attachmate <i>Reflection</i> is widely used in VHA for this purpose.
Tool tips	Tool tips are õhintsö assigned to menu items which appear when the user õhoversö the mouse pointer over a menu.
TSPR	See Technical Services Project Repository
BACK	to Glossary Contents

Term or Acronym	Description
U	
Update Process	When patient records are first selected by the CCR, their status is marked as Pending. These patient records are identified via the automatic nightly registry update process and must be validated before being confirmed in the registry.
User Interface (UI)	A user interface is the means by which people (the users) interact with a particular machine, device, computer program or other complex tool (the system). The user interface provides one or more means of: ÉInput, which allows the users to manipulate the system

ows the system to produce the effects of the usersø

manipulation

The interface may be based strictly on text (as in the traditional øroll and scrollö IFCAP interface), or on both text and graphics.

In computer science and human-computer interaction, the user interface (of a computer program) refers to the graphical, textual and auditory information the program presents to the user, and the control sequences (such as keystrokes with the computer keyboard and movements of the computer mouse) the user employs to control the program.

See also [Graphical User Interface](#)

[BACK](#)

[to Glossary Contents](#)

Term or Acronym	Description
V	
VERA	See Veterans Equitable Resource Allocation
Vergence	<i>Vergence</i> ® software from Sentillion provides a single, secure, efficient and safe point of access throughout the healthcare enterprise, for all types of caregivers and applications. <i>Vergence</i> unifies single sign-on, role-based application access, context management, strong authentication and centralized auditing capabilities into one fully integrated, out-of-the box clinical workstation solution. See http://www.sentillion.com/solutions/datasheets/Vergence-Overview.pdf .
Verify Code	With each sign-on to VistA, the user must enter two codes to be recognized and allowed to proceed: the <i>Access Code</i> and <i>Verify Code</i> . Like the Access Code, the Verify Code is also generally assigned by IRM Service and is also encrypted. This code is used by the computer to verify that the person entering the access code can also enter a second code correctly. Thus, this code is used to determine if users can verify who they are. See also Access Code
Veterans Equitable Resource Allocation (VERA)	Since 1997, the VERA System has served as the basis for allocating the congressionally appropriated medical care budget of the Department of Veterans Affairs (VA) to its regional networks. A 2001 study by the RAND Corporation showed that ø[in] spite of its possible shortcomings, VERA appeared to be designed to meet its objectives more closely than did previous VA budget allocation systems.ö See http://www.rand.org/pubs/monograph_reports/MR1419/
Veterans Health Information Systems and Technology	VistA is a comprehensive, integrated health care information system composed of numerous software modules. See http://www.va.gov/VistA_monograph/docs/2008VistAHealtheVet_Monogra



[Click Here to upgrade to
Unlimited Pages and Expanded Features](#)

(VISTA)	http://www.virec.research.va.gov/DataSourcesName/VISTA/VISTA.htm .
Veterans Health Administration (VHA)	VHA administers the United States Veterans Healthcare System, whose mission is to serve the needs of America's veterans by providing primary care, specialized care, and related medical and social support services.
VHA	See Veterans Health Administration
Veterans Integrated Service Network (VISN)	VHA organizes its local facilities into networks called VISNS (VA Integrated Service Networks). At the VISN level, VistA data from multiple local facilities may be combined into a data warehouse.
VISN	See Veterans Integrated Service Network
VistA	See Veterans Health Information Systems and Technology Architecture
BACK	to Glossary Contents

Term or Acronym	Description
X	
XML	See Extensible Mark-up Language
BACK	to Glossary Contents

Index

!

!KEA, 6

A

CCR, 17
accessibility features, 17
acronym
 CCR, 4
ADMIN security key, 78
adverse events
 trends, 6
antibody tests, 5
application
 CCR, 3

C

CCR
 acronym, 4
 application, 3
 archiving, 61
 data access, 6
 data collection automation, 6
 downloading software, 16
 emulation software, 6
 features of, 5
 graphical user interface, 6
 GUI, 6
 HEP, 3
 HIV, 3
 Installation & Implementation Guide, 4
 intranet Home Page, 17
 key features, 5
 Maintenance menu, 19
 national database, 5
 navigation, 6
 overview of, 5, 188
 purging, 61
 Release Notes, 4
 selection rules, 5
 semiautomatic sign-on, 6
 single sign-on, 6
 software, 3
 User Manual, 4
 version 1.5, 5
CDCO, 5
codes
 ICD-9, 5
confirming pending patient, 5
conventions
 graphical, 2

typographical, 2
coordinator
 registry, 5
Corporate Data Center Operations, 5
Cross Reference Report, 57

D

dashed underlining, 2
data
 automatic transmission, 6
 clinical, 3
 demographic, 3
 Hepatitis C, 5
 HIV, 5
 Human Immunodeficiency Virus, 5
 stored in local VistA system, 5
data collection automation, 6
documentation
 in VistA Document Library, 17
 sources, 16
documents
 related, 4
downloading CCR software, 16
DPGM MOVEMENT EVENT, 62

E

event protocol
 DPGM MOVEMENT EVENT, 62
 ROR DATA EVENT0, 62
 ROR-EVENT-LAB, 62
 ROR-EVENT-PTF, 62
 ROR-EVENT-VISIT, 62
exported options, 58

F

Features of CCR, 188
file
 ROR LOG file (#798.7), 61
 ROR PATIENT EVENTS file (#798.3), 61
 ROR task file (#798.8), 61
 ROR-PATIENT-EVENTS (798.3), 62
File Transfer Protocol, 16
files
 admissions, 4
 diagnoses, 4
 laboratory tests, 4
 patient demographics, 4
 prescriptions, 4
 radiology exams, 4
 surgical procedures, 4

FTP, 16

G

graphical conventions, 2
graphical user interface, 4
green text, 2
GUI, 4

H

HCCR. *See* CCR:HEPC
Hepatitis C Registry. *See* CCR:HEPC
Historical Data Extraction
 Create the Output Directory, 27
Historical Data Extraction menu
 Create Data Extraction Task option, 28
 Define Output Directory Name option, 27
 Start a Task option, 28
 Task Information, 30
 Status values, 30
HIV Registry. *See* CCR:HIV
HL7, 5
HL7 protocol
 ROR-SITE-DRIVER, 62
 ROR-SITE-SUBSCRIBER, 62

I

ICD-9 codes, 5
icon
 history, 3
 note, 2
 tip, 2
 warning, 3
icons, 2
ICR. *See* CCR:HIV, *See* CCR:HIV
Installation & Implementation Guide, 4
IRM
 security key, 78

K

key features, 5
keyboard
 shortcuts, 17
keyboard keys, 2
keys
 keyboard, 2
KIDS Build
 Global ^ROR, 48
 Global ^RORDATA, 48

L

LAB^ROREVT01, 62
lists
 local patients, 6
 patients with evidence of HEPC, 6
 patients with evidence of HIV, 6
local patient lists, 6
local reports, 5

M

Maintenance menu, 19
 ACL option, 19
 Edit Lab Search Criteria option, 19, 20
 Edit Registry Parameters option, 19, 21
 ELS option, 19
 ERP option, 19
 HDE option, 19
 Historical Data Extraction menu, 26
 Historical Data Extraction option, 19, 23, 25
 Pending Patients option, 19, 24
 PLF option, 19
 PP option, 19
 Print Log Files option, 19, 24
 Re-Index the ACL cross-reference option, 19
manual
 revisions, v
menu
 EVE, 58
 Menu Management, 58
 Systems Manager Menu, 58
 XUMAIN, 58
messages
 multiple, 5
monitoring
 patient outcome measures, 6
 process measures, 6
 quality of care, 6
 trends, 5
multiple messages, 5

N

names
 documents, 2
 field, 2
 GUI buttons, 2
 GUI command icons, 2
 GUI panels, 2
 GUI panes, 2
 GUI tabs, 2
 patches, 2
 registry, 2
 reports, 2
 software applications, 2
 standards, 2
Namespaces
 Sub Namespaces, 56

O

observation/result, 122
 option
 Abbreviated Menu Diagrams, 58
 Broker Context, 58
 Clinical Case Registries Maintenance, 60
 Create Extraction Tasks, 59
 Diagram Menus, 58
 Display Extraction Status, 59
 Display Task Log, 59
 Edit [Extraction Tasks], 59
 Edit data extraction, 59
 Edit Lab Search Criteria, 60
 Edit Task Description, 59
 Historical Data Extraction, 59
 ICR Version Comparison Report, 60
 List of Pending Errors, 60
 Option Function Inquiry, 58
 Pending Patients, 60
 Print Log Files, 60
 Registry Setup, 58
 Registry Update & Data Extraction, 58
 Re-index the ACL cross reference, 60
 ROR GUI, 58
 ROR SETUP, 58
 ROR TASK, 58
 RORHDT CREATE, 59
 RORHDT EDIT, 59
 RORHDT EDIT EXTRACTION, 59
 RORHDT EDIT TASK, 59
 RORHDT LOG, 59
 RORHDT MAIN, 59
 RORHDT START, 59
 RORHDT STATUS, 59
 RORHDT STOP, 59
 RORICR VERSION COMPARISON, 60
 RORMNT ACL REINDEX, 60
 RORMNT EDIT LAB SEARCH, 60
 RORMNT MAIN, 60
 RORMNT PENDING ERRORS LIST, 60
 RORMNT PENDING PATIENTS, 60
 RORMNT PRINT LOGS, 60
 Start a Task, 59
 Stop a Task, 59
 Systems Menu Diagrams (with Entry/Exit Actions,
 58
 XUINQUIRE, 58
 XUUSERACC, 58
 XUUSERACC1, 58
 XUUSERACC2, 58
 options
 exported, 58
 outcomes
 tracking, 6

P

patches
 ROR*1.5 series, 7
 patient outcomes
 tracking, 6
 pending patient
 confirming, 5
 pending patient review, 5
 process
 data transmission, 5
 nightly background, 5
 protocol
 DPGM MOVEMENT EVENT, 62
 ROR-EVENT-LAB, 62
 ROR-EVENT-PTF, 62
 ROR-EVENT-VISIT, 62
 ROR-SITE-DRIVER, 62
 ROR-SITE-SUBSCRIBER, 62

Q

quality of care, 6

R

Reflection, 6
 registries, 3
 registry
 HEPC, 4
 HIV, 4
 registry coordinator, 5
 related documents, 4
 Release Notes, 4
 reports
 administrative, 4
 administrative data, 5
 clinical, 4
 clinical data, 5
 local, 5
 robust capabilities, 6
 VA Cross Reference, 57
 review
 pending patient, 5
 revisions
 to manual, v
 ROR LOG file (#798.7), 61
 ROR PATIENT EVENTS file (#798.3), 61
 ROR TASK file (#798.8), 61
 ROR*1.5 series patches, 7
 ROR-EVENT-LAB, 62
 ROR-EVENT-PTF, 62
 ROR-EVENT-VISIT, 62
 RORMNT MAIN, 19
 ROR-PATIENT-EVENTS (798.3), 62
 ROR-SITE-DRIVER, 62
 ROR-SITE-SUBSCRIBER, 62
 routine

Sub Namespaces, 56
XINDEX, 57

S

screen display
 <RET>, 3
 bold type, 3
 user response, 3
selection rules, 5
shortcuts
 keyboard, 17
software
 CCR, 3
 customize, 19
 decommissioned, 6
 distribution, 16
 files, 16
 Hepatitis C Case Registry v1.0, 6
 Immunology Case Registry v2.1, 6
 maintain, 19
 sources, 16
sources
 software and documentation, 16
Sub Namespaces, 56
symbols, 2

T

task parameter
 ROR SETUP, 58
 RORFLCLR, 58
 RORMNTSK, 58
 RORSUSP, 58
tests
 antibody, 5
time on therapy
 trends, 6
tracking

clinical, 3
tracking patient outcomes, 6
tracking trends, 6
training
 hyperlinks, 17
 information, 17
 VistA University, 17
 VistAU, 17
treatment response trends, 6
trend monitoring, 5
trends
 adverse events, 6
 time on therapy, 6
 tracking, 6
 treatment response, 6
typefaces, 2
typographical conventions, 2

U

user interface
 graphical, 4
 User Manual, 4
user response, 3
 {bracketed information}, 3
 question marks, 3
 Return/Enter key, 3
USER security key, 78
users
 Information Resource Management, 4
 IRM, 4

V

VA Cross Reference Report, 57
variable
 clear
 RORFLCLR, 58
 set
 RORFLSET, 58