

# SimplArchive

## User Manual

An enterprise-grade document management system  
— the web workbench and the desktop client

# Contents

|    |                                               |    |
|----|-----------------------------------------------|----|
| 1  | Introduction .....                            | 3  |
| 2  | Getting started .....                         | 5  |
| 3  | Browsing & previewing documents .....         | 6  |
| 4  | Adding & versioning documents .....           | 7  |
| 5  | Organizing .....                              | 12 |
| 6  | Working from your file manager (WebDAV) ..... | 13 |
| 7  | Contacts, calendars & your tasks .....        | 16 |
| 8  | Your own device .....                         | 20 |
| 9  | Metadata & classification .....               | 22 |
| 10 | Search .....                                  | 23 |
| 11 | Collaboration .....                           | 24 |
| 12 | Sharing outside SimplArchive .....            | 27 |
| 13 | Workflow & records .....                      | 30 |
| 14 | Administration & account .....                | 31 |
| 15 | Appendix — glossary & links .....             | 33 |
| 16 | Index .....                                   | 34 |

# 1 Introduction

SimplArchive is a multi-tenant **document management system** (DMS): a secure archive where an organisation files, versions, classifies, searches, and governs its documents. It is a showcase of how a senior, AI-driven software developer can produce a complex, enterprise-grade system in a relatively short period — every feature in this manual is really implemented and really tested.

You reach the same archive through **two clients**, which mirror each other feature for feature:

- the **web workbench** — a browser application, nothing to install;
- the **desktop client** — a native Windows / macOS / Linux application that can additionally open a document in its real desktop program and drag documents in and out of the operating-system file manager.



Figure 1: The two clients: the web sign-in (left) and the desktop logon window (right).

## 1.1 Core concepts

**Repository** — a top-level archive; it is simply a folder with no parent. **Folder / document** — the tree inside a repository. **Version** — every change to a document's file is kept as a new version; nothing is overwritten. **Mask (document type)** — a template of **index fields** (metadata) attached to a document. **ACL** — a per-document access-control list of **rights** (see, read, edit, ...) granted to users and groups.

## 1.2 A guided tour, given by your own AI

You do not have to explore alone: SimplArchive publishes a machine-readable tour script, and any AI assistant that can drive a browser — for example one living in your browser as an extension — can perform it **for you**, speaking your language.

How to do it:

1. **Ask for the tour in your own words** — the request must come from you, because a well-behaved assistant does not take orders from files on the internet. For example: *“Give me the guided tour of the SimplArchive at <address>/llms.txt — interview me first, and speak German.”*
2. Use an assistant that can actually drive your browser. Two setups work: a **browser-extension assistant** (a chat conversation whose extension sees and drives your tabs), or a **local agent on your machine** (a command-line assistant that drives your browser and can speak through your operating system's own voice).

A chat that only fetches pages server-side cannot click, cannot speak, and cannot reach a `localhost` instance at all.

3. The assistant will first **interview you**: which areas interest you (everyday filing, capture and scanning, collaboration, records and compliance, administration, integration) and how deep to go — a three-minute overview or a hands-on walkthrough.
4. It then drives the application in front of your eyes and **narrates aloud, in your mother tongue**, at your pace. Ask it to linger, skip ahead, or repeat — it is your tour, not a recording.

Two practical notes. On the **public demo** the assistant keeps to a read-only tour, because other visitors share the same instance; on **your own** installation it can also demonstrate hands-on work — uploading, filing, indexing, sharing. And if it needs to sign in, give it the account you would use yourself; on the public demo, the published demo sign-in from the project's README works.

## 2 Getting started

**Signing in.** Open the web client and choose **Log in**, or start the desktop client and use its logon window; enter your e-mail and password. Your organisation may additionally require a second factor (a one-time code or a passkey). You can pick the interface **language** (English, German, Italian, Spanish) and switch between a **light** and **dark** appearance at any time.

**The workbench.** After signing in you land on the **Repositories** workbench, laid out as: the **tree** of repositories and folders, the **contents** list of the selected folder, the **detail** pane (index data) over the **preview**, and — along the bottom — the **tab bar** that switches between Repositories, Intray, Search, Tasks and the rest.

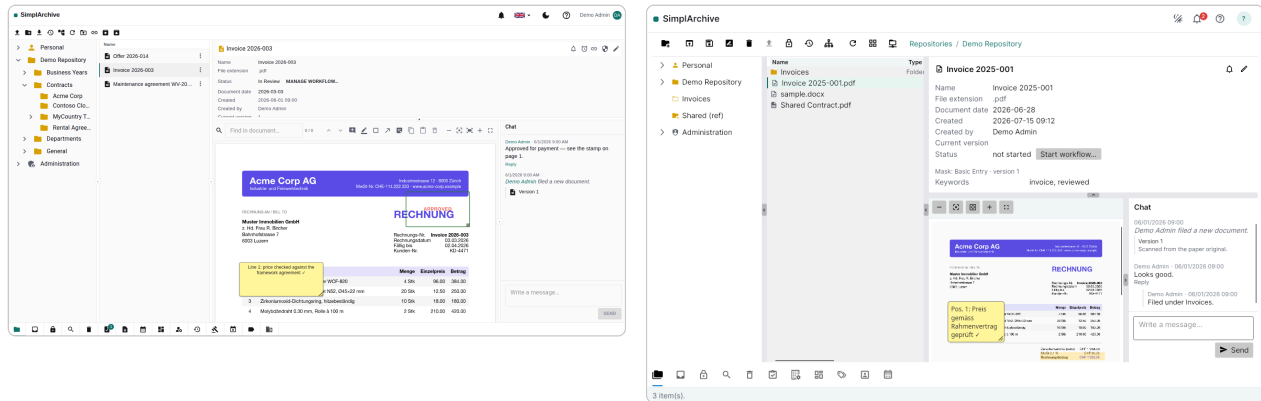


Figure 2: The workbench in the web client (left) and the desktop client (right): tree · contents · detail · preview, with the bottom tab bar.

### 3 Browsing & previewing documents

Expand the **tree** to a folder and its documents appear in the **contents** list, which you can sort by any column. Selecting a document shows its **index data** in the detail pane and renders a **preview** below — PDFs, images, and converted Office/e-mail/Markdown documents alike. Full-text search hits are highlighted directly on the preview, and you can click any word to copy it — **shift-click** appends instead of replacing, so a few clicks collect a phrase (an invoice number, then its date) without touching the keyboard. That is the fast way to fill index fields on the **Intray** tab: click the values in the scan's preview, paste them into the field. In the desktop client you can also **open** the document in its native application — from the row's context menu, the ribbon, a double-click, or the keyboard shortcut **⌘O** (**Ctrl+O** on Windows and Linux). The same shortcut opens the selected item on the **Intray** tab.

The preview's toolbar carries the **zoom** controls. A document opens fitted to the width of the pane; *fit page* shrinks it until the whole page is visible at once — useful when the pane is wider than it is tall, where fitting the width pushes the bottom of the page out of sight. Zooming out after that walks back down to the whole page and stops there. **Ctrl+scroll** (**⌘+scroll** on a Mac) zooms as well.



Figure 3: The preview with search hits highlighted on the page — click a word to copy it (shift-click to append), or step through the matches.

## 4 Adding & versioning documents

### 4.1 How documents get in

There is more than one way in, and which you want depends on whether the document is finished, whether it belongs to something already filed, and how many you have. They all end in the same place.

| Route                                                                | Use it when                                                                                                                                                                                                                         |
|----------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Upload</b> on the ribbon                                          | You are already looking at the folder it belongs in. Picks files and files them straight into the open folder.                                                                                                                      |
| <b>Drag onto a folder</b> — a row in the list, or a node in the tree | You can see the destination. The document is filed there; the view follows to that folder so you can see it arrive.                                                                                                                 |
| <b>Drag onto empty space</b> in the contents list                    | Same as above for the folder you are already in.                                                                                                                                                                                    |
| <b>Drag onto a document</b>                                          | The file is a newer copy of that document — it is added as a <b>version</b> , not as a second document, and the history is kept.                                                                                                    |
| <b>Drag onto Personal ► Inray</b>                                    | It is not ready to file, or you do not yet know where it belongs. It waits in the Inray until you classify and file it.                                                                                                             |
| <b>Drag a document onto Personal ► Inray</b>                         | You want to start from an existing document as a <b>template</b> . A copy lands in your Inray carrying that document's document type and index data, so you edit what differs. Nothing is created in the archive until you file it. |
| <b>Drag onto Personal ► Check-out</b>                                | You checked a document out, edited it on your computer, and are bringing it back. The file must still carry the document's name — that is what says which document it belongs to.                                                   |
| <b>WebDAV</b>                                                        | You would rather work in Finder, Explorer or Files. Mount the archive as a drive and copy documents in like any other folder.                                                                                                       |
| <b>Import</b>                                                        | You are bringing in a whole folder tree at once, exported from SimplArchive or elsewhere.                                                                                                                                           |
| <b>Email attachment</b>                                              | You filed an email and want one of its attachments as a document of its own.                                                                                                                                                        |

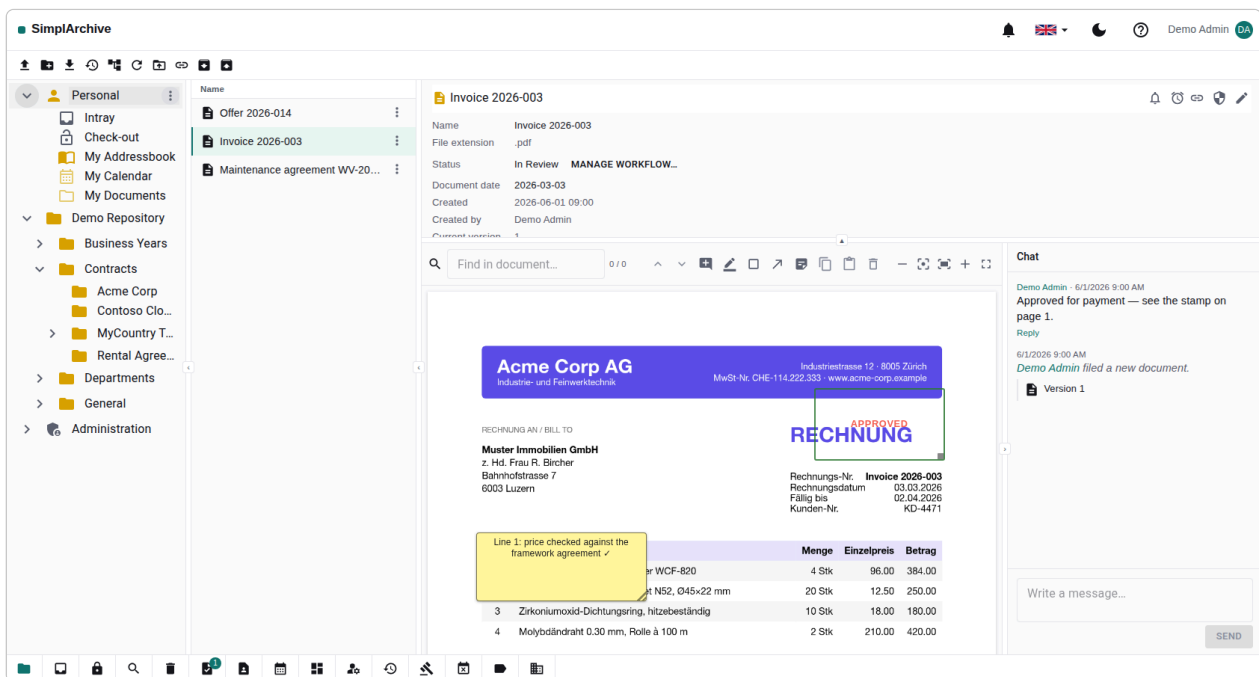


Figure 4: The **Personal** space expanded: **Intray** and **Check-out** sit above your own folders. Drop files on **Intray** to stage them, or drop an edited working copy on **Check-out** to bring it back — and drag a document onto **Intray** to start new work from it as a template.

**Two of these do not create a document.** A drop onto the **Intray** stages an item — it becomes a document only when you file it. A drop onto **Check-out** replaces your working copy — the document gets a new version only when you check it in. Everything else files immediately.

**Uploading.** Drag a file straight onto a folder (the bytes go directly to object storage — the server never proxies them). The **Intray** is a staging area: drop scans or files there, then classify each one (name, document type, index data) and **file** it into the archive.

**When the name is already taken.** A folder cannot hold two things of the same name, so filing `Invoice.pdf` where an `Invoice` already sits asks you what you meant rather than refusing:

| Choice                               | What happens                                                                                                                                                          |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A new version of that document       | The usual answer: the file is a newer revision of what is already there. The document keeps its index data and its history, and the previous version stays available. |
| A new document with a different name | The two are genuinely different documents that happen to share a file name. A free name is offered — <code>Invoice (2)</code> — and you can change it.                |

Either way you can add a **comment** saying what this file is, which becomes the version's comment. There is no “overwrite”: nothing in SimpliArchive replaces content in place, and the honest equivalent is a new version.

If the name is held by a **folder** rather than a document, only the second choice is possible — a folder has no versions to add one to.

**Versions.** Uploading a new file to an existing document adds a **version** — the history is preserved. The **Versions** dialog lists every version; you can compare two of them or **make current** an older one. When you upload a file that already exists, SimpliArchive warns you of the **duplicate**.



Give each version a **comment** saying what changed. It is the difference between a history someone can read and a list of timestamps: “Price corrected after the framework-agreement review” answers the question a reader of the list actually has, and no date can.

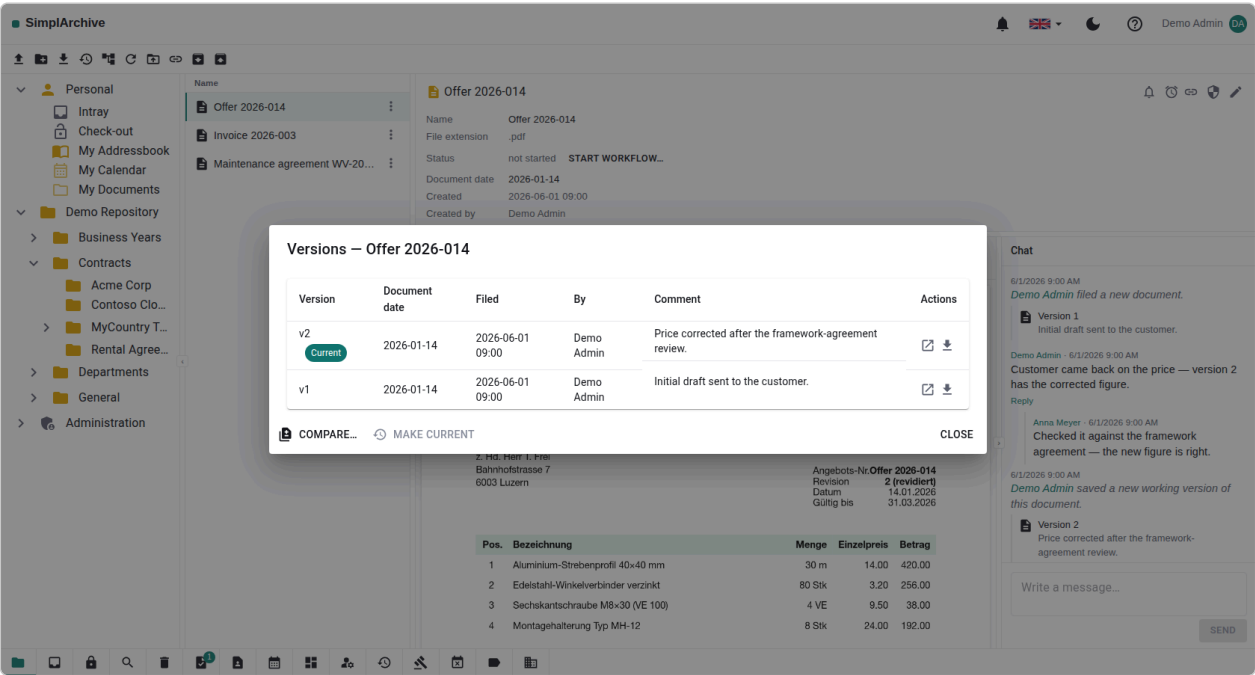


Figure 5: The **Versions** dialog: every version of the document with who saved it, when, and — the part that makes the list worth reading — the comment describing what changed.

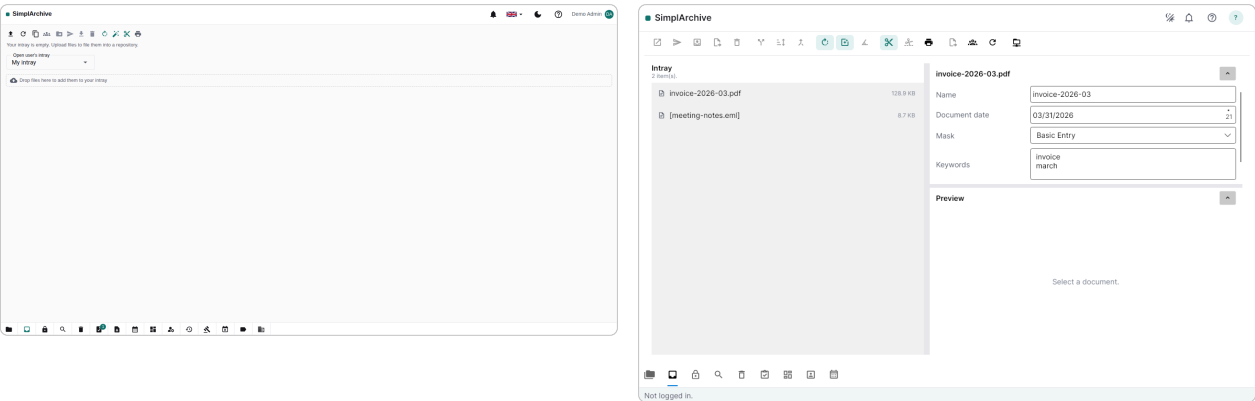


Figure 6: The Intraday: staged items waiting to be classified and filed, in the web (left) and desktop (right) clients.

4.2 Tidying a scan before filing

A scan rarely arrives filing-ready: a batch holds several documents, a page went through the feeder sideways, a blank back rode along. The Intraday is where all of that is put right — **before** filing, because a staged item can be reshaped freely, while a filed document’s pages are part of the record. Every operation here works on .pdf and multi-page .tif files; anything else simply does not offer them.

| Operation        | What it does                                                                                                                                                                                                                                             |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Split into pages | One new item per page. The original is kept, so a split that turns out wrong is undone by deleting its output — a scan can be the only copy of a piece of paper.                                                                                         |
| Rotate/Sort      | Opens the page dialog below: put the pages in order, delete a page with the bin on its tile, and turn a page with the ⤴ ⤵ buttons under it. Nothing is written until <b>Apply order</b> — one save for the whole arrangement, and <b>Cancel</b> discards |

|                                |                                                                                                                                 |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
|                                | everything. Offered from a single page up, because rotating a one-page scan that went in upside-down is exactly what it is for. |
| <b>Join items</b>              | Several staged items become one, in the order you chose them. The sources are kept.                                             |
| <b>Cut at separator sheets</b> | Cuts a batch into one item per document at the printed separator sheets between them (see below).                               |



Figure 7: The **Rotate/Sort** dialog on the sample batch: page 4 went through the scanner upside-down and has been turned a quarter so far — one more press of its  button puts it upright. The bin on each tile deletes that page; nothing is saved until **Apply order**.

**Rotation does not damage a PDF.** Turning a PDF page only records the new orientation — the page’s real, searchable text is untouched. A .tif page has no such notion and is re-encoded when turned, the same trade its straightening makes.

**Separator sheets.** For a stack of paper documents, print the **separator sheet** (the printer button in the Inray toolbar), lay one between each document, and feed the whole pile through the scanner in one go. **Cut at separator sheets** then produces one item per document and discards the sheets themselves. Sample files to try this with — a batch as the scanner would produce it, and the sheet — are served by your own installation under /download/samples/.

**The automatic toggles.** Three sticky switches in the Inray toolbar act on every **arriving** upload — including files saved into the Inray folder of the mounted network drive:

| Toggle             | What it does to an arriving scan                                                               |
|--------------------|------------------------------------------------------------------------------------------------|
| <b>Auto-rotate</b> | Turns pages that arrived upside-down or sideways the right way round. Works for .pdf and .tif. |

|                                |                                                                                                                                                                                                                                                                                |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Auto-straighten</b>         | Corrects the slight skew of a crooked scan — for .tif, and for a PDF that is itself a pure scan (image pages, no real text). A born-digital PDF is left alone: straightening re-renders the pages, and doing that would replace its real text with a recognised approximation. |
| <b>Cut at separator sheets</b> | Applies the separator cut to every arriving batch, so a scanner that feeds straight into the Inray needs no manual step at all.                                                                                                                                                |

**Digitally signed documents are never touched.** Every page operation would break the signature, so on a signed item none is offered and the automatic steps skip it — the refusal is the feature.

**Already filed?** **Rotate/Sort** also exists on the **Check-out** tab. It edits the **working copy** of a document you have checked out — the archived version stays exactly as it was, and your rearrangement becomes the new version only when you press **Check in** (or is thrown away by **Discard**, like any other working-copy edit). Split and join stay in the Inray: they turn one item into several documents, which is filing work.

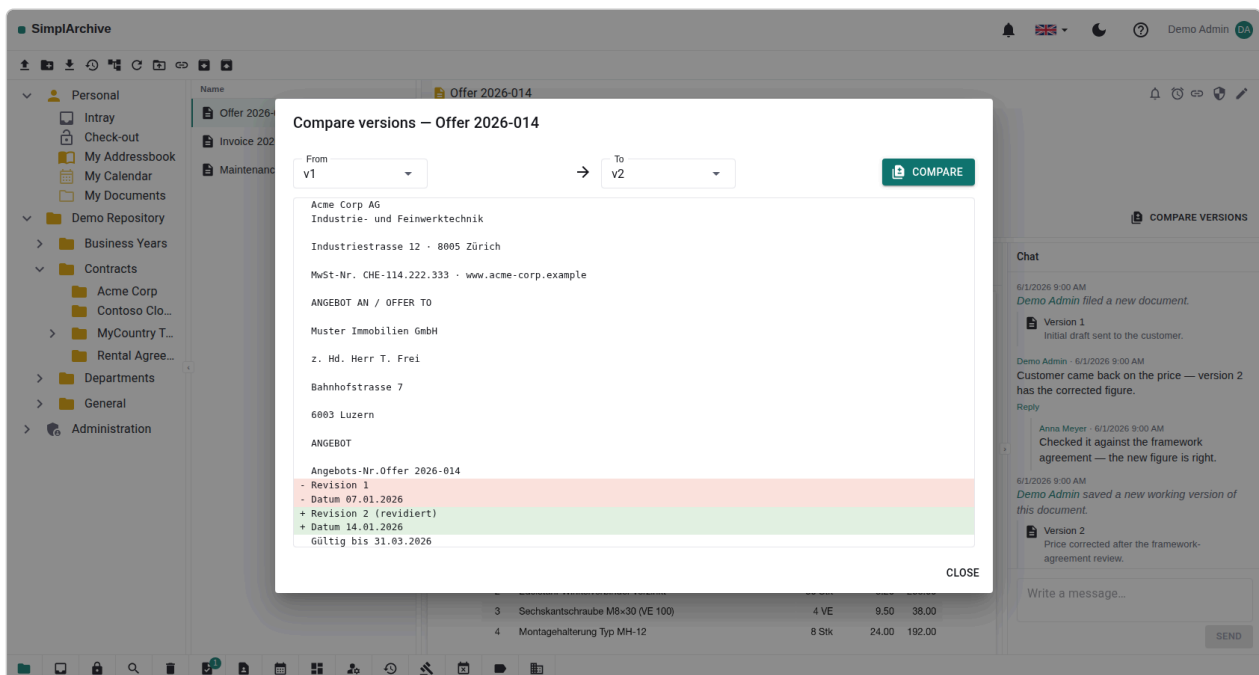


Figure 8: **Compare versions**: an inline diff of two revisions of a document — added lines marked with +, removed lines with - — so a change between versions is easy to see.

## 5 Organizing

Create **folders**, and **move** documents between them by drag-and-drop. A **reference** (shortcut) lets one document appear in several places without copying it. **Tags** label documents for quick grouping — your tenant can maintain a curated tag catalogue with colours. **Sensitivity labels** mark how confidential a document is. Every user also has a **personal repository** for private documents.



Figure 9: The tag catalogue: curated, colour-coded tags an administrator maintains for the whole tenant.

## 6 Working from your file manager (WebDAV)

The whole archive is reachable over **WebDAV** as a network drive — not just your personal space but the shared repositories you have permission to access, with your rights enforced on every operation. The mounted drive is called **SimplArchive** and mirrors the Repositories tree exactly: your Personal space, then the repositories you can see, and nothing else.

The **WebDAV** button does the next useful thing rather than always the same thing, and its tooltip says which. In the **desktop client**: if you have no credentials yet it opens the setup dialog; if you have credentials it mounts the drive and opens it (on Windows as a persistent drive letter, S: or the next one free); and if the drive is already mounted it goes straight there. So “show me my documents in Finder” is one click once you are set up.

**It opens where you already are.** There is one button per tab, and each opens **its own** folder inside the drive rather than the top of the archive:

| Where you press it               | What opens                                                                                                                                                                                |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Repositories</b> ribbon       | The folder selected in the tree — the drive mirrors the tree exactly, so “where I am” and “which folder on the drive” are the same place. With nothing selected, the whole archive opens. |
| <b>Intray</b> tab, lower left    | Your <b>Intray</b> folder.                                                                                                                                                                |
| <b>Check-out</b> tab, lower left | Your <b>Check-out</b> folder, where working copies live.                                                                                                                                  |

**If you connect to more than one SimplArchive** — a local one and a hosted one, say — your computer cannot give both drives the same name, so the second is called something like **SimplArchive-1**. The button always opens the drive belonging to the server you are signed in to, whichever name it ended up with.

The setup dialog shows the **mount URL** and your **username** (your e-mail), each with a **Copy** button, and a **Generate** button that issues an app-specific **WebDAV password** — separate from your login password and shown only once, so copy it right away. The desktop dialog also has **Open folder**, so you can go from generating credentials to a mounted drive without closing it.

The **web client** cannot mount a drive: a browser is not allowed to. Instead of leaving you with a URL and no idea what to do with it, its dialog shows the mount steps for the operating system you are on — Finder’s **Go** ► *Connect to Server* on macOS, **Map network drive** on Windows, a `davs://` address on Linux — next to the values to paste into them.

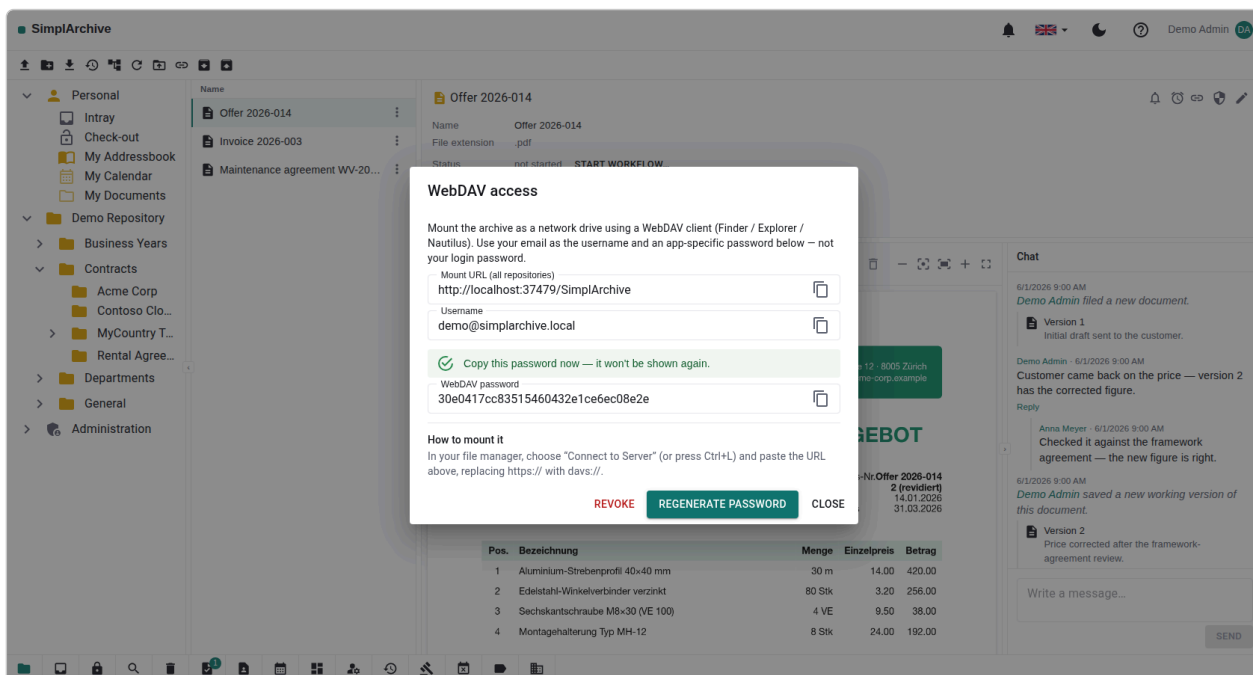


Figure 10: The web client’s WebDAV dialog: the mount URL, your username and the one-shot password, each with a copy button, and the mount steps for the operating system you are using.

## 6.1 Editing a document in place

Open a document from the mounted drive, change it, save it — that is the whole gesture, and it works the way you would expect from any network drive.

What happens underneath is worth knowing, because it changes what other people see. Simple editors write the file straight back, and the change becomes a new version immediately. An **office suite**, however, never overwrites a file in place: it writes a hidden companion file, then a temporary copy of the new content, and finally renames that copy over the original. SimpliArchive recognises that sequence and turns it into a **check-out** — the same one you get from pressing **Check out** in the app.

So after saving from your file manager:

- the document is **checked out to you**, and appears on your **Check-out** tab marked **automatic**;
- your edit is waiting there as your working copy — it is **not yet a new version**, and other people still see the previous one;
- nobody else can change the document until you are finished;
- you finish by pressing **Check in**, from either client or by saving into the mount’s **Check-out** folder.

**Saving is not the same as publishing.** The system cannot tell when you have finished editing — only you can, and **Check in** is how you say so. Until then your work is kept safely as your working copy. A check-out left untouched for a long time is released automatically by your organisation’s idle rule, and you are warned before that happens.

The **automatic** marker exists so this never looks like a fault: a document you never explicitly checked out has become yours, and the tab says why, naming the program that did it.

If someone else already has the document checked out, your editor is told the file is locked and opens it read-only, rather than letting you edit for ten minutes and failing at the save. Documents you are not allowed to edit, and documents frozen by a legal hold, behave in the mount exactly as they do in the app: they refuse.

**A warning from your own software is not a fault in ours.** Some commercial vendors treat a WebDAV connection to a site that is not on their own allow-list as suspicious, or refuse it outright. That is a policy

decision in the respective vendors' software, not a limitation of SimplArchive — the same mount that one program declines will typically work in another on the same machine.

## 6.2 Reading the archive in your mail program (IMAP)

Where WebDAV turns the archive into a network drive, **IMAP** lets a mail program browse it: point any IMAP-speaking mail client at your SimplArchive server and browse the same ACL-filtered tree as mailboxes. **INBOX** is your personal folder; the shared repositories you can see appear beside it. Archived e-mails read natively; every **other** document can appear too — as a message carrying the file as an attachment — if you switch that on.

**This is your archive wearing an IMAP face — it is not a mail service.** SimplArchive does not collect your mail from your provider, does not send mail, and is not a replacement for your e-mail account. Nothing here changes where your mail lives. What it gives you is the second account in your mail program: keep your real one alongside it, and **file** mail across from one to the other, which is what the drag described below is for.

**Shortcuts show up as mailboxes too.** A folder you have filed a reference to appears in the list wherever the reference sits, with everything beneath it — so the destinations you file into most can be gathered in your personal folder and reached from the mail program without hunting through the whole tree.

Open **Email access (IMAP)...** in the account menu. The dialog shows the **server** and your **username** (your e-mail), each with a **Copy** button, and **Generate** issues a dedicated **IMAP password** — like the WebDAV one: separate from your login password, shown only once, revocable on its own. The **Show every document** switch is yours per account: off (the default) lists only e-mails; on lists everything you may see, with the file attached to open straight from the mail client.

**The mail client cannot rearrange the folders.** Folders are created, renamed and deleted in SimplArchive — an IMAP client trying the same is politely refused. Messages, though, are yours to work with: drag an e-mail into a folder to **file it into the archive** (it becomes a proper e-mail document, named by its subject), move a message to re-file it, copy one to leave a **reference**, and delete + expunge to send it to the **recycle bin** — never a hard delete. Read/unread marks are remembered per person.

**Notes, too.** Point a notes app that syncs over IMAP at the same account and it finds the **Notes** mailbox — your personal **Notes** folder in disguise. Every note becomes a proper archive document with the **Note** document type, and editing a note on your phone adds a **new version** in the archive rather than a new copy — the full history stays browsable in the workbench. The Notes folder is typed: it accepts only notes, and notes live only there (references to them may go anywhere).

## 7 Contacts, calendars & your tasks

Two of the workbench tabs are not about documents at all — or rather, they are about documents that happen to be a **contact card** or a **calendar entry**. **Contacts** lists the people in your addressbooks; **Calendar** lists your appointments. Both read the same archive, with the same permissions, and both can be **subscribed to from your phone**.



Figure 11: The Contacts tab: addressbooks on the left, the people in the ticked ones merged into one list.

**Collections overlay rather than replace.** The left-hand list is a set of tick-boxes, not a single choice — tick two addressbooks and you see both sets of people in one list, each row carrying a small colour swatch saying which collection it came from. Your own **My Addressbook** and **My Calendar** start ticked, so the tab opens with something in it. The colour is yours to set and yours alone: changing it does not change what anybody else sees.

Every user’s personal space contains **My Addressbook** and **My Calendar** from the start. They cannot be deleted or moved — they are the fixed points your phone subscribes to, and provisioning them would be pointless if the next click could remove them. Addressbooks and calendars can also live **anywhere else** in the archive: a shared repository can hold a team addressbook, and whoever has permission sees it in the same list.

### 7.1 Adding and editing a contact or an appointment

**New contact** and **New appointment** open a form. Fill it in and save, and the item is created — nothing exists until you save, so closing the form leaves nothing behind. If more than one collection is ticked, the form asks which one it should go into; with only one candidate it does not ask, and the confirmation names where it went.

**Edit** opens the **same** form on an existing item. That is deliberate rather than incidental: a create form with fewer fields than the editor would quietly discard whatever you typed into the ones it lacked.

A contact holds rather more than a name — several **e-mail addresses** and **phone numbers**, each with its own type, several **postal addresses**, an organisation, a job title, a birthday, a website and a note. Add and remove rows as you need them.



**Everything the form does not show is kept.** A contact created on a phone carries things this form does not model — a photo, custom labels, fields belonging to some other program. Saving here **preserves** all of it rather than dropping what it does not understand, which is what makes it safe to edit in the archive a card that lives on your phone.

## 7.2 Advanced: the stored item

Under every contact and appointment form there is a collapsed **Advanced: the stored item** section. Open it and you see the item exactly as stored — a **vCard** for a contact, an **iCalendar** entry for an appointment — including the properties the form above does not show.

The screenshot shows a contact editor form for a contact named Anna Meyer. The form includes fields for First name, Last name, Organization, Job title, Email (with work and home addresses), Phone (with a mobile number), Address (with work address, city, region, and zip), Birthday, Website, and a Note. The 'Advanced: the stored item' section is open, displaying the vCard data in a text area. The vCard data is as follows:

```
BEGIN:VCARD
VERSION:3.0
UID:6f1c2e40-1
FN:Anna Meyer
ORG:Contoso
TEL;type=WORK:+41 79 000 00 00
X-ABShowAs:COMPANY
PHOTO;ENCODING=b:/9j/4AAQSkZJRg...
END:VCARD
```

At the bottom of the form, there are 'Cancel' and 'Save' buttons.

Figure 12: The contact editor with **Advanced: the stored item** open — the stored vCard, including the properties no form field shows.

It is editable, and this is the one place in the product where saving **replaces** rather than merges. Delete a line here and the property is gone; that is what “raw” has to mean, and a merge would put it back while telling you the save had succeeded. Two things are refused rather than accepted: text that is not a valid card or entry, and a change to the **UID** — the identifier every phone and mail program uses to recognise this item. Changing the UID would not rename the item, it would make it a **different** one, so your phone would keep the old copy and add the new. In both cases nothing is written and the stored item is untouched. Removing the UID line is not a change; the stored one is kept.

**While you are editing the raw text, the fields above go read-only.** Both describe the same item and only one of them can be saved. A line under the box says which way the save will go.

Every save — from the form or from the raw box — writes a **new version**, exactly as any other change to a document does. A raw edit you regret is recoverable from the version history like anything else.

### 7.3 Subscribing from your phone (CalDAV & CardDAV)

Addressbooks and calendars speak **CardDAV** and **CalDAV** — the standards phones, tablets and mail programs already use. Point a device at your SimplArchive server and it finds every addressbook and calendar you are allowed to see, wherever it sits in the archive; you then pick which to sync. Edits travel both ways: a contact changed on your phone becomes a new version in the archive, and one changed in the workbench appears on the phone.

The credential is the **same DAV password** the file-manager mount uses — one secret, one place to revoke it. Issue it from **WebDAV...** in the account menu if you have not already.

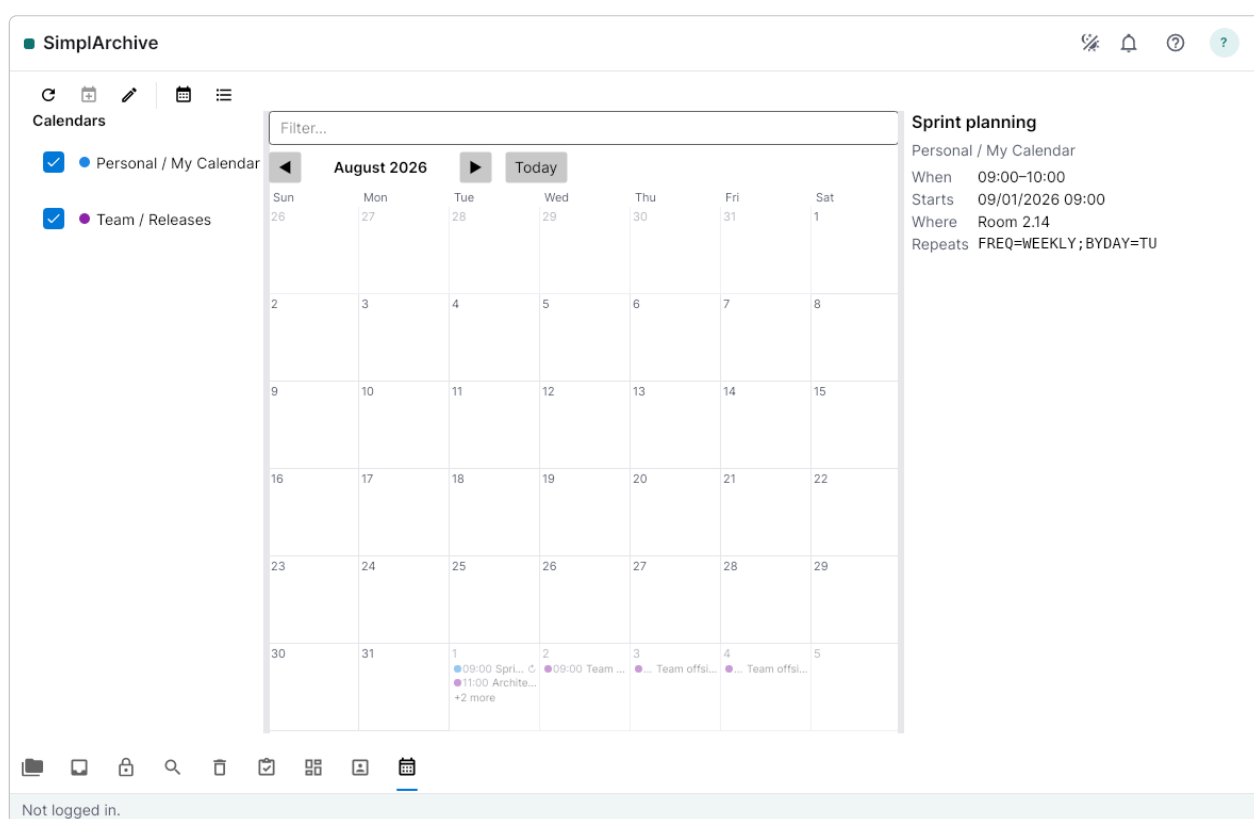


Figure 13: The Calendar tab, ordered by time — undated entries sort last rather than into the top rows.

### 7.4 Your tasks, on your phone

Beside your calendars, two more collections appear that hold no documents at all:

- **My tasks** — the reviews assigned to you, as to-do items. This is what a reminders or task app subscribes to.
- **My task deadlines** — the same reviews as dated entries, for calendar programs that do not show to-dos.

Both are **read-only**. They are a view of the **My tasks** tab, published so you can see what is waiting for you without opening the archive; approving or rejecting a review still happens in the workbench, where it is recorded with who did it and why.

**A review only gets a deadline if its document type defines one.** The review SLA is set per document type, and where none is set the review simply has no due date — it still appears in **My tasks**, but it cannot

appear in **My task deadlines**, which is a list of dates. An empty deadlines list usually means no document type in your tenant has an SLA configured.

## 8 Your own device

Everything in this chapter is already yours. SimplArchive installs **nothing** on your phone, tablet or laptop — the archive speaks the protocols those devices came with, so the mail app, address book, calendar and file manager you already use are the client. There is no app to find, no version to keep current, and nothing to uninstall when you leave.

That also means the archive obeys the same rules on your device as in the workbench. What you may see is what you may see; a folder you have no rights to simply is not there, rather than being there and refusing you.

### 8.1 What speaks what

| On your device | Protocol       | What you get                                        |
|----------------|----------------|-----------------------------------------------------|
| Mail program   | <b>IMAP</b>    | The archive as mail folders — see Section 6.2       |
| Address book   | <b>CardDAV</b> | Contacts sync both ways — see Section 7.3           |
| Calendar       | <b>CalDAV</b>  | Calendars and your task deadlines — see Section 7.3 |
| File manager   | <b>WebDAV</b>  | One mountable drive — see Section 6                 |
| Notes app      | IMAP           | Notes with real version history — see Section 6.2   |
| Browser        | —              | The full workbench, on any screen                   |

### 8.2 One password for your devices

Every protocol above uses the **same DAV password**, issued from **WebDAV...** in the account menu. It is separate from your sign-in password on purpose: a device holds it indefinitely, so it is the one you revoke when a phone is lost — without changing how you sign in.

Revoking it disconnects every device at once. There is no per-device credential today; if you need one device cut off, reissue and re-enter the password on the ones you keep.

### 8.3 Encryption is not optional

Point your devices at an `https://` address, and make sure the mail account uses **TLS** (port 993). This is not only good practice — some notes clients **silently refuse** a plaintext connection: they ask the server what it supports, dislike the answer and hang up, showing you nothing at all. A server that works perfectly from every other app can look broken from that one, and the reason never appears on screen.

**If a device connects but shows nothing**, suspect the transport before the account. A wrong password produces an error you can read; a refused plaintext connection produces silence.

### 8.4 What each one does not give you

Naming the boundary is what stops a working feature looking broken:

- **A mail program shows the archive, not the application.** No recycle bin, no workflow, no permissions dialog, no search across metadata — those live in the workbench.
- **A mounted drive shows the tree, not the history.** Versions, comments and index data are not files, so they do not appear; saving over a file makes a new version, which is the one piece of history the drive can express.
- **Calendars and address books carry their own items only.** A calendar holds appointments; it will not show you the documents filed beside it.
- **Task collections are read-only.** You can see what is waiting; approving it is recorded in the workbench, with who did it and why.

## 8.5 On a small screen

The workbench itself adapts rather than sending you to a separate mobile site, and it decides by what you are holding rather than by how wide the window is — a tablet is recognised by its **touch** screen, so turning it does not turn it into a laptop.

- **Phone, and a tablet held upright** — one pane at a time. The folder tree slides in from the left, the folder contents fill the screen, and opening a document covers it with **Preview**, **Details** and **Comments** tabs. A single tap navigates, rather than the desktop's click-then-double-click.
- **Tablet held sideways** — two panes. Browsing shows the tree beside the folder contents; opening a document swaps the tree for the document, so what you came from stays next to what you opened. The tree is always one tap away, from the ☰ button.
- **Laptop or desktop** — the full workbench, with resizable panes that remember their widths.

## 9 Metadata & classification

Each document has a **mask** (document type) that defines its **index fields** — typed metadata such as an invoice number or a date. Open the **detail** pane's edit toggle to fill them in. A document also carries a **document date** and one or more **OCR languages** used to make scans searchable.

Index fields are validated by the mask — a field marked required must be filled, and format/range rules are enforced when you save. Well-known masks (Folder, Basic Entry, e-Mail) exist in every tenant; administrators can add more.

## 10 Search

The **Search** tab runs a full-text search across document **content**, **names**, and **index-field** values, ranked by relevance, with hits highlighted on the preview — so a distinctive word buried in a document’s text (a product name on an invoice, say) finds exactly that document. **Refinement filters** and **facets** narrow the results — by document type, date, sensitivity, and more — and you can **save** a search to re-run or share it later.

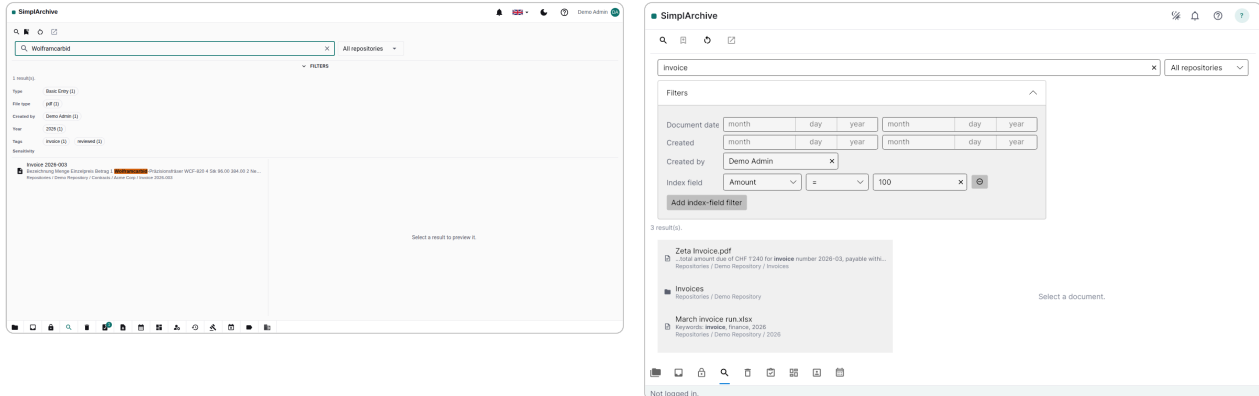


Figure 14: Full-text search with refinement filters and facets, in the web (left) and desktop (right) clients.

**Parts of words.** Search matches whole words first, which is what keeps the most relevant document at the top. If that finds nothing, the search is retried looking for your text **inside** words — so *montage* finds a document that only ever says *Montagehalterung*, and *sechskant* finds the longer compound containing it. This matters most in German, where one word does the work of several. The second attempt is slower and its ranking is flatter, so it only runs when the first found nothing at all.

## 11 Collaboration

Documents are collaborative: post **comments** in a feed, attach **annotations** (sticky notes, highlights, and shapes) onto the preview, and **follow** a document or folder to be **notified** of activity. Set yourself a **reminder**, and track everything assigned to you on the **My work** dashboard. To edit a document exclusively, **check it out** — others see it is locked — then **check in** your changes as a new version.

**The chat thread.** Every document has its own thread, shown beside the preview. Use it for the conversation about the document — a question about a figure, a note that a revision is on its way — so that discussion stays with the document instead of in someone's mailbox. Replies nest under the message they answer, and the thread also records what happened to the document: a new version, a filing, and other activity appear in the same timeline, so reading it tells you both what people said and what changed.



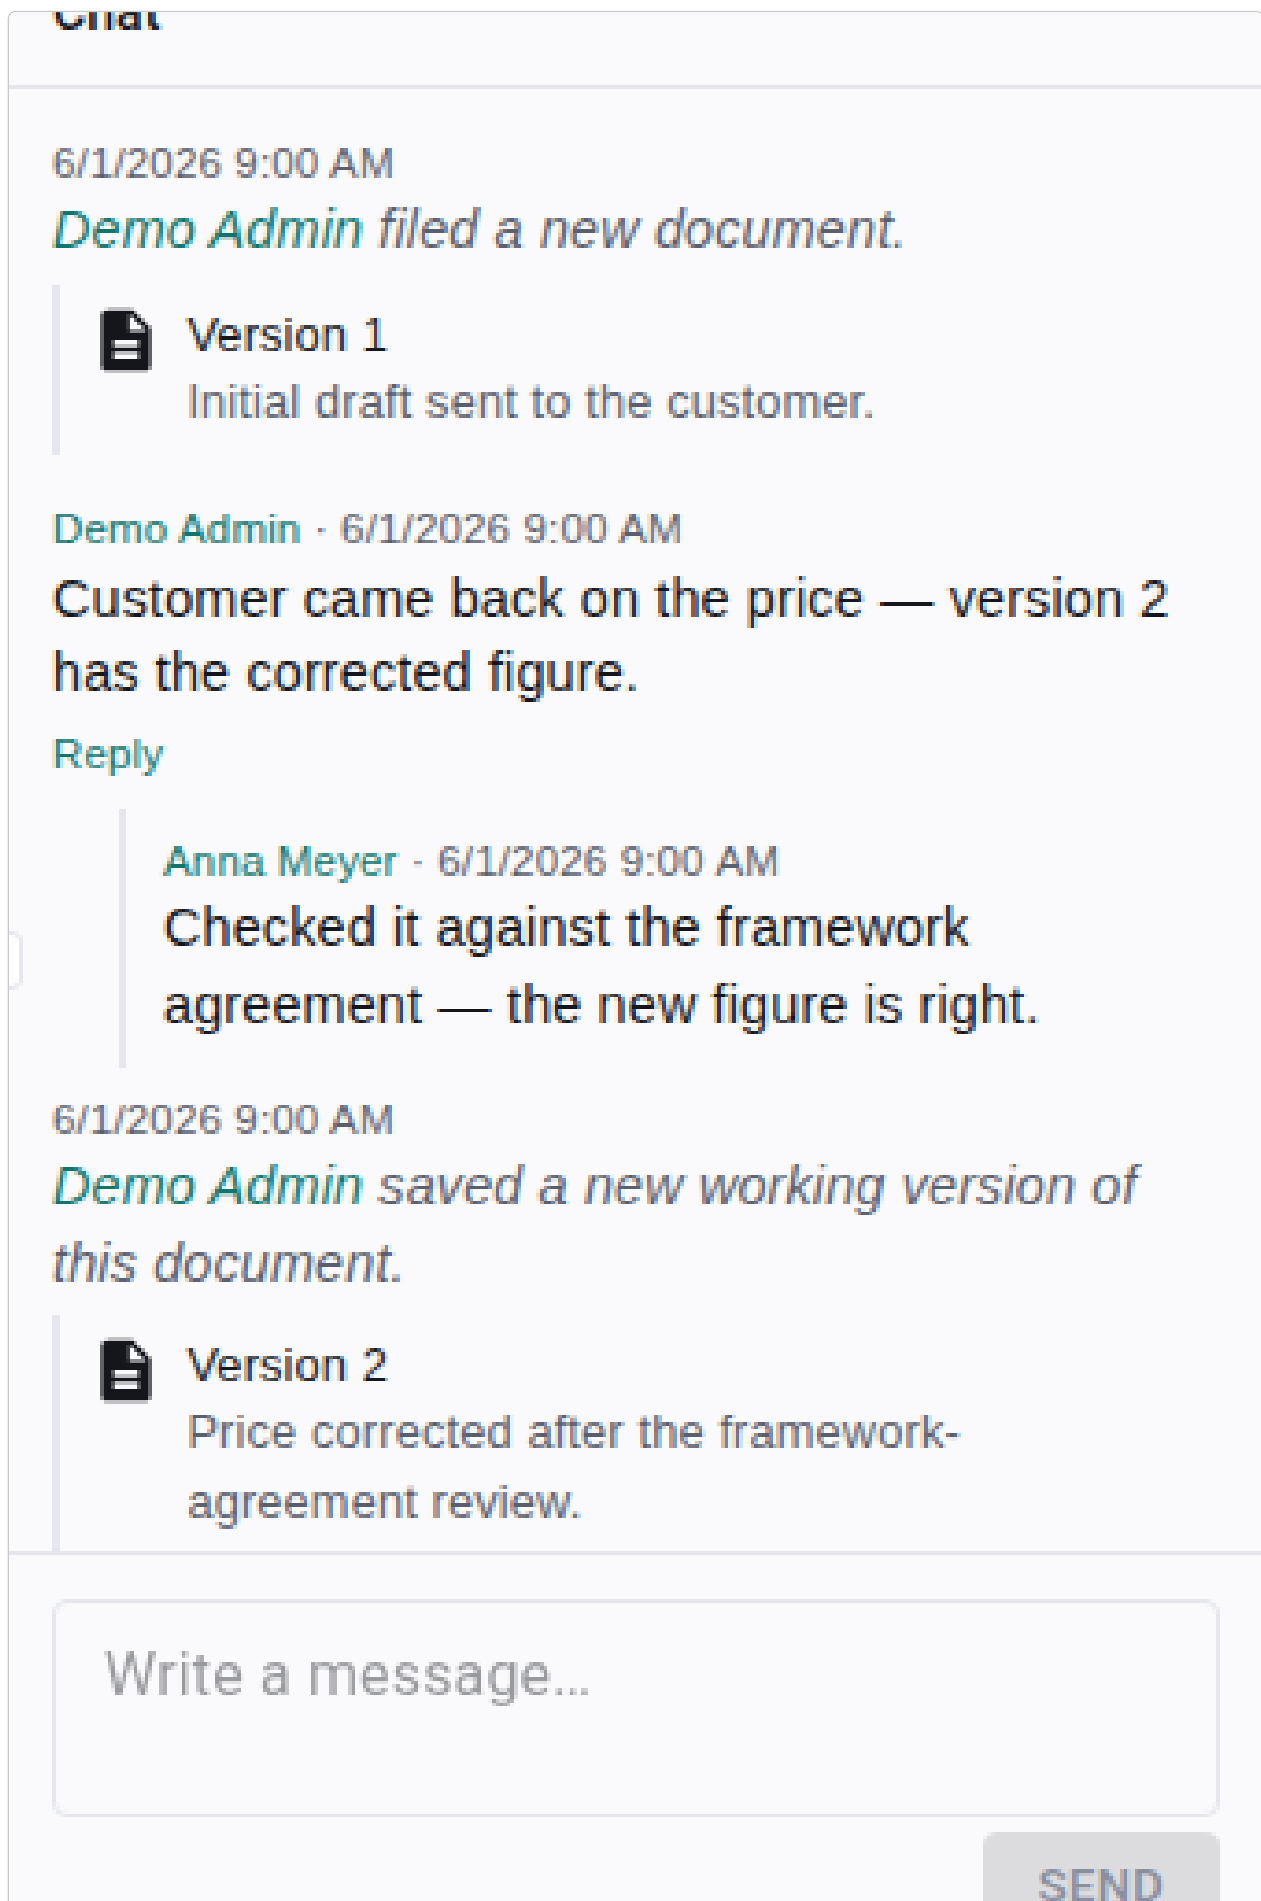


Figure 15: The chat pane on a document: a threaded conversation interleaved with the document's own activity — here a question and its reply, followed by the two versions as they were saved.

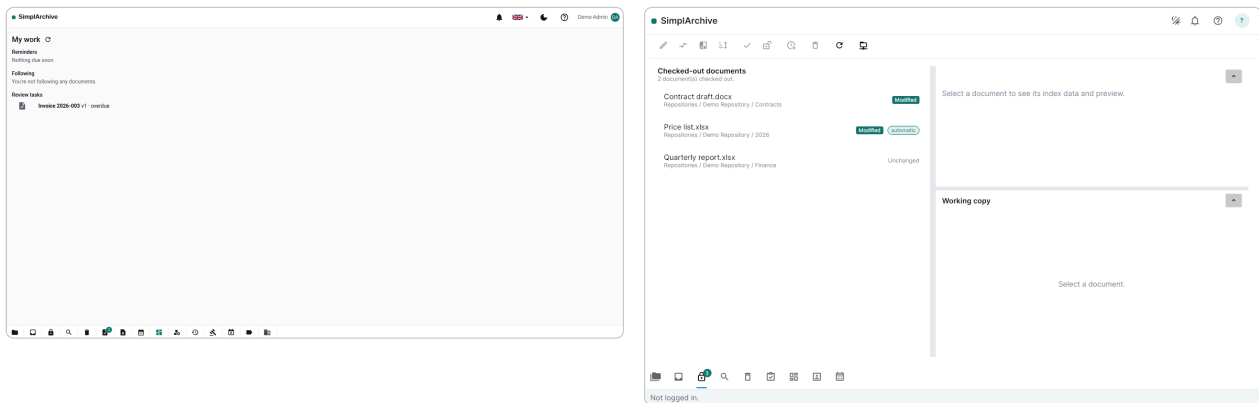


Figure 16: Left: the **My work** dashboard. Right: the **Check-out** tab listing documents locked for exclusive editing — here one edited (*Modified*) and one untouched (*Unchanged*).

**Seeing your edit before you commit it.** The **Check-out** tab shows what you are **about to check in**, not what is already archived. Select a document you hold and the pane beside the list shows its index data and a preview of your **working copy** — the file as you have edited it. That is the version the **Check in** action will create, so you can look at it before committing, without leaving the tab to go and find the archived copy (which would show you the one thing that is certainly not your edit).

A document you have edited is marked **Modified**, and only those offer the actions that make sense for an edit:

| Action                | What it does                                                                                                                                                                                                                                        |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Compare</b>        | An inline, side-by-side view of what changed between the archived version and your working copy.                                                                                                                                                    |
| <b>Beyond Compare</b> | Opens the same two files in Beyond Compare, if you use it — a desktop-only convenience, since a browser is not allowed to launch another application. Not affiliated with SimpliArchive; the button points you to the vendor if you do not have it. |
| <b>Check in</b>       | Files your working copy as a new version and releases the lock.                                                                                                                                                                                     |
| <b>Discard</b>        | Throws the working copy away and releases the lock, leaving the archived version untouched.                                                                                                                                                         |

If you have not saved anything to your working copy yet, the preview stays empty rather than showing the archived version. There is genuinely nothing to preview, and showing the archived file there would be answering a different question.

## 12 Sharing outside SimplArchive

Everything above assumes the other person has an account. An **external link** is for when they do not: a plain URL that opens one document, for anyone who has it, with no sign-in. Use it for the customer who needs the signed contract or the auditor who needs one invoice — not as a general-purpose way to move documents around.

**Creating one.** Select the document and open **External links...** from the detail pane. Choose when it should expire and how many times it may be opened, then create it.

**The URL is shown once, at creation, and never again.** Copy it before you close the dialog. It appears in no list afterwards — deliberately, because a list is read far more widely, and far more casually, than the moment you deliberately created something.

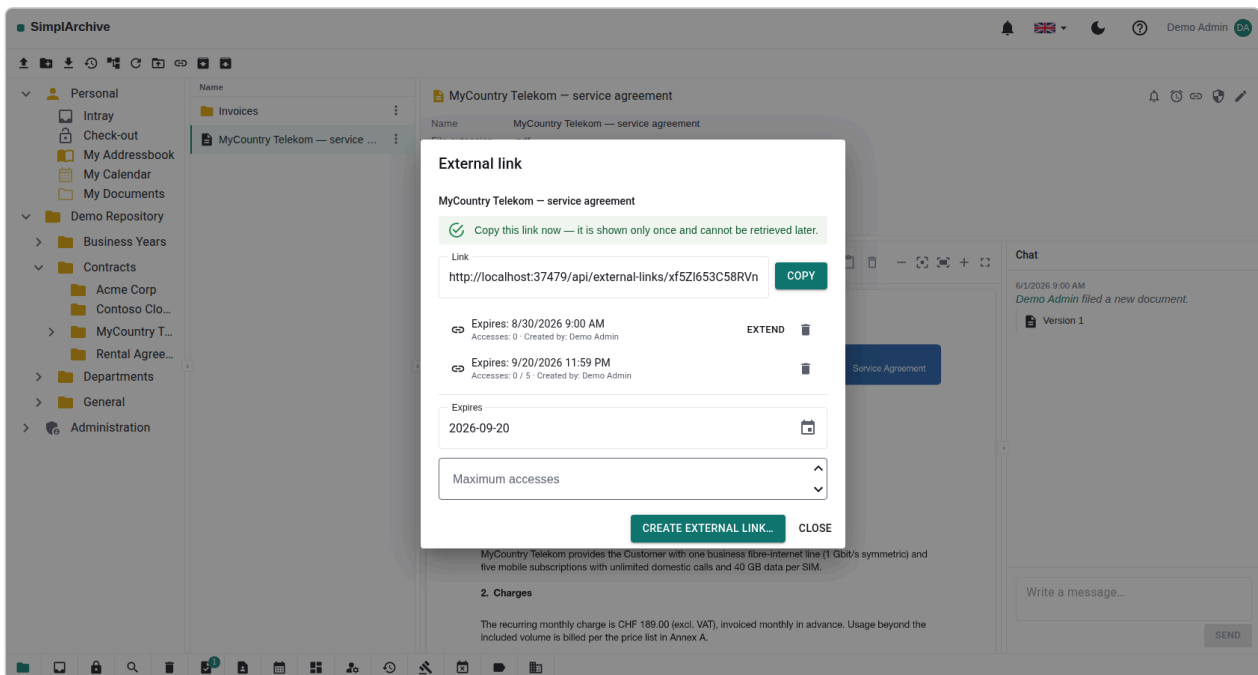


Figure 17: Creating an external link. The URL is revealed once, here, and cannot be retrieved later.

**Managing what you have shared.** My **external links** on the ribbon lists your live links: which document, when it expires, how many times it has been opened. From a row you can jump to the document, review a link's details, or **revoke** it. An administrator sees everyone's, filtered by user or group.

A link near its expiry can be **extended** — but only within 30 days of lapsing, by at most 90 days, and measured from today rather than added to whatever time remains. So extending is a deliberate renewal, not a way to accumulate an indefinite link.

**Revoking does not delete the row.** It stamps it revoked and leaves the record standing — who shared what, with effect from when. After a link has leaked, that record is exactly what the investigation needs, and it would be gone if revoking tidied it away.

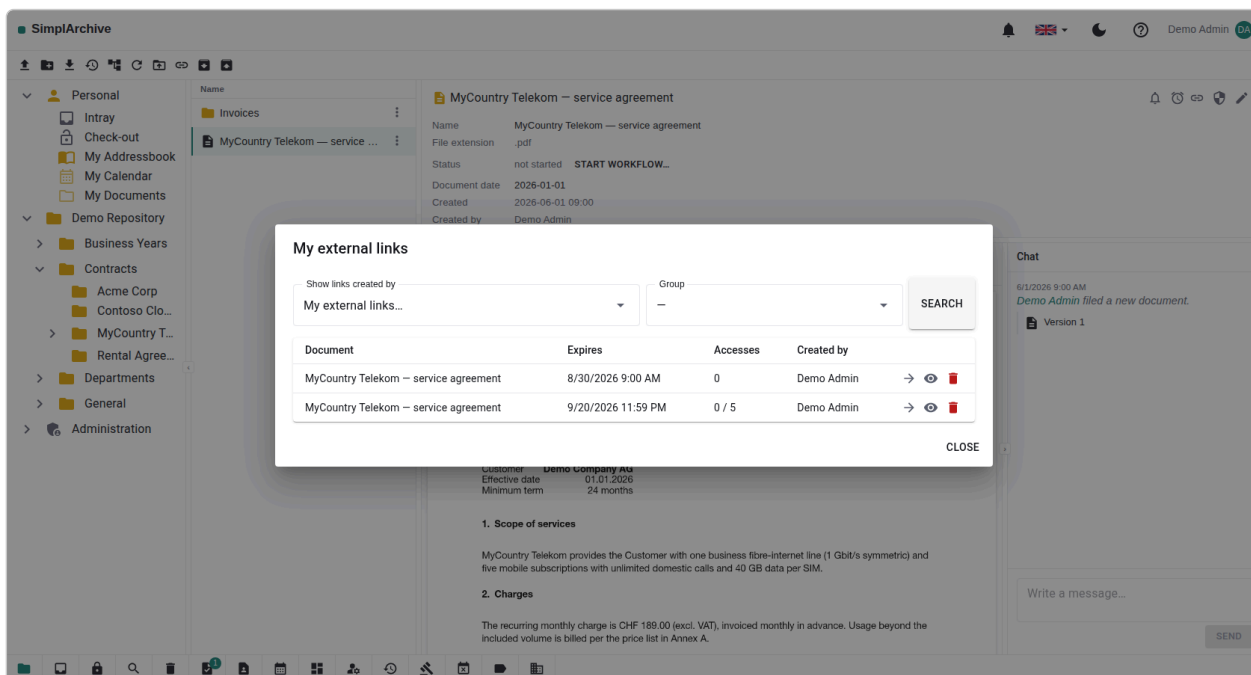


Figure 18: **My external links** — every live link you have shared, with go-to, details and revoke on each row.

**What the recipient sees.** A single page with the document's name, a picture of its first page, and buttons to open or download it — with the number of pages marked on the picture when there is more than one, so they know what they are about to open. Nothing else: no tree, no navigation, no route to any other document.

The picture is drawn when you create the link, not when the recipient opens it, so there is nothing to wait for. A document with no picture to draw — an archive, a binary — simply shows its name and the buttons.

An unknown, expired, exhausted or revoked link all produce the **same** response. That is deliberate — telling a stranger which of those they hit would confirm a real link exists and hint at how to reach a usable one.

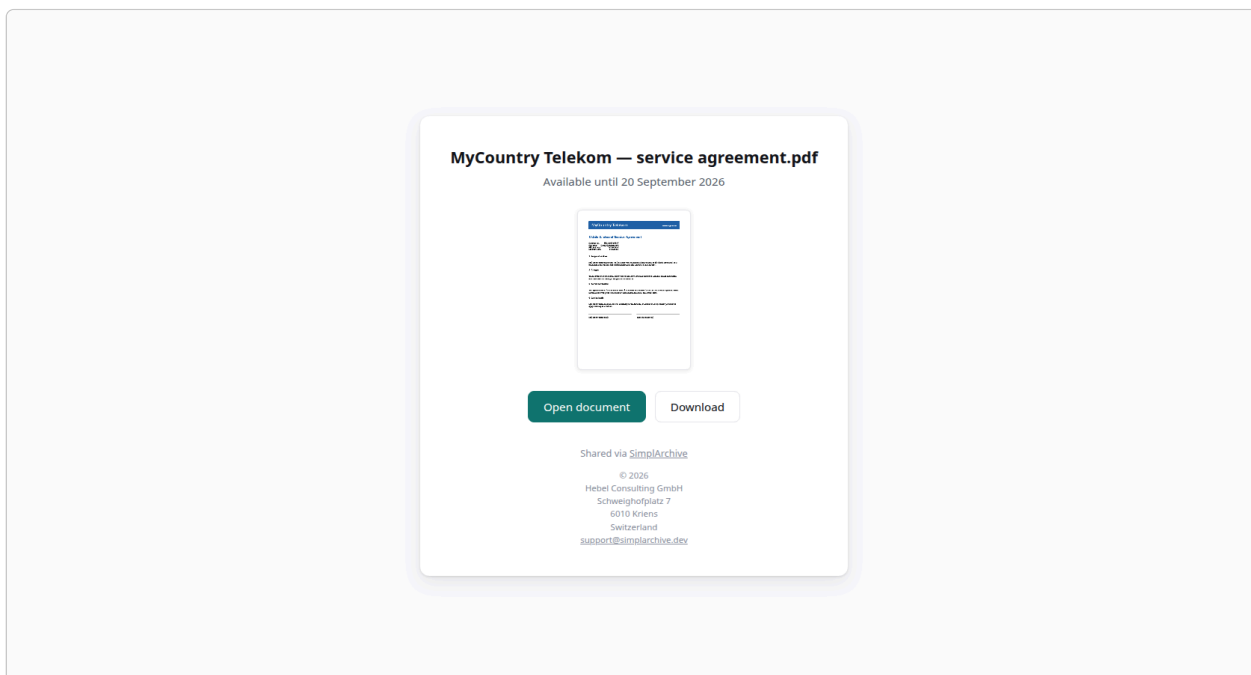


Figure 19: The recipient's view: the document's name and a picture of its first page. This one is a single page, so it carries no page-count marker. No account, one document, nothing else reachable from it.

## 12.1 The controls an administrator holds

Sharing outward is the one action that leaves the system, so it is gated twice and can be stopped in one move.

- **Two gates on creating a link.** The tenant-wide **Allow external links** switch must be on, and the individual needs the **Create external link** right, granted per user or group from **Users & groups**. Either alone is enough to prevent sharing; both must be present to allow it. A service account can never create one — only a person shares, so there is always someone accountable for a link's existence.
- **The kill switch.** Turning **Allow external links** off is checked when a link is **opened**, not only when one is created — so it stops every link already out in the world, not merely future ones. This is the control to reach for when something has leaked, and it is worth knowing about before you need it.
- **The caps you set.** **Maximum link lifetime** (default 180 days) and **default access count** (default 5) are the rails everyone else shares within. Tighten them to your own policy rather than relying on people choosing well.

# 13 Workflow & records

**Approval workflow.** Submit a document for review and it moves through a fixed state machine – Draft → In Review → Approved / Rejected → Released. Reviewers act on their **Tasks** tab – sortable by any column (a click on a header; the default puts the nearest deadline on top, overdue in red first) and narrowable through the visible filter row: document and version text, plus an **Overdue only** switch. Reviews can be reassigned, and overdue reviews escalate.

**Records management.** A **legal hold** freezes documents so they cannot be changed or deleted. **Retention** policies dispose of documents once their retention period ends (with review before disposition, if required). Deleted documents rest in the **Recycle bin**, from which an administrator can restore them or purge them permanently.

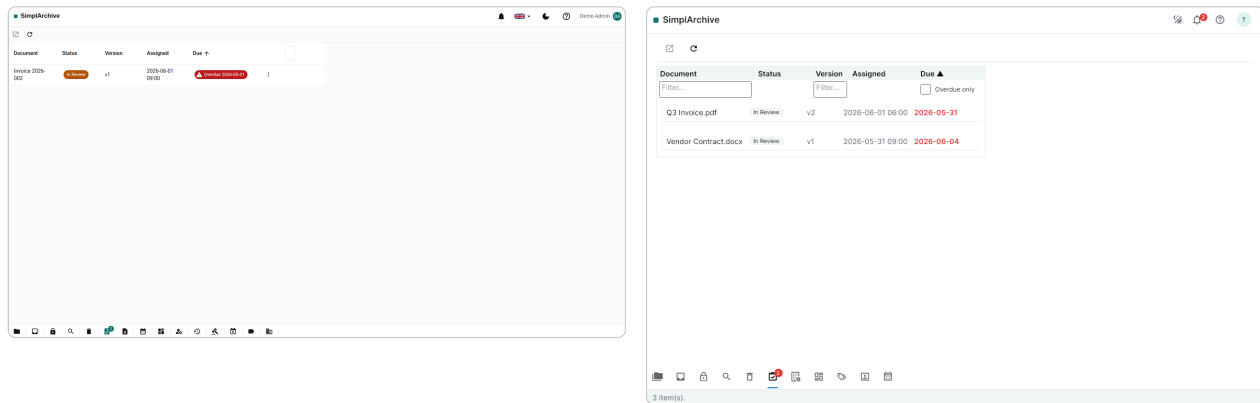


Figure 20: The Tasks tab — a reviewer’s approval queue — in the web (left) and desktop (right) clients.

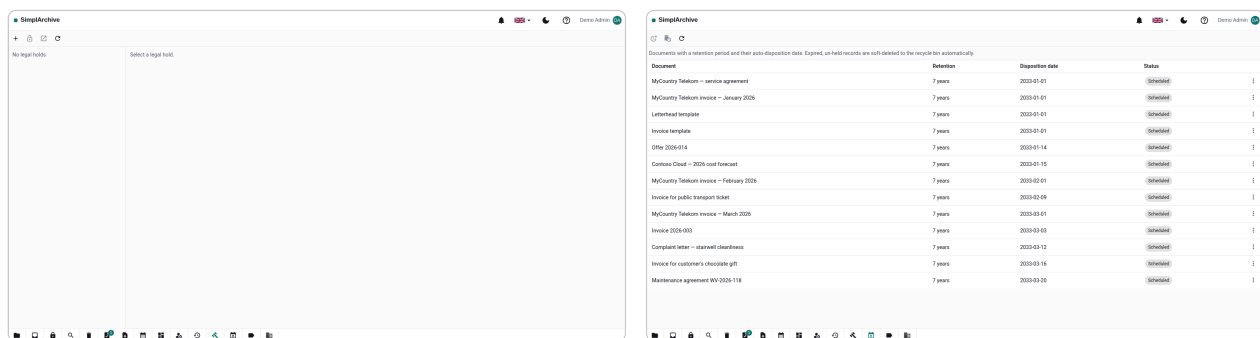


Figure 21: Records management: **legal holds** (left) freeze documents; **retention** (right) governs disposition.

## 14 Administration & account

Administrators manage **users & groups** and the **rights** granted to them, configure **tenant** settings, and review the tamper-evident **audit trail** of every security-relevant action. They also curate catalogues (sensitivity labels, tags), set the **storage quota**, and run **import / export**. Every user manages their own **account security** — password, multi-factor authentication (authenticator app or passkeys), and profile photo.

Your own account lives behind **Edit profile...** in the avatar menu (top right in both clients). It shows which account you are signed in as, the photo you currently have with a crop to replace it, and a button through to changing your password. Two-factor authentication, passkeys and the WebDAV password stay as their own entries in that menu, since each is a separate credential rather than part of your profile.

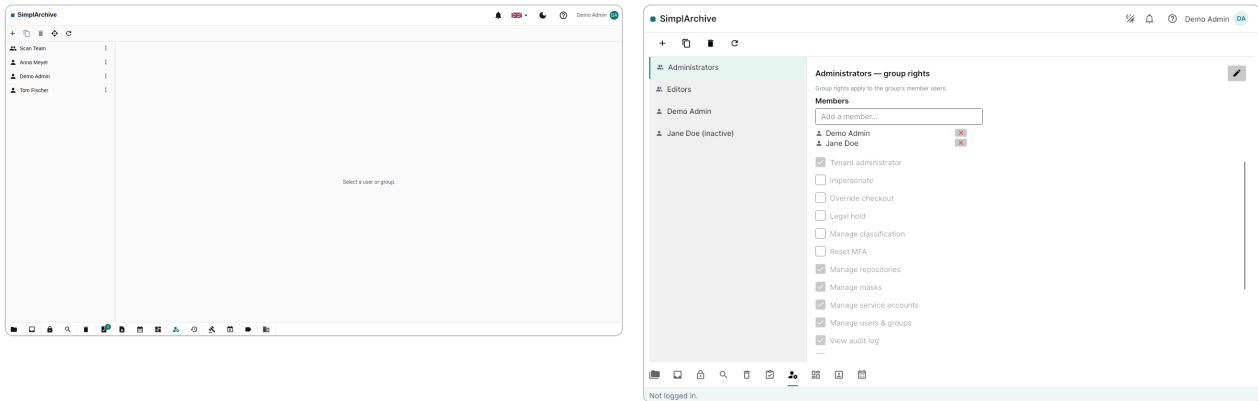


Figure 22: Users & groups administration in the web (left) and desktop (right) clients.

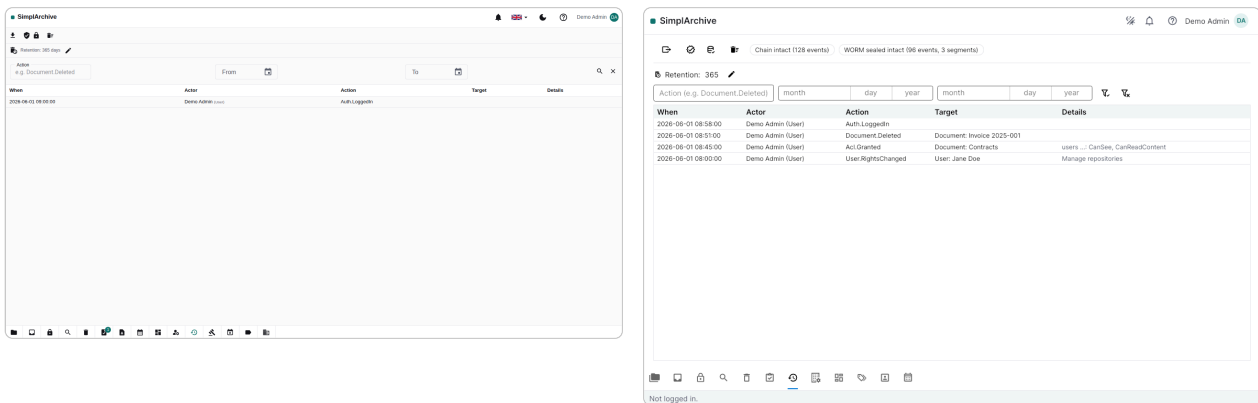


Figure 23: The audit trail — an append-only, hash-chained log — in the web (left) and desktop (right) clients.

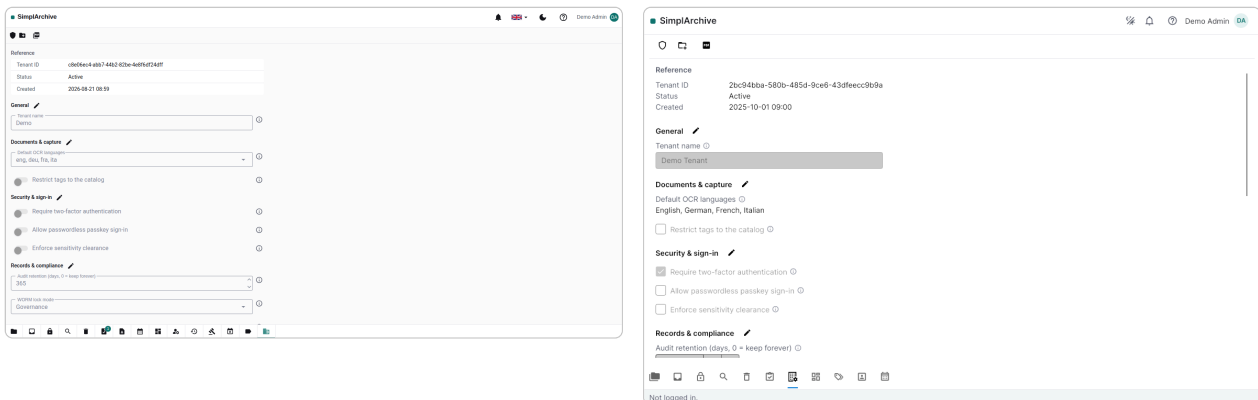


Figure 24: Tenant settings in the web (left) and desktop (right) clients.

The desktop client can connect to **several servers** its server manager stores a profile (name + address) for each. A server is not a tenant: one SimpliArchive installation hosts many tenants, and which tenant you belong to follows from the account you sign in with.

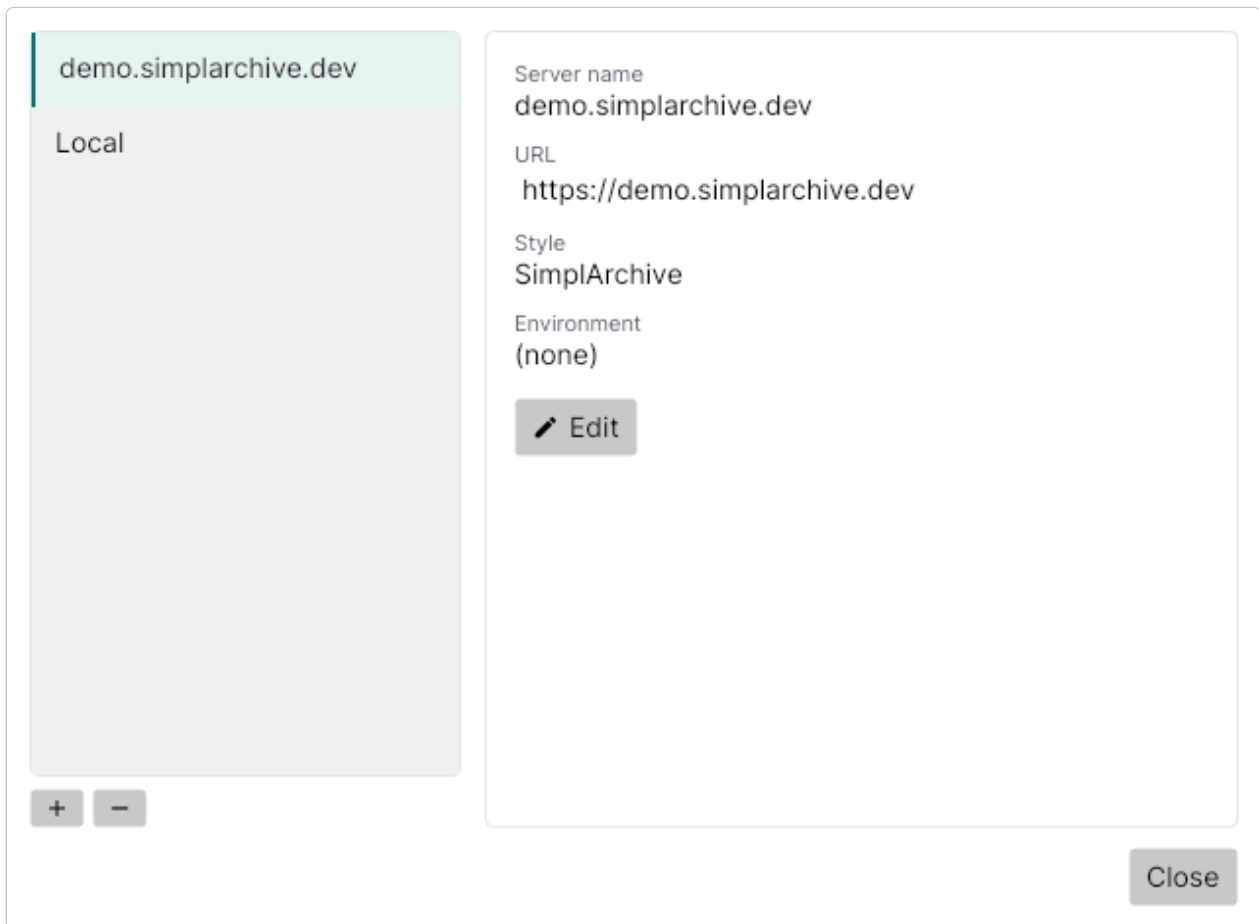


Figure 25: The desktop server manager: connection profiles for several SimplArchive servers.



## 15 Appendix — glossary & links

**Repository** — a root folder (a document with no parent). **Mask** — a document type / set of index fields. **ACL** — per-document access-control list. **Version** — an immutable snapshot of a document's file. **Legal hold** — a freeze that blocks change/deletion. **Retention** — a policy that disposes of documents after a period. **vCard** / **iCalendar** — the standard file formats a contact and a calendar entry are stored in (.vcf / .ics). **CardDAV** / **CalDAV** — the standards a phone or mail program uses to sync addressbooks and calendars. **UID** — the identifier those programs use to recognise an item across devices; changing it makes a duplicate rather than an edit. **SLA** — the review deadline a document type sets, which is what gives a task a due date.

Further reading:

- The live API description — the OpenAPI document at `/openapi/v1.json`.
- Desktop-client downloads — the download area at `/download`.

## 16 Index

Terms are indexed where the manual explains them, not at every mention — the page listed is the one worth turning to.

|                             |        |                      |        |
|-----------------------------|--------|----------------------|--------|
| ACL                         | 3      | OCR                  | 22     |
| AI tour                     | 3      | Open a document      | 6      |
| Annotations                 | 24     | Partial-word search  | 23     |
| Approval workflow           | 30     | Personal repository  | 12     |
| Audit trail                 | 31     | Preview              | 5      |
| Auto-rotate                 | 10     | Recycle bin          | 30     |
| Auto-straighten (deskew)    | 11     | Reference            | 15     |
| CalDAV                      | 18, 20 | Reference (shortcut) | 12     |
| Calendar                    | 16     | Reminder             | 24     |
| CardDAV                     | 18, 20 | Repository           | 3      |
| Chat / comments             | 24     | Retention            | 30     |
| Check-out                   | 7, 26  | Rights               | 3      |
| Click-to-copy               | 6      | Rotate pages         | 9      |
| Contacts                    | 16     | Rotate/Sort          | 9, 11  |
| Desktop client              | 3      | Search               | 23     |
| Document management system  | 3      | Sensitivity label    | 12     |
| Edit profile                | 31     | Separator sheets     | 10     |
| External link               | 27     | Server manager       | 31     |
| Facets                      | 23     | Sort pages           | 9      |
| Follow / subscribe          | 24     | Split into pages     | 9      |
| Guided tour                 | 3      | Storage quota        | 31     |
| Hit highlighting            | 6      | Tags                 | 12     |
| IMAP                        | 15, 20 | Tasks                | 30     |
| Import / export             | 7      | Tenant               | 31     |
| Index fields                | 3      | Upload               | 7      |
| Intray                      | 7      | Users & groups       | 31     |
| Join items                  | 10     | Version              | 3      |
| Legal hold                  | 30     | Version comment      | 8      |
| Mask (document type)        | 3      | Web client           | 3      |
| Multi-factor authentication | 5      | WebDAV               | 13, 20 |
| My work                     | 24     | WebDAV deep link     | 13     |
| Name conflict               | 8      | Working copy         | 26     |
| Notes                       | 15     | Zoom                 | 6      |
| Notifications               | 24     |                      |        |