

# SimplArchive

## User Manual

An enterprise-grade document management system  
— the web workbench and the desktop client

generated from source

© 2026

Hebel Consulting GmbH

Schweighofplatz 7

6010 Kriens (LU)

Switzerland

[support@simplarchive.dev](mailto:support@simplarchive.dev)

# Contents

|    |                                                   |    |
|----|---------------------------------------------------|----|
| 1  | Introduction .....                                | 1  |
| 2  | Getting started .....                             | 2  |
| 3  | Browsing & previewing documents .....             | 3  |
| 4  | Adding & versioning documents .....               | 4  |
| 5  | Organizing .....                                  | 9  |
| 6  | Working from your file manager (WebDAV) .....     | 10 |
| 7  | Contacts, calendars & your tasks .....            | 14 |
| 8  | Your own device .....                             | 26 |
| 9  | Metadata & classification .....                   | 28 |
| 10 | Search .....                                      | 29 |
| 11 | Collaboration .....                               | 30 |
| 12 | Sharing outside SimplArchive .....                | 32 |
| 13 | Workflow & records .....                          | 36 |
| 14 | Administration & account .....                    | 37 |
| 15 | Appendix — preparing a smartcard or token .....   | 43 |
| 16 | Appendix — glossary & links .....                 | 51 |
| 17 | Appendix: the desktop client's log .....          | 52 |
| 18 | Appendix — who does what .....                    | 53 |
| 19 | Appendix — how SimplArchive is put together ..... | 55 |
| 20 | Appendix — security posture .....                 | 58 |
| 21 | Index .....                                       | 62 |

# 1 Introduction

SimplArchive is a multi-tenant **document management system** (DMS): a secure archive where an organization files, versions, classifies, searches, and governs its documents. It is a showcase of how a senior, AI-driven software developer can produce a complex, enterprise-grade system in a relatively short period — every feature in this manual is really implemented and really tested.

You reach the same archive through **two clients**, which mirror each other feature for feature:

- the **web workbench** — a browser application, nothing to install;
- the **desktop client** — a native Windows / macOS / Linux application that can additionally open a document in its real desktop program and drag documents in and out of the operating-system file manager.



Figure 1: The two clients: the web sign-in (left) and the desktop logon window (right).

## 1.1 Core concepts

**Repository** — a top-level archive; it is simply a folder with no parent. **Folder / document** — the tree inside a repository. **Version** — every change to a document's file is kept as a new version; nothing is overwritten. **Mask (document type)** — a template of **index fields** (metadata) attached to a document. **ACL** — a per-document access-control list of **rights** (see, read, edit, ...) granted to users and groups.

## 2 Getting started

**Signing in.** Open the web client and choose **Log in**, or start the desktop client and use its logon window; enter your e-mail and password. Your organisation may additionally require a second factor (a one-time code or a passkey). You can pick the interface **language** (English, German, Italian, Spanish) and switch between a **light** and **dark** appearance at any time.

**If sign-in suddenly refuses everything,** you have most likely mistyped several times in a row. Repeated failed attempts are turned away for a short while — about a minute at first, longer if they keep coming — and the wait clears on its own, so there is nobody to ring and nothing to reset. A passkey keeps working throughout, which is the quickest way back in if you have one.

**The workbench.** After signing in you land on the **Repositories** workbench, laid out as: the **tree** of repositories and folders, the **contents** list of the selected folder, the **detail** pane (index data) over the **preview**, and — along the bottom — the **tab bar** that switches between Repositories, Intray, Search, Tasks and the rest.

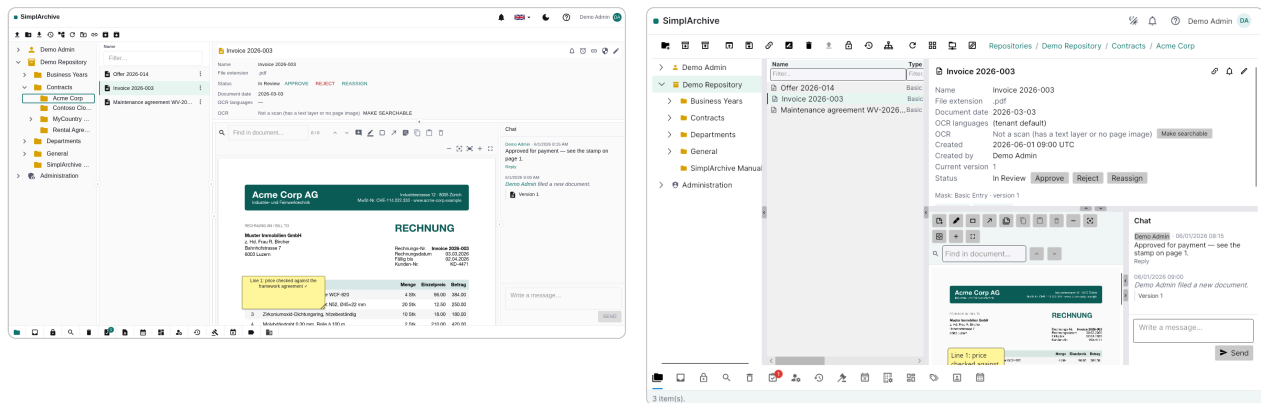


Figure 2: The workbench in the web client (left) and the desktop client (right): tree · contents · detail · preview, with the bottom tab bar.

### 3 Browsing & previewing documents

Expand the **tree** to a folder and its documents appear in the **contents** list, which you can sort by any column. Selecting a document shows its **index data** in the detail pane and renders a **preview** below — PDFs, images, and converted Office/e-mail/Markdown documents alike. Full-text search hits are highlighted directly on the preview, and you can click any word to copy it — **shift-click** appends instead of replacing, so a few clicks collect a phrase (an invoice number, then its date) without touching the keyboard. That is the fast way to fill index fields on the **Intray** tab: click the values in the scan's preview, paste them into the field. In the desktop client you can also **open** the document in its native application — from the row's context menu, the ribbon, a double-click, or the keyboard shortcut **⌘O** (**Ctrl+O** on Windows and Linux). The same shortcut opens the selected item on the **Intray** tab.

The preview's toolbar carries the **zoom** controls. A document opens fitted to the width of the pane; *fit page* shrinks it until the whole page is visible at once — useful when the pane is wider than it is tall, where fitting the width pushes the bottom of the page out of sight. Zooming out after that walks back down to the whole page and stops there. **Ctrl+scroll** (**⌘+scroll** on a Mac) zooms as well.



Figure 3: The preview with search hits highlighted on the page — click a word to copy it (shift-click to append), or step through the matches.

## 4 Adding & versioning documents

### 4.1 How documents get in

There is more than one way in, and which you want depends on whether the document is finished, whether it belongs to something already filed, and how many you have. They all end in the same place.

| Route                                                                | Use it when                                                                                                                                                                                                                         |
|----------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Upload</b> on the ribbon                                          | You are already looking at the folder it belongs in. Picks files and files them straight into the open folder.                                                                                                                      |
| <b>Drag onto a folder</b> — a row in the list, or a node in the tree | You can see the destination. The document is filed there; the view follows to that folder so you can see it arrive.                                                                                                                 |
| <b>Drag onto empty space</b> in the contents list                    | Same as above for the folder you are already in.                                                                                                                                                                                    |
| <b>Drag onto a document</b>                                          | The file is a newer copy of that document — it is added as a <b>version</b> , not as a second document, and the history is kept.                                                                                                    |
| <b>Drag onto your own space ► Inray</b>                              | It is not ready to file, or you do not yet know where it belongs. It waits in the Inray until you classify and file it.                                                                                                             |
| <b>Drag a document onto your own space ► Inray</b>                   | You want to start from an existing document as a <b>template</b> . A copy lands in your Inray carrying that document's document type and index data, so you edit what differs. Nothing is created in the archive until you file it. |
| <b>Drag onto your own space ► Check-out</b>                          | You checked a document out, edited it on your computer, and are bringing it back. The file must still carry the document's name — that is what says which document it belongs to.                                                   |
| <b>WebDAV</b>                                                        | You would rather work in Finder, Explorer or Files. Mount the archive as a drive and copy documents in like any other folder.                                                                                                       |
| <b>Import</b>                                                        | You are bringing in a whole folder tree at once, exported from SimplArchive or elsewhere.                                                                                                                                           |
| <b>Email attachment</b>                                              | You filed an email and want one of its attachments as a document of its own.                                                                                                                                                        |

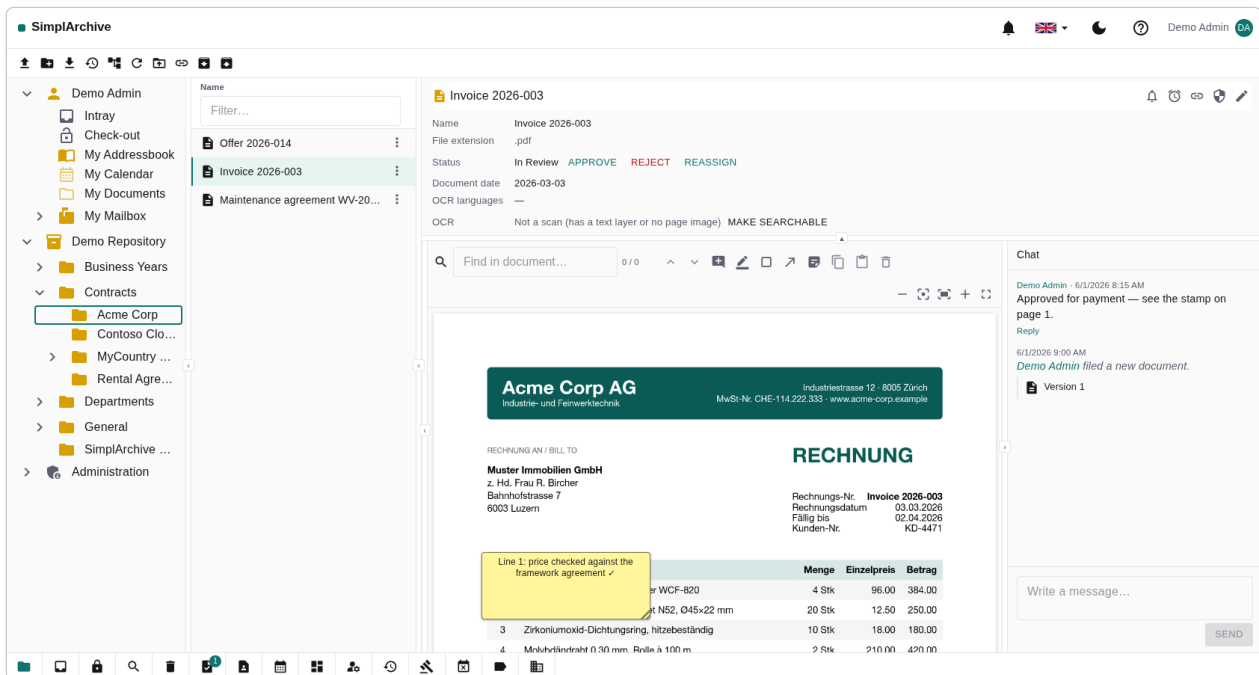


Figure 4: Your own space expanded — it carries **your name** at the top of the tree: **Intray** and **Check-out** sit above your own folders. Drop files on **Intray** to stage them, or drop an edited working copy on **Check-out** to bring it back — and drag a document onto **Intray** to start new work from it as a template.

**Two of these do not create a document.** A drop onto the **Intray** stages an item — it becomes a document only when you file it. A drop onto **Check-out** replaces your working copy — the document gets a new version only when you check it in. Everything else files immediately.

**Uploading.** Drag a file straight onto a folder (the bytes go directly to object storage — the server never proxies them). The **Intray** is a staging area: drop scans or files there, then classify each one (name, document type, index data) and **file** it into the archive.

**What the archive will not keep.** Programs and scripts are refused — an .exe, a .bat, a shell script, and anything that turns out to be a program whatever it has been named. Everything else is kept, including the formats a document system is often too narrow for: drawings, disk images, archives, video. When an **email's** attachment is refused the message itself is still archived, and a line in its chat thread names the attachment that was left out, so nothing goes missing quietly.

**When the name is already taken.** A folder cannot hold two things of the same name, so filing Invoice.pdf where an Invoice already sits asks you what you meant rather than refusing:

| Choice                               | What happens                                                                                                                                                          |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A new version of that document       | The usual answer: the file is a newer revision of what is already there. The document keeps its index data and its history, and the previous version stays available. |
| A new document with a different name | The two are genuinely different documents that happen to share a file name. A free name is offered — Invoice (2) — and you can change it.                             |

Either way you can add a **comment** saying what this file is, which becomes the version's comment. There is no “overwrite”: nothing in SimpliArchive replaces content in place, and the honest equivalent is a new version.

If the name is held by a **folder** rather than a document, only the second choice is possible — a folder has no versions to add one to.

**Versions.** Uploading a new file to an existing document adds a **version** — the history is preserved. The **Versions** dialog lists every version; you can compare two of them or **make current** an older one. When you upload a file that already exists, SimplArchive warns you of the **duplicate**.

Give each version a **comment** saying what changed. It is the difference between a history someone can read and a list of timestamps: “Price corrected after the framework-agreement review” answers the question a reader of the list actually has, and no date can.

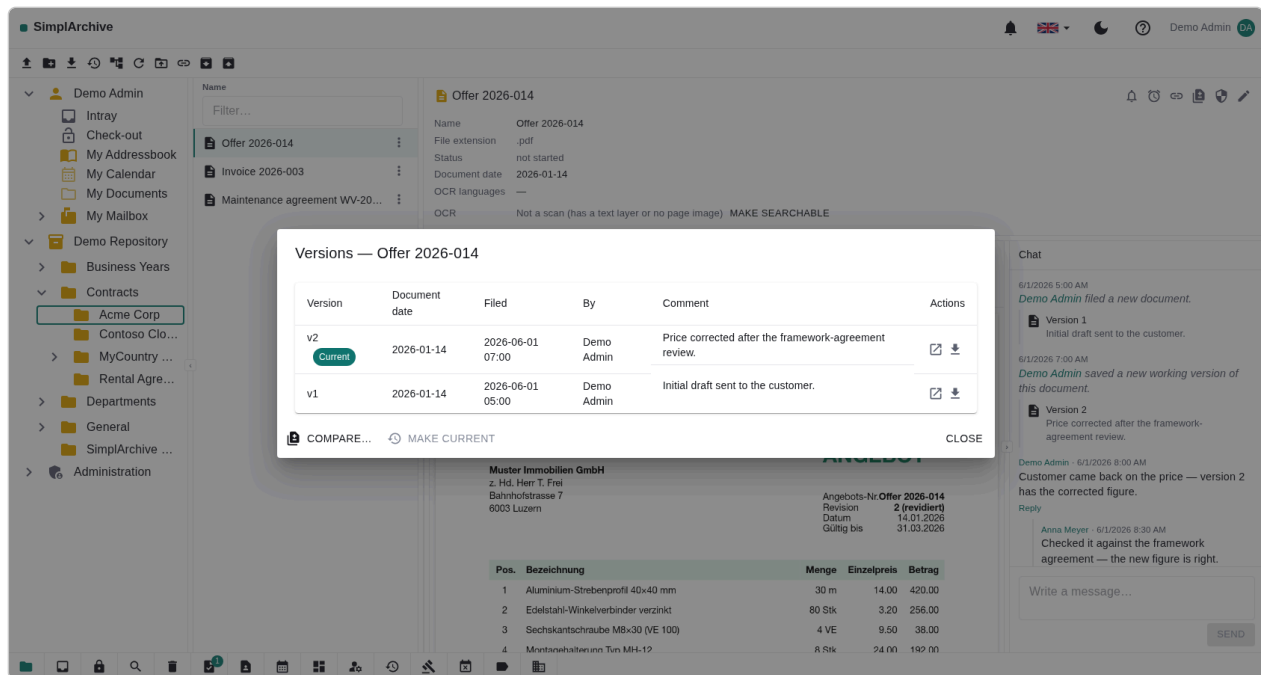


Figure 5: The **Versions** dialog: every version of the document with who saved it, when, and — the part that makes the list worth reading — the comment describing what changed.

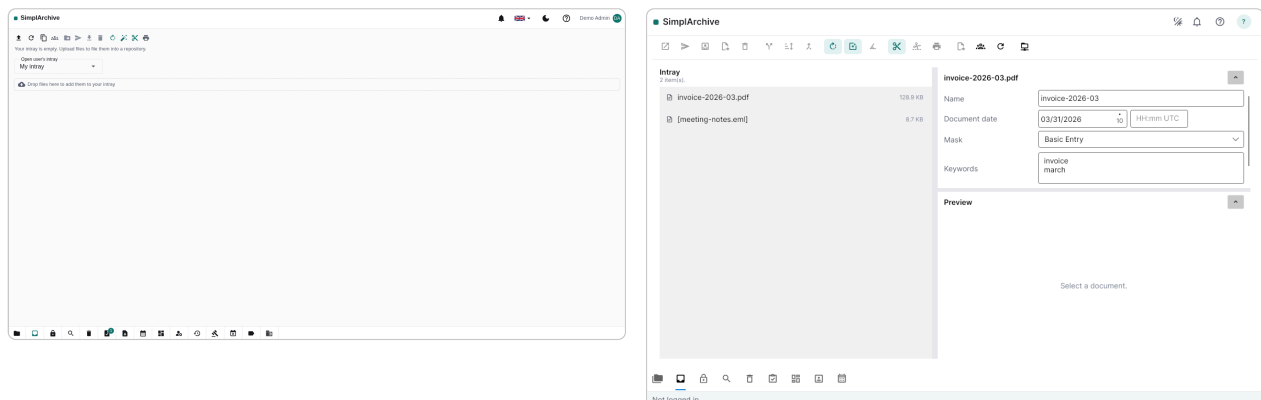


Figure 6: The **Intray**: staged items waiting to be classified and filed, in the web (left) and desktop (right) clients.

## 4.2 Tidying a scan before filing

A scan rarely arrives filing-ready: a batch holds several documents, a page went through the feeder sideways, a blank back rode along. The Inray is where all of that is put right — **before** filing, because a staged item can be reshaped freely, while a filed document's pages are part of the record. Every operation here works on .pdf and multi-page .tif files; anything else simply does not offer them.

| Operation                      | What it does                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Split into pages</b>        | One new item per page. The original is kept, so a split that turns out wrong is undone by deleting its output — a scan can be the only copy of a piece of paper.                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Rotate/Sort</b>             | Opens the page dialog below: put the pages in order, delete a page with the bin on its tile, and turn a page with the   buttons under it. Nothing is written until <b>Apply order</b> — one save for the whole arrangement, and <b>Cancel</b> discards everything. Offered from a single page up, because rotating a one-page scan that went in upside-down is exactly what it is for. |
| <b>Join items</b>              | Several staged items become one, in the order you chose them. The sources are kept.                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Cut at separator sheets</b> | Cuts a batch into one item per document at the printed separator sheets between them (see below).                                                                                                                                                                                                                                                                                                                                                                                                                                                        |



Figure 7: The **Rotate/Sort** dialog on the sample batch: page 4 went through the scanner upside-down and has been turned a quarter so far — one more press of its  button puts it upright. The bin on each tile deletes that page; nothing is saved until **Apply order**.

**Rotation does not damage a PDF.** Turning a PDF page only records the new orientation — the page’s real, searchable text is untouched. A .tif page has no such notion and is re-encoded when turned, the same trade its straightening makes.

**Separator sheets.** For a stack of paper documents, print the **separator sheet** (the printer button in the Intray toolbar), lay one between each document, and feed the whole pile through the scanner in one go. **Cut at separator sheets** then produces one item per document and discards the sheets themselves. Sample files to try this with — a batch as the scanner would produce it, and the sheet — are served by your own installation under /download/samples/.

**The automatic toggles.** Three sticky switches in the Intray toolbar act on every **arriving** upload — including files saved into the Intray folder of the mounted network drive:

| Toggle                         | What it does to an arriving scan                                                                                                                                                                                                                                               |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Auto-rotate</b>             | Turns pages that arrived upside-down or sideways the right way round. Works for .pdf and .tif.                                                                                                                                                                                 |
| <b>Auto-straighten</b>         | Corrects the slight skew of a crooked scan — for .tif, and for a PDF that is itself a pure scan (image pages, no real text). A born-digital PDF is left alone: straightening re-renders the pages, and doing that would replace its real text with a recognised approximation. |
| <b>Cut at separator sheets</b> | Applies the separator cut to every arriving batch, so a scanner that feeds straight into the Intray needs no manual step at all.                                                                                                                                               |

**Digitally signed documents are never touched.** Every page operation would break the signature, so on a signed item none is offered and the automatic steps skip it — the refusal is the feature.

**Already filed? Rotate/Sort** also exists on the **Check-out** tab. It edits the **working copy** of a document you have checked out — the archived version stays exactly as it was, and your rearrangement becomes the new version only when you press **Check in** (or is thrown away by **Discard**, like any other working-copy edit). Split and join stay in the Intray: they turn one item into several documents, which is filing work.

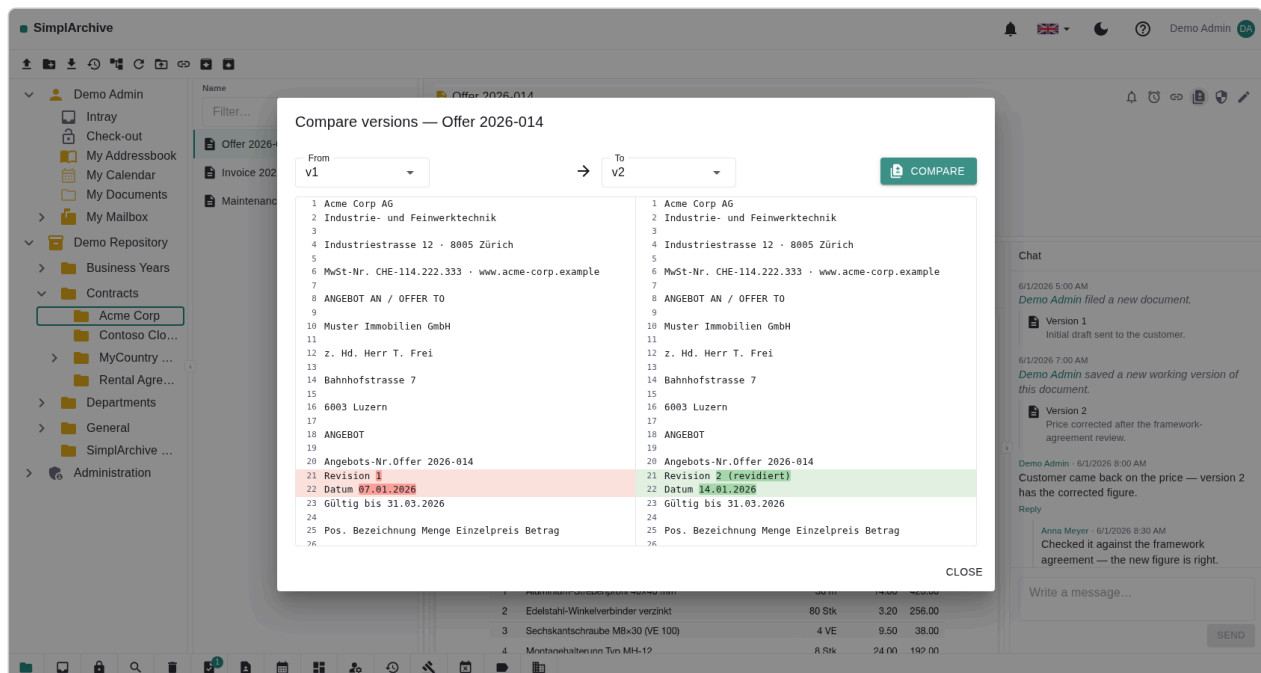


Figure 8: **Compare versions:** two revisions of a document side by side — old on the left, new on the right, changed lines aligned and the changed words highlighted within them. Works for any pair whose content yields text, notes and emails included.

## 5 Organizing

Create **folders**, and **move** documents between them by drag-and-drop. A **reference** (shortcut) lets one document appear in several places without copying it. **Tags** label documents for quick grouping — your tenant can maintain a curated tag catalogue with colours. **Sensitivity labels** mark how confidential a document is. Every user also has a **personal repository** for private documents.



Figure 9: The tag catalogue: curated, colour-coded tags an administrator maintains for the whole tenant.

## 6 Working from your file manager (WebDAV)

The whole archive is reachable over **WebDAV** as a network drive — not just your personal space but the shared repositories you have permission to access, with your rights enforced on every operation. The mounted drive is called **SimplArchive** and mirrors the Repositories tree exactly: your Personal space, then the repositories you can see, and nothing else.

The **WebDAV** button does the next useful thing rather than always the same thing, and its tooltip says which. In the **desktop client**: if you have no credentials yet it opens the setup dialog; if you have credentials it mounts the drive and opens it (on Windows as a persistent drive letter, S: or the next one free); and if the drive is already mounted it goes straight there. So “show me my documents in Finder” is one click once you are set up.

**It opens where you already are.** There is one button per tab, and each opens **its own** folder inside the drive rather than the top of the archive:

| Where you press it               | What opens                                                                                                                                                                                |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Repositories</b> ribbon       | The folder selected in the tree — the drive mirrors the tree exactly, so “where I am” and “which folder on the drive” are the same place. With nothing selected, the whole archive opens. |
| <b>Intray</b> tab, lower left    | Your <b>Intray</b> folder.                                                                                                                                                                |
| <b>Check-out</b> tab, lower left | Your <b>Check-out</b> folder, where working copies live.                                                                                                                                  |

**If you connect to more than one SimplArchive** — a local one and a hosted one, say — your computer cannot give both drives the same name, so the second is called something like **SimplArchive-1**. The button always opens the drive belonging to the server you are signed in to, whichever name it ended up with.

The setup dialog shows the **mount URL** and your **username** (your e-mail), each with a **Copy** button, and a **Generate** button that issues an app-specific **WebDAV password** — separate from your login password and shown only once, so copy it right away. The desktop dialog also has **Open folder**, so you can go from generating credentials to a mounted drive without closing it.

The **web client** cannot mount a drive: a browser is not allowed to. Instead of leaving you with a URL and no idea what to do with it, its dialog shows the mount steps for the operating system you are on — Finder’s **Go** ► *Connect to Server* on macOS, **Map network drive** on Windows, a `davs://` address on Linux — next to the values to paste into them.

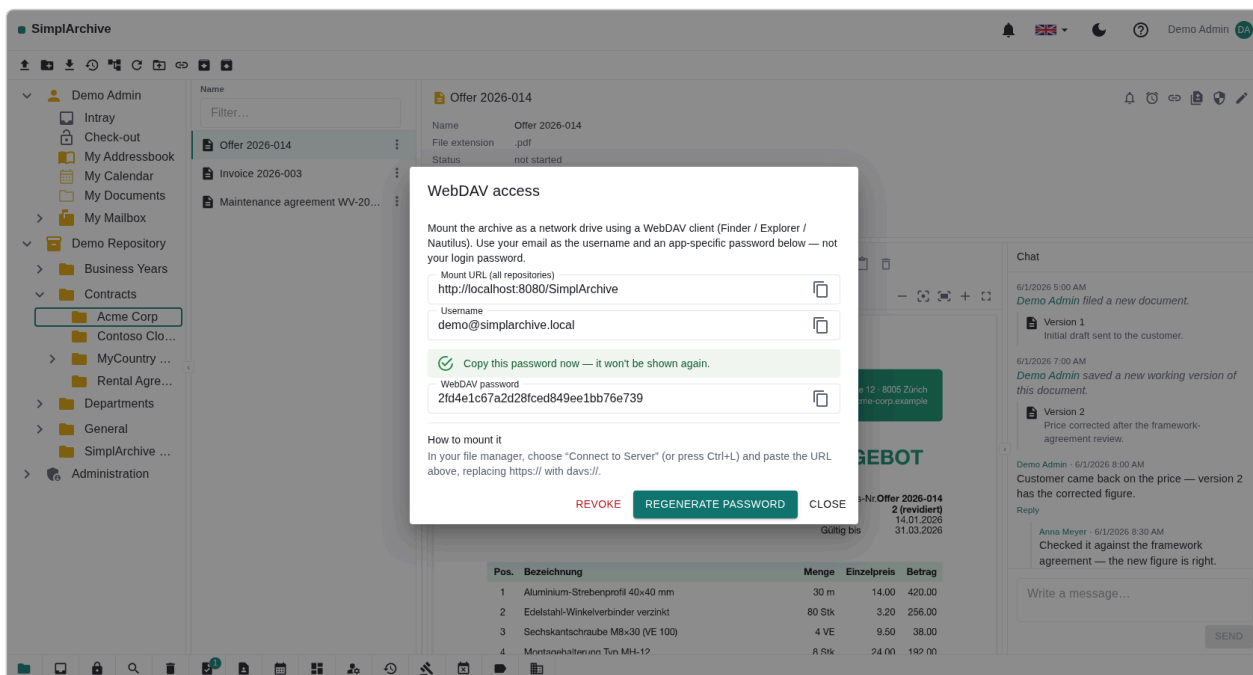


Figure 10: The web client’s WebDAV dialog: the mount URL, your username and the one-shot password, each with a copy button, and the mount steps for the operating system you are using.

## 6.1 Editing a document in place

Open a document from the mounted drive, change it, save it — that is the whole gesture, and it works the way you would expect from any network drive.

What happens underneath is worth knowing, because it changes what other people see. Simple editors write the file straight back, and the change becomes a new version immediately. An **office suite**, however, never overwrites a file in place: it writes a hidden companion file, then a temporary copy of the new content, and finally renames that copy over the original. SimpliArchive recognises that sequence and turns it into a **check-out** — the same one you get from pressing **Check out** in the app.

So after saving from your file manager:

- the document is **checked out to you**, and appears on your **Check-out** tab marked **automatic**;
- your edit is waiting there as your working copy — it is **not yet a new version**, and other people still see the previous one;
- nobody else can change the document until you are finished;
- you finish by pressing **Check in**, from either client or by saving into the mount’s **Check-out** folder.

**Saving is not the same as publishing.** The system cannot tell when you have finished editing — only you can, and **Check in** is how you say so. Until then your work is kept safely as your working copy. A check-out left untouched for a long time is released automatically by your organisation’s idle rule, and you are warned before that happens.

The **automatic** marker exists so this never looks like a fault: a document you never explicitly checked out has become yours, and the tab says why, naming the program that did it.

If someone else already has the document checked out, your editor is told the file is locked and opens it read-only, rather than letting you edit for ten minutes and failing at the save. Documents you are not allowed to edit, and documents frozen by a legal hold, behave in the mount exactly as they do in the app: they refuse.

### 6.1.1 When something in the Intray is overwritten

The **Intray** holds bare files rather than documents: no versions, no history — which is what makes it quick to drop things into, and what makes an overwrite final in a way it never is for a filed document. That matters because a program can overwrite one without meaning to. One office suite saved correctly into an Intray item and then, six seconds later, rolled its own save back by moving an **empty** backup slot over the file.

Nothing is lost when that happens. Every write that replaces an Intray item first **sets the outgoing bytes aside**, and an administrator can list what was set aside for you and restore any of it. So if an Intray item has turned empty or wrong after a save, say so rather than starting again — the previous bytes are almost certainly still there. Filed documents need none of this: they keep every version by design, which is the argument for filing anything you would mind losing.

**A warning from your own software is not a fault in ours.** Some commercial vendors treat a WebDAV connection to a site that is not on their own allow-list as suspicious, or refuse it outright. That is a policy decision in the respective vendors' software, not a limitation of SimplArchive — the same mount that one program declines will typically work in another on the same machine.

## 6.2 Reading the archive in your mail program (IMAP)

Where WebDAV turns the archive into a network drive, **IMAP** lets a mail program browse it: point any IMAP-speaking mail client at your SimplArchive server and browse the same ACL-filtered tree as mailboxes. **INBOX** is your personal folder; the shared repositories you can see appear beside it. Archived e-mails read natively; every **other** document can appear too — as a message carrying the file as an attachment — if you switch that on.

**This is your archive wearing an IMAP face — it is not a mail service.** SimplArchive does not collect your mail from your provider, does not send mail, and is not a replacement for your e-mail account. Nothing here changes where your mail lives. What it gives you is the second account in your mail program: keep your real one alongside it, and **file** mail across from one to the other, which is what the drag described below is for.

**Shortcuts show up as mailboxes too.** A folder you have filed a reference to appears in the list wherever the reference sits, with everything beneath it — so the destinations you file into most can be gathered in your personal folder and reached from the mail program without hunting through the whole tree.

Open **Email access (IMAP)...** in the account menu. The dialog shows the **server** and your **username** (your e-mail), each with a **Copy** button, and **Generate** issues a dedicated **IMAP password** — like the WebDAV one: separate from your login password, shown only once, revocable on its own. The **Show every document** switch is yours per account: off (the default) lists only e-mails; on lists everything you may see, with the file attached to open straight from the mail client.

**The mail client cannot rearrange the folders.** Folders are created, renamed and deleted in SimplArchive — an IMAP client trying the same is politely refused. Messages, though, are yours to work with: drag an e-mail into a folder to **file it into the archive** (it becomes a proper e-mail document, named by its subject), move a message to re-file it, copy one to leave a **reference**, and delete + expunge to send it to the **recycle bin** — never a hard delete. Read/unread marks are remembered per person.

**Encrypting what your mail program receives.** If you want the messages your mail client fetches to be readable **only on your own devices**, open **Encrypted mail (S/MIME)...** in the account menu. Either **upload** your certificate (a .pem or .crt file — just the certificate, never a private key), or type a password and **generate** a complete identity: you get a .p12 to import on any device and a .mobileconfig that installs it on an iPhone or iPad in one tap. Download both right away — they are not stored on the server, and the password you typed is what the device asks for at import. From the next mail connection on, every message arrives encrypted to that certificate; your mail program decrypts it automatically once the identity is installed, and devices without

it see only an encrypted attachment. **Or read it off a card.** If your certificate lives on a smartcard or a USB token, **Add a card or token...** lists what your readers can see — every device, and every certificate on each — and registers the one you pick. Before choosing this, read Section 15 on what a card covers: it is the strongest option for the archive itself, and it leaves mail unreadable on an iPhone or iPad, which cannot use a card for S/MIME. Only the certificate is sent; the private key never leaves the device, which is the point of keeping it there. You are not asked for a PIN, because reading a certificate off a device does not need one. This is a desktop-client feature: a browser cannot reach a card reader, and the web client says so where the option would be.

While a certificate is set, all three entrances stay greyed out — **Delete certificate** switches your mail back to plain, and they come back. On installations where certificates are managed centrally, the dialog says so and there is nothing to set up **here** — the entry beside it is then the one that enrolls a certificate for reading documents (Section 15.7). The profile also installs the **archive's own mail-in certificate**: composing an encrypted message **to** the archive's ingest address (archive@ your installation's mail domain) then works out of the box — the archive decrypts it on arrival and files a normal, searchable document.

**Notes, too.** Point a notes app that syncs over IMAP at the same account and it finds the **Notes** mailbox — your personal **Notes** folder in disguise. Every note becomes a proper archive document with the **Note** document type, and editing a note on your phone adds a **new version** in the archive rather than a new copy — the full history stays browsable in the workbench. The Notes folder is typed: it accepts only notes, and notes live only there (references to them may go anywhere).

## 7 Contacts, calendars & your tasks

Two of the workbench tabs are not about documents at all — or rather, they are about documents that happen to be a **contact card** or a **calendar entry**. **Contacts** lists the people in your addressbooks; **Calendar** lists your appointments. Both read the same archive, with the same permissions, and both can be **subscribed to from your phone**.

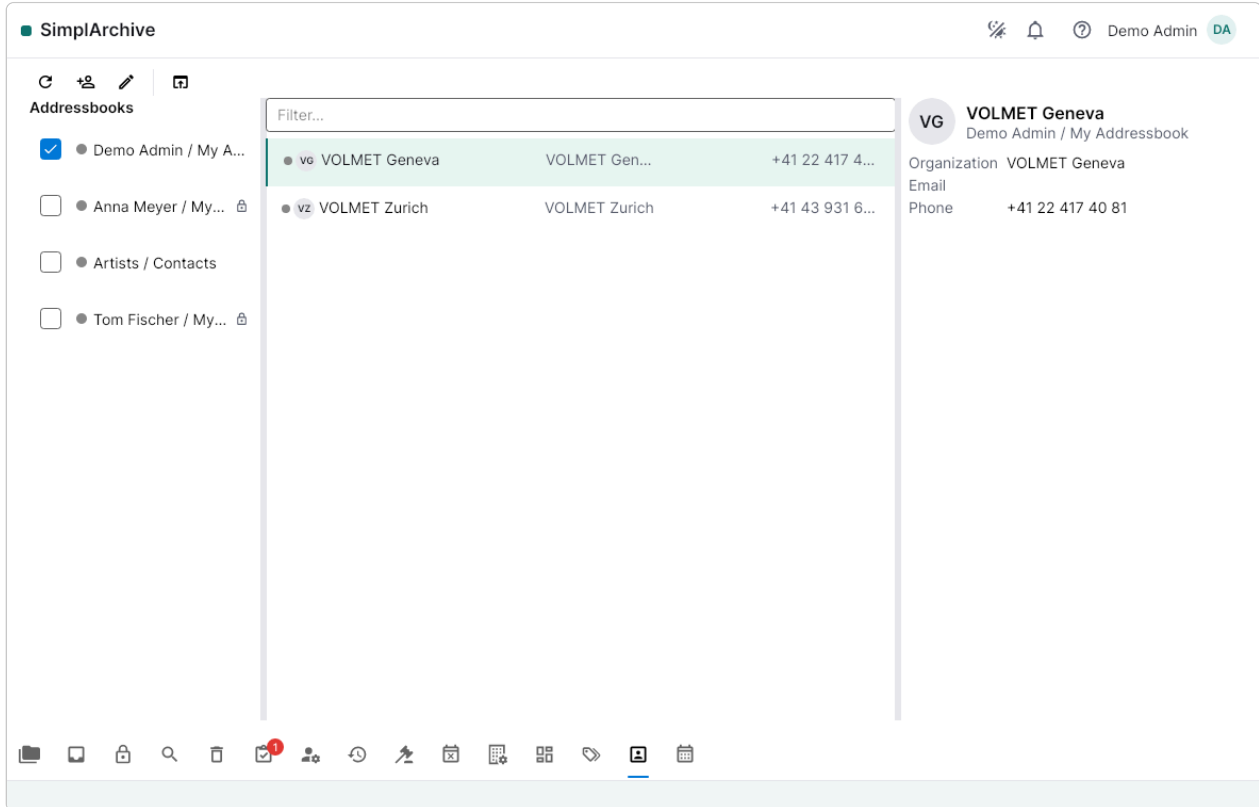


Figure 11: The Contacts tab: addressbooks on the left, the people in the ticked ones merged into one list.

**Collections overlay rather than replace.** The left-hand list is a set of tick-boxes, not a single choice — tick two addressbooks and you see both sets of people in one list, each row carrying a small colour swatch saying which collection it came from. Your own **My Addressbook** and **My Calendar** start ticked, so the tab opens with something in it. The colour is yours to set and yours alone: changing it does not change what anybody else sees.

Every user's personal space contains **My Addressbook** and **My Calendar** from the start. They cannot be deleted or moved — they are the fixed points your phone subscribes to, and provisioning them would be pointless if the next click could remove them. Addressbooks and calendars can also live **anywhere else** in the archive: a shared repository can hold a team addressbook, and whoever has permission sees it in the same list.

## 7.1 Adding and editing a contact or an appointment

**New contact** and **New appointment** open a form. Fill it in and save, and the item is created — nothing exists until you save, so closing the form leaves nothing behind. If more than one collection is ticked, the form asks which one it should go into; with only one candidate it does not ask, and the confirmation names where it went.

**Edit** opens the **same** form on an existing item. That is deliberate rather than incidental: a create form with fewer fields than the editor would quietly discard whatever you typed into the ones it lacked.

A contact holds rather more than a name — several **e-mail addresses** and **phone numbers**, each with its own type, several **postal addresses**, an organisation, a job title, a birthday, a website and a note. Add and remove rows as you need them.

**Everything the form does not show is kept.** A contact created on a phone carries things this form does not model — a photo, custom labels, fields belonging to some other program. Saving here **preserves** all of it rather than dropping what it does not understand, which is what makes it safe to edit in the archive a card that lives on your phone.

## 7.2 Advanced: the stored item

Under every contact and appointment form there is a collapsed **Advanced: the stored item** section. Open it and you see the item exactly as stored — a **vCard** for a contact, an **iCalendar** entry for an appointment — including the properties the form above does not show.

The screenshot shows a contact editor form. At the top, there are input fields for 'First name' (Anna), 'Last name' (Meyer), 'Organization' (Contoso), and 'Job title' (Head of Procurement). Below these are sections for 'Email' (with 'work' and 'home' addresses), 'Phone' (with a 'mobile' number), and 'Address' (with 'work' address, city, region, and zip code). Further down are fields for 'Birthday', 'Website', and a 'Note'. A small disclaimer states: 'Anything this contact carries that is not shown here — a photo, custom labels, extra fields — is kept as it is when you save.' The 'Advanced: the stored item' section is expanded, showing a text box with the following vCard data:

```
BEGIN:VCARD
VERSION:3.0
UID:6f1c2e40-1
FN:Anna Meyer
ORG:Contoso
TEL;type=WORK:+41 79 000 00 00
X-ABShowAs:COMPANY
PHOTO;ENCODING=b:/9j/4AAQSkZJRg...
END:VCARD
```

At the bottom right of the form are 'Cancel' and 'Save' buttons.

Figure 12: The contact editor with **Advanced: the stored item** open — the stored vCard, including the properties no form field shows.

It is editable, and this is the one place in the product where saving **replaces** rather than merges. Delete a line here and the property is gone; that is what “raw” has to mean, and a merge would put it back while telling you the save had succeeded. Two things are refused rather than accepted: text that is not a valid card or entry, and a change to the **UID** — the identifier every phone and mail program uses to recognise this item. Changing the UID would not rename the item, it would make it a **different** one, so your phone would keep the old copy and add the new. In both cases nothing is written and the stored item is untouched. Removing the UID line is not a change; the stored one is kept.

**While you are editing the raw text, the fields above go read-only.** Both describe the same item and only one of them can be saved. A line under the box says which way the save will go.

Every save — from the form or from the raw box — writes a **new version**, exactly as any other change to a document does. A raw edit you regret is recoverable from the version history like anything else.

## 7.3 Subscribing from your phone (CalDAV & CardDAV)

Addressbooks and calendars speak **CardDAV** and **CalDAV** — the standards phones, tablets and mail programs already use. Point a device at your SimplArchive server and it finds every addressbook and calendar you are allowed to see, wherever it sits in the archive; you then pick which to sync. Edits travel both ways: a contact changed on your phone becomes a new version in the archive, and one changed in the workbench appears on the phone.

The credential is the **same DAV password** the file-manager mount uses — one secret, one place to revoke it. Issue it from **WebDAV...** in the account menu if you have not already.

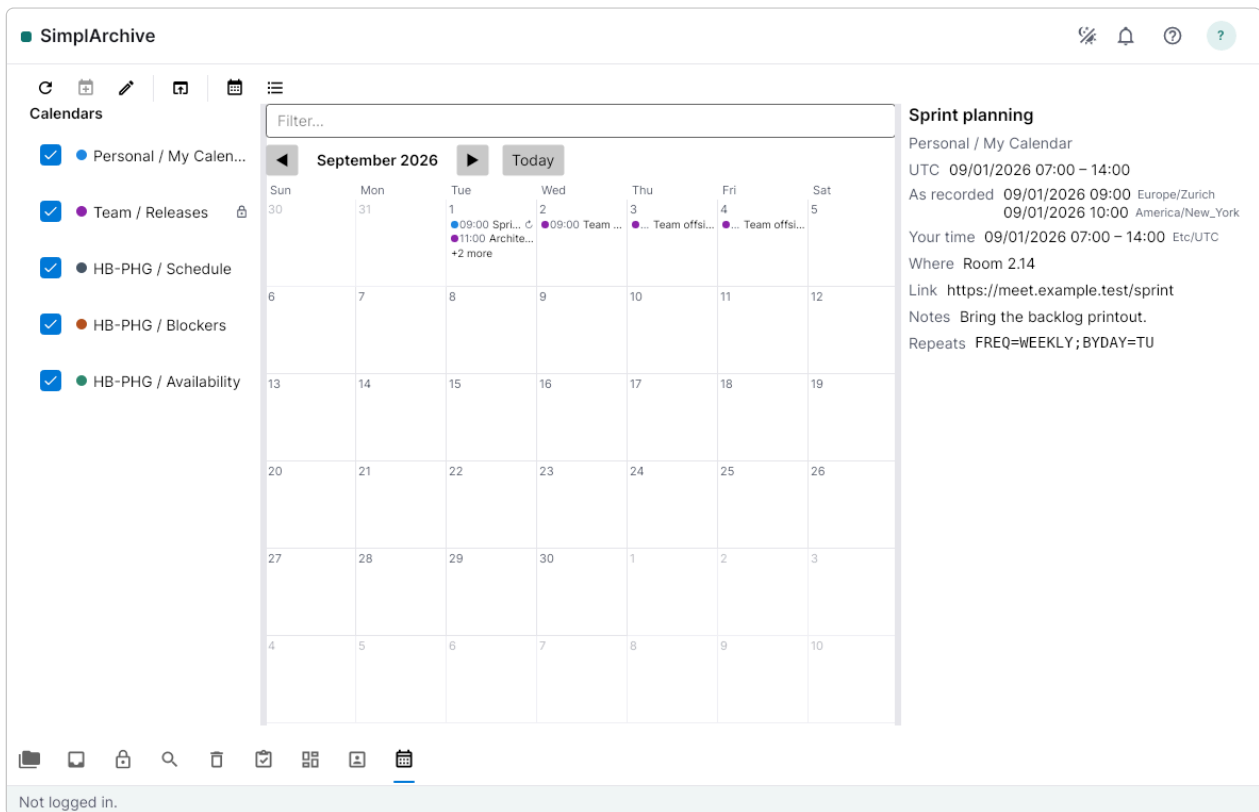


Figure 13: The Calendar tab, ordered by time — undated entries sort last rather than into the top rows.

## 7.4 Your tasks, on your phone

Beside your calendars, two more collections appear that hold no documents at all:


- **My tasks** — the reviews assigned to you, as to-do items. This is what a reminders or task app subscribes to.
- **My task deadlines** — the same reviews as dated entries, for calendar programs that do not show to-dos.

Both are **read-only**. They are a view of the **My tasks** tab, published so you can see what is waiting for you without opening the archive; approving or rejecting a review still happens in the workbench, where it is recorded with who did it and why.

**A review only gets a deadline if its document type defines one.** The review SLA is set per document type, and where none is set the review simply has no due date — it still appears in **My tasks**, but it cannot appear in **My task deadlines**, which is a list of dates. An empty deadlines list usually means no document type in your tenant has an SLA configured.

## 7.5 Reserving a meeting room

A **meeting room** is a folder whose type is *Meeting room* — an administrator creates one wherever rooms should live, and whoever may see the folder may see its reservations. Select a room and the ribbon offers **Bookings...**: the reservations that exist, and a row to take a new one.

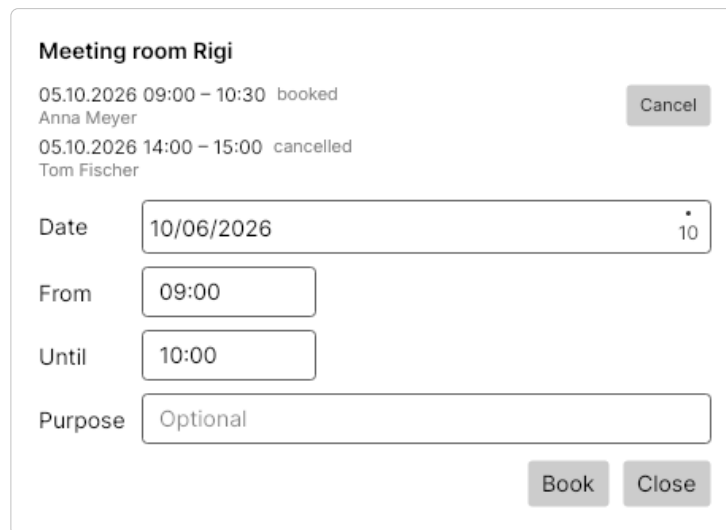

**Meeting room Rigi**

05.10.2026 09:00 – 10:30 booked  
Anna Meyer Cancel

05.10.2026 14:00 – 15:00 cancelled  
Tom Fischer

Date

From

Until

Purpose

Book Close

Figure 14: The Bookings dialog on a room: existing reservations above — a cancelled one stays visible as history — and the new reservation below, its times typed rather than picked.

Pick the date, type the times — 0950, 9:50 and 09:50 all work — add a purpose if you want one, and **Book**. A slot that overlaps an existing reservation is **refused**, and the refusal says so: the room is never silently double-booked, and there is no queue to wonder about. **Cancel** keeps the row, marked cancelled, so “who had the room booked?” stays answerable; cancelling frees the slot for the next person.

**A reservation can repeat.** The dialog books single slots; a weekly jour fixe is made as a repeating calendar entry in the room’s Schedule — from the Calendar tab or from your phone — and **every occurrence** is conflict-checked, so a series that would collide with anything on any of its dates is refused as a whole. The one condition: a repeating **reservation** must have an end (a last date or a number of times). “Every Monday, forever” cannot be checked against the next endless series, so the archive does not accept it.

Behind the dialog there is no separate booking system. The first reservation creates a **Schedule** calendar under the room, and every reservation **is** a calendar entry in it — a document like any other, with versions, an audit trail and the room’s own permissions. Open the Schedule in the tree and you are looking at the same reservations the dialog shows; tick it in the **Calendar** tab and they overlay your own appointments, colour-coded like any other collection.

**And because the Schedule is a calendar, your phone can subscribe to it** — the same CalDAV subscription as any other calendar (Section 7.3). That cuts both ways, deliberately:

- **Reading:** tick the room’s Schedule on your phone and the room’s reservations appear beside your own appointments — the fastest answer to “is the room free at three?” is the calendar already in your pocket.
- **Writing:** creating an event in that calendar from your phone **is** booking the room, and it passes the **same** conflict check as the dialog. Dragging a reservation to another time is a rebooking, checked again; there is no way in — workbench, phone, or any calendar program — that bypasses the rule.

### 7.5.1 Three calendars, three different questions

A bookable thing — a room, a vehicle, a person’s time — answers three questions about the same timeline, and each gets its own calendar because each obeys a **different rule**. Putting them in one calendar would mean one rule for three jobs, and two of the three would be wrong.

| Calendar            | It says                       | And the rule that makes it different                                                                                                                                  |
|---------------------|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Schedule</b>     | This time is <i>claimed</i>   | Two reservations may <b>never</b> overlap. A slot that collides is refused, and the refusal says so.                                                                  |
| <b>Blockers</b>     | This time is <i>withdrawn</i> | Blocks <b>may</b> overlap each other — two defects reported on one vehicle are two entries, and refusing the second would mean the second finding cannot be recorded. |
| <b>Availability</b> | This time is <i>offered</i>   | Windows may overlap each other, <b>and</b> reservations sit inside them — that overlap is the whole point, not a conflict.                                            |

**Out of service.** A block filed in Blockers (“projector broken, Tuesday to Thursday”) **suspends** every reservation it overlaps rather than deleting them; when the block is cleared, those reservations simply stand again. Nothing is stored as “suspended”, so nothing can be left stale, and nobody can edit a reservation back into service — the only way out is clearing the block, which is a right of its own. A suspended reservation shows on your phone as **tentative**, so you can see it is in doubt without it vanishing from your week.

The two moments differ, deliberately. A **new** booking that lands in a block is **refused** at the door; a booking that already existed when the block appeared is **suspended**. The archive will not let you walk into a known problem, and it will not quietly cancel a commitment you already made.

**Offered time.** An Availability window is somebody publishing when a thing may be booked — an instructor’s teaching hours, a pool car’s lending times. Two rules about it are worth knowing because the obvious guess is wrong in both cases:

- **A window must cover the whole booking, on its own.** Two adjacent windows do not add up: 09:00–11:00 and 11:00–13:00 will not between them carry a 10:00–12:00 booking. Accepting half an offer as consent for a whole booking is a failure nobody would see — the booking succeeds, somebody is committed to a time they never offered, and the first anyone learns of it is when they do not turn up.
- **No window means not offered.** A thing nobody has published time for offers nothing. Absence of an offer is not consent.

Whether a reservation **requires** an offer at all depends on what is being booked, and that is decided by the industry module that owns the thing rather than by the archive: booking an instructor may need their published hours as their consent, while booking a meeting room needs nothing of the sort. The archive stores the offer and answers the question; what the answer **obliges** is the module’s rule.

## 7.6 On a phone or a tablet

The same address, in the same browser, gives you a layout built for the screen you are holding. There is no separate mobile site and nothing to install — and nothing is **taken away**: what the narrower layouts cannot show side by side, they show one at a time.

**A tablet is recognised by its touch screen, not by its width.** That distinction matters more than it sounds: a large tablet is about 1024 points across upright and 1366 across sideways, so measuring width alone would call the same device a tablet one way up and a desktop the other. Turning your tablet changes how many panes you get, and never which kind of device the archive thinks you have.

### 7.6.1 A phone: one pane, and a way back

The folder tree becomes a drawer, the folder's contents fill the screen, and a document opens over the top with its own **Preview**, **Details** and **Comments** tabs — so the panes the wide layout drops are a tap away rather than gone.

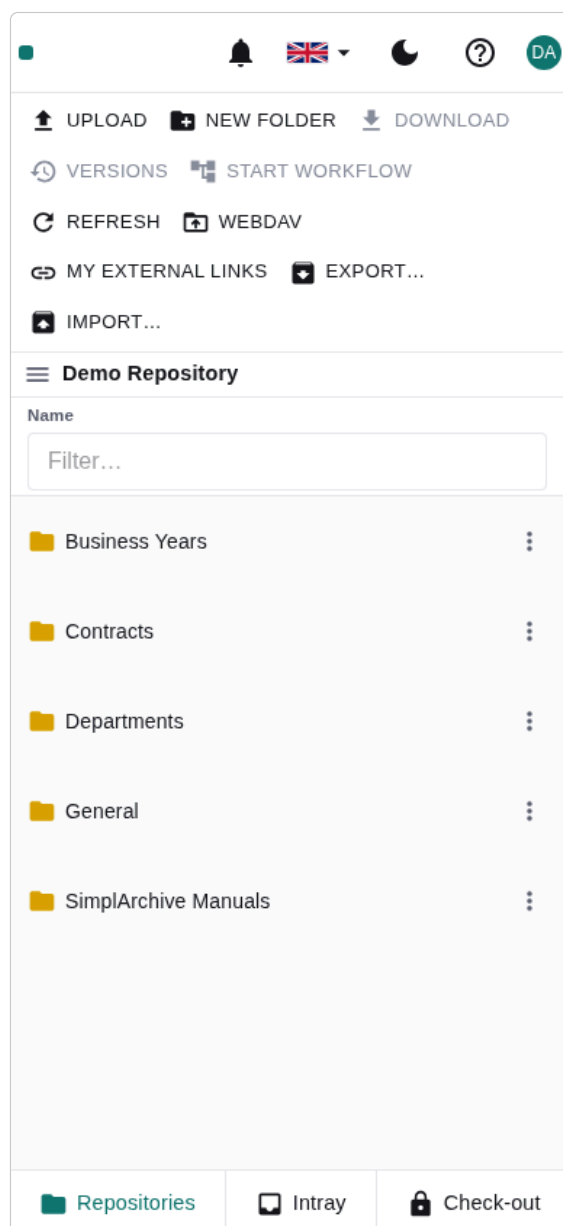


Figure 15: A folder's contents on a phone, filling the screen. A single tap opens — there is no double-click here.

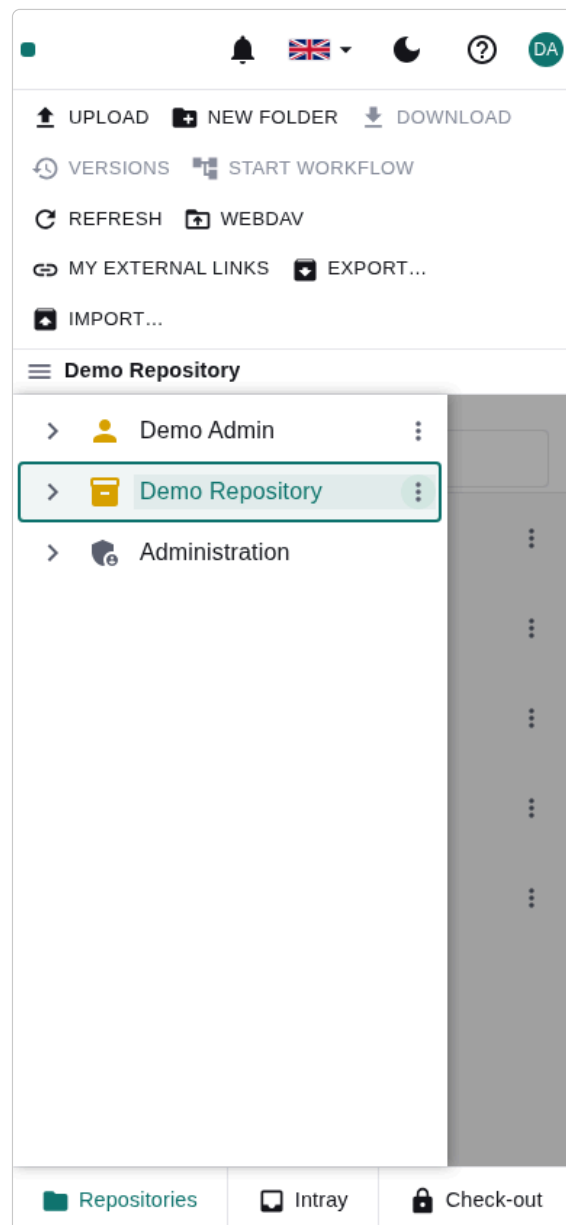


Figure 16: The tree, slid in from the left. Choosing a folder closes it again.

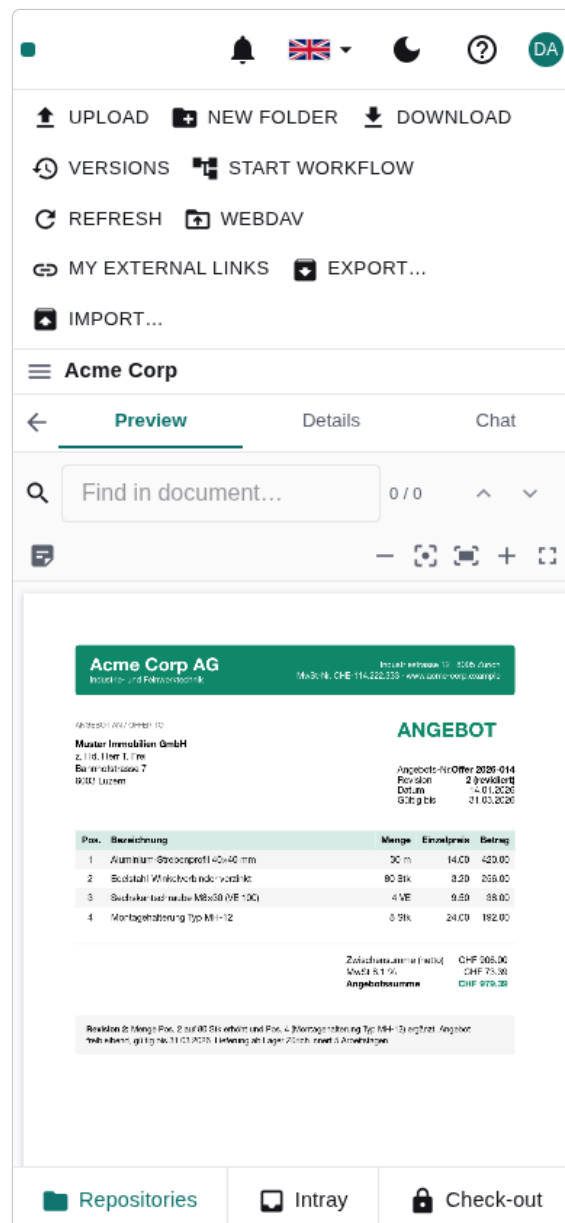


Figure 17: A document, full screen, with its three tabs. Back returns to the list.

**A single tap navigates on a phone.** On a desktop a click selects and a double click opens, because there is a second pane to show the selection in. On a phone there is not, so a tap goes straight in.

7.6.2 A tablet: one pane upright, two sideways

Held upright, a tablet behaves exactly as a phone does — one pane, the tree in a drawer.

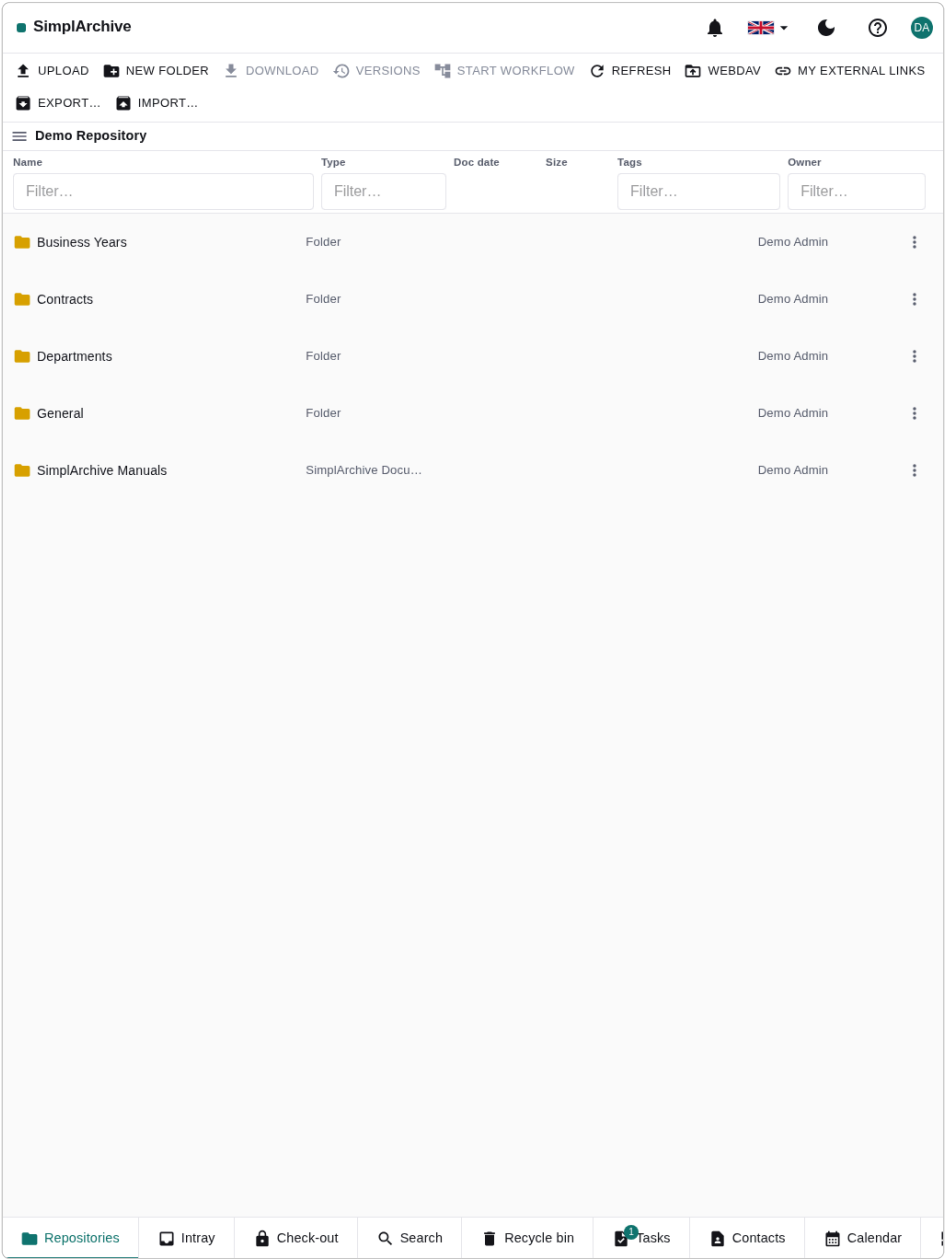


Figure 18: Upright: one pane at a time, the same shape as a phone.

Turn it sideways and you get two of the three panes. While you are browsing, the tree sits beside the folder’s contents.

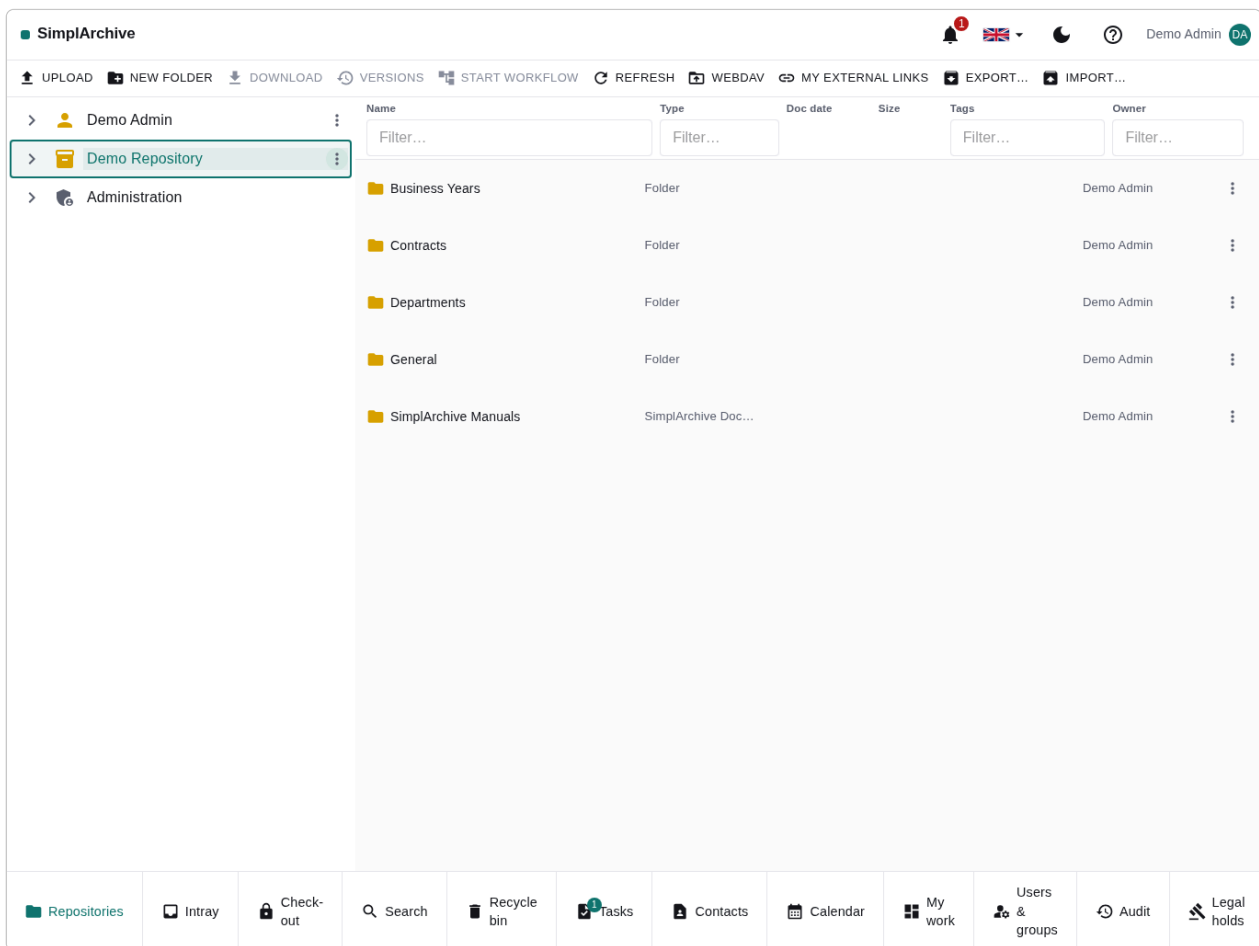


Figure 19: Sideways, browsing: the tree beside the contents list.

Open a document and the tree steps aside for it, so what you came **from** stays next to what you opened – and the tree is one tap away from the ≡ button whenever you want it back.

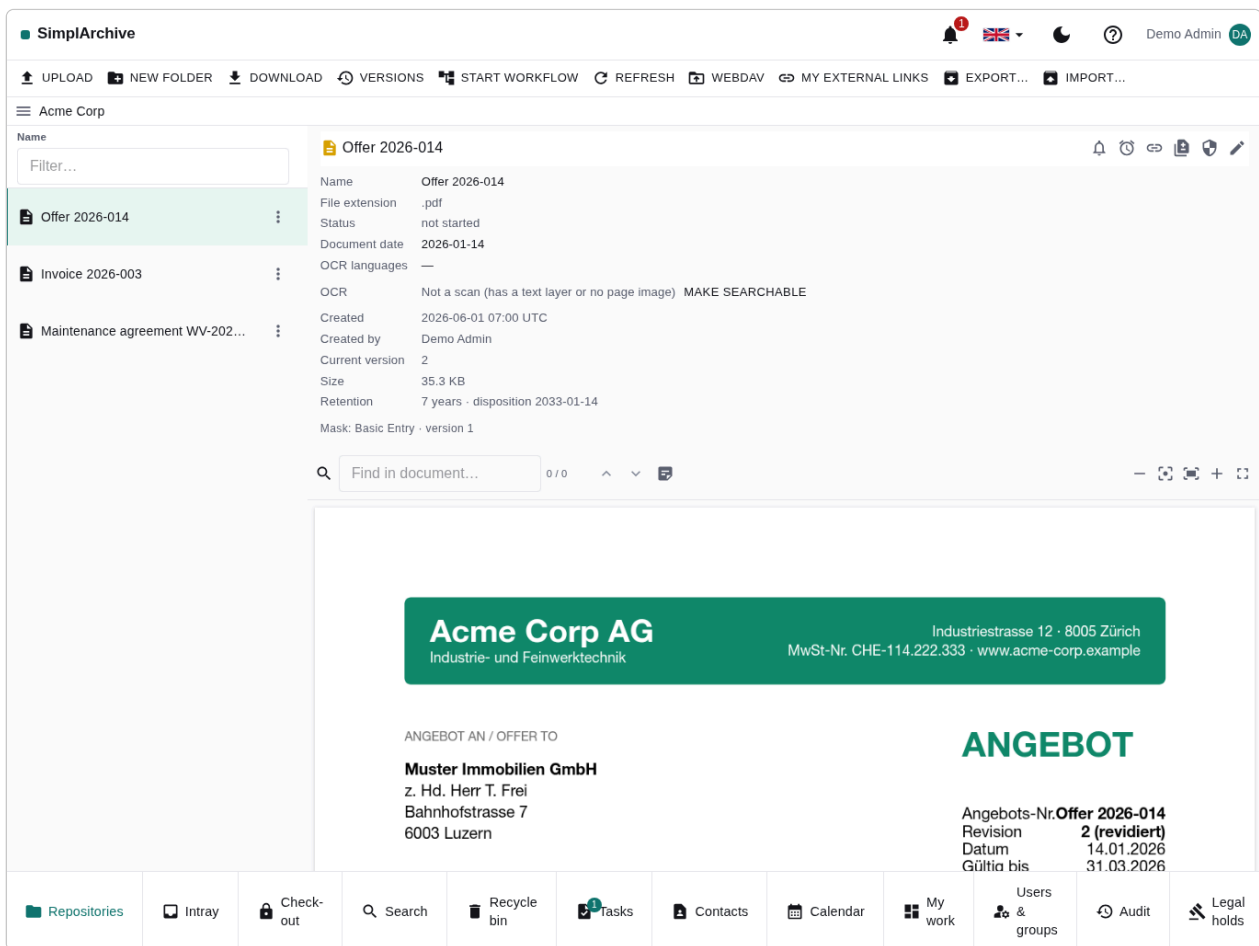


Figure 20: Sideways, with a document open: the list beside the document. The tree is a tap away.

### 7.6.3 What each width shows

| Screen           | What you see                                                                                |
|------------------|---------------------------------------------------------------------------------------------|
| Desktop          | All four panes — tree, contents, document, comments — resizable, and remembered per browser |
| Tablet, sideways | Two panes: tree and contents, or contents and document                                      |
| Tablet, upright  | One pane, tree in a drawer                                                                  |
| Phone            | One pane, tree in a drawer, document full screen                                            |

The comments pane is the first to go as the screen narrows, and the index-data pane the next — both come back as tabs inside the document view, so nothing becomes unreachable. It moves.

**Buttons are labelled where you cannot hover.** On a desktop a ribbon button is an icon and its name appears on hover. A touch screen has no hover and therefore no tooltip, so the same buttons keep their labels — an unlabelled symbol you cannot interrogate is a guess.

This chapter is about the archive **in a browser**. For your device's own mail, contacts, calendar and files apps reaching the archive with no browser at all, see Section 8.

## 8 Your own device

Everything in this chapter is already yours. SimplArchive installs **nothing** on your phone, tablet or laptop — the archive speaks the protocols those devices came with, so the mail app, address book, calendar and file manager you already use are the client. There is no app to find, no version to keep current, and nothing to uninstall when you leave.

That also means the archive obeys the same rules on your device as in the workbench. What you may see is what you may see; a folder you have no rights to simply is not there, rather than being there and refusing you.

### 8.1 What speaks what

| On your device | Protocol       | What you get                                                                           |
|----------------|----------------|----------------------------------------------------------------------------------------|
| Mail program   | <b>IMAP</b>    | The archive as mail folders — see Section 6.2                                          |
| Address book   | <b>CardDAV</b> | Contacts sync both ways — see Section 7.3                                              |
| Calendar       | <b>CalDAV</b>  | Calendars and your task deadlines — see Section 7.3                                    |
| File manager   | <b>WebDAV</b>  | One mountable drive — see Section 6                                                    |
| Notes app      | IMAP           | Notes with real version history — see Section 6.2                                      |
| Browser        | —              | The full workbench, on any screen — except opening encrypted content, see Section 14.1 |

### 8.2 Two passwords for your devices

Your devices use **two** app passwords, not one, and neither is your sign-in password:

- the **DAV password** — issued from **WebDAV...** in the account menu — for the file manager (**WebDAV**), the calendar (**CalDAV**) and the address book (**CardDAV**);
- the **IMAP password** — issued from **Email access (IMAP)...** — for the mail program and the notes app.

Both are separate from your sign-in password on purpose: a device holds them indefinitely, so they are what you revoke when a phone is lost — without changing how you sign in. **A lost device needs both revoked:** revoking the DAV password leaves that phone’s mail and notes connected, and revoking the IMAP password leaves its files, calendar and contacts connected.

Revoking either disconnects every device using it at once. There is no per-device credential today; if you need one device cut off, reissue the password and re-enter it on the devices you keep.

## 8.3 Encryption is not optional

Point your devices at an `https://` address, and make sure the mail account uses **TLS** (port 993). This is not only good practice — some notes clients **silently refuse** a plaintext connection: they ask the server what it supports, dislike the answer and hang up, showing you nothing at all. A server that works perfectly from every other app can look broken from that one, and the reason never appears on screen.

**If a device connects but shows nothing**, suspect the transport before the account. A wrong password produces an error you can read; a refused plaintext connection produces silence.

## 8.4 What each one does not give you

Naming the boundary is what stops a working feature looking broken:

- **A mail program shows the archive, not the application.** No recycle bin, no workflow, no permissions dialog, no search across metadata — those live in the workbench.
- **A mounted drive shows the tree, not the history.** Versions, comments and index data are not files, so they do not appear; saving over a file makes a new version, which is the one piece of history the drive can express.
- **Calendars and address books carry their own items only.** A calendar holds appointments; it will not show you the documents filed beside it.
- **Task collections are read-only.** You can see what is waiting; approving it is recorded in the workbench, with who did it and why.

## 8.5 On a small screen

The workbench itself adapts rather than sending you to a separate mobile site, and it decides by what you are holding rather than by how wide the window is — a tablet is recognised by its **touch** screen, so turning it does not turn it into a laptop.

- **Phone, and a tablet held upright** — one pane at a time. The folder tree slides in from the left, the folder contents fill the screen, and opening a document covers it with **Preview**, **Details** and **Comments** tabs. A single tap navigates, rather than the desktop's click-then-double-click.
- **Tablet held sideways** — two panes. Browsing shows the tree beside the folder contents; opening a document swaps the tree for the document, so what you came from stays next to what you opened. The tree is always one tap away, from the ☰ button.
- **Laptop or desktop** — the full workbench, with resizable panes that remember their widths.

## 9 Metadata & classification

Each document has a **mask** (document type) that defines its **index fields** — typed metadata such as an invoice number or a date. Open the **detail** pane's edit toggle to fill them in. A document also carries a **document date** and one or more **OCR languages** used to make scans searchable.

Index fields are validated by the mask — a field marked required must be filled, and format/range rules are enforced when you save. Well-known masks (Folder, Basic Entry, e-Mail) exist in every tenant; administrators can add more.

## 10 Search

The **Search** tab runs a full-text search across document **content**, **names**, and **index-field** values, ranked by relevance, with hits highlighted on the preview — so a distinctive word buried in a document’s text (a product name on an invoice, say) finds exactly that document. **Refinement filters** and **facets** narrow the results — by document type, date, sensitivity, and more — and you can **save** a search to re-run or share it later.

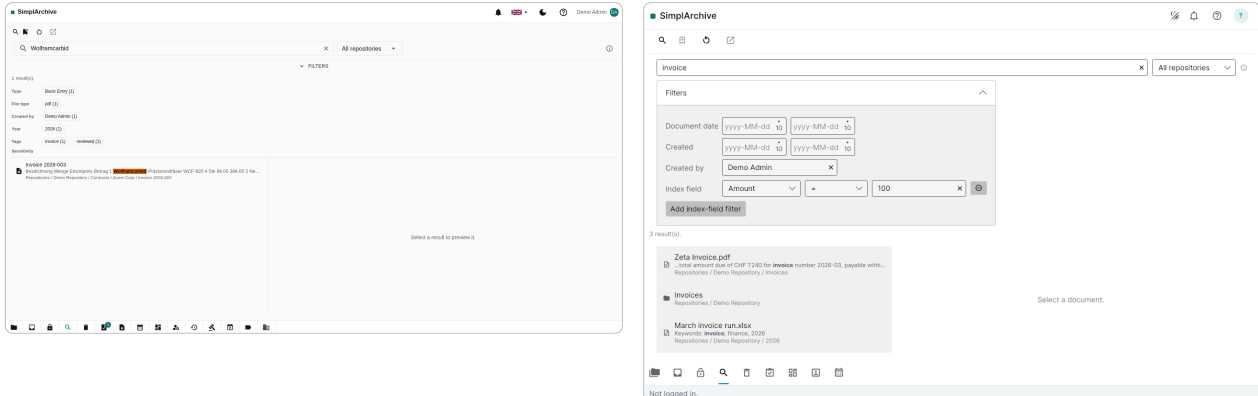


Figure 21: Full-text search with refinement filters and facets, in the web (left) and desktop (right) clients.

**Parts of words.** Search matches whole words first, which is what keeps the most relevant document at the top. If that finds nothing, the search is retried looking for your text **inside** words — so **montage** finds a document that only ever says **Montagehalterung**, and **sechskant** finds the longer compound containing it. This matters most in German, where one word does the work of several. The second attempt is slower and its ranking is flatter, so it only runs when the first found nothing at all.

**What the field does not do.** Operators are not interpreted: quotes, AND, **field:value** and wildcards are searched as literal text, deliberately — a query can never fail over a stray character. Structured narrowing — by document type, owner, year, tags, or a specific index field — lives in the refinement filters beside the results, not in the text box.

## 11 Collaboration

Documents are collaborative: post **comments** in a feed, attach **annotations** (sticky notes, highlights, and shapes) onto the preview, and **follow** a document or folder to be **notified** of activity. Set yourself a **reminder**, and track everything assigned to you on the **My work** dashboard. To edit a document exclusively, **check it out** — others see it is locked — then **check in** your changes as a new version.

**The chat thread.** Every document has its own thread, shown beside the preview. Use it for the conversation about the document — a question about a figure, a note that a revision is on its way — so that discussion stays with the document instead of in someone’s mailbox. Replies nest under the message they answer, and the thread also records what happened to the document: a new version, a filing, and other activity appear in the same timeline, so reading it tells you both what people said and what changed.

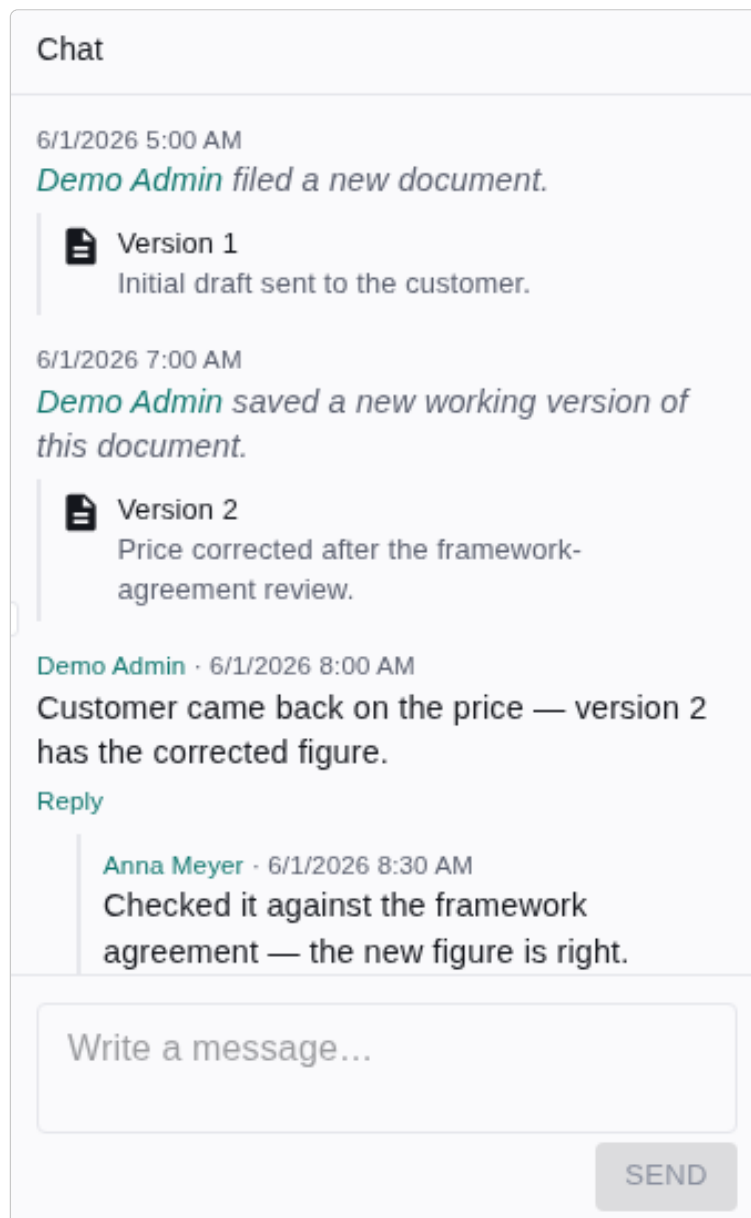


Figure 22: The chat pane on a document: a threaded conversation interleaved with the document’s own activity — here a question and its reply, followed by the two versions as they were saved.



Figure 23: Left: the **My work** dashboard. Right: the **Check-out** tab listing documents locked for exclusive editing — here one edited (*Modified*) and one untouched (*Unchanged*).

**Seeing your edit before you commit it.** The **Check-out** tab shows what you are **about to check in**, not what is already archived. Select a document you hold and the pane beside the list shows its index data and a preview of your **working copy** — the file as you have edited it. That is the version the **Check in** action will create, so you can look at it before committing, without leaving the tab to go and find the archived copy (which would show you the one thing that is certainly not your edit).

A document you have edited is marked **Modified**, and only those offer the actions that make sense for an edit:

| Action                | What it does                                                                                                                                                                                                                                        |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Compare</b>        | An inline, side-by-side view of what changed between the archived version and your working copy.                                                                                                                                                    |
| <b>Beyond Compare</b> | Opens the same two files in Beyond Compare, if you use it — a desktop-only convenience, since a browser is not allowed to launch another application. Not affiliated with SimpliArchive; the button points you to the vendor if you do not have it. |
| <b>Check in</b>       | Files your working copy as a new version and releases the lock.                                                                                                                                                                                     |
| <b>Discard</b>        | Throws the working copy away and releases the lock, leaving the archived version untouched.                                                                                                                                                         |

If you have not saved anything to your working copy yet, the preview stays empty rather than showing the archived version. There is genuinely nothing to preview, and showing the archived file there would be answering a different question.

## 12 Sharing outside SimplArchive

Everything above assumes the other person has an account. An **external link** is for when they do not: a plain URL that opens one document, for anyone who has it, with no sign-in. Use it for the customer who needs the signed contract or the auditor who needs one invoice — not as a general-purpose way to move documents around.

**Creating one.** Select the document and open **External links...** from the detail pane. Choose when it should expire and how many times it may be opened, then create it.

**The URL is shown once, at creation, and never again.** Copy it before you close the dialog. It appears in no list afterwards — deliberately, because a list is read far more widely, and far more casually, than the moment you deliberately created something.

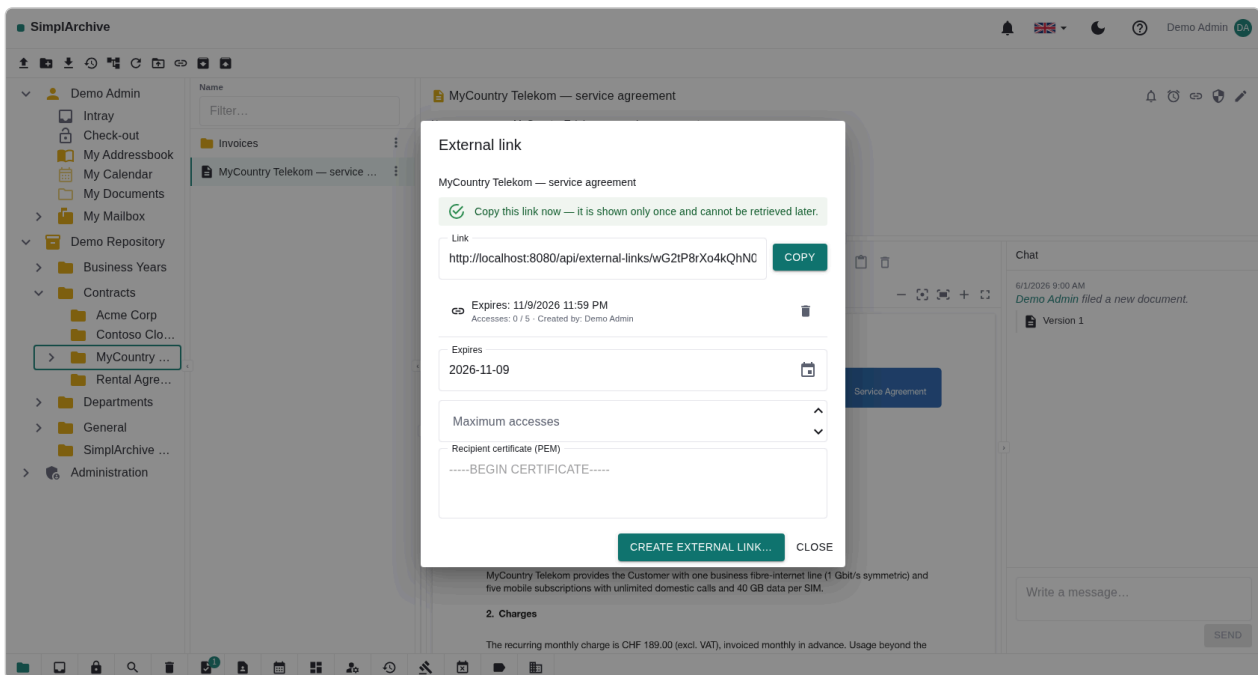


Figure 24: Creating an external link. The URL is revealed once, here, and cannot be retrieved later.

**Managing what you have shared.** My **external links** on the ribbon lists your live links: which document, when it expires, how many times it has been opened. From a row you can jump to the document, review a link's details, or **revoke** it. An administrator sees everyone's, filtered by user or group.

A link near its expiry can be **extended** — but only within 30 days of lapsing, by at most 90 days, and measured from today rather than added to whatever time remains. So extending is a deliberate renewal, not a way to accumulate an indefinite link.

**Revoking does not delete the row.** It stamps it revoked and leaves the record standing — who shared what, with effect from when. After a link has leaked, that record is exactly what the investigation needs, and it would be gone if revoking tidied it away.

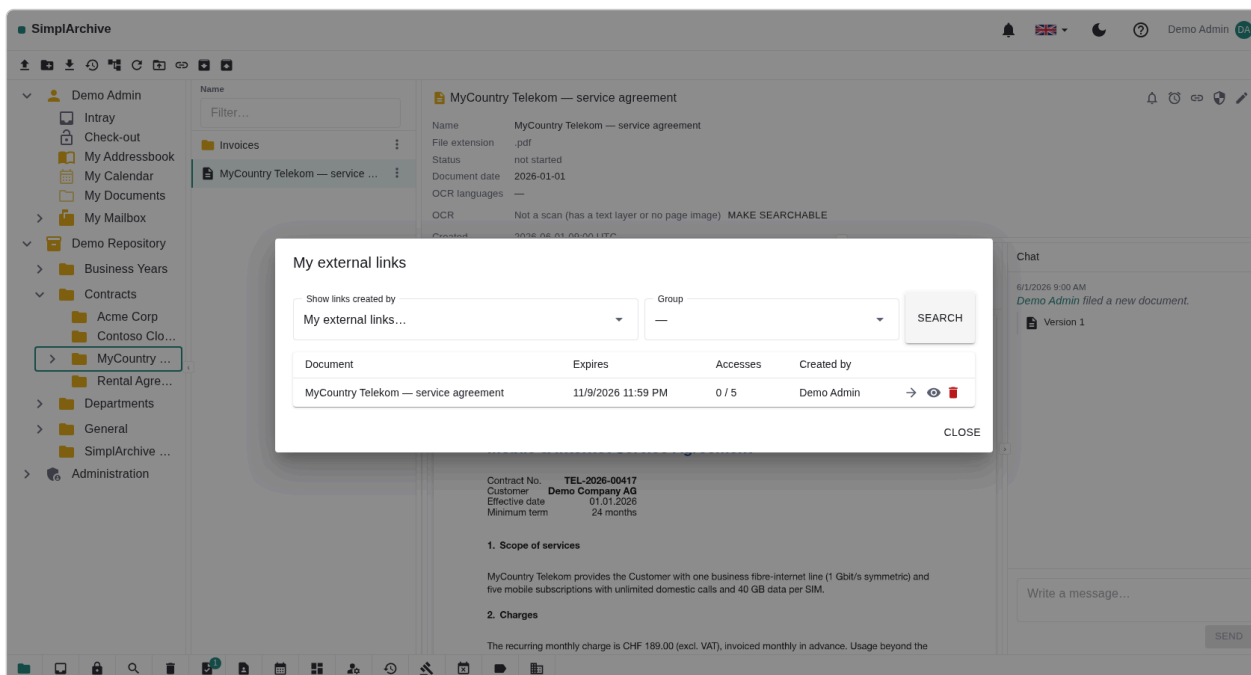


Figure 25: **My external links** — every live link you have shared, with go-to, details and revoke on each row.

**What the recipient sees.** A single page with the document’s name, a picture of its first page, and buttons to open or download it — with the number of pages marked on the picture when there is more than one, so they know what they are about to open. Nothing else: no tree, no navigation, no route to any other document.

The picture is drawn when you create the link, not when the recipient opens it, so there is nothing to wait for. A document with no picture to draw — an archive, a binary — simply shows its name and the buttons.

An unknown, expired, exhausted or revoked link all produce the **same** response. That is deliberate — telling a stranger which of those they hit would confirm a real link exists and hint at how to reach a usable one.

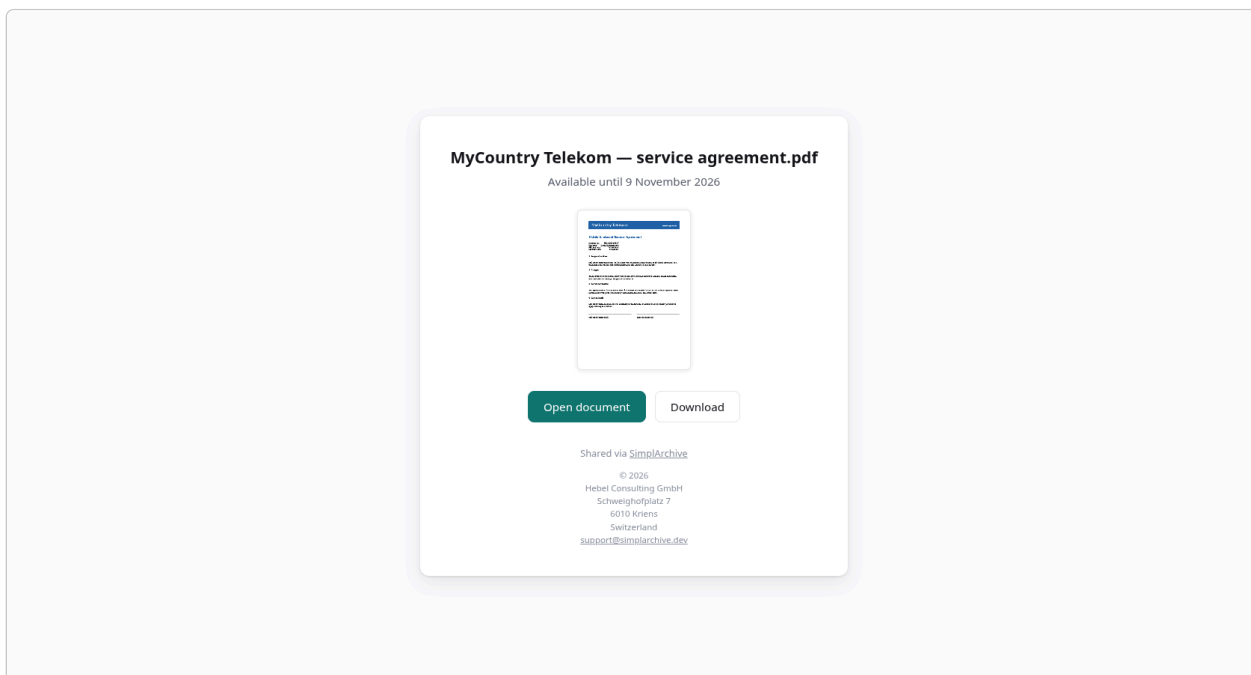


Figure 26: The recipient’s view: the document’s name and a picture of its first page. This one is a single page, so it carries no page-count marker. No account, one document, nothing else reachable from it.

## 12.1 Sharing to one named recipient

An external link is open by construction: whoever holds the URL can open the document. When that is too much, the link can be **addressed to a certificate** instead — and then only the holder of the matching private key can read what it delivers.

**How you do it.** In the create dialog, paste the recipient's certificate (their .pem or .crt — the certificate only, never a private key) into the certificate field before creating the link. The dialog reads it and shows you back the **subject** and the **fingerprint** it found.

**Check the subject and fingerprint before you send the link.** They are your only confirmation that the certificate is the one you meant, and addressing a document to the wrong key cannot be undone: the person you intended will not be able to open it, and whoever holds the key you actually used will. The remedy is to revoke the link and create a new one — an existing link cannot be re-addressed.

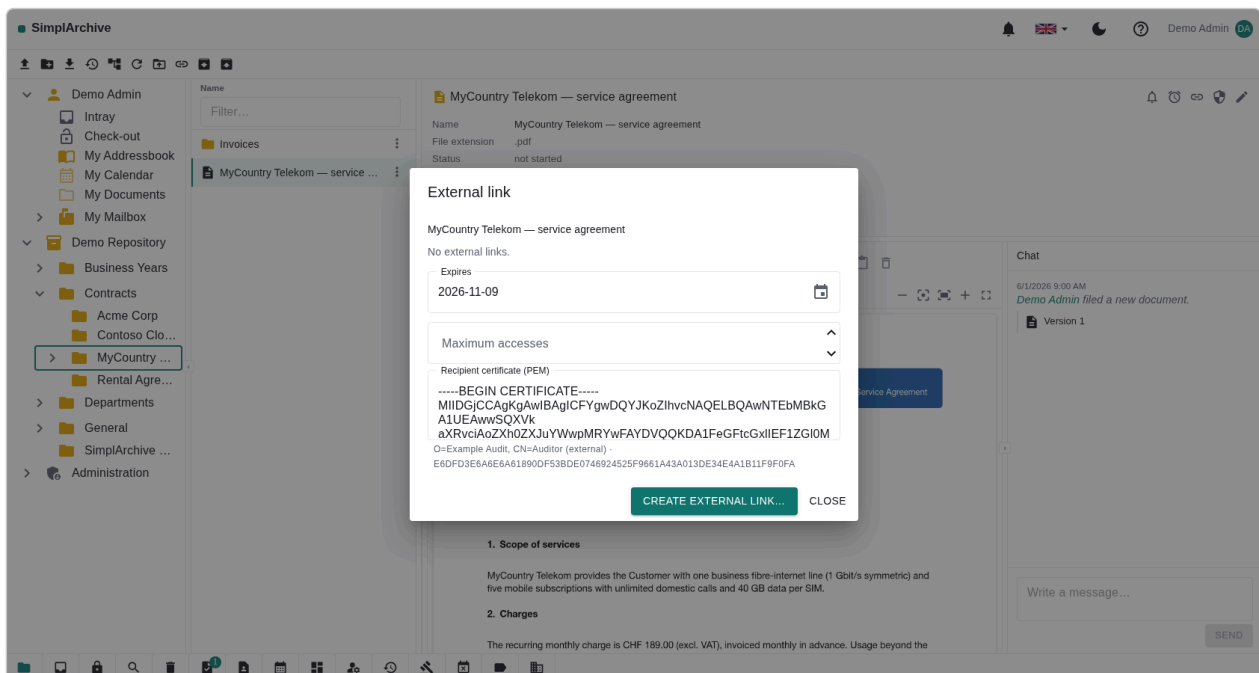


Figure 27: Addressing a link to a recipient: the pasted certificate is described back as its subject and fingerprint, which is what to check before sending the URL.

**What the recipient gets.** The landing page looks the same, but the download hands them a .p7m — the document inside an encrypted envelope addressed to their certificate. Mail software that handles S/MIME opens it with their own key; a browser or file manager cannot, and will simply save a file they must open with the right program. Tell them to expect that, because a .p7m nobody warned them about reads as a broken download.

**Where the archive itself is encrypted, this is the only way to share outward.** On such an installation the archive serves no readable content at all, so a link with no recipient is one it could never fulfil — and the dialog **refuses to create one**, rather than letting you send a URL that fails when it is opened. The certificate is not an option there but the requirement. Two smaller differences follow from the same cause: the recipient's page carries **no picture of the first page** (the picture is content too), and **Open document** has nothing to show inline, so downloading the envelope is the whole of what the link does.

## 12.2 The controls an administrator holds

Sharing outward is the one action that leaves the system, so it is gated twice and can be stopped in one move.

- **Two gates on creating a link.** The tenant-wide **Allow external links** switch must be on, and the individual needs the **Create external link** right, granted per user or group from **Users & groups**. Either alone is enough to prevent sharing; both must be present to allow it. A service account can never create one — only a person shares, so there is always someone accountable for a link's existence.
- **The kill switch.** Turning **Allow external links** off is checked when a link is **opened**, not only when one is created — so it stops every link already out in the world, not merely future ones. This is the control to reach for when something has leaked, and it is worth knowing about before you need it.
- **The caps you set.** **Maximum link lifetime** (default 180 days) and **default access count** (default 5) are the rails everyone else shares within. Tighten them to your own policy rather than relying on people choosing well.

## 13 Workflow & records

**Approval workflow.** Submit a document for review and it moves through a fixed state machine — Draft → In Review → Approved / Rejected → Released. Reviewers act on their **Tasks** tab — sortable by any column (a click on a header; the default puts the nearest deadline on top, overdue in red first) and narrowable through the visible filter row: document and version text, plus an **Overdue only** switch. Reviews can be reassigned, and overdue reviews escalate.

**Records management.** A **legal hold** freezes documents so they cannot be changed or deleted. **Retention** policies dispose of documents once their retention period ends (with review before disposition, if required). Deleted documents rest in the **Recycle bin**, from which an administrator can restore them or purge them permanently.

On the desktop the number of tasks waiting for you also rides on the application icon itself — a badge on the macOS Dock, an overlay on the Windows taskbar — so a window you have minimised still tells you there is something to do.

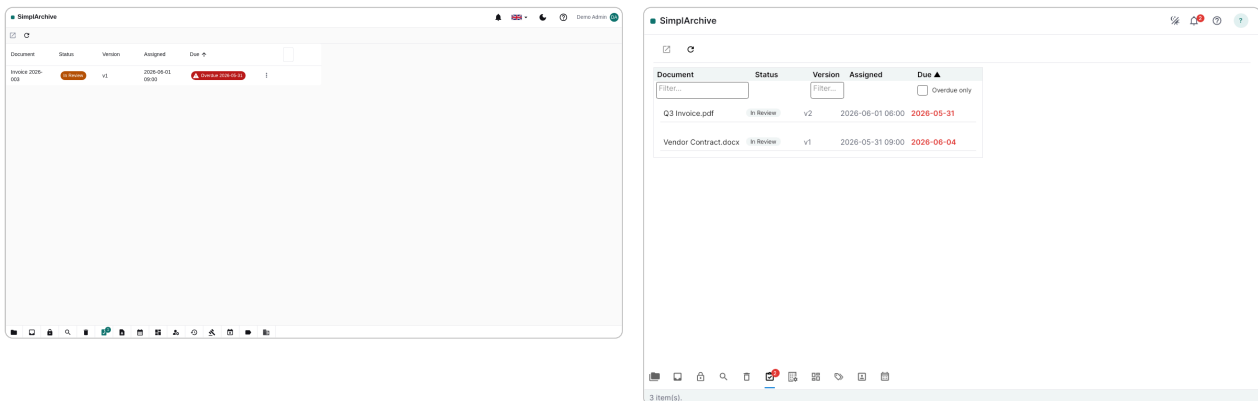


Figure 28: The Tasks tab — a reviewer’s approval queue — in the web (left) and desktop (right) clients.

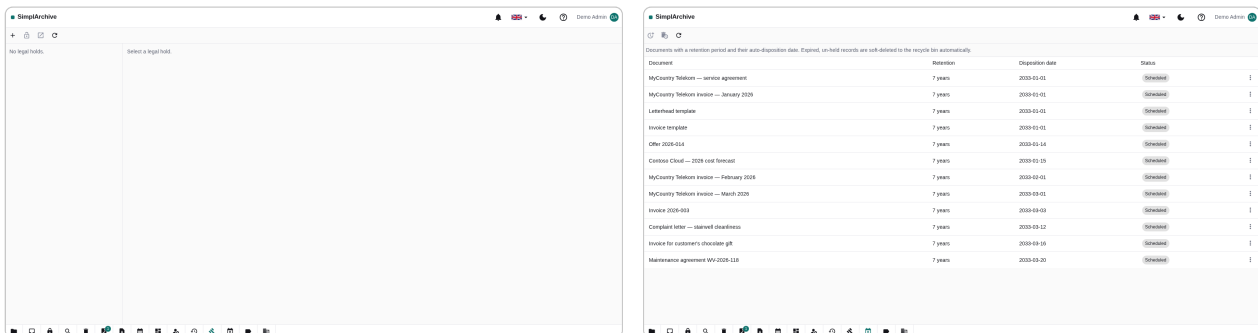


Figure 29: Records management: **legal holds** (left) freeze documents; **retention** (right) governs disposition.

## 14 Administration & account

Administrators manage **users & groups** and the **rights** granted to them, configure **tenant** settings, and review the tamper-evident **audit trail**. They also curate catalogues (sensitivity labels, tags), set the **storage quota**, and run **import / export**. Every user manages their own **account security** — password, multi-factor authentication (authenticator app or passkeys), and profile photo.

Your own account lives behind **Edit profile...** in the avatar menu (top right in both clients). It shows which account you are signed in as, the photo you currently have with a crop to replace it, and a button through to changing your password. Two-factor authentication, passkeys and the WebDAV password stay as their own entries in that menu, since each is a separate credential rather than part of your profile.

One thing to expect from the authenticator code: it is **single-use**. A six-digit code is accepted once and then refused for the rest of the half-minute it remains on screen, which is what “one-time password” means and what stops a code read over your shoulder — or relayed by a page pretending to be this one — being used again behind you. If you have just signed in somewhere with the code showing, wait for the next one rather than retyping it.

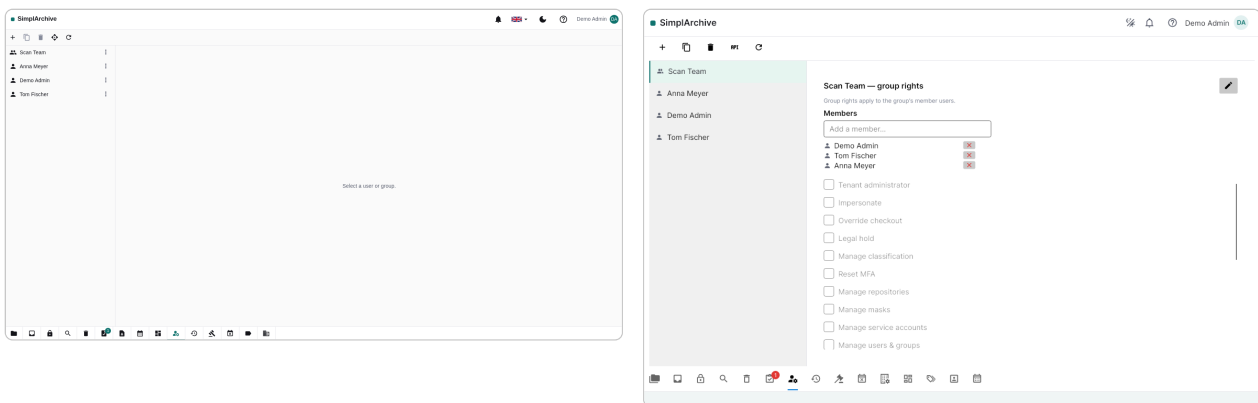


Figure 30: Users & groups administration in the web (left) and desktop (right) clients.

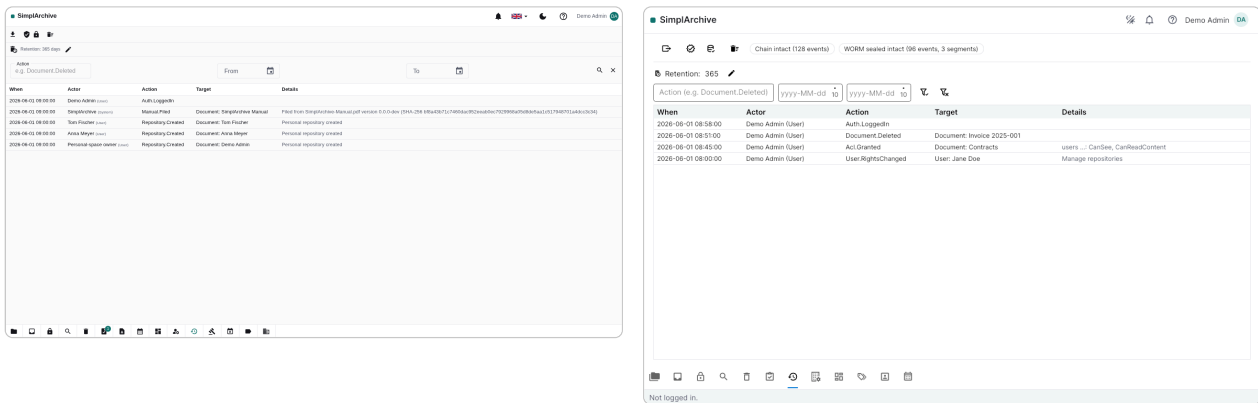


Figure 31: The audit trail — an append-only, hash-chained log — in the web (left) and desktop (right) clients.

What reaches that trail is worth being precise about, because an audit trail is read by people deciding whether something happened — and a trail believed to hold everything is one nobody checks. It records **sign-in and account events** (signing in, signing out, a refused credential, an account walled up after repeated attempts), **document acts** (filing, versioning, moving, deleting, restoring, rights changes, legal holds, disposition), **administration** (users, groups, tenant settings, service accounts, certificate enrolment) and the **deliberately dangerous** ones — impersonation, purge, encryption-key rotation and retirement.

It is **not** a record of literally every write. A small, named and shrinking set of operations still mutate without recording — chiefly some document sub-items such as appointment and contact edits — and the project tracks that set explicitly rather than claiming coverage it does not have. If an entry’s absence would be evidence for

you, confirm that the act you care about is one of the recorded kinds rather than assuming silence means it did not happen.

A refused sign-in and a logout are recent additions. Before them the trail carried only successful sign-ins, so a reader could see that somebody **got in** and not that somebody had been trying for an hour — which is the question an investigation actually asks.

Among the tenant settings is the account your notifications **leave through**. Most installations run no mail relay of their own and authenticate against an ordinary provider — and such an account is naturally per tenant, because each tenant’s mail should come from its own domain. Fill in a server and the port, encryption, user name, password and sender address appear with it; leave the server empty and the installation’s own account is used, which is what every existing deployment keeps doing.

The password is write-only. No screen ever shows it back to you: the pane says whether one is stored, and an empty box on saving means **keep the one you have** rather than **clear it**, so changing the port does not silently wipe the credential. **Send test message** is offered whether or not this tenant has its own account — with none it proves the installation’s, which is what your mail would really use. The point of it is to fail in front of somebody who can fix it, rather than at three in the morning inside a reminder nobody receives.

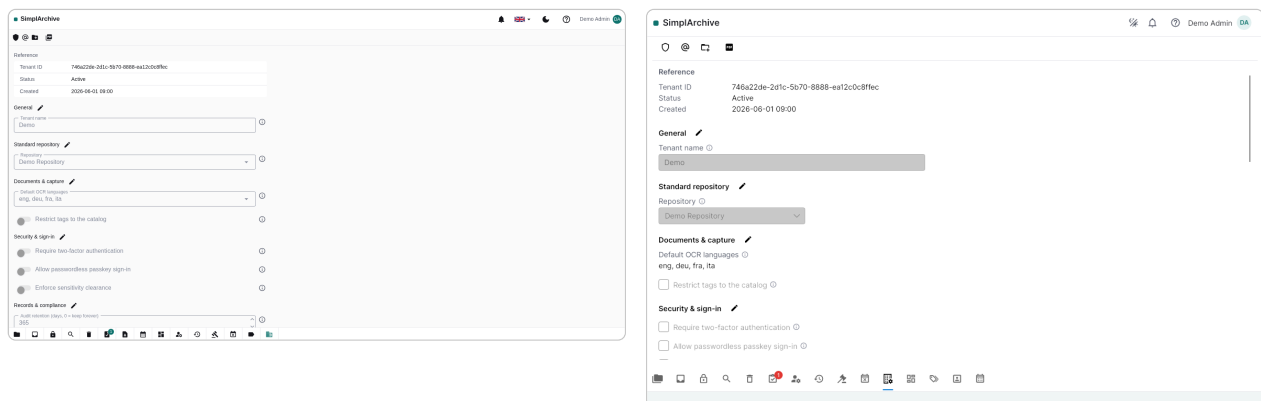


Figure 32: Tenant settings in the web (left) and desktop (right) clients.

The desktop client can connect to **several servers** its server manager stores a profile (name + address) for each. A server is not a tenant: one SimpliArchive installation hosts many tenants, and which tenant you belong to follows from the account you sign in with.

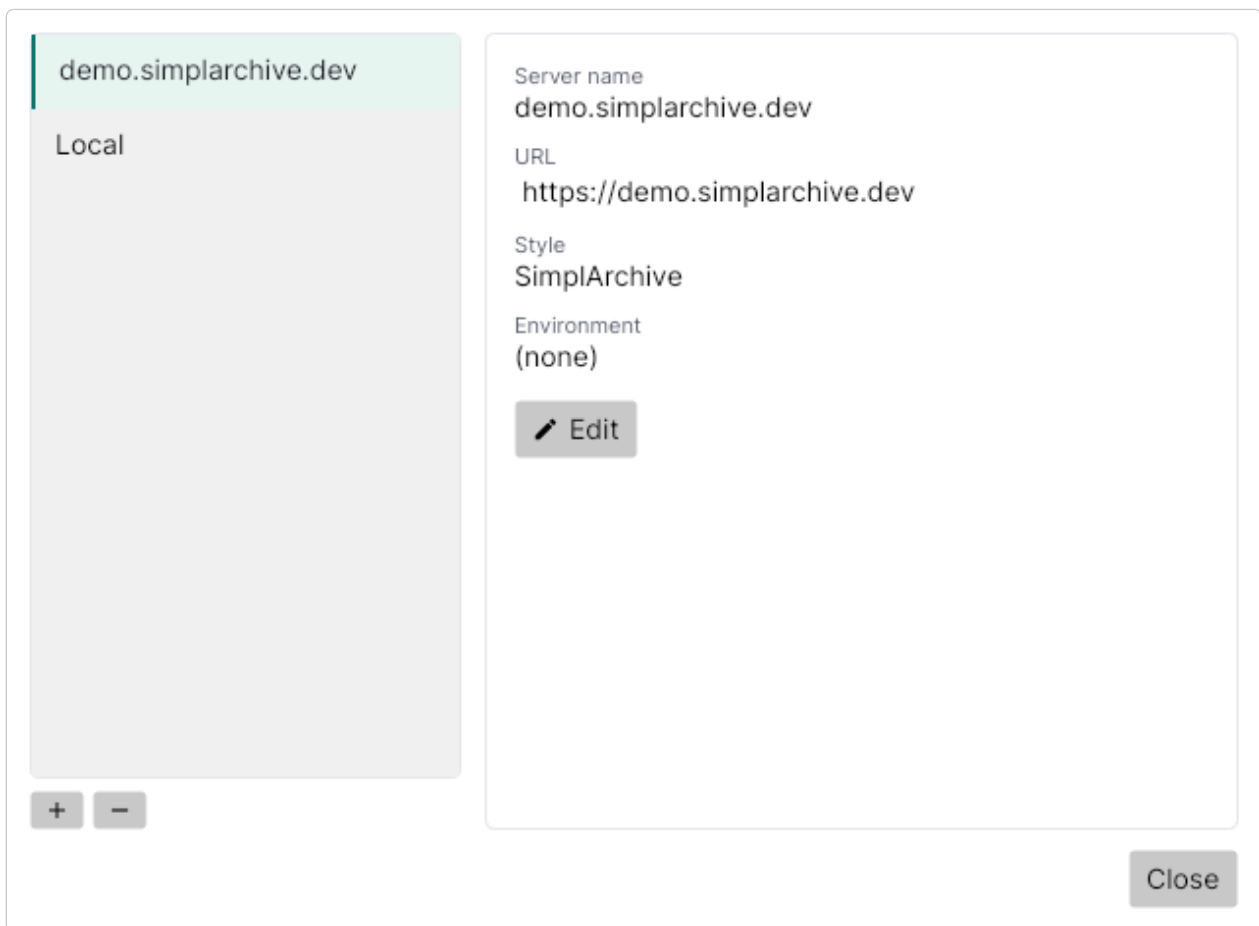


Figure 33: The desktop server manager: connection profiles for several SimplArchive servers.

## 14.1 When the archive hands you encrypted content

On an installation configured for it, the archive does not serve readable document content at all. What arrives is an **envelope addressed to your own certificate** — the same certificate you registered to make your mail readable (see Section 6.2) — and it is opened on your own machine, with your own key, by the client you are working in.

**This describes the strict level.** An administrator can also set a level where documents are offered **both** ways — as an envelope to whoever can open one, and in the ordinary readable way to everyone else. There the buttons below stay where they are and keep working, the web client keeps showing documents, and what changes is only that the desktop client reads through your card. If your buttons work, you are on that level rather than this one, and nothing here has gone wrong. Section 14.2 sets out the levels.

Two consequences are worth meeting in a manual rather than in the application, because neither looks like what it is.

**Without a registered certificate, download and preview are not offered** — on the strict level. Not refused with an error — **absent**. The document, its index data and its history all still render; the buttons that would hand you content simply are not there. That is deliberate: a button that fails when clicked teaches nothing, while a missing one, beside the certificate entry in your account menu, points at the remedy. Register a certificate and the buttons appear — and note that on an installation that runs certificate management there are **two** entries there, of which only one addresses documents to you. Section 15.7 sets out which.

**The desktop client opens these envelopes; the web client cannot.** A browser has no access to the certificate store your private key lives in, so on such an installation reading documents is work for the desktop

client. The web client stays fully usable for everything that is not content — browsing, index data, search results, workflow, administration.

**Find-in-document follows the same line, and for the same reason.** Highlighting your search words on the page needs the words and their positions, and on such an installation the server does not have them — it holds only the envelope. The desktop client finds within a document because it has already opened that envelope and holds the page in the clear; the web client cannot, so the find box is not offered there. Where a document carries no text of its own — a photograph, or a scan that was never recognised — find has nothing to search and says so, on either client.

**A key held on a smartcard never leaves it.** Where your private key lives on a card or a token rather than in a file, the card performs the one operation that opens each envelope, and the key itself is never read out — not by the archive, not by the client, not by anything else running on the machine.

**Reading with your card.** The first document you open asks for your **card PIN**, once. It is not asked again while you stay signed in and the card stays in the reader — one document's preview, its page images and its searchable text are three separate reads, and a prompt for each would be unusable. The PIN itself is not stored: what the client keeps is the unlocked connection to the card, not the number you typed.

**Two cards in readers at once is fine.** Where more than one card is plugged in — your own and a colleague's, or a card you are preparing beside the one you work with — the client first asks the **document** who it was addressed to, and compares that against what each card carries. That question is answered from public information, so **a card that cannot open the document is never asked for its PIN**: a prompt whose answer was always going to be no is how people learn to click through prompts.

Where **several** cards could open it — a card and a laptop identity are one person, and a document is addressed to all of them — each is tried in turn, and the PIN prompt **names the card it is about**. So declining one, or mistyping it, does not lose a document another card would have opened. You are not offered a choice between them, deliberately: every card that can open it opens the same document, so the choice would have no outcome you could see.

**Taking your card out closes what it opened.** Within a few seconds of removing the card, any document on screen that it decrypted is closed and the pages it drew are discarded. You stay signed in and can carry on browsing folders, index data and search results — none of that is encrypted — and putting the card back lets you open documents again. This protects the document you left on an unattended screen; it does not sign you out, so lock your computer as you normally would when you leave it.

If a document cannot be opened, the message says **which** of the three things is missing — smartcard software on the computer, a card in a reader, or a certificate matching the document — because the remedy for each is somewhere completely different.

Preparing a card in the first place — putting a key on it, getting a certificate onto it, and registering that certificate here — is set out in Section 15.

## 14.2 Encryption of the archive itself

SimplArchive's encryption is extended by **two separate paid products**, and which one you need depends on what you are trying to achieve. They are named here because the division is not where most people guess.

**The Encryption Service** encrypts **content where it is stored**, under keys held in hardware the operating organisation controls.

**The Encryption Module** manages **certificates at the scale of an organisation**: several per person — one per device, so a smartcard in a computer and an identity on a phone can both be addressed at once — enrolment **on somebody else's behalf** and in bulk, **revocation**, and a **tenant policy** stating what makes a certificate acceptable at all (minimum key sizes, permitted curves). It is also **where a reader's certificates come from** wherever content is delivered as an envelope.

What may surprise you is what is **not** in either list. **Addressing a document to your own certificate needs neither product**. This application can do that with the certificate you registered yourself — it is the same mechanism that makes your mail readable on your devices alone (see Section 6.2). What the paid products add is protection of the stored bytes, and the means to run certificates for hundreds of people rather than one.

Where the Service is installed, an administrator sets a **level per tenant**, so an archive that needs this can sit beside one that does not. Three of those levels concern you as a reader, and they differ in what happens when you have no certificate yet. The first needs only the Service; the other two deliver envelopes, so they also need the Module, which is where your certificates are enrolled:

**Stored encrypted** Content is encrypted where it is kept. Nothing changes in how you read it.

**Rehearsal** Every document is **also** offered as an envelope to whoever can open one, while every ordinary way of reading stays open. It exists so an organisation can find out whether its machines and cards are ready **before** the strict level is switched on — nobody is blocked while the gaps are found. It is a readiness exercise and **not** additional protection: everything readable before is still readable, by anyone who could read it before.

**Strict** Content is served **only** as an envelope. This is the level Section 14.1 describes, and the one where a missing certificate means no content at all.

Everything else these products do, including what their protection does and does not claim, is described in **their own manuals**: they are separate products with their own releases, and documenting them twice is how the two come to disagree.

### 14.2.1 What encryption here does not claim

One question is worth answering wherever encryption is described, because the honest answer is not the one the word “encrypted” suggests: **this is quantum-migratable, not quantum-resistant**.

The **content** holds up. Documents and messages are encrypted with AES-256, and a quantum computer does not break it — the best known attack halves the effective key strength, which leaves 256-bit AES at a level still considered safe. The bulk of what is stored is therefore fine.

What does not hold up is every **asymmetric** step beside it: wrapping a content key under a hardware-held key, and addressing an envelope to somebody's certificate. Those rest on RSA and elliptic-curve mathematics, which a sufficiently capable quantum computer breaks outright.

The consequence has a name — **harvest now, decrypt later**. An adversary who copies today's wrapped keys and envelopes can decrypt them on the day such a machine exists. For a chat message that is academic. For an **archive**, whose whole purpose is to keep documents readable for decades, the time the content must stay protected plausibly overlaps the time that machine might appear, so it is worth stating plainly rather than leaving in the small print.

**Migratable** is the claim that is true. The content keys never have to change: moving to post-quantum protection means re-wrapping those keys under a new scheme, not re-encrypting a single document — and in the Encryption Service the rolling key generations that already exist are exactly the machinery that would do

it. What is missing today is not the design but the parts: hardware security modules, card vendors and mail clients have not shipped post-quantum support yet.

The two paid products' own manuals carry this in more detail, each for its own half. It is repeated here because a reader of **this** manual may never open those, and a boundary nobody states is one a reader assumes does not exist.

## 15 Appendix — preparing a smartcard or token

This is the one-time technical setup behind Section 14.1: putting a key on a card, getting a certificate onto it, and registering that certificate with the archive. It is work for whoever administers the cards — an ordinary user meets only the last step.

The procedure below is for a **PIV** card or token, which is what the archive's clients speak. A specific device is used as the worked example because the key-generation commands belong to the card's own tool and differ per vendor; everything from the certificate request onwards is the same for any PIV device.

**About the device in the example.** This manual uses a YubiKey because they are widely available and affordable, which makes the example easy to follow along with. It is not a recommendation, and the archive requires nothing of that vendor: any PIV-capable card or token works, and only the commands in steps 1, 2, 3 and 5 — the ones that speak to the card itself — would change. Substitute your own device's tool there.

### 15.1 What has to be true, and why

Four choices are not free. Getting one wrong produces a card that looks right and cannot read a document.

- **Slot 9D (Key Management).** That is the decryption slot. 9A is authentication and 9C is signing; a certificate in either cannot open an envelope, and using the wrong one is the classic first mistake.
- **An elliptic curve (P-256) is preferred; RSA 2048 also works.** Both are addressed: an EC key by key agreement, an RSA key by key transport. EC is the better choice on a modern token and is what the provisioning command below picks unless told otherwise. This manual said **RSA, not an elliptic curve** until the EC path was completed and proven on two cards — if your card already carries an RSA key there is no reason to replace it.
- **PIN policy on, touch policy OFF.** A touch requirement means a physical tap **per decryption** — and one document's preview, page images and searchable text are three separate reads. Acceptable for signing, unusable for an archive.
- **The key is generated ON the card.** That is the whole point: it cannot be copied off, so there is no file of it to lose.

### 15.2 Tools

Two are needed, and a third is not.

- **The card's own tool**, for generating the key and writing the certificate back. Card personalisation and key generation are card-applet operations, not PKCS#11 ones. In this example that is **ykman**.
- **The PKCS#11 module**, so the desktop client can reach the card at all. Install **OpenSC**; the client looks for `opensc-pkcs11` in the usual places and offers a file picker if it is somewhere else.
- **caconsole**, the certificate tool, if the certificate is issued by your own certificate authority. It installs from the public package feed and needs no credentials:

```
dotnet tool install --global HebelConsulting.CAManagement.Cli
```

```
# ONCE PER MACHINE: a global tool lands in ~/.dotnet/tools, which is not on PATH by default.  
# Without this the next line fails with "command not found: caconsole".  
export PATH="$PATH:$HOME/.dotnet/tools" # add to ~/.zshrc to keep it
```

```
caconsole list-slots --module <the PKCS#11 module>
```

**“command not found: caconsole” does not mean the install failed.** It almost always means `~/.dotnet/tools` is not on your PATH — the installer prints that warning once and it is easy to miss. Check with `dotnet tool list --global`: if the table lists the package and the command `caconsole`, the tool is there and only the PATH is missing. `~/.dotnet/tools/caconsole` will run it in the meantime.

**Where the module is.** `list-slots` needs the path to OpenSC's PKCS#11 library, and it differs per system. These are the places the desktop client itself looks, so one of them is almost certainly right:

**macOS, Homebrew on Apple silicon**

`/opt/homebrew/lib/opensc-pkcs11.so`

**macOS, Homebrew on Intel**

`/usr/local/lib/opensc-pkcs11.so`

**macOS, the OpenSC installer package**

`/Library/OpenSC/lib/opensc-pkcs11.so`

**Windows**

`C:\Program Files\OpenSC Project\OpenSC\pkcs11\opensc-pkcs11.dll`

**Linux, Debian and Ubuntu**

`/usr/lib/x86_64-linux-gnu/opensc-pkcs11.so`

**Linux, Fedora and RHEL**

`/usr/lib64/opensc-pkcs11.so`

A working run names the token rather than staying silent — with a card inserted it prints the Cryptoki version and a table with one row per slot, and the token column shows `PIV_II` for a personalised card. If the table is empty the module loaded but the reader sees no card; if the command fails on the module path, the path is wrong rather than the card.

**Two tools, two jobs — and both are now involved.** `caconsole` belongs to the certificate authority: it prepares the card and issues the certificate. `saconsole` belongs to the archive: it **enrols** a finished certificate against a person, lists what is enrolled and revokes one (`saconsole certificates enrol|list|revoke`).

This manual said `saconsole` had no certificate commands, which was true until they were added. The division still holds and is worth keeping straight: the authority issues, the archive enrolls.

## 15.3 One command, where your own authority issues the certificate

If the certificate comes from a certificate authority you run with `caconsole`, the whole of the next section is one command:

```
caconsole yubikey provision --holder anna@example.test \
  --token-label ca-token --pin "$CA_PIN" --ca-label ca-root --ca-cert ca.crt \
  --label "YubiKey 5C" --manifest enrolments.json
```

It generates the key in slot 9D, has the **card itself** sign the certificate request — which is the only available proof that the private key is really there and reachable — issues a certificate for decryption, imports it, and reads the slot back to confirm what the card now holds.

Three things it will not do quietly:

- **It will not overwrite a card without being told.** If the slot already holds something it prints what is there and stops. `--force` replaces the **certificate** and keeps the key — which is the repair for a card whose certificate declares the wrong usage — and `--regenerate-key` replaces the **key**, which is irreversible: anything encrypted to the old one becomes unreadable. Any certificate already in the slot is saved beside the new one first.
- **It will not trust a card that cannot answer.** A token whose PIV firmware is older than 5.3 reports Private key type: `EMPTY` whether or not a key is present — it simply does not publish that detail. The command treats “empty” on such a card as **unknown** rather than **absent** and refuses to generate over it.
- **It will not hide what it did.** Every command it runs against the card, and the card's answer, is printed — with the PIN and management key removed.

With `--manifest` it also records what was issued and to whom, in a file `saconsole certificates import` reads — so a box of prepared cards is enrolled in one go rather than one at a time:

```
saconsole certificates import enrolments.json --dry-run # what would change
saconsole certificates import enrolments.json
```

It is safe to re-run: a certificate already enrolled is reported as **unchanged** rather than as an error, so an interrupted import is finished by running it again. (saconsole certificates enrol <file> --holder <email> is the single-certificate sibling, for one card prepared on its own.)

## 15.4 The walk-through

This is what the command above does, and the route to take when the certificate comes from somewhere else — a corporate authority, or a card that arrives already personalised.

**1 — Personalise the card**, once per card. These two objects must exist before anything else will behave.

```
ykman piv objects generate chuid
ykman piv objects generate ccc
```

**2 — Generate the key on the card**, into the Key Management slot.

```
ykman piv keys generate 9d public.pem \
  --algorithm rsa2048 --pin-policy once --touch-policy never
```

**3 — Put a certificate in the slot.** The slot needs one before anything can use the key at all: a PKCS#11 module does not surface a PIV slot that carries only a key. There are two routes, and **for this archive the simple one is enough** — so it is given first rather than as an afterthought.

**3a — Self-signed, with no authority at all.** The card's own tool both makes the certificate and writes it to the slot, in one command.

```
ykman piv certificates generate 9d public.pem \
  --subject "CN=Card Holder,0=Example,C=CH" --valid-days 730
```

**The archive accepts a self-signed certificate, and that is deliberate rather than an oversight.**

Nothing on the reading path validates a chain or an issuer: content is enveloped to a **public key**, and the only thing that can open the envelope is the private key on the card. A certificate authority answers a different question — **who vouches that this key belongs to that person** — which matters for an organisation issuing identities and not at all for whether a document opens.

What the archive does check is that the file parses as X.509 and carries an **RSA** key. An elliptic-curve key is refused, because content uses RSA key transport — the same requirement section 15.1 gives for the key itself.

**Mind the lifetime.** --valid-days defaults to 365, and while the archive itself does not refuse an expired certificate on the reading path, the encryption service **does** refuse to register one — so a certificate that has already lapsed cannot be re-registered after a reset or a move to another installation. Choose a lifetime you are willing to live with.

**3b — Or issued by your own authority**, if your organisation wants identities it controls — a common trust root, a name it owns, a register of who was issued what. Ask the card for a request, issue it, and write the result back.

```
ykman piv certificates request 9d public.pem holder.csr \
  --subject "CN=Card Holder,0=Example,C=CH"

caconsole issue --token-label ca --pin <ca-pin> \
  --ca-label root --ca-cert ca.crt --csr holder.csr --days 365 --out holder.crt

ykman piv certificates import 9d holder.crt
```

**Use the card's tool for the request, not the certificate tool.** caconsole can produce a request from a key that lives on a token — but a PKCS#11 module only surfaces a PIV slot once that slot carries a **certificate**, and this one does not yet. Asking the certificate tool first fails with No private key with label '...' found on the token, which reads like a wrong label and is not one.

**An empty ERROR: with no message means the slot has no key.** Both commands in 3a and 3b sign with the private key in slot 9D, so running either before step 2 fails — and the card’s tool reports it as a bare ERROR: with nothing after the colon, which says nothing at all about the cause. Check with `ykman piv info`: if the output has no **Slot 9D** section, there is no key there yet.

This is also what a **reset** leaves behind. `ykman piv reset` — the way out of a blocked PIN when the PUK is blocked too — erases every key and certificate on the card, so it puts you back at step 1 rather than where you left off. Prefer `ykman piv access unblock-pin`, which takes the PUK and keeps the key.

**4 — Remove the card and put it back in.** The operating system creates its view of a token when the card is **inserted**, so a card personalised in place is not yet visible to anything. Skipping this makes a correctly prepared card look broken.

## 15.5 Checking the card before you rely on it

The desktop client carries two hooks that answer “**is this card actually going to work?**” without a server, an account, or a document. They are worth running before registering anything, and they are the first thing to reach for when a card misbehaves later.

Both are the **installed desktop client**, run from a terminal with a flag — there is nothing extra to install and no source tree to build.

```
# The installed executable. This is the macOS path; the others are below.  
SA=/Applications/SimplArchive.app/Contents/MacOS/SimplArchive.DesktopClient
```

### macOS

```
/Applications/SimplArchive.app/Contents/MacOS/SimplArchive.DesktopClient
```

### Windows, in the unpacked folder

```
SimplArchive.DesktopClient.exe
```

### Linux, in the unpacked folder

```
./SimplArchive.DesktopClient
```

**What the client can see** — no PIN, because certificates are public:

```
$SA --card-test
```

It prints the PKCS#11 module it found, then every certificate on every token in every reader, with the subject, the expiry and a **concern** — KeyUsage when the certificate does not mention key encipherment, Expired, or None. A card that shows nothing here will show nothing in the dialog either, and the cause is the module or the reader rather than the archive.

**Whether it can actually decrypt** — this one needs the PIN:

```
CARD_PIN=<pin> $SA --card-open-test
```

It builds an envelope **the way the server builds one**, addressed to the certificate on the card, and opens it through the same code a real document goes through. MATCHES: True on the last line means the whole chain works: the certificate, the key behind it, the PIN, the module, and the client’s own reading path.

**This is the test that settles arguments, and it is the only one that can.** A certificate looks identical whether or not a usable private key stands behind it — and on YubiKey firmware older than 5.3 `ykman piv info` reports `Private key type: EMPTY` for a slot holding a perfectly good key, because key metadata did not exist before that version. Reading that as “there is no key” and regenerating would destroy the real one. A decryption is the only thing that proves the key is there.

It also tells a **wrong PIN** apart from a **broken card**: the failure names `CKR_PIN_INCORRECT` rather than reporting that nothing could open the envelope. Mind the retry counter while trying — three wrong entries block the PIN.

## 15.6 Registering it with the archive

In the desktop client, open **Encrypted mail (S/MIME)...** from the account menu and choose **Add a card or token....** It lists every certificate on every device in a reader — not just the first — because a card can carry several and a computer can have more than one reader. Pick the one from the Key Management slot and register it. No PIN is asked: a certificate is public, and only reading a **document** needs the key.

From then on the archive addresses that person's content to that certificate, and Section 14.1 describes what they see.

**A warning about key usage is expected and is not a problem.** Many certificate authorities mark a key-management certificate for signing only. The card decrypts regardless — neither the archive nor the card enforces that field — so the dialog says so and lets you continue rather than refusing a certificate that works.

## 15.7 Enrolling it yourself, where that is open to you

The registration above is the archive's own, and it holds **one** certificate per person. Where the installation also runs **certificate management** — several certificates per person, revocation, and a policy stating what counts as an acceptable certificate (Section 14.2) — the account menu carries a second entry beside the mail one: **Enrol a certificate....** Both clients have it.

The entry is there where that management is installed and licensed, and nowhere else: on an installation that does not run it there is nothing the entry could have done, so it is not shown.

**Whether you may use it is your organisation's decision, and the dialog tells you** rather than the menu hiding it. Enrolling your own certificate is switched **off** until an administrator opens it — so where it is closed, the dialog says that it is closed and that somebody who administers certificates can enrol one for you, or open it. That is deliberately not the same message as “this installation does not do this at all”: one of the two is something a colleague can change this afternoon, and a missing entry could not tell them apart.

**What it asks for is the certificate file** — the public half, as .pem, .crt or .cer; the desktop client also takes the binary .der that card tools export. **A file containing a private key is refused before anything is sent**, with the reason: the private key belongs on the card or in the keystore that generated it, and the moment worth saying so is while it is still only on your own machine.

**You also give the key a name** you will recognise — “YubiKey 5C”, “work laptop”. That is what stops several certificates per person being confusable later, and it is worth a moment's thought because a document is addressed to **all** of them: the card on your desk and the identity on your laptop open the same document, with nothing having to guess which one you are at.

**A refusal names which of four things happened**, because the remedy differs every time and only one of them is yours to act on: enrolment is not open to you here (an administrator's), the certificate is not one the product can use at all (a re-issue), your organisation's policy does not accept this one because its key is too short or its curve is not on the permitted list (ask for one that is), or it is enrolled already (nothing to do). The sentence comes from the certificate management itself, in your own language, rather than a single “could not enrol” that would send all four to the same place.

**Two entries, two stores — and where certificate management is in use, only one of them addresses your documents.** **Encrypted mail (S/MIME)...** registers the certificate that makes your **mail** readable: the archive's own, one per person, and on an installation without certificate management it is what documents are addressed to as well. **Enrol a certificate...** enrolls a **reader** certificate with the certificate management — and where that management is in use, it is the **only** place the archive looks when it addresses a document. Deliberately not both: a certificate revoked in one store would otherwise go on opening documents because a copy of it lingered in the other, which is a revocation that does not revoke.

So on such an installation, having registered a mail certificate is **not** the same as being addressed. Enrol one, and Section 14.1 describes what you then see.

## 15.8 When the certificate expires, and replacing a key

**The key does not expire; the certificate does.** Validity dates are a property of the certificate, and the private key on the card outlives them — it keeps decrypting whatever was ever addressed to it.

**Expiry is checked when a certificate is REGISTERED, and never again.** Both doors refuse one that has already lapsed: the archive's own registration answers it `expired <date>`, and so does enrolment in the Encryption Module. After that, nothing re-checks it. Content keeps being addressed to it, the card keeps opening it, and no warning appears — which is deliberate rather than an omission, because the alternative is worse: a reader whose renewal is a week late would stop receiving anything, and the key that opens their existing documents would still be in their pocket.

**So an expired certificate is a LATENT problem, not an immediate one.** Everything works until the day it has to be registered again — a new installation, a card re-issued after a reset, the same person added to a second archive — and only then is it refused. The fix at that point is a new certificate, and if a new **key** comes with it, every document already addressed to the old one stops opening. Renew before that day, not after it.

### 15.8.1 Replacing a key without losing the past

Content is addressed to a **certificate**, so the archive cannot re-address history for you — doing that would need the plaintext it deliberately never keeps. If you overwrite slot 9D with a fresh key, everything enveloped to the old one becomes unreadable, and there is no undo.

**A PIV slot holds exactly one key and one certificate**, so 9D cannot hold both the old and the new. What a YubiKey adds is **twenty retired key-management slots** — 82 through 95 — meant for precisely this: the old key moves aside instead of being destroyed.

**The archive needs no configuration for this, and there is nothing to register a second time.** The desktop client enumerates **every** certificate on the token rather than looking in a particular slot, and an envelope names the certificate it was sealed to — so an old key sitting in a retired slot is found and used automatically when an old document is opened. New documents go to the new certificate, old ones keep opening, and the reader sees no difference.

**Two practical cautions.** `ykman piv keys move` exists, but moving a key between slots depends on the card's firmware — try it on a spare card before relying on it, rather than discovering the limit on the card that holds the only copy of a key. And a card has twenty retired slots, not an unlimited number: they are room for a working lifetime of rotations, not a place to keep everything forever.

## 15.9 What a card covers, and what it may not

One certificate is registered, and **two** different things use it: the archive envelopes document content to it, and it also envelopes the mail your mail program fetches (see Section 6.2). Those are read by different software, and a key on a card changes what can read them.

- **The desktop client opens card-held content.** That is what Section 15 prepares, and it is the case this manual describes end to end.
- **Your mail program is its own question.** It can only open mail enveloped to a card if it can use a hardware token for S/MIME itself. Some desktop mail programs can, through the facilities their operating system provides for smartcards; whether yours does is a question for its documentation, not for this manual.
- **On an iPhone or iPad it cannot.** Mail there reads S/MIME using an identity installed into the device, and there is no route for a mail app to use a card — over NFC or otherwise. A card-held certificate therefore leaves mail on those devices unreadable, even while documents open normally on the desktop.

**So choose by what you need to read.** If the point is that the private key never leaves hardware, a card is right and mail on a phone is the thing you give up. If people must read archived mail on phones and tablets, register a **generated** identity instead (see Section 6.2) — it installs on those devices in one tap, at the cost of the key existing as a file. Registering one replaces the other: delete the current certificate first — and if you need **both** at once, that is the next section.

## 15.10 When one certificate per person is not enough

The limitation behind the choice above is that this application stores **one** certificate per user. That is what makes a card an either/or: the certificate that is on the card is the certificate everything is addressed to, so the devices that cannot use the card cannot read anything.

Several certificates per person dissolves it — a card for the computer and an installed identity for the phone, each addressed alongside the other, so the same document opens on both without the card's key ever leaving it. That, and **enrolment** for more people than one administrator wants to prepare by hand, belong to the separate **Encryption Module** described in Section 14.2. If you need either, contact support and ask about it; it is a paid extra.

Nothing in this appendix is wasted if you go that way — the card is prepared the same, and it is the registration that the module takes over: Section 15.7 is what the last step becomes.

## 15.11 When something looks wrong

- **The dialog says no smartcard software was found.** OpenSC is not installed, or is somewhere unusual — use **Choose module...** and point at it.
- **It says no card or token is in a reader,** with the card plainly in the reader. Remove it and re-insert it (see step 6), and check nothing else on the machine is talking to the card at the same time.
- **The card's own tool reports the private key as EMPTY.** On firmware older than 5.3 the card cannot be asked what a slot holds, so the tool prints that whether or not a key is there. It is not evidence. Settle it by using the key rather than by reading a summary.

## 16 Appendix — glossary & links

**Repository** — a root folder (a document with no parent). **Mask** — a document type / set of index fields. **ACL** — per-document access-control list. **Version** — an immutable snapshot of a document's file. **Legal hold** — a freeze that blocks change/deletion. **Retention** — a policy that disposes of documents after a period. **vCard** / **iCalendar** — the standard file formats a contact and a calendar entry are stored in (.vcf / .ics). **CardDAV** / **CalDAV** — the standards a phone or mail program uses to sync addressbooks and calendars. **UID** — the identifier those programs use to recognise an item across devices; changing it makes a duplicate rather than an edit. **SLA** — the review deadline a document type sets, which is what gives a task a due date.

Further reading:

- The live API description — the OpenAPI document at `/openapi/v1.json`.
- Desktop-client downloads — the download area at `/download`.

## 17 Appendix: the desktop client's log

When the desktop client misbehaves — a preview that stays empty, a server that will not connect, a file that does not open — its log usually says why. The client writes one rolling log file per day, always at full detail, so there is nothing to switch on after the fact: whatever just went wrong is already recorded.

**Where to find it.** The easiest way is in the app itself: **Help ► Show log folder** opens the folder directly. The location by operating system:

- Windows — %APPDATA%\SimplArchive\logs
- macOS — ~/Library/Application Support/SimplArchive/logs
- Linux — ~/.config/SimplArchive/logs

Files are named `simplarchive-YYYYMMDD.log`; the newest one is today's. The log is small by design (it rolls at 4 MB and keeps seven files) and never contains a password or a token, so it is safe to attach to a support request as it is.

**Watching it live.** Start the client from a terminal with the `--verbose` flag and the same full detail is printed to the terminal as it happens — useful when reproducing a problem step by step:

- Windows — `SimplArchive.DesktopClient.exe --verbose`
- macOS — `SimplArchive.app/Contents/MacOS/SimplArchive.DesktopClient --verbose`
- Linux — `./SimplArchive.DesktopClient --verbose`

Without the flag a terminal shows only the important lines; the file always carries everything, flag or no flag.

## 18 Appendix — who does what

A short inventory of what each kind of participant can do, for readers who need the shape of the system before its detail: an evaluator sizing it up, an administrator planning a rollout, or anyone deciding which chapter of this manual they actually need. Everything here is described properly in the chapters above; this is the map, not the territory.

**Everybody's rights are per document.** None of the lists below overrides that. What a person may do to a particular document comes from that document's permissions (and the groups they belong to), inherited down the tree unless a folder breaks the inheritance. An action missing from the interface is usually not a missing feature — it is the server declining to offer it here, to you, now.

### 18.1 The everyday user

|                          |                                                                                                                                                                                                                                    |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Find and read</b>     | Browse the tree, open a folder, preview a document without downloading it, search by content or index data, jump to a search hit inside the page, and follow references to wherever else a document is filed.                      |
| <b>Add and change</b>    | Upload by drag or from the ribbon, add a new <b>version</b> to an existing document, stage work in the <b>Intray</b> until it is ready to file, check a document <b>out</b> and back <b>in</b> , and edit index data.              |
| <b>Organise</b>          | Create folders, move documents, place a <b>reference</b> so one document appears in a second folder, tag, and classify with a <b>document type</b> (mask).                                                                         |
| <b>Collaborate</b>       | Comment in a document's chat and mention colleagues, annotate a page, subscribe to a document to hear about changes, set a reminder, and act on the tasks a workflow sends you.                                                    |
| <b>Share</b>             | Create an <b>external link</b> for someone without an account — time-limited and access-limited — and revoke it.                                                                                                                   |
| <b>Work elsewhere</b>    | Mount the archive in the operating system's file manager, sync contacts and calendars to a phone, read the archive's mail folders in a mail client, and open a document in its native desktop application from the desktop client. |
| <b>Their own account</b> | Language and appearance, profile photo, password, two-factor authentication and passkeys, and the separate app passwords their devices use.                                                                                        |

### 18.2 The tenant administrator

Everything above, plus the settings that govern their own organisation. A tenant administrator can reach every document in their tenant: the bypass is deliberate, and what they **do** with it is audited like anything else.

|                       |                                                                                                                                                                                                            |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>People</b>         | Create and deactivate users, build groups, grant the system rights that let somebody administer users, view the audit log, import, or manage records — and issue <b>service accounts</b> for integrations. |
| <b>Document types</b> | Define masks and their index fields, which folders they may live in, what they may contain, their retention period and their default sensitivity label.                                                    |
| <b>Records</b>        | Place and lift <b>legal holds</b> , review documents that have reached the end of their retention before they are disposed of, and purge when that is the decision.                                        |
| <b>Oversight</b>      | Read, filter, export and verify the <b>audit log</b> , and stream it to a SIEM over a signed webhook.                                                                                                      |

|               |                                                                                                                                                                                                      |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Policy</b> | Require multi-factor authentication for everybody, cap storage, allow or forbid external links and bound their lifetime, restrict tags to a catalogue, and set the retention and check-out defaults. |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### 18.3 The platform administrator

Runs the **installation** rather than any one organisation in it. They create and suspend tenants and provision the first administrator of each. They deliberately belong to no tenant, so they do not see documents; the separation is the point, and it is why a platform administrator cannot quietly read a customer's archive.

### 18.4 The service account

A machine identity for an integration — a scanner, a line-of-business system, a script. It authenticates with a client id and secret rather than a password, holds exactly the rights it was granted (and never more than the person who granted them held), and appears in the audit log under its own name. It is the supported way to put documents in automatically, and it is why nobody needs to share a human's credentials with a robot.

### 18.5 The recipient of an external link

Somebody with no account at all, holding a URL. They can open the one document it names — and no other — until the link expires or its permitted number of uses runs out. Nothing else in the archive is reachable from it, and the link can be revoked the moment it turns out it should not have been sent.

### 18.6 Programs, not people

|                                      |                                                                                                                                                             |
|--------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>A file manager</b>                | Mounts the archive over WebDAV and shows exactly the tree the workbench shows. Opening, editing and saving a file works the way it does on a network drive. |
| <b>A phone or a calendar program</b> | Syncs contacts and calendars over CardDAV and CalDAV. What it changes, the archive keeps — and versions.                                                    |
| <b>A mail client</b>                 | Reads the archive's mail folders over IMAP, and can file a message into the archive by copying it there.                                                    |
| <b>A mail server</b>                 | Delivers mail straight into a user's Inray, so an address can be filed simply by being written to.                                                          |

All four use **app-specific passwords**, issued from the account menu and revocable one at a time — never the password used to sign in. A lost phone costs one revocation, not a password change.

## 19 Appendix — how SimplArchive is put together

The vocabulary the system actually thinks in. Worth ten minutes if you are evaluating it, integrating with it, or wondering why something behaves the way it does — several of the answers in this manual are consequences of the shape below rather than of any particular screen.

### 19.1 The document is the spine

Almost everything is a **document**. A document has a name, a place in the tree, permissions of its own, and — usually — content.

|                       |                                                                                                                                                                                                                |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>A folder</b>       | A document with no content. That is the whole difference: folders are not a separate species, which is why a folder has index data, permissions, a chat thread and a history like anything else.               |
| <b>A repository</b>   | A document with no parent — a root. Again not a separate species, which is why the same permission rules reach the top of the tree without a special case.                                                     |
| <b>Your own space</b> | A repository belonging to one person, provisioned for them, holding their <b>Intray</b> and their checked-out documents. It is why every user has somewhere to put something before deciding where it belongs. |

### 19.2 Content lives in versions

A document's file is a **version**, and versions are immutable. Uploading again adds a new one; the old one stays readable. This is what makes “restore an old version” honest — nothing is overwritten, so nothing has to be recovered.

**Metadata belongs to the document, content belongs to the version.** Rename a document, re-classify it or edit its index data and the history is untouched; upload a new file and the metadata carries across. That split is why re-filing a document never costs its history, and why a version can be restored without copying anything.

### 19.3 Document types and index data

A **mask** is a document type: a named set of **index fields** with their types, validation and defaults. Assigning a mask to a document decides what may be recorded about it, and — through the mask — where it may live and what it may contain.

Masks are **versioned and immutable**. Changing one publishes a new version; documents already classified keep the version they were classified under. A field's meaning therefore never changes retrospectively, which is what makes a ten-year-old document still readable on its own terms.

## 19.4 Who may do what

Permissions are an **access-control list per document** — a set of rights granted to a user, a group or a service account. Rights inherit down the tree until a folder is set to break inheritance, at which point that subtree starts again from what is granted there.

Two rules are worth knowing because they explain refusals:

- **Nobody can grant a right they do not hold.** An administrator of a folder cannot manufacture access to it for someone else beyond their own.
- **A deactivated user and a suspended tenant have no rights at all**, decided before any administrator bypass — so deactivating an account is immediate and total rather than a matter of stripping grants one at a time.

## 19.5 One installation, many organisations

A **tenant** is an organisation. Every row that belongs to one carries its tenant, and the isolation is enforced in a single place — a filter the database context applies to every query — rather than by each feature remembering. Users, groups, masks, documents, tags and audit events are all tenant-scoped; a **platform administrator** deliberately belongs to no tenant.

## 19.6 The things that hang off a document

|                                 |                                                                                                                                                                |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Chat, mentions</b>           | The conversation about a document, and the system entries that record what happened to it — a version filed, an older one made current, an attachment refused. |
| <b>Annotations</b>              | Marks on a page, anchored to the version they were drawn on.                                                                                                   |
| <b>References</b>               | The same document appearing in a second folder. One document, two places — not a copy, so there is nothing to diverge.                                         |
| <b>Tags</b>                     | Free or catalogue-restricted labels, orthogonal to the tree.                                                                                                   |
| <b>Subscriptions, reminders</b> | Who wants to hear about changes, and when somebody wants to be reminded.                                                                                       |
| <b>External links</b>           | Time-limited, use-limited access for somebody with no account.                                                                                                 |
| <b>Legal holds, retention</b>   | A freeze that blocks change and deletion, and a policy that eventually disposes of what is no longer needed. A hold always wins.                               |
| <b>Workflow</b>                 | The state a document is in, and the trail of transitions that got it there.                                                                                    |
| <b>Audit events</b>             | What was done, by whom, to what — hash-chained so a gap or an edit is detectable.                                                                              |

## 19.7 What the archive stores it in

Content goes to object storage, never through the application: the browser and the desktop client transfer bytes directly against a short-lived signed URL. Metadata, permissions and the audit trail go to PostgreSQL. Full-text search is a separate index built from the extracted text, and the archive works without it — search falls back to metadata alone rather than failing.

Nothing above is peculiar to the web client or the desktop client. Both are views onto the same model, which is why a document filed from a phone's calendar, a mail server, a file manager and the workbench are the same kind of thing afterwards — and why the permissions on it mean the same thing in all four.

## 20 Appendix — security posture

A self-assessment against the **OWASP Top 10 (2021)** and a summary against **ASVS Level 2**, for readers who have to answer for what they deploy.

**What this is, and is not.** It is a structured review of the software by the people who wrote it, kept current with the code. It is **not** a penetration test and not a third-party certification, and it says nothing about any particular installation's network, backups or operating procedures. The distinction the project holds elsewhere applies here too: the product is production software; the public demonstration instance is not, and is documented as such.

### 20.1 The finding that mattered

The review's most useful result was not any single weakness. It was a **pattern**: the four gaps it ranked highest had all been **decided, written down, and never built**. Response headers, sign-in throttling, an outbound-request guard and an upload content check each had an architecture record specifying them — in one case naming the exact four controls — and none of the four existed in the code. Nothing was visibly broken, which is precisely why they survived: the absence of a preventive control is invisible until the day it is needed.

All four are now built, each with its own record explaining what was decided and what it concedes. The lesson is kept: a decision recorded is not a decision delivered, and only a test can tell the two apart.

### 20.2 OWASP Top 10 (2021)

|                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>A01 Broken access control</b>  | Permissions are an access-control list per document, resolved by one calculator that every caller goes through — with group expansion, inheritance and explicit breaks. Nobody can grant a right they do not hold. A deactivated user or suspended organisation has no rights at all, decided <b>before</b> any administrator bypass. Multi-tenant isolation is a query filter applied in a single place rather than remembered per feature, and a test suite asserts a tenant cannot reach another's data.                                                                                                                                                                                                                                                              |
| <b>A02 Cryptographic failures</b> | Passwords are stored only as hashes, and never logged. Secrets — database credentials, object-storage keys, token-signing certificates — come from a secrets manager when one is configured, with the database credential issued afresh at every start-up and the application never using the database superuser. Outside development a secret the application must store — a one-time-code seed — is encrypted by the secrets manager, and the start-up gate refuses to run without one rather than storing it in plaintext. Transport security is relaxed only when the application is run in <b>development</b> mode: the relaxation is tied to that mode rather than to a setting, so there is no configuration switch that turns it off in a deployed installation. |
| <b>A03 Injection</b>              | Data access is exclusively through a typed query layer: the application contains <b>no raw or string-concatenated SQL anywhere outside its schema migrations</b> . Output in both clients is framework-                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

|                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                       | <p>escaped, and the response-header policy blocks inline script rather than allowing it. XML from outside is parsed through one helper that prohibits document-type definitions, resolves no external entities and expands none — by assertion, so a changed framework default would not change it.</p>                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>A04 Insecure design</b>                            | <p>Progressive throttling of credential guessing at every door that verifies one; an upload content check that refuses executables and scripts by their bytes as well as their names; storage quotas; connection caps on the mail endpoint; page-size clamps on every listing. The archive's own invariants — no cycles in the tree, no duplicate sibling names, immutable document types — are enforced at the single point where data is saved, not by each caller.</p>                                                                                                                                                                                                                                              |
| <b>A05 Security misconfiguration</b>                  | <p>A start-up gate refuses to run outside development when any development-grade setting is present — development certificates, bootstrap secrets, default storage credentials, an unstamped build — and there is <b>no flag to bypass it</b>. Responses carry a content-security policy, frame and referrer restrictions and content-type pinning; each header is set only if absent, so a deployment that owns its own edge keeps ownership. Forwarded headers from a reverse proxy are honoured only from the proxies a deployment names, and the start-up gate refuses the option with none named.</p>                                                                                                             |
| <b>A06 Vulnerable and outdated components</b>         | <p>Every build scans the dependency tree for known vulnerabilities and fails on a finding; the container image is scanned separately; dependency updates are proposed automatically each week. A licence gate additionally fails the build on any dependency outside the allowed set.</p>                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>A07 Identification and authentication failures</b> | <p>Standards-based sign-in with proof-key exchange for the interactive clients. Second factors are supported as time-based codes and as passkeys, including passwordless sign-in, and an organisation can require them for everybody. A chosen password must be at least twelve characters and must not be, or merely decorate, one of the ten thousand most common breached passwords. Failed attempts are progressively refused per account <b>and</b> per source, with blocks that expire on their own rather than needing an administrator. Access tokens live fifteen minutes and refresh tokens thirty days, and a revoked token is refused on its very next request rather than at the end of its lifetime.</p> |
| <b>A08 Software and data integrity failures</b>       | <p>Uploaded content is re-read and hashed by the server rather than trusted from the client. Versions can be locked immutable in storage for a retention period.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                     | The audit log is hash-chained, so an altered or missing entry is detectable. Schema migrations are checked for data-destroying operations, and a destructive one must be listed with a reason before the build will pass. Published images are signed, carry build provenance and a software bill of materials, and the release notes say how to verify all three.                                                                                                                                                                                                                                                                 |
| <b>A09 Security logging and monitoring failures</b> | Changes are audited to an append-only, hash-chained log with a retention policy, write-once archival segments, export, and signed streaming to a SIEM — including a refused sign-in, a sign-out and an account lockout. Coverage is <b>not</b> claimed to be complete: a build check fails when a new change-making endpoint records nothing, and the endpoints that still record nothing are a listed, justified backlog rather than an assumption. Requests carry a correlation identifier end to end, and every external seam can be traced in full detail when needed. Logs never contain a password, a token or a signed URL. |
| <b>A10 Server-side request forgery</b>              | The two places that accept a caller-supplied URL — an organisation’s audit webhook and a client’s push endpoint — are checked when the URL is registered <b>and again at the moment of connecting</b> , against the address actually resolved, connecting to that address so nothing can be re-pointed in between. Redirects are refused. Private ranges are refused unless the deployment’s own configuration permits them, and the cloud metadata addresses are refused regardless.                                                                                                                                              |

### 20.3 ASVS Level 2, in summary

|                                  |                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Architecture</b>              | Layering is enforced by tests rather than convention; every architectural decision is recorded, including the ones later reversed.                                                                                                                                                                                                                                                                   |
| <b>Authentication</b>            | Standards-based, second factors supported and enforceable, throttled; chosen passwords meet a length and breach-list policy; failed and throttled sign-ins reach the audit trail.                                                                                                                                                                                                                    |
| <b>Session management</b>        | Server-issued tokens with bounded lifetimes — fifteen minutes for access, thirty days for refresh. Signing out revokes that client’s tokens on the server, and every request checks its token against the server’s record, so a revoked token stops working at once. A refresh token used a second time is treated as stolen: the whole session it belongs to is revoked, the access token included. |
| <b>Access control</b>            | Per-object, deny by default, and evaluated <b>server-side on every request</b> — the clients never decide it. They additionally hide an action the server did not advertise, so a user is rarely offered something that would be refused; but the hiding is courtesy, and the refusal is the control.                                                                                                |
| <b>Validation &amp; encoding</b> | Typed data access, framework-escaped output, content checked on upload, and uploads that never pass through the application.                                                                                                                                                                                                                                                                         |
| <b>Logging</b>                   | Structured, correlated, redaction-conscious; the audit trail is separate from the operational log and is tamper-evident.                                                                                                                                                                                                                                                                             |

|                        |                                                                                                                                                   |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Data protection</b> | Content in object storage reached only by short-lived signed URLs; deletion is a two-stage process with a recycle bin, and disposal is auditable. |
| <b>Communications</b>  | Transport security enforced outside development; the demonstration stack's relaxations are development-only by construction.                      |
| <b>Configuration</b>   | Dependency, licence, secret and image scanning on every build; a start-up gate that refuses development settings in production.                   |

## 20.4 What is still open

An assessment that reports nothing outstanding is one to distrust. This is tracked, and it is not a remotely exploitable defect in the shipped configuration. Each names the issue that tracks it, and a weekly check fails when one of those issues closes while its line is still here — because this list once went on describing a product that had moved on, in the one chapter a reader opens to find out what is not done.

- **External-link tokens at rest** (#1579) — the token behind a link shared outside the system is stored as issued, so reading it requires database access. Hashing it would remove the ability to show an existing link again, which is why it is a decision rather than a fix.

Recently closed, and listed so that their absence above is not mistaken for an omission: a revoked or signed-out token is refused on its next request, and a refresh token used twice revokes its whole session; chosen passwords must meet a minimum length and are checked against a list of commonly used ones; token lifetimes are set deliberately rather than left at framework defaults; a production installation refuses to start without a secrets manager, so second-factor seeds and the other stored secrets are never kept in plaintext; refused sign-ins and lockouts are audit events; published images are signed and carry provenance and a bill of materials; XML is parsed with external entities refused by assertion, and a test fails if a parser is added without it; and an installation behind a reverse proxy must name the proxies it trusts.

## 20.5 How this stays true

Every one of the claims above is held by something that runs on each change: a test, a gate, or both. The build fails on a dependency with a known vulnerability, on a licence outside the allowed set, on a leaked secret, on a destructive migration without a stated reason, and on a compiler warning. The rest is held by roughly two thousand automated tests, including end-to-end suites that drive the real application over HTTP and a real browser. That is the only reason a document like this one can be published rather than merely written.

## 21 Index

Terms are indexed where the manual explains them, not at every mention — the page listed is the one worth turning to.

- ACL 1
- Annotations 30
- App password 54
- Approval workflow 36
- Audit trail 37
- Auto-rotate 8
- Auto-straighten (deskew) 8
- Availability 19
- Block 19
- Blockers 19
- Booking 18
- CalDAV 17, 26
- Calendar 14
- CardDAV 17, 26
- Chat / comments 30
- Check-out 4, 31
- Click-to-copy 3
- Contacts 14
- Desktop client 1
- Document management system 1
- Edit profile 37
- Encrypted content 39
- Encryption (S/MIME) 12
- Encryption Module 41
- Encryption Service 41
- Enrolling a certificate 48
- Executable content 5
- External link 32
- External link (encrypted) 34
- Facets 29
- Follow / subscribe 30
- Hit highlighting 3
- IMAP 12, 26
- Import / export 4
- Index fields 1
- Intray 4, 12
- Join items 7
- Legal hold 36
- Mask (document type) 1
- Meeting room 18
- Multi-factor authentication 2
- My work 30
- Name conflict 5
- Notes 13
- Notifications 30
- OCR 28
- Offered time 19
- Open a document 3
- Outbound mail 38
- Partial-word search 29
- Personal repository 9
- Preview 2
- Quantum 42
- Recycle bin 36
- Reference 12
- Reference (shortcut) 9
- Reminder 30
- Repository 1
- Retention 36
- Rights 1
- Rotate pages 7
- Rotate/Sort 7, 8
- Schedule 19
- Search 29
- Sensitivity label 9
- Separator sheets 7
- Server manager 38
- Sign-in throttling 2
- Smartcard 13
- Sort pages 7
- Split into pages 7
- Storage quota 37
- Tablet 20
- Tags 9
- Task count 36
- Tasks 36
- Tenant 37
- Two-factor authentication 37
- Upload 4
- Users & groups 37
- Version 1
- Version comment 6
- Web client 1
- WebDAV 10, 26
- WebDAV deep link 10
- Working copy 31
- Zoom 3