



## **University Interscholastic League Computer Science Competition**

Number 144 (Invitational B - 2014)

### **General Directions:**

- 1) DO NOT OPEN EXAM UNTIL TOLD TO DO SO.**
- 2) NO CALCULATOR OF ANY KIND MAY BE USED.**
- 3) There are 40 questions on this contest exam. You have 45 minutes to complete this contest. If you are in the process of actually writing an answer when the signal to stop is given, you may finish writing that answer.
- 4) Papers may not be turned in until 45 minutes have elapsed. If you finish the test before the end of the allotted time, remain at your seat and retain your paper until told to do otherwise. Use this time to check your answers.
- 5) All answers must be written on the answer sheet/Scantron card provided. Indicate your answers in the appropriate blanks provided on the answer sheet or on the Scantron card. Clean erasures are necessary for accurate Scantron grading.
- 6) You may place as many notations as you desire anywhere on the test paper, but not on the answer sheet or Scantron card, which are reserved for answers only.
- 7) You may use additional scratch paper provided by the contest director.
- 8) All questions have ONE and only ONE correct (BEST) answer. There is a penalty for all incorrect answers.
- 9) A reference to commonly used Java classes is provided at the end of the test, and you may use this reference sheet during the contest. You may detach the reference sheets from the test booklet, but **DO NOT DO SO UNTIL THE CONTEST BEGINS.**

### **Scoring:**

- 1) All questions will receive 6 points if answered correctly; no points will be given or subtracted if unanswered; 2 points will be deducted for an incorrect answer.

Note: Correct responses are based on Java, **J2sdk v 1.7.25**, from Sun Microsystems, Inc. All provided code segments are intended to be syntactically correct, unless otherwise stated (i. e. `error` is an answer choice) and any necessary Java 2 Standard Packages have been imported. Ignore any typographical errors and assume any undefined variables are defined as used. **For all output statements, assume that the `System` class has been statically imported... `import static java.lang.System.*`;**

#### QUESTION 1

Which of these is NOT equivalent to  $110_2 + 100010_2$  ?

- A.  $40_{10}$                       B.  $46_8$                       C.  $28_{16}$                       D.  $101000_2$                       E. All are equivalent

#### QUESTION 2

What is output by the code to the right?

- A. 4                                  B. 4.8  
C. 5                                  D. 5.0  
E. There is no output due to a compile error.

```
int h = 24;
h/=5;
out.println(h);
```

#### QUESTION 3

What is output by the code to the right?

- A. 3                                  B. 4                                  C. 4.0  
D. There is no output due to a compile error.  
E. There is no output due to a runtime error.

```
Double [] list = {1.0,2.0,3.0,4};
out.println(list[3]);
```

#### QUESTION 4

What is output by the code to the right?

- A. 369                                  B. 36912  
C. 6912                                  D. infinite loop  
E. There is no output.

```
int k = 3;
do
{
    k+=3;
    out.print(k);
}
while (k!=12);
```

#### QUESTION 5

What is output by the code to the right?

- A. 0                      B. 1                      C. 5                      D. 6                      E. 7

```
String s = "beachbum";
out.println(s.indexOf(98,1));
```

#### QUESTION 6

What is output by the code to the right?

- A. 0.12.34.56.7                      B. 2.36.74.54.5  
C. 4.54.54.54.5                      D. 6.74.52.30.1  
E. There is no output due to a runtime error.

```
double [] list = {0.1,2.3,4.5,6.7};
list[3]=list[2];
list[1]=list[3];
list[0]=list[1];
for(double d:list)
    out.printf("%.1f",d);
```

#### QUESTION 7

For which initial values of p and q will this expression output true?


- I.        p=false;q=false  
II.       p=false;q=true  
III.      p=true;q=false;  
IV.      p=true;q=true                      ;  
A. I and IV only  
B. II and III only  
C. IV only  
D. I, II, and III only  
E. All will work.  
F.

```
boolean p = ?;
boolean q = ?;
out.println(p^q);
```

<p><b>QUESTION 8</b></p> <p>For which of these inputs will the final value of sum be greater than zero?</p> <p>A. "a"                                      B. "aa"  C. "bb"                                      D. "cccc"  E. ""</p>	<pre>String s = &lt;string value&gt;; int sum = 0; switch(s) {     case "a"      : sum += s.length();     case "bb"     : sum -= s.length();     case "cccc"   : sum *= -s.length();     case ""       : sum--; } out.println(sum);</pre>
<p><b>QUESTION 9</b></p> <p>What is output by the code to the right?</p> <p>A. 3.1                                      B. 5.2                                      C. -5.2  D. -2.1                                      E. -3.1</p>	<pre>out.println(Math.min(-5.2,3.1));</pre>
<p><b>QUESTION 10</b></p> <p>Which statement will correctly output the value 6 from the array shown to the right?</p> <p>A. out.print(a[1][2]);    B. out.print(a[2][3]);  C. out.print(a[5]);        D. out.print(a[2][1]);  E. out.print(a[3][2]);</p>	<pre>int[][]a={{1,2,3},{4,5,6,7},{8,9}};</pre>
<p><b>QUESTION 11</b></p> <p>Which of the following correctly replaces &lt;statement1&gt; in the Guitar class definition on the right ?</p> <p>A. public void  B. public int  C. private void  D. private int  E. public static int</p>	<pre>class Guitar {     private String type;     private int numStrings;     public Guitar()     {         type = "acoustic";         numStrings = 6;     }     public Guitar(int n)     {         this();         numStrings = n;     }     public Guitar(int n, String s)     {         this(n);         type = s;     }     public String toString()     {         return type + ": " +             numStrings + " string";     }     &lt;statement1&gt;setNumStrings&lt;statement2&gt;     {         &lt;statement3&gt;     } }</pre>
<p><b>QUESTION 12</b></p> <p>Which of the following correctly replaces &lt;statement2&gt; in the Guitar class definition on the right ?</p> <p>A. ( );  B. (int n);  C. ( )  D. (String s)  E. (int n)</p>	
<p><b>QUESTION 13</b></p> <p>Which of the following correctly replaces &lt;statement3&gt; in the Guitar class definition on the right ?</p> <p>A. type = s;  B. numStrings = n;  C. return type;  D. return numStrings;  E. return 6;</p>	<pre>&lt;statement1&gt;setNumStrings&lt;statement2&gt; {     &lt;statement3&gt; } }</pre>

<p><b>QUESTION 14</b></p> <p>What is output by the code to the right?</p> <p>A. 0                      B. 15 C. 25                      D. 34 E. 1073741823</p>	<pre>int d = 30; d = d ^ 15 &lt;&lt; 1; out.println(d);</pre>
<p><b>QUESTION 15</b></p> <p>What is output by the code to the right?</p> <p>A. 0                      B. 39                      C. 40 D. 120                      E. 121</p>	<pre>int j = 0; do{     j+=2*j;     j++; } while(j&lt;50); out.println(j);</pre>
<p><b>QUESTION 16</b></p> <p>Which term best describes the method type in the code shown to the right?</p> <p>I. static method II. void method III. return method IV. mutator method</p> <p>A. I only D. II only C. III only D. I and III only E. II and IV only</p>	<pre>static int stuff(int x) {     if(x%9&gt;5)         return (x%9-5);     if(x%9&lt;5)         return (x%9+5);     return (x%9); }  //client code out.print(stuff(9)); out.print(stuff(8)); out.print(stuff(14));</pre>
<p><b>QUESTION 17</b></p> <p>What is output by the client code to the right?</p> <p>A. -5593680105 B. 439 C. 651 D. 535 E. 9814</p>	
<p><b>QUESTION 18</b></p> <p>Which of these statements will return the substring "R"?</p> <p>A. s.substring(6); B. s.substring(7); C. s.substring(6,6); D. s.substring(6,7); E. s.substring(7,8); F.</p>	<pre>String s = "FenderRumble";</pre>
<p><b>QUESTION 19</b></p> <p>What is output by the code to the right?</p> <p>A. -2              B. -3              C. 21              D. 22              E. 25</p>	<pre>int d = 9; int f = 60; int g = 31; out.println(g-f%d);</pre>

<p><b>QUESTION 20</b></p> <p>What is output by the code to the right?</p> <p>A. 000 010 101 111  B. 000 011 100 111  C. 001 010 101 110  D. 001 011 101 110  E. 000 010 101 110</p>	<pre>for(int p = 0; p &lt;= 1; p++)   for(int q = 0; q &lt;= 1; q++)     out.print(""+p+q+(p&amp;q q)+" ");</pre>
<p><b>QUESTION 21</b></p> <p>What is output by the code to the right?</p> <p>A. 1            B. 2            C. 3            D. 1.0            E. 1.5</p>	<pre>double g = 28.5; out.println(g%9);</pre>
<p><b>QUESTION 22</b></p> <p>What is output by the code to the right?</p> <p>A. 0.79    B. 1.05    C. 1.57    D. 3.14    E. 6.28</p>	<pre>d = Math.toRadians(180.0); out.printf("%.2f\n",d);</pre>
<p><b>QUESTION 23</b></p> <p>What is output by the code to the right?</p> <p>A. 2147483644  B. -2147483645  C. 11001111111111111111111111111111 (32 digits)  D. 11000000000000000000000000000000 (32 digits)  E. 1100</p>	<pre>int x = 12 &lt;&lt; 32; String s = Integer.toBinaryString(x); out.println(s);</pre>
<p><b>QUESTION 24</b></p> <p>What is output by the code to the right?</p> <p>A. 4 null  B. 4 6  C. 5 null  D. 5 6  E. There is no output due to a runtime error.</p>	<pre>ArrayList lost = new ArrayList(5); lost.add(null); lost.add(new Integer(6)); lost.add("ball"); lost.add(4.7); out.println(lost.size()+" "+lost.get(1));</pre>
<p><b>QUESTION 25</b></p> <p>Find <math>f(10,5)</math> according to the recursive function definition shown on the right. You may use the space below to do your work.</p> <p style="text-align: center;"><math>f(10,5) =</math></p> <div style="text-align: center; margin: 20px 0;"> <math display="block">f(x,y) = \begin{cases} f(x-y,y-1)+2 &amp; \text{when } x &gt; y \\ x+y &amp; \text{otherwise} \end{cases}</math> </div> <p>A. 5                                  B. 6                                  C. 7  D. 8                                  E. 10</p>	
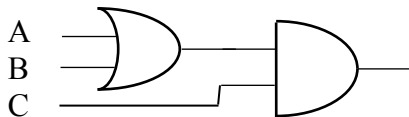
<p><b>QUESTION 26</b></p> <p>What is output by the code to the right?</p> <p>A. il                                      B. vain</p> <p>C. ilovetopaint</p> <p>D. There is no output due to a runtime error</p> <p>E. There is no output due to a compile error</p>	<pre>String s = "ilovetopaint"; String [] ar = s.split("[pote]"); out.println(ar[1]+ar[5]);</pre>
<p><b>QUESTION 27</b></p> <p>What is output by the code to the right?</p> <p>A. 0                                      B. 5</p> <p>C. 100                                      D. dead</p> <p>E. walking</p>	<pre>String b = (100%5==0)?"walking"            : "dead"; out.println(b);</pre>
<p><b>QUESTION 28</b></p> <p>What is output by the code to the right?</p> <p>A. -1                                      B. 1</p> <p>C. -15                                      D. 15</p> <p>E. false</p>	<pre>s = "SperryRand"; t = "SpecialK"; out.println(s.compareTo(t));</pre>
<p><b>QUESTION 29</b></p> <p>A. nine                                      B. 9</p> <p>C. ten                                      D. sepuluh</p> <p>E. null</p>	<pre>Map&lt;Integer,String&gt; m =     new HashMap&lt;Integer,String&gt;(); m.put(10,"ten"); m.put(14,"fourteen"); m.put(9,"nine"); m.put(10,"sepuluh"); out.println(m.get(0));</pre>
<p><b>QUESTION 30</b></p> <p>Which of the following logical statements is represented by the digital electronics diagram on the right ?</p> <p>A. A &amp;&amp; B    C                                      B. A    B &amp;&amp; C</p> <p>C. A ^ B    C                                      D. (A    B) &amp;&amp; C</p> <p>E. A &amp;&amp; B ^ C</p>	
<p><b>QUESTION 31</b></p> <p>On the right is a boolean expression using generic notation. Which of the expressions below represents the simplest form of this expression ? (Note : * means AND, + means OR, ⊕ means XOR)</p> <p>A. <math>\bar{A} + \bar{B}</math>                                      B. <math>A \oplus B</math>                                      C. <math>\bar{A}\bar{B} + \bar{A}B</math></p> <p>D. False                                      E. A+B</p>	<p style="text-align: center;"><math>(A \oplus B) (A + B)</math></p> <p style="text-align: center;">(this translates to “<i>A xor B and A or B</i>”)</p>
<p><b>QUESTION 32</b></p> <p>In a typical binary search process, in how many steps will the value 8 be found in the array shown on the right?</p> <p>A. 3                                      B. 4</p> <p>C. 5                                      D. 6</p> <p>E. 7</p>	<p style="text-align: center;">0 1 2 3 4 5 6 7 8 9 10 11 12 13</p>

**QUESTION 33**

Which statement below best describes the minimum required <implementation> of class B for the class structure shown on the right?

- A. class B is only required to define method **two()**.
- B. class B is not required to implement anything.
- C. class B is required to implement method **two()** and override method **one()**.
- D. class B is only required to override method **one()**.
- E. This class structure is invalid.

**QUESTION 34**

Suppose all is correctly defined with this class structure so that method **two()** returns the value 2. What is the output for the client code shown on the right?

- A. 0
- B. 5
- C. 20
- D. 40
- E. There is no output due to a runtime error.

**QUESTION 35**

Which of the following is an **INVALID** class B definition?

- I.  
class B extends A{  
    int two(){  
        return 2;  
    }}  
II.  
class B implements A{  
    x=1;  
    int two(){  
        return 2;  
    }}  
III.  
class B extends A{  
    int one(){  
        return 5;  
    }  
    int two(){  
        return 2;  
    }}  
IV.  
class B extends A{  
    int x = 4;  
    int one(){  
        return 5;  
    }  
    int two(){  
        return 2;  
    }}

- A. I is invalid
- B. II is invalid
- C. III is invalid
- D. IV is invalid
- E. All of these are valid

```
abstract class A
{
    int x = 2;
    int one()
    {
        return 5;
    }
    abstract int two();
}
class B extends A
{
    //<implementation>
}

//////////client code//////////
B bop = new B();
out.println(bop.one()*bop.two()
            *bop.x);
```

QUESTION 36

Suppose a linked list has been implemented as shown in the diagram on the right, with public fields **data** and **next**. What is the output of the statement below?

```
out.print(p.next.next.data);
```

- A. 2      B. 3      C. 4      D. 5      E. 9



QUESTION 37

What is output by the code to the right?

- A. 3null  
B. 3false  
C. 3true  
D. 4false  
E. 4true

```
Set<Integer> sa = new
    TreeSet<Integer>();
sa.add(4);
sa.add(5);
sa.add(4);
sa.add(6);
sa.add(7);
sa.remove(4);
out.print(sa.size());
out.println(sa.contains(6));
```

QUESTION 38

What is the output of this code if the value of **<keyboard input>** is 3.14?


- A. Bad data.  
B. All is good.  
C. Bad data. All is good.  
D. There is no output.  
E. There is no output due to a runtime error.

```
double tx;
try{
    tx = <keyboard input>;
}
catch(Exception ee){
    out.print("Bad data. ");
}
finally{
    out.print("All is good. ");
}
```

QUESTION 39

On the right is a binary tree implementing a max heap, with the 9 in position 0, the 7 in position 1, and the 5 in position 2. The last element added was a 12. In what position does the value 12 settle when the min heap is reestablished in the sifting up process?

- A. position 0  
B. position 1  
C. position 2  
D. position 5  
E. position 6

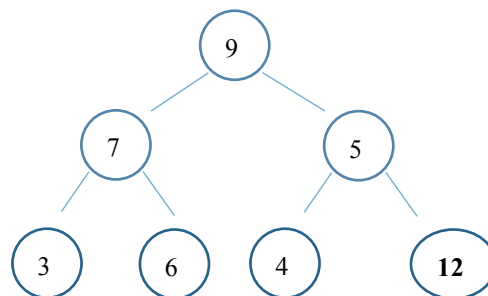

QUESTION 40

**OPEN ENDED QUESTION** – Using the generic push and pop sequence given on the right (**push** to mean Java's **enqueue**, **pop** to mean Java's **dequeue**), process the commands shown on the right into a queue and indicate the **last value popped** and which value would be the **next one popped**.

Find the **two** answers and write them on your answer sheet **correctly labeled**. If using a ScanTron form, out to the side of the bubbles, also **correctly labeled**. If not labeled, the order you put your answers will be assumed to be **last value popped**, then **next value to be popped**.

Last value popped      Next value to be popped

--	--

Push 9  
Push 7  
Pop x  
Push 5  
Push 8  
Push 6  
Pop x  
Pop x



## Standard Classes and Interfaces — Supplemental Reference

### **class java.lang.Object**

- o boolean equals(Object other)
- o String toString()
- o int hashCode()

### **interface java.lang.Comparable<T>**

- o int compareTo(T other)  
Return value < 0 if this is less than other.  
Return value = 0 if this is equal to other.  
Return value > 0 if this is greater than other.

### **class java.lang.Integer implements**

**Comparable<Integer>**

- o Integer(int value)
- o int intValue()
- o boolean equals(Object obj)
- o String toString()
- o int compareTo(Integer anotherInteger)
- o static int parseInt(String s)
- o static int parseInt(String s, int radix)

### **class java.lang.Double implements**

**Comparable<Double>**

- o Double(double value)
- o double doubleValue()
- o boolean equals(Object obj)
- o String toString()
- o int compareTo(Double anotherDouble)
- o static double parseDouble(String s)

### **class java.lang.String implements**

**Comparable<String>**

- o int compareTo(String anotherString)
- o boolean equals(Object obj)
- o int length()
- o String substring(int begin, int end)  
Returns the substring starting at index begin and ending at index (end - 1).
- o String substring(int begin)  
Returns substring(from, length()).
- o int indexOf(String str)  
Returns the index within this string of the first occurrence of str. Returns -1 if str is not found.
- o int indexOf(String str, int fromIndex)  
Returns the index within this string of the first occurrence of str, starting the search at the specified index.. Returns -1 if str is not found.
- o charAt(int index)
- o int indexOf(int ch)
- o int indexOf(int ch, int fromIndex)
- o String toLowerCase()
- o String toUpperCase()
- o String[] split(String regex)
- o boolean matches(String regex)

### **class java.lang.Character**

- o static boolean isDigit(char ch)
- o static boolean isLetter(char ch)
- o static boolean isLetterOrDigit(char ch)
- o static boolean isLowerCase(char ch)
- o static boolean isUpperCase(char ch)
- o static char toUpperCase(char ch)
- o static char toLowerCase(char ch)

### **class java.lang.Math**

- o static int abs(int a)
- o static double abs(double a)
- o static double pow(double base, double exponent)
- o static double sqrt(double a)
- o static double ceil(double a)
- o static double floor(double a)
- o static double min(double a, double b)
- o static double max(double a, double b)
- o static int min(int a, int b)
- o static int max(int a, int b)
- o static long round(double a)
- o static double random()  
Returns a double value with a positive sign, greater than or equal to 0.0 and less than 1.0.

### **interface java.util.List<E>**

- o boolean add(E e)
- o int size()
- o Iterator<E> iterator()
- o ListIterator<E> listIterator()
- o E get(int index)
- o E set(int index, E e)  
Replaces the element at index with the object e.
- o void add(int index, E e)  
Inserts the object e at position index, sliding elements at position index and higher to the right (adds 1 to their indices) and adjusts size.
- o E remove(int index)  
Removes element from position index, sliding elements at position (index + 1) and higher to the left (subtracts 1 from their indices) and adjusts size.

### **class java.util.ArrayList<E> implements List<E>**

### **class java.util.LinkedList<E> implements List<E>, Queue<E>**

Methods in addition to the List methods:

- o void addFirst(E e)
- o void addLast(E e)
- o E getFirst()
- o E getLast()
- o E removeFirst()
- o E removeLast()

```

class java.util.Stack<E>
    o boolean isEmpty()
    o E peek()
    o E pop()
    o E push(E item)

interface java.util.Queue<E>
    o boolean add(E e)
    o boolean isEmpty()
    o E peek()
    o E remove()

class java.util.PriorityQueue<E>
    o boolean add(E e)
    o boolean isEmpty()
    o E peek()
    o E remove()

interface java.util.Set<E>
    o boolean add(E e)
    o boolean contains(Object obj)
    o boolean remove(Object obj)
    o int size()
    o Iterator<E> iterator()
    o boolean addAll(Collection<? extends E> c)
    o boolean removeAll(Collection<?> c)
    o boolean retainAll(Collection<?> c)

class java.util.HashSet<E> implements Set<E>

class java.util.TreeSet<E> implements Set<E>

interface java.util.Map<K,V>
    o Object put(K key, V value)
    o V get(Object key)
    o boolean containsKey(Object key)
    o int size()
    o Set<K> keySet()
    o Set<Map.Entry<K, V>> entrySet()

class java.util.HashMap<K,V> implements Map<K,V>

class java.util.TreeMap<K,V> implements Map<K,V>

interface java.util.Map.Entry<K,V>
    o K getKey()
    o V getValue()
    o V setValue(V value)

interface java.util.Iterator<E>
    o boolean hasNext()
    o E next()
    o void remove()

interface java.util.ListIterator<E> extends
    java.util.Iterator<E>
    Methods in addition to the Iterator methods:
    o void add(E e)
    o void set(E e)

```

```

class java.lang.Exception
    o Exception()
    o Exception(String message)

class java.util.Scanner
    o Scanner(InputStream source)
    o boolean hasNext()
    o boolean hasNextInt()
    o boolean hasNextDouble()
    o String next()
    o int nextInt()
    o double nextDouble()
    o String nextLine()
    o Scanner useDelimiter(String pattern)

```