

1. Data Structure and Algorithms 2

Priority Queue and Heap

목차

- ▶ Priority Queue
- ▶ Implementation & performance of Priority Queue
- ▶ Balanced Tree
- ▶ Binary Heap for Priority Queue
- ▶ Reference Structure of Binary
- ▶ Insert Operation of Binary Heap
- ▶ Delete Operation of Binary Heap
- ▶ Complexity of Priority Queue and Heap Sort

1. Priority Queue

Detour: Performance of binary search tree

Coming from divide and conquer

	Linked List	BST in Average	BST in Worst Case
Search	$O(n)$	$O(\log n)$	$O(n)$
Insert after search	$O(1)$	$O(1)$	$O(1)$
Delete after search	$O(1)$	$O(1)$	$O(1)$
Traverse	$O(n)$	$O(n)$	$O(n)$

BST in Average
Insert 3, 2, 0, 5, 4, 7

```
graph TD; 3((3)) --> 2((2)); 3 --> 5((5)); 2 --> 0((0)); 5 --> 4((4)); 5 --> 7((7));
```


BST in Worst Case
Insert 0, 2, 3, 4, 5, 7

```
graph TD; 0((0)) --> 2((2)); 2 --> 3((3)); 3 --> 4((4)); 4 --> 5((5)); 5 --> 7((7));
```

- Binary search tree는 height가 낮아야 성능이 높다.
- BST가 worst case라면 linked list와 같다.
- Worst case를 없애주는게 더 나은 structure가 될 수 있다.
- 이를 위해 **balanced tree**를 만들 수 있는 것을 제안을 많이 하는데 다양한 형태의 **balanced tree**가 있다.

1. Priority Queue

Priority Queue

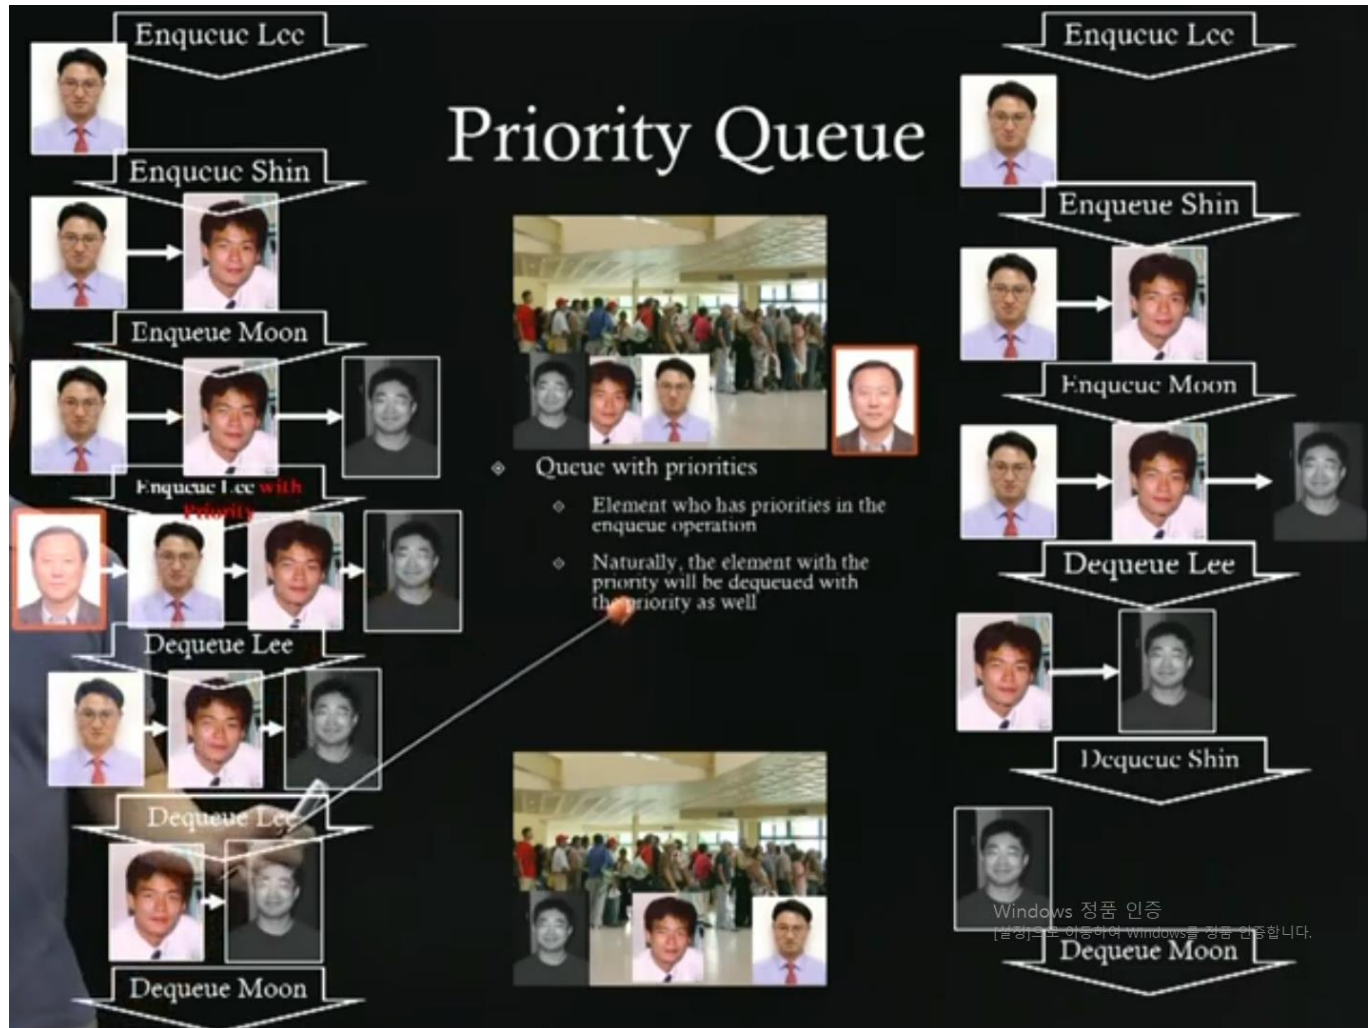


- Enqueue한 순서대로 Dequeue한다.
- 공항의 VIP는 Enqueue한 순서에 상관없이 제일 먼저 Dequeue하게 된다.
- 예를들어, 생산에서 빨리, 먼저 생산해야하는것들이 있다면 Priority Queue 공식을 이용 할 수 있다.
- Priority Queue는 elements들이 무순위가 아니라 순위가 정해져 있다.
- 순서가 있는 상태에서 Priority를 매겨서 Queue를 관리 하는 것이다.

1. Priority Queue

Operations of priority queues

- ◊ Previously in queues
 - ◊ Enqueue an element
- ◊ Now in priority queues
 - ◊ Enqueue an element with a priority
 - ◊ Priority in the priority queue context
 - ◊ In our definition, let's say
 - ◊ Higher value = higher priority
 - ◊ Lower value = lower priority
 - ◊ Then, consider the previous example
 - ◊ Prof. Tae Eog Lee
 - ◊ Priority 2
 - ◊ Prof. Hayong Shin, Taesik Lee, Il-Chul Moon
 - ◊ Priority 1
 - ◊ Therefore, the interface of the priority queue will be
 - ◊ `enqueue(element, key)`
 - ◊ Rather, `enqueue(element)` in queue

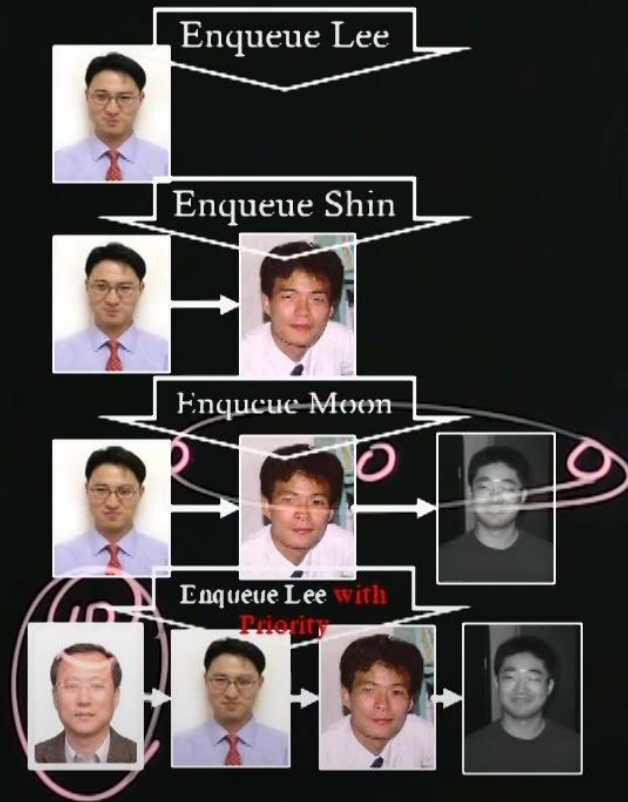

이전의 Queue는 하나의 element를 enqueue
Priority enqueue는 enqueue를 하긴 하는데
priority를 같이 enqueue
Higher value : higher priority
Lower value : lower priority
모든 elements들의 priority가 0이면 enqueue한 순
선대로 dequeue
Priority가 높으면 먼저 dequeue
Enqueue(element, key) 이전에는 key가 없었음

2. Implementation & performance of Priority Queue

How to implement priority queues

◇ Using the linked list as the basis of the priority queue

◇ Store the element as well as the priority

◇ Then, two approaches to implement the priority queue

④ Lazy approach == Unsorted implementation


◇ When there is an enqueue event, just insert the element and the priority value at the end of the queue

◇ When there is a dequeue event, remove the element with the highest priority by searching the queue from the beginning to the end

④ Early-bird approach == Sorted implementation

◇ When there is an enqueue event, insert the element and the priority at the position that starts a sequence of elements with lower priorities

◇ When there is a dequeue event, remove the element at the front of the queue

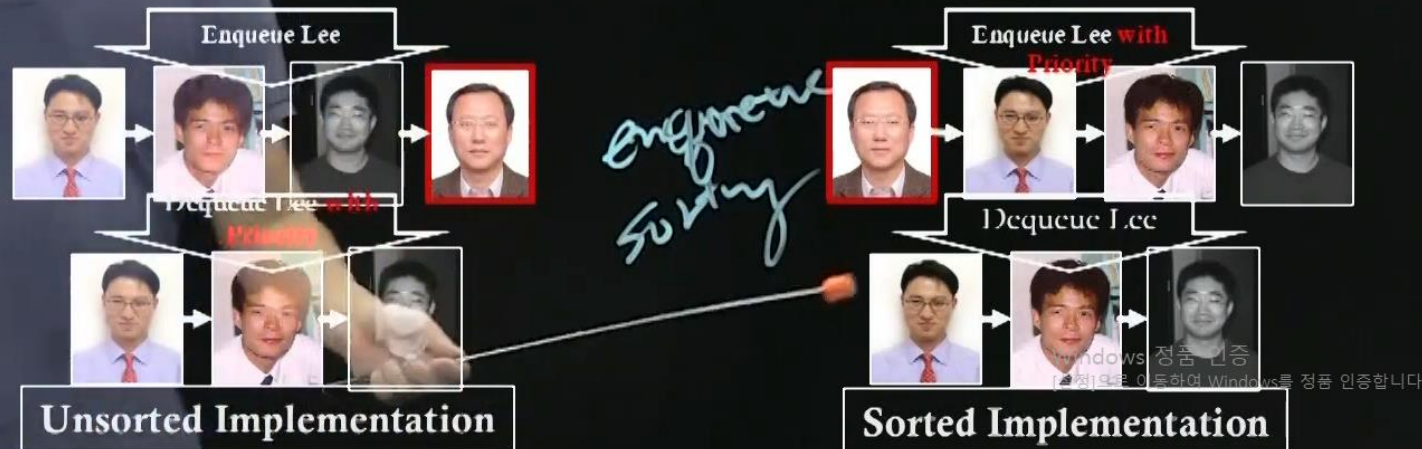

- Queue는 기본적으로 linked list위에 쌓아 만듦
- Elements 뿐만 아니라 Priority도 함께 저장
- 두가지 접근 방법:
- Lazy approach == Unsorted implementation
- Early-bird approach == Sorted implementation
- Lazy approach :
 - dequeue와 함께 sorting이 일어남,
 - 기본적으로 저장될때는 sorting이 안되어 있음
 - Dequeue할 때 sorting해서 제일 priority가 높은 element를 찾아서 dequeue하는 것
- Enqueue event -> just insert
- Dequeue event -> searching priority and remove
- Early-bird approach :
 - Enqueue 할때 sorting 하는것
 - Dequeue는 그대로 나감
 - Enqueue event -> sorting priority and insert
 - Dequeue event -> remove

2. Implementation & performance of Priority Queue

Implementation of priority queues

Sorted implementation

Enqueue(node, priority)

- current = head
- While current.next().getPriority() > priority:
 - current = current.next()
 - Index = current.getIndex()

Insert

- At index
- PriorityQueueNode(value, priority)

Unsorted implementation?

- Have to change the Dequeue method

tae eog lee
hayong shin
taesik lee
il-chul moon

```
from edu.kaist.seslab.ie362.week3.SinglyLinkedList import SinglyLinkedList

class PriorityNode:
    priority = 1
    value = ''
    def __init__(self, value, priority):
        self.priority = priority
        self.value = value
    def getValue(self):
        return self.value
    def getPriority(self):
        return self.priority

class PriorityQueue:
    list = ''
    def __init__(self):
        self.list = SinglyLinkedList()
    def enqueueWithPriority(self, value, priority):
        idxInsert = 0
        for itr in range(self.list.getSize()):
            node = self.list.get(itr)
            if node.getValue() == '':
                idxInsert = itr
                break
            if node.getValue().getPriority() < priority:
                idxInsert = itr
                break
            else:
                idxInsert = itr + 1
        self.list.insertAt(PriorityNode(value, priority), idxInsert)
    def dequeueWithPriority(self):
        return self.list.removeAt(0).getValue()

pq = PriorityQueue()
pq.enqueueWithPriority('il-chul moon', 1)
pq.enqueueWithPriority('taesik lee', 2)
pq.enqueueWithPriority('hayong shin', 3)
pq.enqueueWithPriority('tae eog lee', 99)

print pq.dequeueWithPriority()
print pq.dequeueWithPriority()
print pq.dequeueWithPriority()
print pq.dequeueWithPriority()
```

Windows 정품 인증 7
[설정]으로 이동하여 Windows를 정품 인증합니다.


- Sorted implementation
- Enqueue(node, priority) priority가 생김
- Linked list를 for loop를 통해서 반복
- List의 각 node를 찾고 node의 value를 찾음
- 값이 없으면 insert
- value의 priority와 현재의 priority를 비교
- 현재 Priority가 크면 바로 insert
- 마지막 줄 code 위치에 바로 insert

2. Implementation & performance of Priority Queue


Performances of priority queue implementations

	Enqueue = Insert	Dequeue = Delete Highest Priority	FindMax = Find highest Priority
Unsorted Implemen- tation	$O(1)$	$O(n)$	$O(n)$
Sorted Implemen- tation	$O(n)$	$O(1)$	$O(1)$
Tree-based Implemen- tation	$O(\log n)$	$O(\log n)$	$O(\log n)$

Only true under the assumption that the tree is balanced...

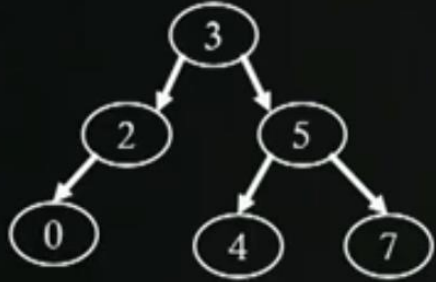

Balanced Tree

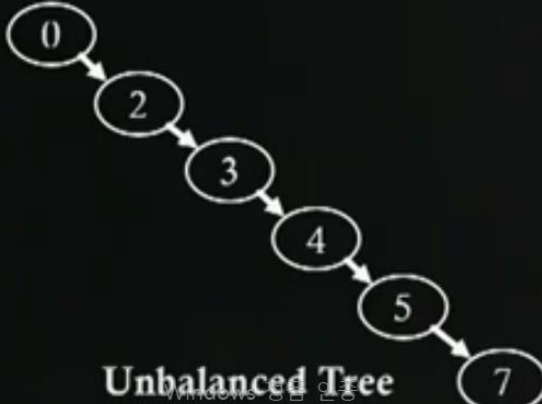

Unbalanced Tree

- Linked list뿐만 아니라 BST도 구현 가능
- Enqueue :
 - Unsorted : 뒤에 붙여서 $O(1)$
 - Sorted : 처음에 비교를 해야하기 때문에 $O(n)$
- Tree : log가 depth로 따라가서 $O(\log n)$, $O(1)$ 보다는 좀 더 걸리지만 $O(n)$ 보다는 훨씬 덜 걸린다.
- Dequeue :
 - Unsorted : searching 해야 해서 $O(n)$
 - Sorted : 앞에서 작업을 해놔서 $O(1)$
- Tree : $O(\log n)$
- FindMax는 같고 $O(1)$ 만드는 것이 좋음
- Unbalancing Tree : $O(n)$, $O(n)$, $O(n)$


3. Balanced Tree

Balanced tree?


전체화면을 종료하려면 [Esc] 을(를) 누르세요.

Balanced tree?

- ◆ If its size is n,
 - ◆ $n \leq 2^{h+1} - 1$
 - ◆ 6 nodes in a tree of height 2
 - ◆ Correct: $6 \leq 2^{2+1} - 1 = 2^3 - 1 = 7$
 - ◆ 6 nodes in a tree of height 5
 - ◆ Correct: $6 \leq 2^{5+1} - 1 = 2^6 - 1 = 63$
- ◆ What-if.....
 - ◆ $2^h - 1 < n \leq 2^{h+1} - 1$
 - ◆ 6 nodes in a tree of height 2
 - ◆ $2^2 - 1 < 6 \leq 2^{2+1} - 1$
 - ◆ Correct: $3 < 6 \leq 7$
 - ◆ 6 nodes in a tree of height 5
 - ◆ $2^5 - 1 < 6 \leq 2^{5+1} - 1$
 - ◆ Incorrect: $31 < 6 \leq 63$
- ◆ Complete tree → balanced tree
 - ◆ Yes
- ◆ Balanced tree → complete tree
 - ◆ No

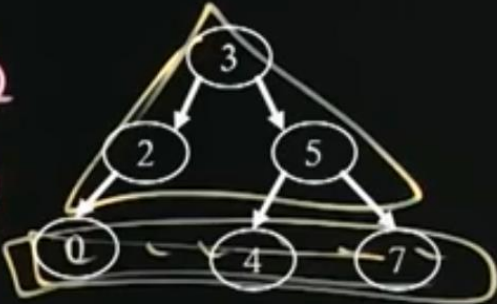

Balanced Tree



Unbalanced Tree


- Tree 공식 $n = 2^{H+1} - 1$
- Size = n, h = height
- 6 nodes in a tree of height 2 -> balanced tree
- 6 nodes in a tree of height 5 -> Unbalanced tree
- 두번째 공식을 만족하면 Balanced Tree
- 만족하지 못하면 Unbalanced Tree

4. Binary Heap for Priority Queue

Binary heap for priority queue

Binary heap for priority queue

- Priority queue implementation
 - Linked list based implementation
 - Sorted implementation
 - Unsorted implementation
 - Tree based implementation
 - Tree should be balanced to justify the reason of using trees
- Binary heap is a binary tree with two properties
 - The shape property
 - The tree is a complete tree
 - The heap property
 - Each node is greater than or equal to each of its children
 - Max-heap since we defined a higher priority has a higher value

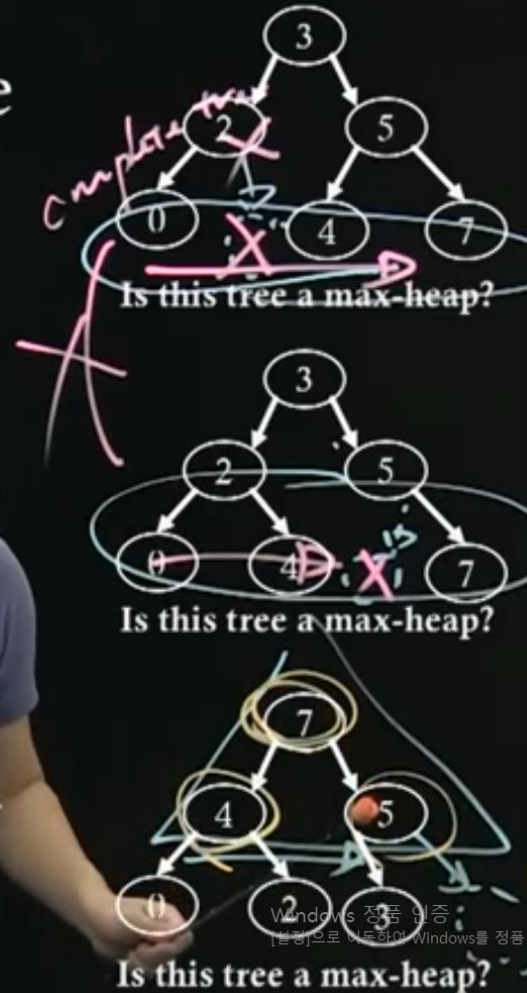


- Linked list:
- Sorted and Unsorted implementation
- Tree based:
- Should be balanced tree
- Binary tree:
- Shape property : complete tree여야 한다.
- Heap property :
- 첫번째는 complete tree가 아니기 때문에 No
- 두번째도 complete tree가 아니기 때문에 NO
- 세번째는 complete tree이고 parents value가 child value보다 크다

5. Reference Structure of Binary

Structure of binary heap using reference

- 위쪽은 full tree
- 과정은 complete tree
- 11번째에 값을 채워야 함
- 그 level의 3번째 node에 넣으면 됨
- 찾아가는 방법은 3을 2진수로 표현
- 11의 2진수가 되는데, $\rightarrow 00011$
- Root에서 0이면 LHS, 1이면 RHS
- 0=LSH, 1=RHS, 1=RHS

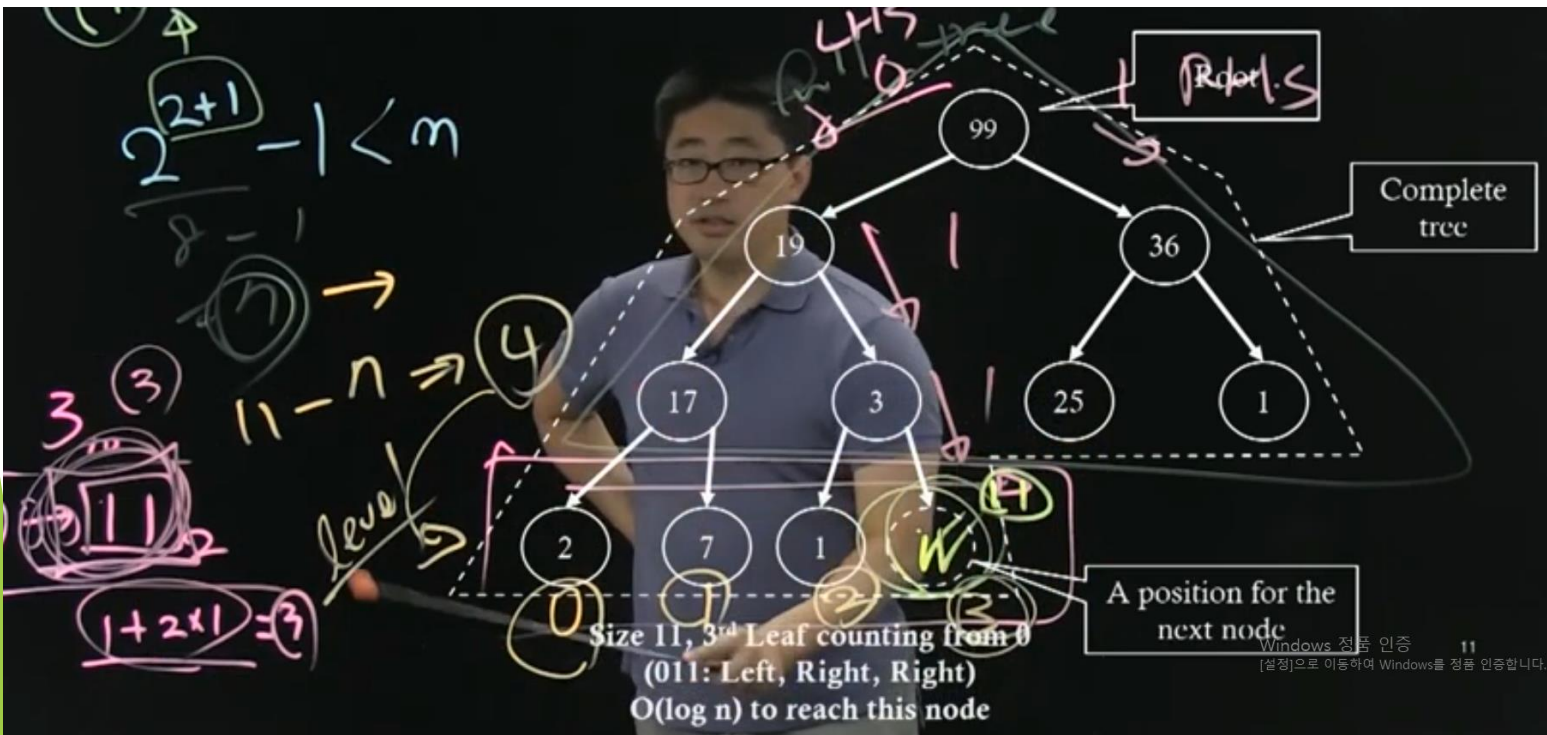

6. Insert Operation of Binary Heap

Insert operation of binary heap

of

- ◆ Insert of binary heap, a.k.a. Percolate-up
 - ◆ Starting from a leaf
 - ◆ Approaching toward a root
 - ◆ How to?
 - ◆ Insert a value at the next node to insert
 - ◆ Compare the value to the value of the inserted node's parent
 - ◆ If the value is bigger than the parent's
 - ◆ The heap property is broken
 - ◆ Exchange the two values
 - ◆ Repeat this comparison at the parent's node

children

parent

One level Percolate up Need Recursions

2 7 1 3 25 1 17 19 36 99

2 7 1 3 25 1 17 19 36 99

정품 인증
[일정]으로 이동하여 Windows를 정품 인증합니다.

- Percolate-up = 스며들다 = leap서 위로 올라간다
- Binary heap을 만족시키기 위해 approaching toward a root 한다.
- 1. 다음 노드에 value를 insert한다.
- heap property와 structure property때문에
- 하지만 heap의 조건은 깨짐. 고쳐줘야함
- 2. node's의 parents와 value를 비교
- value가 크면 exchange
- -> Percolate-up
- 3. 그 다음 Recursion한다.

6. Insert Operation of Binary Heap

Implementation of insert of binary heap

```
def enqueueWithPriority(self, value, priority):  
    self.arrPriority[self.size] = priority  
    self.arrValue[self.size] = value  
    self.size = self.size + 1  
    self.percolateUp(self.size-1)  
  
def percolateUp(self, idxPercolate):  
    if idxPercolate == 0:  
        return  
    parent = int((idxPercolate-1) / 2)  
    if self.arrPriority[parent] < self.arrPriority[idxPercolate]:  
        self.arrPriority[parent], self.arrPriority[idxPercolate] = self.arrPriority[idxPercolate], self.arrPriority[parent]  
        self.arrValue[parent], self.arrValue[idxPercolate] = self.arrValue[idxPercolate], self.arrValue[parent]  
        self.percolateUp(parent)  
    recursion
```

Windows 정품 인증 14
[설정]으로 이동하여 Windows를 정품 인증합니다.

- 70과 19를 비교해서 child의 value가 크기때문에 다시한번 exchange
- 더 이상 자리가 바뀌지 않으면 전체가 heap property가 만족하게 된다.
- Enqueue는 value와 priority
- Value를 array차원에 넣고 그 다음에 percolateUp을 하게 된다.
- 저장된 값의 index가 들어오게 된다.
- Index가 0이 되면 root가 된다.
- Parents를 찾고 비교를 하게 된다.
- Value가 크면 exchange
- 다음 recursion 한다.

7. Delete Operation of Binary Heap

Delete operation of binary heap

on

◆ Delete of binary heap, a.k.a. Percolate-down or cascade-down

- ◆ Starting from a root
- ◆ Approaching toward a leaf
- ◆ How to?
 - ◆ Delete the root node value by replacing the node with the last node
 - ◆ Compare the value to the value of the inserted node's children
 - ◆ If the children's value is bigger than the parent's, (pick a bigger child)
 - ◆ The heap property is broken
 - ◆ Exchange the root value and the bigger value from children
 - ◆ Repeat this comparison at the exchanged child's node

Exchange with the last element

Windows 정품 인증 15
[설정]으로 이동하여 Windows를 정품 인증합니다.

- Delete는 Percolate-down을 한다.
- Root를 지운다는 가정 하에 시작
- 1을 지우는게 이상적, root로 올린다.
- Structure만족, heap은 만족하지 않음
- 1. root node의 값을 지우고 last node의 값을 가져온다.
- 2. value를 child values과 비교
- 3. value가 child values(두 값중 큰 값)작다면 exchange
- 4. 그 다음 recursion

7. Delete Operation of Binary Heap

Delete operation of binary heap

Implementation of
Delete operation of binary
heap

```
def deleteWithPriority(self):
    if self.size == 0:
        return ''
    retPriority = self.arrPriority[0]
    retValue = self.arrValue[0]
    self.arrPriority[0] = self.arrPriority[self.size - 1]
    self.arrValue[0] = self.arrValue[self.size - 1]
    self.size = self.size - 1
    self.percorlateDown(0)
    return retValue

def percorlateDown(self, idxPercorlate):
    if 2 * idxPercorlate + 1 >= self.size:
        return
    leftChild = 2 * idxPercorlate + 1
    leftPriority = self.arrPriority[leftChild]
    if 2 * idxPercorlate + 2 >= self.size:
        rightPriority = -99999
    else:
        rightChild = 2 * idxPercorlate + 2
        rightPriority = self.arrPriority[rightChild]
    biggerChild = leftChild if leftPriority > rightPriority else rightChild
    if self.arrPriority[idxPercorlate] < self.arrPriority[biggerChild]:
        self.arrPriority[idxPercorlate], self.arrPriority[biggerChild] = self.arrPriority[biggerChild], self.arrPriority[idxPercorlate]
        self.arrValue[idxPercorlate], self.arrValue[biggerChild] = self.arrValue[biggerChild], self.arrValue[idxPercorlate]
        self.percorlateDown(biggerChild)
```

Handwritten notes on the code:

- last node value/priority → root copy
- leaf
- Percolate the value from the root to a leaf

Windows 정품 인증 16
[설정]으로 이동하여 Windows를 정품 인증합니다.

- 1과 25를 비교
- 큰 값과 exchange
- Root의 값을 없애고 index스 저장
- Percorlate-down함
- Last node value와 priority를 root로 copy
- percorlate가 leaf node에 도달하게 되면 escape
- Left child와 priority, Right child와 priority 비교
- RHS가 없을 경우 항상 LHS를 선택하게끔 아주 낮은 값으로 지정
- Bigger child를 찾아내서 그 값과 parent값 비교
- Bigger child가 크면 exchange
- 마지막으로 recursion function call 한다.

8. Complexity of Priority Queue and Heap Sort

Complexity of priority queue, again

		Build	Enqueue = Insert	Dequeue = Delete Highest Priority	FindMax = Find highest Priority
Unsorted Implementation		$O(N)$	$O(1)$	$O(N)$	$O(N)$
Sorted Implementation		$O(N^2)$	$O(N)$	$O(1)$	$O(1)$
Binary Heap	Reference based	$O(N \log N)$	$O(\log N)$	$O(\log N)$	$O(1)$
	Array based (Naive build)	$O(N \log N)$	$O(\log N)$	$O(\log N)$	$O(1)$

- Build(여러 개) :
- Unsorted : 계속 쌓아 가기 때문에 $O(N)$
- Sorted : 항상 sort하기 때문에 $O(N)$
- Reference :
- Array :
- Enqueue = Insert(하나만) :
- Unsorted : sort안해서 $O(1)$
- Sorted : sort하기 때문에 $O(N)$
- Reference :
- Array :
- Dequeue = delete and FindMax = Find :
- Unsorted : sort하기 때문에 $O(N)$
- Sorted : sort를 이미 했기 때문에 $O(1)$
- Reference :
- Array :
- 중요한건 $O(N)$ 보다 Binary Heap의 $O(\log N)$ 훨씬더 작은 값이기 때문에 전반적으로 binary heap을 이용한 queue 관리가 더 효율적

8. Complexity of Priority Queue and Heap Sort

Heap sort

◆ Priority queue

- ◆ Repeated, dequeue with the highest priority
- ◆ = dequeue the maximum value
- ◆ Well-utilizable for sorting
- ◆ Particularly
 - ◆ Binary heap enables the dequeuing with $O(\log N)$
 - ◆ For dequeuing all elements, it takes $O(N \log N)$
 - ◆ Same to the sorting all of the elements

◆ How to perform a sorting with a heap (= heap sort)

- ◆ Given a list whose index ranges from 0 to N
- ◆ Firstly, Consider it as an insert to the heap from an array = $O(N \log N)$
 - ◆ It is the same problem of building a binary heap
- ◆ Secondly, take out one element at a time = $O(N \log N)$
 - ◆ For itr in $\text{range}(0, N)$:
 - ◆ $\text{Sorted}[itr] = \text{Heap.getHighestPriority}()$

- Priority queue :
- Priority가 높은것은 dequeue하는 것
- 다시 말해 queue에서 maximum value가 dequeuer
- 이 과정이 sorting algorithm
- 이러한 sorting algorithm을 binary heap을 이용하여 구현
- How :
- 0에서부터 n까지의 값의 리스트를 가지고 있는다.(sorting 해야할 list)
- 1. heap에 insert = binary heap을 build하는것과 같다.
- 2. 하나하나 element를 take한다.
- 따라서, list를 heap에 넣고 다시 나오는 과정에서 자연스럽게 sort가 된다.