Continuous integration

Every push and pull request to main runs the whole test suite on a clean Linux machine.

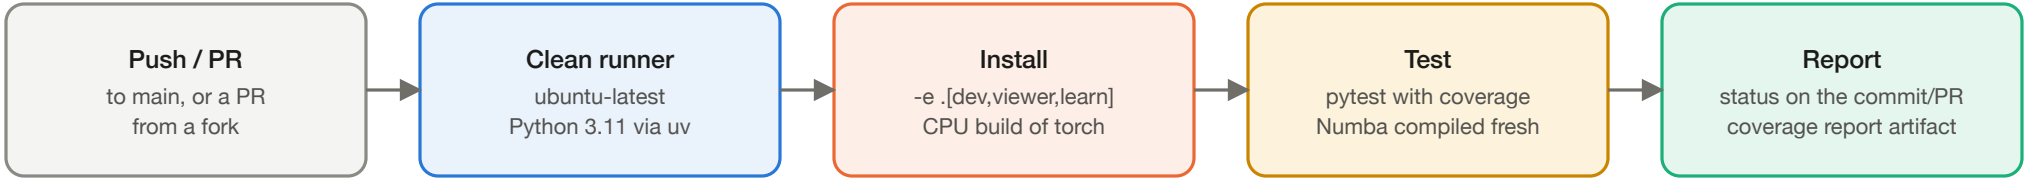

Local gate before every PR: make test runs the same suite. Determinism tests fail on any unintended change to the dynamics.