

CS620T: Compilers - Principles and Implementation

Autumn 2026

Overview, Structure of a compiler

Course structure and Syllabus

CS620T


Compilers - Principles and Implementation

3-0-0-6

PG

1	Title of the course (L-T-P-C)	Compilers - Principles and Implementation (3-0-0-6)
2	Pre-requisite courses(s)	Exposure to Data Structures and Algorithms, Computer Architecture, Automata Theory
3	Course content	Structure of a compiler, the compiled and interpreted execution models. Lexical analysis and parsing using lex and yacc. Scope and visibility analysis. Data layout and lifetime management of data. Runtime environment. Dynamic memory allocation and Garbage collection. Translation of expressions, control structures, and functions. Code generation and local optimizations, Lattice theory, register allocation, instruction scheduling, optimizations - dataflow, control flow, reaching definitions, and liveness analysis, code transformation-tiling, fusion.
4	Texts/References	1. Alfred V. Aho, Monica S. Lam, Ravi Sethi and Jeffrey D. Ullman: Compilers: Principles, Techniques, and Tools, 2/E, Addison Wesley 2007. 2. Andrew Appel: Modern Compiler Implementation in C/ML/Java, Cambridge University Press, 2004 3. Dick Grune, Henri E. Bal, Cerial J.H. Jacobs and Koen G. Langendoen: Modern Compiler Design, John Wiley & Sons, Inc. 2000. 4. Michael L. Scott: Programming Language Pragmatics, Morgan Kaufman Publishers, 2006. 5. Fisher and LeBlanc: Crafting a Compiler in C.

Assessment Plan

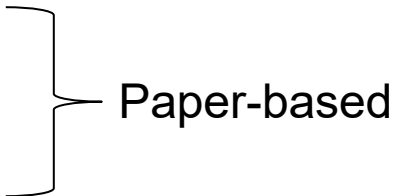- Midsem (25%),
 - Endsem (40%),
- 
- Paper-based
- Short quiz (roughly one per class), best 20 taken. (20%)
 - Open(source) problem (7%).
 - Programming exercises, 2, (8%).

Grading

If your numerical score is at least:	Your course grade will be at least:
90	AA
80	AB
70	BB
60	BC
50	CC
45	CD
40	DD

Change of thoughts about CS620T? Act swiftly.

Why Study Compilers?

Modular

[Job Postings: 2025 LLVM Developers' Meeting \(swoogo.com\)](http://swoogo.com)

Company Contact: Mike Edwards - llvmjobs2022@modul

.....

Job Title: AI Compiler Engineer



Very Very Exciting Jobs!

Job Title: Senior Apple GPU Compiler Backer

Job Description: As a member of the AGX compiler for current and future Apple GPUs, you will have room for growth that works on every Apple



Company Description: Arm's processors are shipped in billions of products with unique code generation challenges. LLVM is a foundational code generation Learning accelerators. For example, in the past year, 75 Arm engineers performed performance optimization, security hardening, support for new instruction

Company Contact: Kristof Beyls - kristof.beyls@arm.com

.....

Job Title: Many LLVM-related jobs at Arm

Job Description: Your skills and knowledge of compiler fundamentals contribute to the LLVM community will help us develop innovative technologies and security of the entire field of computing.

Arm always has lots of LLVM-related job vacancies open.



Company Description: MATLAB® and Simulink® are the preeminent languages using state-of-the-art compiler technologies such as code generation to meet stringent demands—for speed, memory, area, standards compliance—to help customers to implement their ideas and enable them to deploy their products. Customers and products span domains including Deep Learning, Robotics, and Embedded Generation.

Company Contact: Akshatha Bhat - akshathb@mathworks.com

.....

Job Title: Compiler Engineer LLVM, Senior Software Engineer - JF

ink® are the programming language that enable our customers to im



Company Description: Founded in 1987, Huawei is a leading global provider of information technology infrastructure and smart devices. We invest heavily in research and technological breakthroughs that drive the world forward. We have more than 170 countries and regions. Huawei's Heterogeneous Compiler is the fastest growing teams in the field of compilation technology.

Company Contact: Shivani Bhardwaj - shivani.bhardwaj@huawei.com

.....

Job Title: Junior Compiler Software Engineer

Job Description: Be a team player in a fast-paced R&D environment, where you will work on LLVM-based compilers targeting next-generation mobile, network, or server

- Few disciplines with **deep theory + practice**

"..Theory and practice are two sides of the same coin.." - Jeff Ullman, *ACM Turing Award lecture*.

Some **PL**osophical Questions

- Why are there so many programming languages?
- Why are there new languages?
- What is a good programming language?

Some **P**Losophical Questions

- Why are there so many programming languages?
 - Distinct often conflicting requirements of the application domain

Scientific Computing	Floating-Point Arithmetic, Parallelism Support, Array Manipulation	FORTRAN
Business Applications	No data loss (persistence), Reporting capabilities, Data analysis tools	SQL
Systems Programming	Fine-grained control of system resources, real-time constraints	C/C++
Machine Learning	? CS620T, IITDharwad	CUDA, PyTorch, etc.

Some **P**Losophical Questions

- Why are there new languages?
 - To fill a technology gap
 - E.g. arrival of Web and Java. Java's design closely resembled that of C++
 - `@torch.jit.script`, `torch.compile` in PyTorch

Training a programmer on a new programming language is a dominant cost

- Widely-used languages are slow to change
- Easy to start a new language


Some **PL**osophical Questions

- What is a good Programming Language?

No universally accepted argument

Intro to Compilers


- One way to implement *programming languages*
 - Programming languages are notations for specifying computations to machines

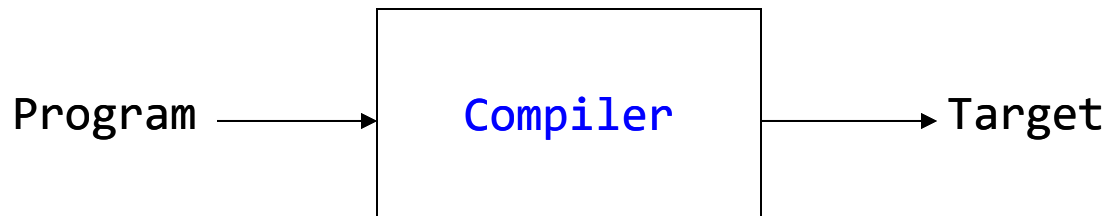


- *Target* can be an assembly code, executable, another source program etc.

Intro to Compilers

- Alternate way to implement programming languages

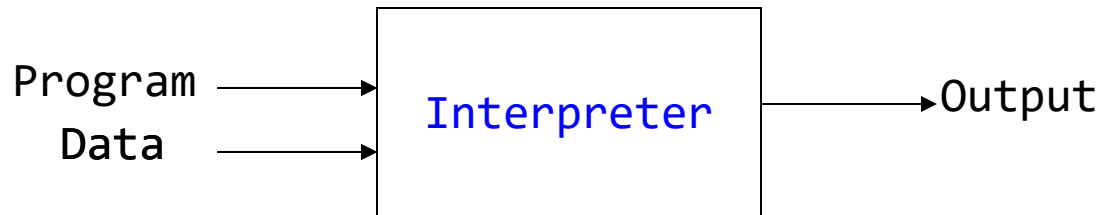

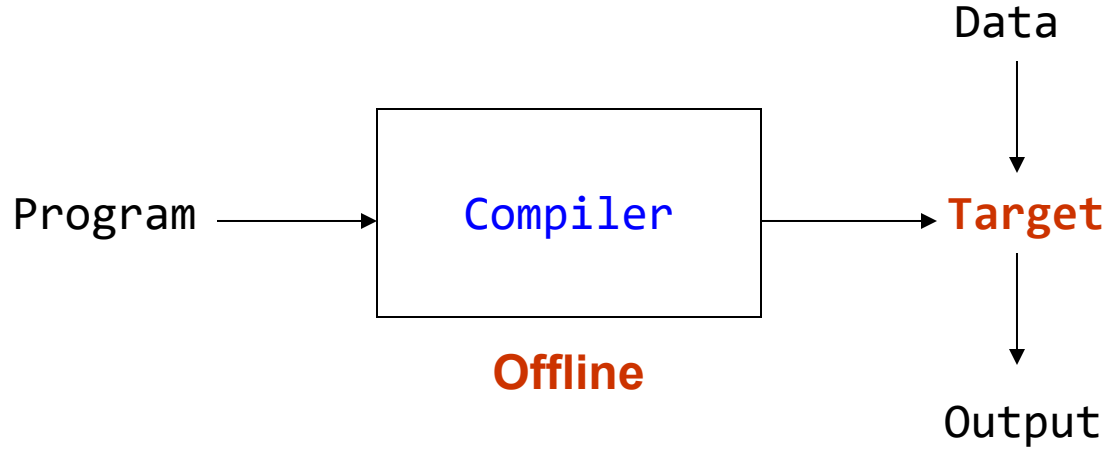


these are the two types of language processing systems

What is a Compiler?

Traditionally: Program that analyzes and **translates** from a high-level language (e.g. C++) to low-level assembly language that can be executed by the hardware

```
int a, b;  
a = 3;  
if (a < 4) {  
    b = 2;  
} else {  
    b = 3;  
}
```



```
var a  
var b  
mov 3 a  
mov 4 r1  
cmpi a r1  
jge l_e  
mov 2 b  
jmp l_d  
l_e: mov 3 b  
l_d: ;done
```

Compilers are *translators*


- Fortran
- C
- C++
- Java
- Text processing language
- HTML/XML
- Command & Scripting Languages
- Natural Language
- Domain Specific Language

translate


- Machine code
- Virtual machine code
- Transformed source code
- Augmented source code
- Low-level commands
- Semantic components
- Another language

Compilers are *optimizers*

- Can perform optimizations to make a program more efficient

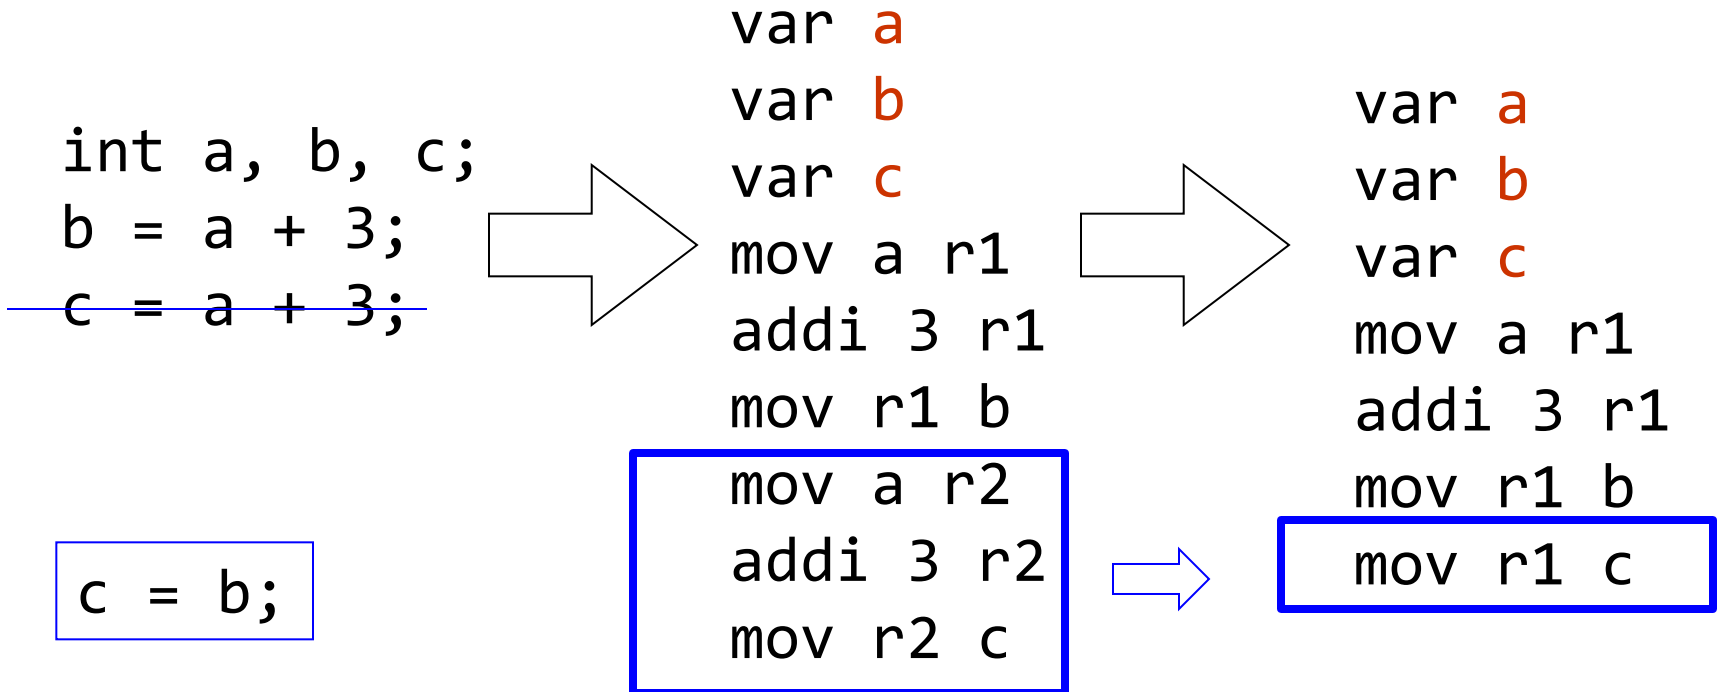

Why do we need compilers?

- Compilers provide *portability*
- Old days: whenever a new machine was built, programs had to be rewritten to support new instruction sets
- IBM System/360 (1964): Common Instruction Set Architecture (ISA) --- programs could be run on any machine which supported ISA
 - Common ISA is a huge deal (note continued existence of x86)
- But still a problem: when new ISA is introduced (EPIC) or new extensions added (x86-64), programs would have to be rewritten
- Compilers bridge this gap: write new compiler for an ISA, and then simply recompile programs!


Why do we need compilers?

- Compilers enable **high-performance and productivity**
- Old: programmers wrote in assembly language, architectures were simple (no pipelines, caches, etc.)
 - Close match between programs and machines --- easier to achieve performance
- New: programmers write in high level languages (Ruby, Python), architectures are complex (superscalar, out-of-order execution, multicore)
- Compilers are needed to bridge this ***semantic gap***
 - Compilers let programmers write in high level languages and still get good performance on complex architectures


Semantic Gap

- Python code that actually runs on GPU

```
import pycuda
import pycuda.autoinit from pycuda.tools import
make_default_context
c = make_default_context()
d = c.get_device()
```



Impossible without Compilers

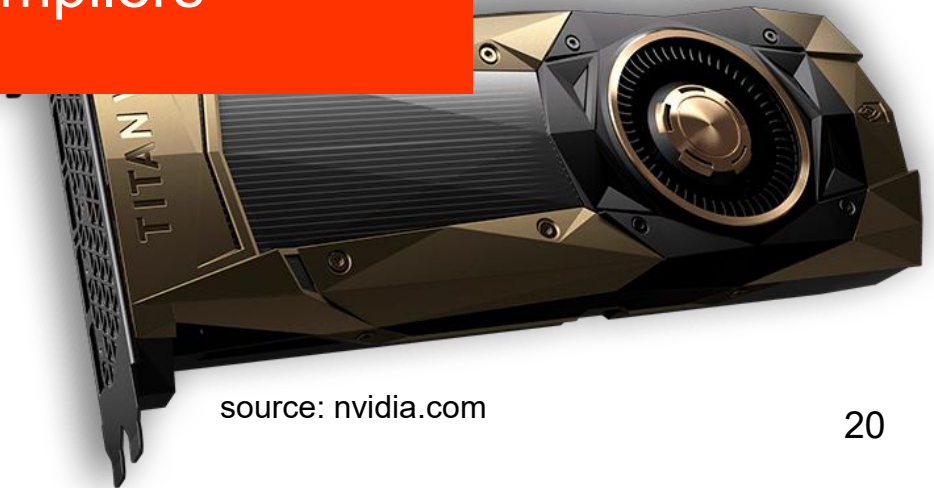

source: nvidia.com

Example: Compilers as Translators

1. High level language $\implies$ assembly language (e.g. gcc)
2. High level language $\implies$ machine independent bytecode (e.g. javac)
3. Bytecode $\implies$ native machine code (e.g. java's JIT compiler)
4. High level language $\implies$ High level language
(e.g. domain-specific languages, many research languages)

How would you categorize a compiler that handles SQL queries?

HLL to Assembly



- Compiler converts program to assembly
- Assembler is machine-specific translator which converts assembly to machine code

`add $7 $8 $9 ($7 = $8 + $9 ) => 000000 00111 01000 01001 00000 100000`


- Conversion is usually one-to-one with some exceptions
 - Program locations
 - Variable names

HLL to Bytecode



- Compiler converts program into machine independent bytecode
 - e.g. javac generates Java bytecode, C# compiler generates CIL
- Interpreter then executes bytecode “on-the-fly”
- Bytecode instructions are “executed” by invoking methods of the interpreter, rather than directly executing on the machine
- Aside: what are the pros and cons of this approach?

HLL to Bytecode to Assembly



- Compiler converts program into machine independent bytecode
 - e.g. javac generates Java bytecode, C# compiler generates CIL
- Just-in-time compiler compiles code *while program executes* to produce machine code
 - Is this better or worse than a compiler which generates machine code directly from the program?

History

- 1954: IBM 704
 - Huge success
 - Could do complex math
 - Software cost > Hardware cost




Source: IBM Italy,
<https://commons.wikimedia.org/w/index.php?curid=48929471>

How can we improve the efficiency of creating software?

History

- 1953: Speedcoding
 - *High-level programming language* by John Backus
 - Early form of *interpreters*
 - Greatly reduced programming effort
- About 10x-20x slower
- Consumed lot of memory (~300 bytes = about 30% RAM)

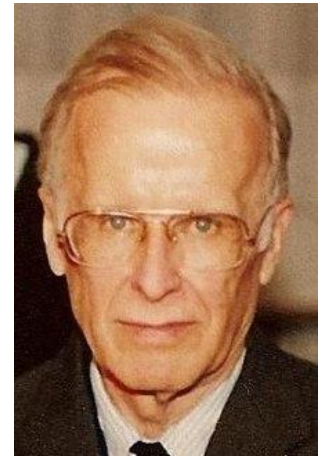


Fortran I

- 1957: Fortran released
 - Building the compiler took 3 years
 - Very successful: by 1958, 50% of all software created was written in Fortran
- Influenced the design of:
 - high-level programming languages e.g. BASIC
 - practical compilers

Today's compilers still preserve the structure of Fortran I

Structure of a Compiler

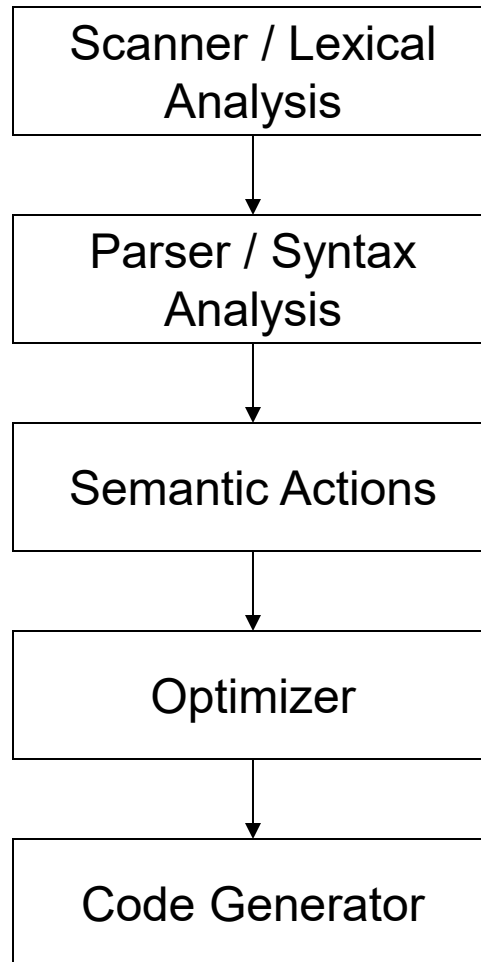

Scanner

- Analogy: Humans processing English text

Rama is a neighbor.

Ra mais an eigh bor.

You have to do some work to align the spaces and understand the sentence.

Scanner

- Consider the program text

```
if ( a < 4) {  
    b = 5  
}
```

– Has *tokens* that are:

1. keywords – if
2. Punctuation marks – (,), {, }, blankspaces, tab space (\t), newlines (\n)
3. Identifiers – a, b
4. Constants/Literals – 4, 5
5. Operators - <, =

Scanner

- A compiler starts by seeing only program text

```
if ( a < 4) {  
    b = 5  
}
```

- as a series of letters

```
'i' 'f' ' ' '(', 'a' '<' '4' ')'  
  ' ' '{' '\n' '\t' 'b' '=' '5'  
        '\n' '}'
```

Scanner



- A compiler starts by seeing only program text
- Scanner converts program text into string of *tokens*

```
'i' 'f' ' ' '(' 'a' '<' '4' ')'
' ' '{' '\n' '\t' 'b' '=' '5'
      '\n' '}'
```

- Analogy: Humans processing English text
 - recognize words in Rama is a neighbor.
 - Rama, is, a, neighbor
 - Additional details such as punctuations(.), capitalizations (R), blank spaces.


Scanner

- A compiler starts by seeing only program text
- Scanner converts program text into string of *tokens*

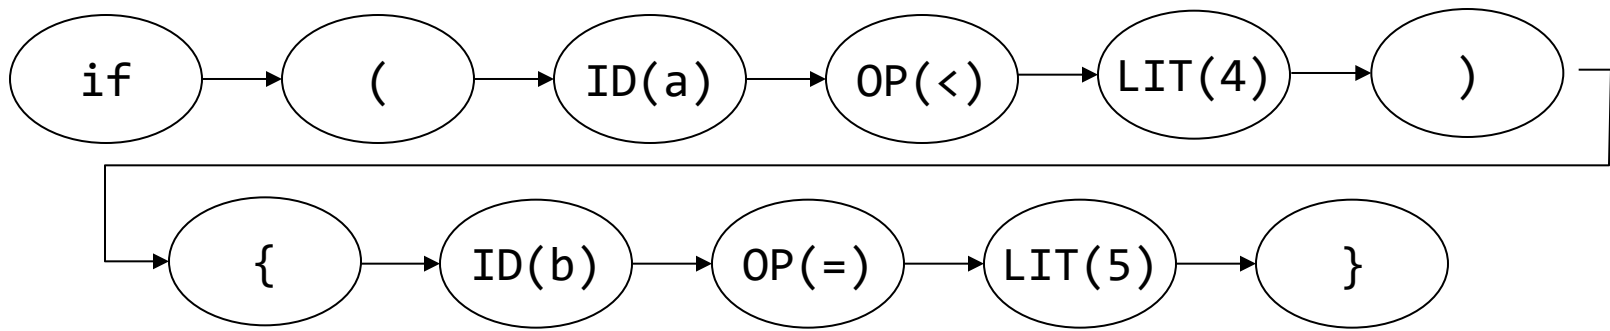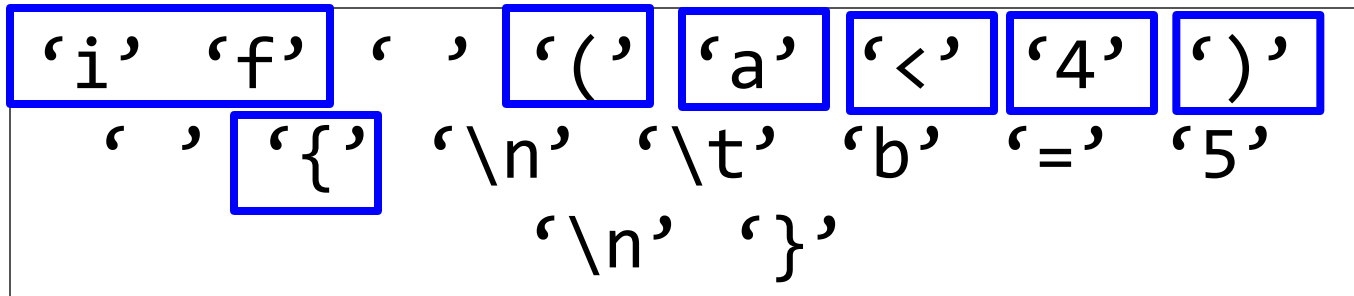

Scanner - Summary

- A compiler starts by seeing only program text
- Scanner converts program text into string of *tokens*

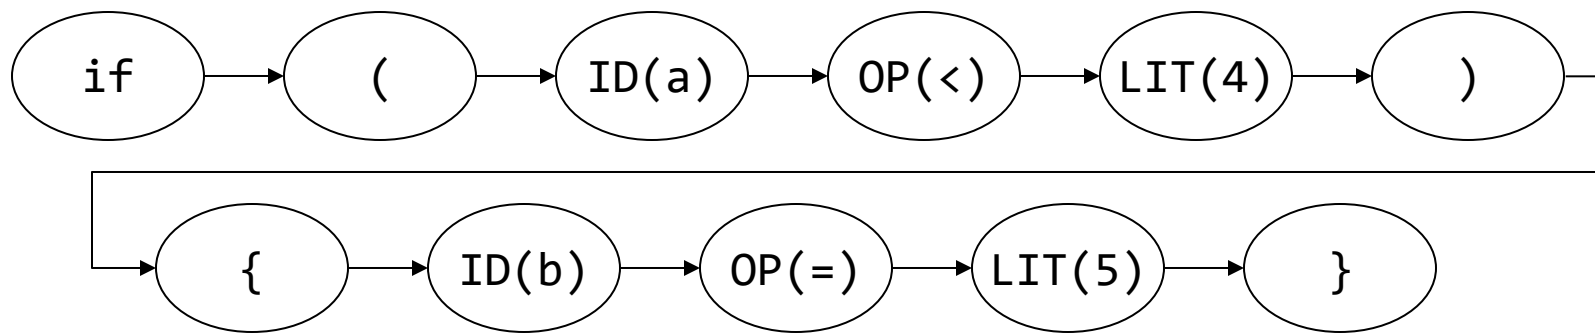

- But we still don't know what the *syntactic structure* of the program is


Exercise

Convert the following program text into tokens:

`c = a + b * -60`

Parser - Analogy


- Diagramming English sentences


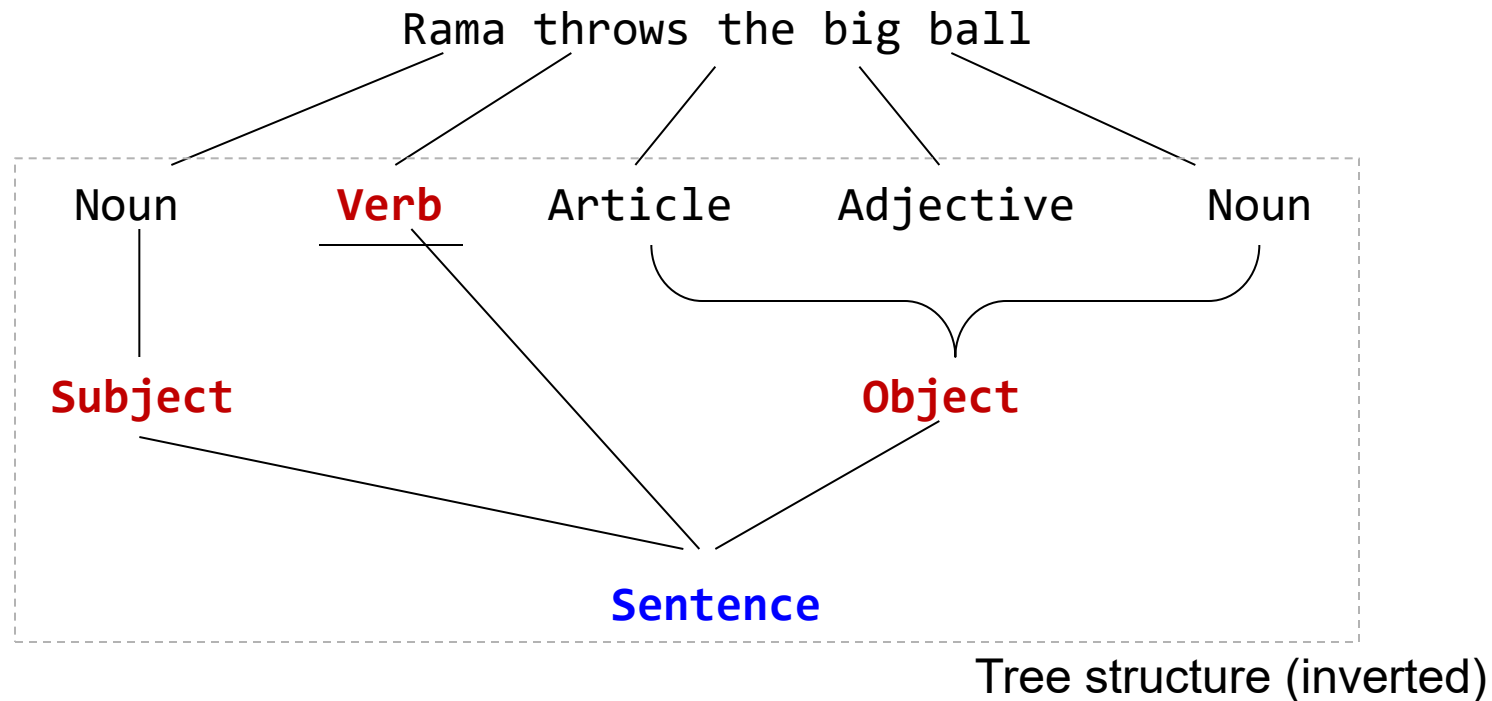


Group lower-level language elements to higher-level language elements

Parser

- Converts a string of tokens into *parse tree* or *abstract syntax tree*
- Captures syntactic structure of the code (i.e. “this is an if statement, with a then-block”)

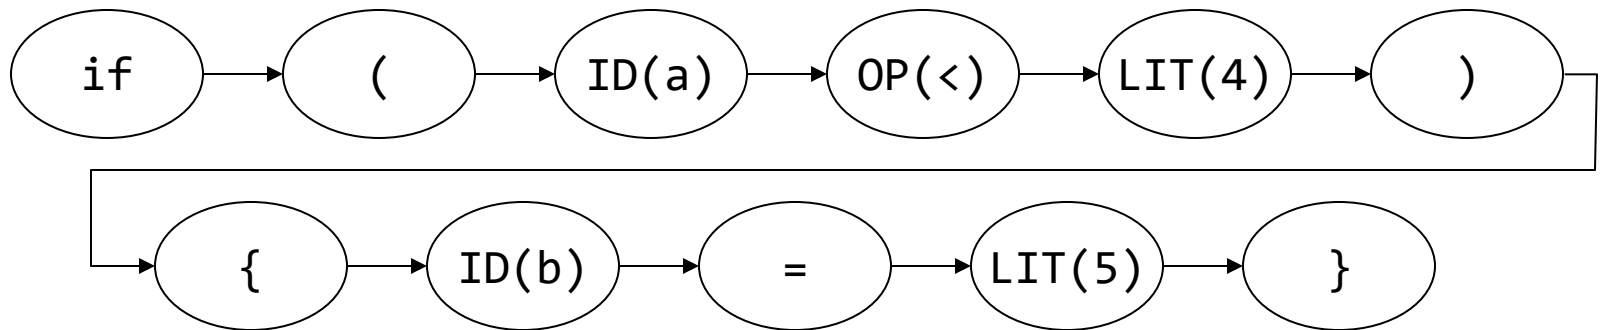

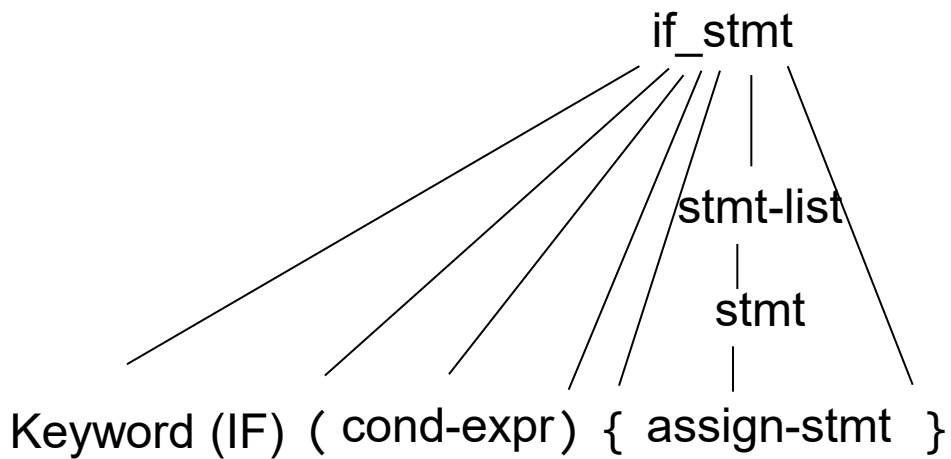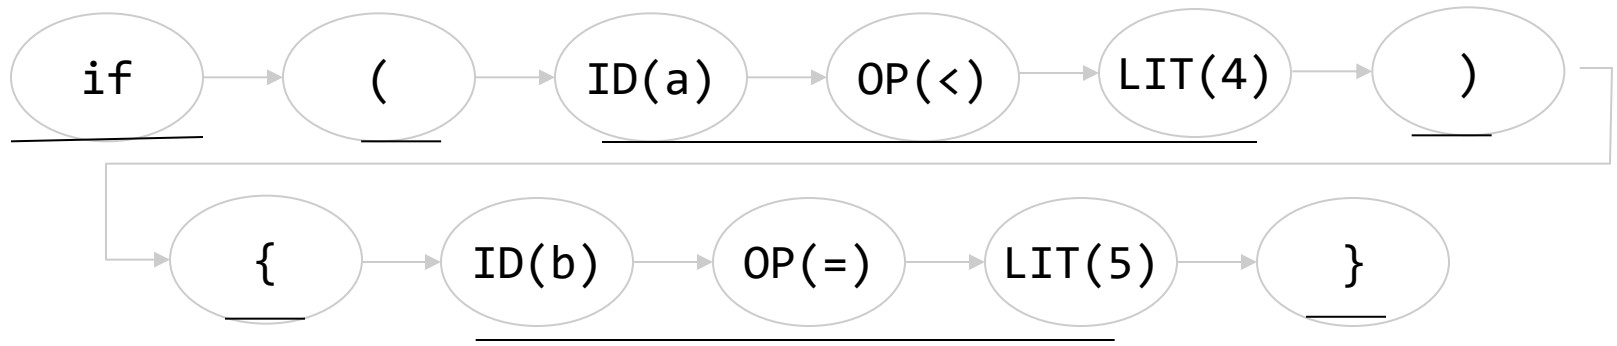

Parser

- Converts a string of tokens into *parse tree* or *abstract syntax tree*
- Captures syntactic structure of the code (i.e. “this is an if statement, with a then-block”)

